

# BALLUFF

sensors worldwide

## SMARTLIGHT

The future of stack light and process visualization



# Multi-purpose Tower Light

SmartLight is the first programmable LED signal tower light. With a rich color spectrum, adjustable light intensity and the ability to program individual configurable segments, the Balluff SmartLight can display numerous machine or process status information – instantaneously. The mode of operation can be switched based on programmed conditions so that the single SmartLight can be used as a multi-function tower indicator.

## Stack Light Mode

- 1- 5 segments
- Programmable customizable colors for each segment
- Blinking mode with programmable frequency




## Level Mode

- Individual LEDs light up to display level
- Level input mapped directly to SmartLight
- Programmable customizable colors for level indication



## Run Light Mode

- Complete module displays the running light effect
- Programmable colors of running segment and background
- Programmable speed for running segment

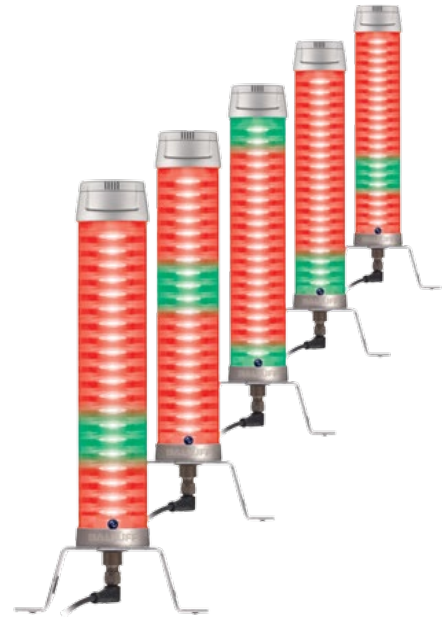

## Flexible, Scalable, Intelligent Stack Light!

The SmartLight offers three programmable modes of functionality: segment or stack light, level indication, and run light mode. Additionally, a SmartLight with a buzzer option is available for audible feedback.

SmartLight's segment or stack light mode is feature-rich compared to a standard stack light. The number of segments and color for each segment can be programmed and changed on demand. Individual segments can be set for blinking or flashing mode, and the frequency of blinking can be programmed as well.

When using the SmartLight as a level indicator, the resolution of input level can be mapped from an 8-bit to a 16 bit integer number.

The input could be a position of an object on a linear track or liquid level in a tank. Colors of the LEDs can be changed to signify the importance of the level as well. For example, if the level or the pressure in the tank is closer to the extreme, the SmartLight will display in red.

SmartLight, in a run light mode, allows using different programmable colors for the background and for the running segment. The length of the running segment and the speed of the running mode is configurable and can be switched to express different conditions. As with any other mode, the intensity or brightness can be configured to ensure noticeable performance.



# SMARTLIGHT Advantages


Process monitoring and machine status is an integral part of manufacturing operations. Instantaneous visual feedback enables plants to operate efficiently. SmartLight adds tremendous value to the plant floor as it combines multiple modes of operations and functions in a single programmable tower light. With the SmartLight there are unlimited possibilities!

## Fit for Harsh Environments

- Machine mount IP67 design
- Standard M18 thread for mounting

## Simplified Use

- Standard M12 sensor cable connection reduces need for special spare parts
- Mount exactly where needed with wall, ceiling, or pole mounting options

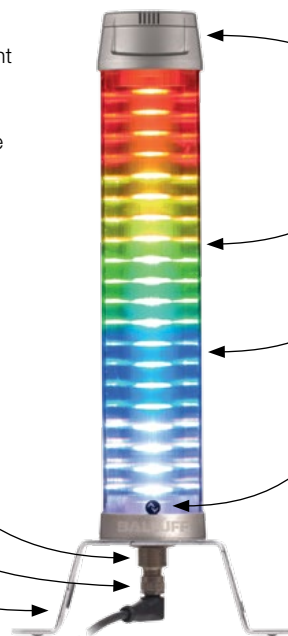


## Assures Desired Attention

- Audible 95db sound module
- Programmable intensity and customizable bright colors

## Maintenance Friendly Design

- Maintenance-free, very long work life with LED segments to power the lights
- Built-in diagnostics with IO-Link

## SmartLight Architecture

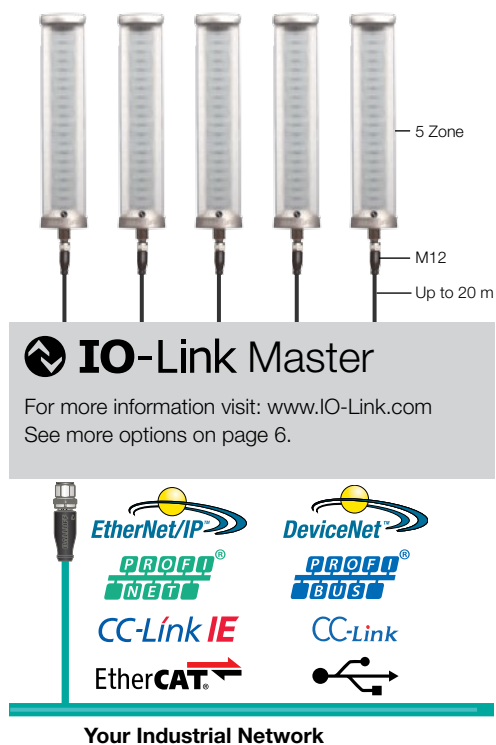

## Reduce Complexity

### Reduce Complexity → Reduce Risk

- Single part number, tamper resistant design
- Programmable colors, intensity, and blinking
- Configurable modes of operation with on-demand change of mode
- Standard M12 sensor cable – no complex wiring
- Programmable buzzer for continuous chopped or beeping sounds



Generic Stack Light

Balluff LED SmartLight

# IO-Link Distributed Modular I/O

IO-Link is a fieldbus and manufacturer independent communications standard defined by the International Communications Standard IEC 61131-9. IO-Link enables seamless integration of a variety of actuators while maintaining scalability for future adaptability in the controls architecture. IO-Link is universal and adaptable to any major industrial network protocol, such as EtherNet/IP, PROFINET, EtherCAT, CC-Link IE, DeviceNet, PROFIBUS, or CC-Link.

A multitude of actuators or devices can be connected without complex wiring. Devices include discrete I/O (e.g., prox switches), analog I/O devices, smart sensors (e.g., pressure sensor, linear position sensors), and specialty devices (e.g., RFID, non-contact connections). IO-Link has built in scalability to add more devices to the existing network without adding more network nodes in the architecture – thus providing ease of operation and a cost-effective solution for automation.

## Smart Light

- Stack Light Mode: 1-5 zones
- Level Mode: high/low level
- Configure: colors, brightness, levels, etc.

## IO-Link Masters

- 4 port and 8 port versions
- Parameter server functionality
- Fully programmable display



## Discrete I/O

- Up to 128 I/O per IP address
- IP67 metal or plastic, M8 or M12
- Inputs, outputs, configurable
- PNP or NPN, 2-wire DC

## Analog I/O

- Up to 4 channels at 10 bit
- Available with 1 channel at 14 bit
- Requires no shielded cable runs

## Smart Sensors

- Photoeye, Prox, Ultrasonic, Pressure Sensors
- Software storable and programmable parameters
- Diagnostics and digital measurements

## Valve Manifold Control

- Compatible with most major manifold brands
- 24 VDC, Up to 1.1 amps active at one time
- Up to 24 position control via 25 pin D-sub or M26

## RFID Traceability

- Simple to implement, easy to use
- 10 byte or 32 byte read/write versions
- Enables flexibility and visibility in the machine

## Linear Transducers

- No shielded cable runs and 32 bit signed integer
- Programmable stroke and set points
- Available from 2" to 180"

## Non-Contact Couplers


- Power and signal transmission over the air gap
- Power: 24 VDC, Up to 0.5 amps transmitted
- Signal: any IO-Link device, appears transparent

For full product offering, download the latest catalog at [www.balluff.us](http://www.balluff.us)



# SMARTLIGHT – LED Signal Tower Light with IO-Link

For signaling operating states



Model	5-segment with buzzer	5-segment without buzzer	3-segment with buzzer	3-segment without buzzer	1-segment with buzzer	1-segment without buzzer
<b>Order code</b>						
Part number	<b>BNI0085</b> BNI IOL-802-102-Z037	<b>BNI0082</b> BNI IOL-802-102-Z036	<b>BNI008A</b> BNI IOL-801-102-Z037	<b>BNI0088</b> BNI IOL-801-102-Z036	<b>BNI0087</b> BNI IOL-800-000-Z037	<b>BNI007T</b> BNI IOL-800-000-Z036
Stack light mode		■		■		■
Run light mode		■		■		■
Level mode		■		■		■
Sound module (buzzer)	Yes	No	Yes	No	Yes	No
Volume	95dB/1 m		95dB/1 m		95dB/1 m	
Audio frequencies	1Hz, 5Hz, Continuous tone, pulse		1Hz, 5Hz, Continuous tone, pulse		1Hz, 5Hz, Continuous tone, pulse	
Dimension (LxWxH) mm	60x60x330.5	60x60x309	60x60x234.5	60x60x213	60x60x138.5	60x60x117
Segments (Min-Max)	1-5		1-3		1	
Supply voltage U <sub>s</sub>	18...30V DC		18...30V DC		18...30V DC	
Max. load current	0.5 A		0.25 A		0.25 A	
Communication	IO-Link		IO-Link		IO-Link	
Connector	M12, A-coded, male		M12, A-coded, male		M12, A-coded, male	
Configurable	Yes		Yes		Yes	
Function indicator IO-Link run	Green LED		Green LED		Green LED	
Power indicator	Green LED		Green LED		Green LED	
Mounting	M18 thread		M18 thread		M18 thread	
Operating temperature	-5...+55 °C		-5...+55 °C		-5...+55 °C	
Storage temperature	-25...+70 °C		-25...+70 °C		-25...+70 °C	
Degree of protection per IEC60529	IP 67		IP 67		IP 67	
Housing material	Transparent plastic		Transparent plastic		Transparent plastic	
<b>IO-Link Version 1.1</b>						
Transfer rate	COM 2 (38.4 kBaud)					
Cycle time	7.2 ms with IO-Link 1.1 Master					
IO-Link process data length	8-byte output, 1-byte input					
Communication indicators	Green LED					

# IO-Link Masters

Balluff offers IO-Link master blocks for all major networks and fieldbus protocols. With built-in expandability, IO-Link blocks can significantly increase the I/O count served by a single network node. Each IO-Link port is configurable to be used as either IO-Link or as input or output – providing flexibility for scalable and modular controls architecture.



Network Protocol	EtherNet/IP	DeviceNet	PROFINET
Addressing	Display	Display	Display
4 IO-Link / 12 Configurable	<b>BNI004A</b> BNI EIP-502-105-Z015	<b>BNI005A</b> BNI DNT-502-100-Z001	<b>BNI004U</b> BNI PNT-502-105-Z015
8 IO-Link / 8 Configurable	<b>BNI006A</b> BNI EIP-508-105-Z015		<b>BNI005H</b> BNI PNT-508-105-Z015
16 IO-Link / 16 Configurable			<b>BNI007M</b> (not shown) BNI PNT-509-105-Z003



Network Protocol	PROFIBUS	PROFIBUS
Addressing	Display	Rotary Dials
4 IO-Link / 4 Configurable		<b>BNI0030</b> BNI PBS-504-001-K008
4 IO-Link / 12 Configurable	<b>BNI005R</b> BNI PBS-502-101-Z001	



Network Protocol	EtherCAT	CC-Link
Addressing	Display	Display
4 IO-Link / 12 Configurable		<b>BNI0040</b> BNI CCL-502-100-Z001
8 IO-Link / 8 Configurable	<b>BNI0077</b> BNI ECT-508-105-Z015	

# Accessories & Connectivity

To make the most out of your investment, Balluff offers an optional array of accessories and connectivity solutions perfectly tailored to the SmartLight.

- IO-Link USB converter enables connecting the SmartLight to PC
- Free configuration utility to configure and test the SmartLight as well as other IO-Link devices available from Balluff
- Ease of diagnostics, troubleshooting and configuration off-line



Order code	BNI0073
Part Number	BNI USB-901-013-A501
Aux power	110V AC with converter for sensor actuation
IO-Link	Master
Load Current Max	40mA via USB, 1.6A with external supply
Dimensions	(L) 69.00 mm x (W) 66.00 mm x (H) 29.00 mm



Order code	BAM026L	BAM026K	BAM0255	SET016U	SET011M
Part Number	BAM MB-NI-017-400-1	BAM MB-NI-017-100-1	BAM MB-NI-016-800-1	BAV BP-PH-00105-01	BAV BP-PH-00065-01
Description	Pedestal mounting for SmartLight	Pedestal mounting for SmartLight	Right angle bracket for wall mount	Pole or wall mounting Kit contains: 150 mm rod, knuckle, foot, sensor holder	Pole or wall mounting Kit contains: 2x150 mm rod, knuckle, joint, foot, sensor holder
Material	Aluminum anodized	Aluminum anodized	Aluminum anodized		
Dimensions	H 400 mm x Ø 70mm	H 100 mm x Ø 70mm			
Mounting h/w	M5 screws	M5 screws	M6 screws		



Order code	Determined by cable length	Determined by cable length	Determined by cable length	Determined by cable length
Part Number	BCC M415-M414-3A-304-_X44T2-__	BCC M425-M414-3A-304-_X44T2-__	BCC M415-M424-3A-304-_X44T2-__	BCC M425-M424-3A-304-_X44T2-__
Description	4-wire, non-LED	4-wire, non-LED	4-wire, non-LED	4-wire, non-LED
Type	M12 Female - M12 Male	M12 Female - M12 Male	M12 Female - M12 Male	M12 Female - M12 Male
Configuration	Straight - Straight	Right angle - Straight	Straight - Right angle	Right angle - Right angle
Voltage rating	250 VAC/VDC	250 VAC/VDC	250 VAC/VDC	250 VAC/VDC
Amperage	4 A	4 A	4 A	4 A

Standard Cable Jackets: V=PVC, P=PUR, E=TPE

Standard Lengths Available: 003=0.3 m, 006=0.6 m, 010=1.0 m, 015=1.5 m, 020=2 m, 030=3 m, 050=5 m



Systems and Services



Industrial Networking and Connectivity



Industrial Identification



Object Detection



Linear Position Sensing and Measurement



Fluid Sensors



Accessories

## USA

Balluff Inc.  
8125 Holton Drive  
Florence, KY 41042  
Phone: (859) 727-2200  
Toll-free: 1-800-543-8390  
Fax: (859) 727-4823  
E-Mail: balluff@balluff.com

## Canada

Balluff Canada, Inc.  
2840 Argentinia Road, Unit #2  
Mississauga, Ontario L5N 8G4  
Phone: (905) 816-1494  
Toll-free: 1-800-927-9654  
Fax: (905) 816-1411  
E-Mail: balluff.canada@balluff.ca

## Mexico

Balluff de México SA de CV  
Anillo Vial II Fray Junípero Serra No. 4416  
Colonia La Vista Residencial.  
Querétaro, Qro. CP76232  
Phone: (+52 442) 212-4882  
Fax: (+52 442) 214-0536  
E-Mail: balluff.mexico@balluff.com