



Pushing Performance



People | Power | Partnership

HARTING Industrial Connectors Han[®]

Contents	Chapter
Industrial Connectors Technical characteristics	00
Han A® Slim Construction Size (up to 16 amperes)	01
Han D® / DD® up to 216 contacts	02
Han E® / Han® ES/ESS/EE/EEE for 16 amperes	03
Han Hv E® / Han® Hv ES for higher voltages	04
Han-Com® Combination Connectors	05
Han-Modular® modular connectors	06
Han® HsB for higher currents	07
Han® AV Terminal Block Connectors	08
Staf® for low voltages	09
Han-Snap® for the use in switch cabinets	11
Han-Port® Interface for power and signals	12
Han® Q compact connectors	13
Han® HC-Modular High Current Connectors	14
Han-Power® Energy Bus Components	15
Han® HMC for High Mating Cycles	16
Han® High Temp for high temperatures	17
Han-Brid® Industrial Bus Interface	19
Han® PCB termination	20
Han-Yellok®	25
Han-Eco®	29
Han® Hoods and Housings with metric thread	31
Han® Thermocouple	41
Han® GND	42
Accessories	80
Tools	90

Economic and Reliable Connections

Specifications

DIN EN 60664-1 (VDE 0110-1)

Principles,
requirements and tests

DIN EN 61984 (VDE 0627)

Connectors,
Safety requirements and tests

Note:

The connectors included in this catalogue should not be coupled or decoupled under electrical load unless otherwise stated.

The connector must not be powered-up in the un-mated condition. This is also true if the connector is closed with a protection cover, unless otherwise stated.

The provision of protection against electric shock is the responsibility of the user. Protection can be achieved by the use of HARTING hoods and housings coupled with/or alternatively appropriate installation methods provided by the user.

The female connector in a HARTING hood or housing offers finger safe protection according to relevant standards for the mating face, even in the unmated condition, unless otherwise stated.

Connectors of the same or different series being mounted side by side may be protected against incorrect mating by the use of coding options.

Standard

DIN EN 175301-801

Approvals

UL File No. E 235076 (www.ul.com)

CSA File No. LR 18753, SEV
for inserts

GL certificate No. 13 674 - 99 HH



Certified according to EN ISO 9001
in design/development, production,
installation and servicing

Terminations

- Screw terminal
- Crimp terminal
- Cage-clamp terminal
- Wrap terminal
- Solder terminal
- Axial-screw terminal
- Rapid terminal
- IDC termination

Inserts

- Leading protective ground
- Polarised for correct mating
- Interchangeability of male and female inserts in hoods and housings
- Captive fixing screws
- Can be used with hoods and housings, or for rack and panel applications

Hoods/Housings

- Standard Hoods/Housings
- Hoods/Housings for harsh environmental requirements
- Hoods/Housings for intrinsically safe plant
- Degree of protection IP 65
- Electrical connection with protective ground
- High mechanical strength and vibration-resistance ensured by locking levers
 - Spring-loaded covers in shockproof thermoplastic or metal covers, both lockable

Accessories

- Extensive range of cable protection and sealing accessories
- Protective covers available
- Coding options for incorrect mating protection

For "non standard applications" we can manufacture designs to match your requirements.
Please discuss requirements with us.

HARTING components help you to construct top quality products – economically and in line with market requirements.

General information

It is the customer's responsibility to check whether the components illustrated in this catalogue also comply with different regulations from those stated in special fields of applications.

We reserve the right to modify designs or substance of content in order to improve quality, keep pace with technological advancement or meet particular requirements in production.

No part of this catalogue may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed by means of electronic systems without the prior written consent of HARTING Electric GmbH & Co. KG, Espelkamp. We are bound by the German version only.

Transforming customer wishes into concrete solutions



The HARTING Technology Group is skilled in the fields of electrical, electronic and optical connection, transmission and networking technology, as well as in manufacturing, mechatronics and software creation. The Group uses these skills to develop customized solutions and products such as connectors for energy and data-transmission/data-networking applications, including, for example, mechanical engineering, rail technology, wind energy plants, factory automation and the telecommunications sector. In addition, HARTING also produces electro-magnetic components for the automobile industry and offers solutions in the field of housing technology and shop systems.

The HARTING Group currently comprises 53 sales companies and production plants worldwide employing a total of about 4,200 staff.



HARTING Subsidiary



HARTING Representation

We aspire to top performance.

Connectors ensure functionality. As core elements of electrical and optical termination, connection and infrastructure technologies, they are essential in enabling the modular construction of devices, machines and systems across an extremely wide range of industrial applications. Their reliability is a crucial factor guaranteeing smooth functioning in the manufacturing area, telecommunications, applications in medical technology – in short, connectors are at work in virtually every conceivable application area. Thanks to the ongoing development of our technologies, our customers enjoy investment security and benefit from durable, long-term functionality.

Wherever our customers are, we're there.

Increasing industrialization is creating growing markets that are characterized by widely diverging demands and requirements. What these markets all share in common is the quest for perfection, increasingly efficient processes and reliable technologies. **HARTING** is providing these technologies – in Europe, the Americas and Asia. In order to implement customer requirements in the best possible manner, the **HARTING** professionals at our international subsidiaries engage in up-close, partnership-based interaction with our customers, right from the very early product development phase.

Our on-site staff form the interface to the centrally coordinated development and production departments. In this way, our customers can rely on consistently high, superior product quality – worldwide.

Our claim: Pushing Performance.

HARTING provides more than optimally attuned components. In order to offer our customers the best possible solutions, on request **HARTING** contributes a great deal more and is tightly integrated into the value-creation process.

From ready-assembled cables through to control racks or ready-to-go control desks. Our aim is to generate maximum benefit for our customers – with no compromises!

Quality creates reliability – and warrants trust.

The **HARTING** brand stands for superior quality and reliability – worldwide. The standards we set are the result of consistent, stringent quality management that is subject to regular certifications and audits.

EN ISO 9001, the EU Eco-Audit and ISO 14001:2004 are key elements here. We take a proactive stance towards new requirements, which is why **HARTING** is the first company worldwide to have obtained the new IRIS quality certificate for rail vehicles.



HARTING technology creates added value for customers.

Technologies by **HARTING** are at work worldwide. **HARTING's** presence stands for smoothly functioning systems powered by intelligent connectors, smart infrastructure solutions and sophisticated network systems. Over the course of many years of close, trust-based cooperation with its customers, the **HARTING** Technology Group has become one of the leading specialists globally for connector technology. We offer individual customers specific and innovative solutions that go beyond the basic standard functionalities. These tailored solutions deliver sustained results, ensure investment security and enable customers to achieve significant added value.

Opting for HARTING opens up an innovative, complex world of concepts and ideas.

In order to develop and produce connectivity and network solutions serving an exceptionally wide range of connector applications in a professional and cost-effective manner, **HARTING** not only commands the full array of conventional tools and basic technologies. Above and beyond these capabilities, **HARTING** is constantly harnessing and refining its broad base of knowledge and experience to create new solutions that also ensure continuity. To secure its lead in know-how, **HARTING** draws on a wealth of sources from its in-house research and applications.

Salient examples of these sources of innovative knowledge include microstructure technologies, 3D design and connection technolo-

gy, high-temperature and ultrahigh-frequency applications that are finding use in telecommunications and automation networks, in the automotive industry, or in industrial sensor and actuator applications, RFID and wireless technologies, in addition to packaging and housing made of plastics, aluminum and stainless steel.

HARTING overcomes technological limitations.

Drawing on the comprehensive resources of the group's technology pool, **HARTING** devises practical solutions for its customers. Whether this involves industrial networks for manufacturing automation, or hybrid interface solutions for wireless telecommunication infrastructures, 3D circuit carriers with microstructures, or cable assemblies for high-temperature applications in the automotive industry – **HARTING** technologies offer not only components, but comprehensive solutions attuned to individual customer requirements and preferences. The range of cost-effective solutions covers ready-to-use cable configurations, completely assembled backplanes and board system carriers, as well as fully wired and tested control panels.

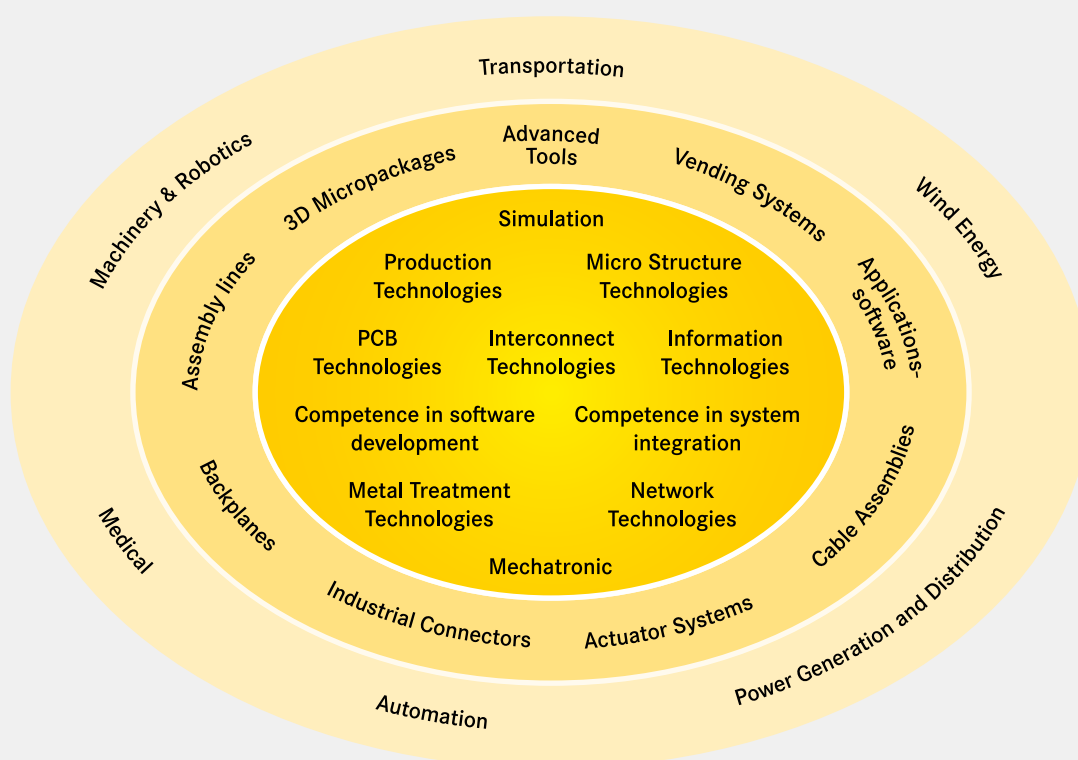
In order to ensure the future-proof design of RF and EMC-compatible interface solutions, the central **HARTING** laboratory (certified to EN 45001) employs simulation tools, as well as experimental, testing and diagnostics facilities all the way to scanning electron microscopes. In addition to product and process suitability considerations, lifecycle and environmental aspects play a key role in the selection of materials and processes.



HARTING's knowledge is practical know-how that generates synergy effects.

HARTING commands decades of experience with regard to the applications conditions involved in connections in telecommunications, computer, network and medical technologies, as well as industrial automation technologies, e.g. in the mechanical engineering and plant engineering areas, in addition to the power generation industry and the transportation sector. **HARTING** is highly

conversant with the specific application areas in all of these technology fields. In every solution approach, the key focus is on the application. In this context, uncompromising, superior quality is our hallmark. Every new solution found invariably flows back into the **HARTING** technology pool, thereby enriching our resources. And every new solution we go on to create will draw on this wealth of resources in order to optimize each and every individual solution. **HARTING** is synergy in action.





The **HARTING eCatalogue / eShop** can be found on our homepage at **www.HARTING.com** or at the direct link **www.eCatalogue.HARTING.com**.

The HARTING e-Catalogue is your platform for conveniently selecting individual products as well as configuring complete solutions. Our comprehensive product pages provide you with all necessary technical information and CAD files in various formats for downloading. You may also contact our technical sales department directly.

Find out about **product innovations and news** on the start page of the HARTING e-Catalogue or go directly to **www.product-news.HARTING.com**.

Registered users can take advantage of MyHARTING to check on availability or prices, and to place or track their orders. Here, your customized „HARTING history“ provides you with a list of your inquiries, quotations and more.

Sign up now for your free e-Catalogue account at HARTING!

www.eShop.HARTING.com

Contents	Page
Summary Han®-sizes	00.2
How to order connectors	00.4
Hoods/Housings connector insert protection	00.5
Types of hood/housing	00.6
Locking systems	00.8
Connection technology	00.9
Electrical engineering data	00.18
Current carrying capacity	00.21
Metric cable thread	00.23
Declaration of Conformity	00.24

Size Description


Han

A




3

Hood side-entry

Hood top-entry





230/400 V 10 A Han® 3 A / 4 A chapter 01	50 V 10 A Staf 6 chapter 09	250 V 10 A Han® 7 D chapter 02	50 V 10 A Han® 8 D chapter 02	230/400 V 16 A Han® Q 5/0 chapter 13	400 V 10 A Han® Q 7/0 chapter 13	50 V 10 A Han-Brid® chapter 19
3 / 4 + ⊕	6	7 + ⊕	8	5 + ⊕	7 + ⊕	4 + 2



Hood top-entry

Hood side-entry










250 V
16 A
Han A®
chapter 01

250 V
10 A
Han D®
chapter 02

50 V
10 A
Staf®
chapter 09

50 V – 1000 V
5 A – 70 A
Han-Modular®
chapter 06






1 module

Housing bulkhead mounting

Housing surface mounting


Hood cable to cable coupling




suitable for 2 inserts of size 16 A

Size Description

B




Hood side-entry




Hood top-entry

250 V 10 A Han D® chapter 02	250 V 10 A Han DD® chapter 02	500 V 16 A Han E® Han® ES chapter 03	500 V 16 A Han® EE Han® EEE chapter 03	400/690 V 35 A Han® HsB chapter 07	830 V 16 A Han Hv E® Han® Hv ES chapter 04	160 V – 690 V 10 A – 100 A Han-Com® chapter 05	50 V – 5000 V 5 A – 200 A Han-Modular® chapter 06


6




24 + $\oplus$



6 + $\oplus$




10 + $\oplus$




2 modules


10




42 + $\oplus$




10 + $\oplus$




18 + $\oplus$



3 + $\oplus$




4/4 + $\oplus$
8/24 + $\oplus$




3 modules


16




40 + $\oplus$




72 + $\oplus$



16 + $\oplus$



40 + $\oplus$
32 + $\oplus$



6 + $\oplus$



6 + $\oplus$




6/36 + $\oplus$
4/2 + $\oplus$




4 modules


24




64 + $\oplus$




108 + $\oplus$




24 + $\oplus$




64 + $\oplus$
46 + $\oplus$



16 + $\oplus$
10 + $\oplus$




4/8 + $\oplus$
6/6 + $\oplus$




6 modules


Housing surface mounting



Housing bulkhead mounting



Hood cable to cable coupling



32

48

suitable for 2 inserts of size 16 B

suitable for 2 inserts of size 24 B

Han

00

3

For a complete connector components may be ordered from the following sub headings

Cable entry protection

- Universal cable glands
- Special cable clamp with strain relief, bell mouthed cable fitting and anti-twist devices
- Cable gland with normal or multiple seal
- Extensive range of accessories

Hoods

- low or high construction
- top or side cable entry
- 1 or 2 locking levers

Male insert with

- screw terminal or
- crimp terminal (order contacts separately)
- or cage-clamp terminal

Female insert with


- screw terminal or
- crimp terminal (order contacts separately)
- or cage-clamp terminal

Housings


- Housing (bulkhead mounting) with or without thermoplastic or metal covers
- 1 or 2 locking levers
- Housing (surface mounting) low or high construction with or without thermoplastic or metal covers
- 1 or 2 locking levers
- 1 or 2 cable entries
- Hood (cable to cable)
- low or high construction
- for cable to cable connections

Accessories

- Protective covers available
- Code and guide pins for coding
- Special insert fixing screws for use without hoods and housings
- Label according to CSA-approval




Cable clamp




Hood



Male contacts



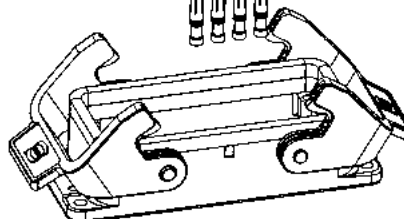
Male insert



Female insert



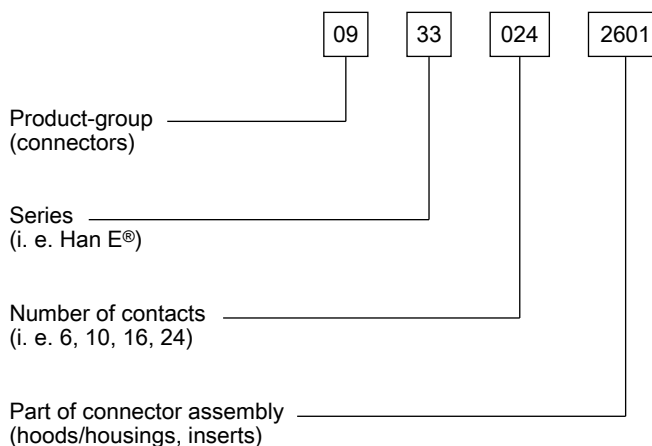
Female contacts



Housing

Part number explanation







Our computerized ordering system uses the following code:



Suitable hoods and housings will be found on the same page.

The connector's housing, sealing and locking mechanism protect the connection from external influences such as mechanical shocks, foreign bodies, humidity, dust, water or other fluids such as cleansing and cooling agents, oils, etc. The degree of protection the housing offers is explained in the IEC 60529, DIN EN 60529, standards that categorize enclosures according to foreign body and water protection.

The following table shows the different degrees of protection.

Code letters (International Protection)		First Index Figure (Foreign bodies protection)		Second Index Figure (Water protection)	
IP		6		5	
Index figure	Degree of protection		Index figure	Degree of protection	
0	No protection		No protection against accidental contact, no protection against solid foreign bodies	0	No protection against water
1	Protection against large foreign bodies		Protection against contact with any large area by hand and against large solid foreign bodies with Ø > 50 mm	1	Drip-proof
2	Protection against medium sized foreign bodies		Protection against contact with the fingers, protection against solid foreign bodies with Ø > 12 mm	2	Drip-proof
3	Protection against small solid foreign bodies		Protection against tools, wires or similar objects with Ø > 2.5 mm, protection against small foreign solid bodies with Ø > 2.5 mm	3	Spray-proof
4	Protection against grain-shaped foreign bodies		As 3 however Ø > 1 mm	4	Splash-proof
5	Protection against injurious deposits of dust		Full protection against contact. Protection against interior injurious dust deposits	5	Hose-proof
6	Protection against ingress of dust		Total protection against contact. Protection against penetration of dust	6	Strong hose-proof
				7	Protected against immersion
				8	Water-tight
				9K *	Protected against high-pressure

Standard hoods/housings for industrial connectors

Field of application	For excellent mechanical and electrical protection in demanding environments, for example, in the automobile and mechanical engineering industries also for process and regulation control applications
Distinguishing feature	Hoods/housings colour-coded grey (RAL 7037)
Material of hoods/housings	Die-cast light alloy
Locking levers	Han-Easy Lock®
Cable entry protection	Optional special cable clamp for hoods with strain relief, bell mouthed cable fitting and anti-twist devices



Han® M hoods/housings for more demanding environmental requirements

Field of application	For all applications where aggressive environmental conditions and extreme climatic atmospheres are encountered
Distinguishing feature	Hoods/housings colour-coded black (RAL 9005)
Material of hoods/housings	Die-cast light alloy, corrosion resistant
Locking levers	Corrosion resistant stainless steel
Cable entry protection	Special cable clamp for hoods with strain relief, bell mouthed cable fitting and anti-twist devices



Han® EMC hoods/housings for higher EMC requirements

Field of application	For sensitive interconnections that have to be shielded against electrical, magnetic or electro-magnetic interferences
Distinguishing feature	Electrically conductive surface, internal seal
Material of hoods/housings	Die-cast light alloy
Locking levers	Han-Easy Lock®
Cable entry protection	EMC cable clamp in order to connect the cable shielding to the hood without interruption of the shielding



Han® HPR hoods/housings for harsh outdoor environments

Field of application	For external electrical interconnections in vehicles, in highly demanding environments and wet areas, as well as for sensitive interconnections that have to be shielded
Distinguishing feature	Hoods/housings colour-coded black, internal seal (RAL 9005)
Locking parts	Stainless steel
Material of hoods/housings	Die-cast light alloy, corrosion resistant
Cable entry protection	Optional universal cable clamp for hoods with strain relief, or special cable clamp with bell mouthed cable fitting and anti-twist devices (use of adapter is necessary)



Han-INOX® hoods/housings for harsh environments

Field of application	For excellent mechanical and electrical protection in demanding environments, for example, in the food, automobile and mechanical engineering industries also for process and regulation control applications
Distinguishing feature	Matt-finished metal surface
Material of hoods/housings	Stainless steel
Locking levers	Stainless steel
Cable entry protection	Standard cable gland (stainless steel)



Han-Eco® – Lightweight hood/housing made of high-performance plastic

Field of application	Industrial environments, outdoor applications
Distinguishing feature	Black plastic hoods / housings
Material of hoods/housings	Polyamide (glass-fibre reinforced)
Locking levers	Double locking lever / single locking lever (10 A / 16 A) (polyamide, glass-fibre reinforced)
Cable entry protection	Integrated plastic cable gland (optional) for sizes 6 B, 10 B, 16 B, 24 B / 10 A, 16 A



Han

Han-Yellok® – Compact hood/housing in a shapely design

Field of application	Industrial environments (e.g. in robotics, machinery)
Distinguishing feature	Internal locking mechanism, push-buttons, two-part hood
Material of hoods/housings	Zinc die-cast, aluminum
Locking parts	Stainless steel and polyamide
Cable entry protection	Standard cable gland (with metric threads M20 / M25 / M32 / M40) for hoods with strain relief or special cable glands



Recommended tightening torque for housings, bulkhead mounting

Series	Number of screws	Size of screws	Recommended Tightening torque (Nm)	Remarks
Han® 3 A	2	M 3	0.8 ... 1.0	Gasket
Han® 10 A / 16 A	4	M 3	0.8 ... 1.0	Gasket
Han® 15 EMV / 25 EMV	4	M 3	min. 1.0	O-ring
Han® 32 A	4	M 4	0.8 ... 1.0	Gasket
Han® 6 B / 10 B / 16 B / 24 B	4	M 4	0.8 ... 1.0	Gasket
Han® 32 B	4	M 5	min. 2.5	O-ring
Han® 48 B	4	M 6	min. 3.0	O-ring
Han® 3 HPR	2	M 4	min. 1.0	O-ring
Han® 6 / 10 / 16 / 24 HPR	4	M 6	min. 3.0	O-ring
Han® 48 HPR	4	M 8	min. 5.0	O-ring

To offer safe protection the surface condition for mounting panel should be according to DIN 4766:

- Waviness ≤ 0.2 mm on 200 mm distance
- Roughness $R_a \leq 16$ μ m

General remark for assembling

During assembly and handling of the connector, any kind of damage to the surface of the housing must be avoided to guarantee the correct surface protection.

Housing with 2 levers Han-Easy Lock®

- ☐ easy operation
- ☐ high degree of pressure tightness
- ☐ reliable locking guaranteed by 4 locking points
- ☐ space saving mounting
- ☐ ideal for mounting side by side
- ☐ cable to cable connection is possible
- ☐ high seal force

Details of Han-Easy Lock® see chapter 31



Housing with 1 lever Han-Easy Lock®

- ☐ easily accessible, even with side entry
- ☐ possibility to lock protective covers on the housing
- ☐ cable to cable connection is possible
- ☐ 2 locking points on the longitudinal axis



1 lever in central position

- ☐ easily accessible, even with side entry
- ☐ 2 locking points on the lateral axis
- ☐ space saving mounting
- ☐ ideal for mounting side by side
- ☐ single hand operation



Screw locking / toggle locking

- ☐ hexagon nuts tightened with spanner
- ☐ highest degree of pressure tightness
- ☐ easily accessible, also with side entry
- ☐ use of tools avoids access by unauthorized persons



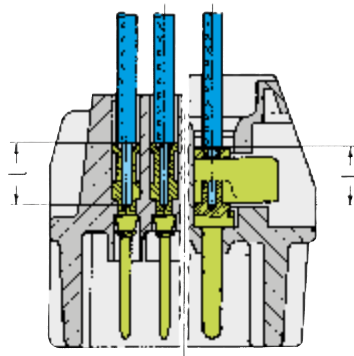
Hood with 2 levers Han-Easy Lock®

- ☐ easy operation
- ☐ high degree of pressure tightness
- ☐ ideal for mating to housings with protection cover
- ☐ high seal force


Details of Han-Easy Lock® see chapter 31



Crimp connection



Han DD®
Han D®
R 15
Han-Modular® (10 A)
Han E®
Han A®
Han Hv E®



Han-Com® (40 A)
Han-Modular® (40 A)
Han E®
Han A®
Han Hv E®
Han® EE
Han® EEE
Han-Modular® (16 A)
Han® Q

A perfect crimp connection is gastight, therefore corrosion free and amounts to a cold weld of the parts being connected. For this reason, major features in achieving high quality crimp connections are the design of the contact crimping parts and of course the crimping tool itself. Wires to be connected must be carefully matched with the correct size of crimp contacts. If these basic requirements are met, users will be assured of highly reliable connections with low contact resistance and high resistance to corrosive attack.

The economic and technical advantages are:

- Constant contact resistance as a result of precisely repeated crimp connection quality
- Corrosion free connections as a result of cold weld action
- Pre-preparation of cable forms with crimp contacts fitted
- Optimum cost cable connection

Requirements for crimp connectors are laid down in DIN EN 60352-2 as illustrated in the table.

Pull out force of stranded wire

The main criterion by which to judge the quality of a crimp connection is the retention force achieved by the wire conductor in the terminal section of the contact. DIN EN 60352-2 defines the extraction force in relation to the cross-section of the conductor. When fitted using HARTING crimping tools and subject to their utilization in an approved manner, our crimp connectors comply with the required extraction forces.

Crimping tools

Crimping tools (hand operated or automatic) are carefully designed to produce with high pressure forming parts a symmetrical connection of the crimping part of the contact and the wire being connected with the minimum increase in size at the connection point. The positioner automatically locates the crimp and wire at the correct point in the tool.

A ratchet in the tool performs 2 functions:

- It prevents insertion of the crimp into the tool for crimping before the jaws are fully open
- It prevents the tool being opened before the crimping action is completed

Identical, perfectly formed, connections can be produced using this crimping system.

Crimp-cross section



HARTING-crimp profile




BUCHANAN crimp profile

Tensile strength of crimped connections
(Table 1 of the DIN EN 60352-2)

Conductor cross-section		Tensile strength
mm²	AWG	N
0.05	30	6
0.08	28	11
0.12	26	15
0.14		18
0.22	24	28
0.25		32
0.32	22	40
0.5	20	60
0.75		85
0.82	18	90
1.0		108
1.3	16	135
1.5		150
2.1	14	200
2.5		230
3.3	12	275
4.0		310
5.3	10	355
6.0		360
8.4	8	370
10.0		380

Wire gauge		Internal diameter	Stripping length l (mm)		
(mm²)	AWG	Ø (mm)	Han® DD Han® D R15 Han-Modular® (10 A)	Han E® Han A® Han Hv E®	Han® C
0.14 ... 0.37	26 ... 22	0.9	8	-	-
0.5	20	1.15	8	7.5	-
0.75	18	1.3	8	7.5	-
1	18	1.45	8	7.5	-
1.5	16	1.75	8	7.5	9.5
2.5	14	2.25	6	7.5	9.5
4	12	2.85	-	7.5	9.5
6	10	3.5	-	-	9.5
10	8	4.3	-	-	12-18

Screw terminal



Screw terminals meet VDE 0609 /EN 60 999. Dimensions and tightening torques for testing are shown in following table.


Screw dimensions and tightening torque for screw terminals

Wire gauge (mm ²)	1.5	2.5	4	6	10	16
Screw thread	M3	M3	M3.5	M4	M4	M6
Test moment of torque (Nm)	0.5	0.5	0.8	1.2	1.2	1.2*
min. pull-out for stranded wire (N)	40	50	60	80	90	100

* for screws without heads


The relevant regulations state that in the case of

- Terminals with wire protection



the use of ferrules is not necessary. Series Han E®, Han® HsB, Han Hv E®, Han® K 6/12, Han® K 6/6

- Terminals without wire protection



The insulation is first stripped and then a wire ferrule must be used.

Series Han® K 4/x, Han A®, Staf®

Screw terminal

Inserts	Wire protection		min. wire gauge		max. wire gauge*		Stripping length
	Yes	No	mm ²	AWG	mm ²	AWG	
Han® 3 A, Han® 4 A		X	0.75	18	1.5	16	4.5
Han® 10 A, 16 A, 32 A		X	0.75	18	2.5	14	7.5
Han E®, Hv E®	X		0.75	18	2.5	14	7.5
Han® HsB	X		1.5	16	6	10	11.5
Han® K 6/6, K 6/12 (signal contacts)	X		0.2	24	2.5	14	7.5
Han® K 4/2, K 4/8 (signal contacts)		X	0.5	20	2.5	14	7.5
Han® K 4/0, K 4/2, K 4/8 (power contacts)		X	1.5	16	16	6	14
Han E® AV, Han D® AV	X		0.2	24	2.5	14	8 ... 11
Staf®		X	0.5	18	1.5	16	4.5

* Rated wire gauge according to DIN EN 60 999-1

Recommended screw drivers and tightening torques

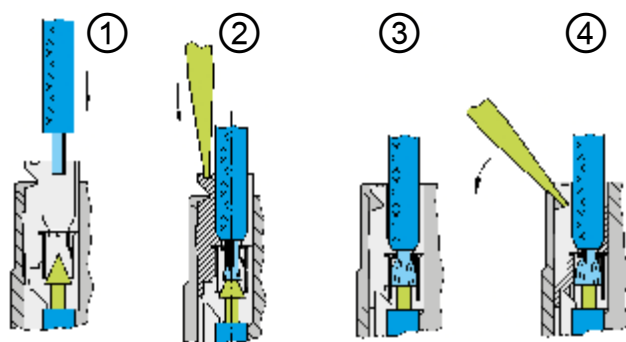

Screw size	Connector type	Tightening torque (Nm)	Tightening torque (lbft)	Recommended screw driver
M3	Screw terminals: Han® 3 A / 4 A, Q 5/0 (PE), Q 7/0 (PE), Staf®	0.25	0.20	slotted 0.4 x 2.5
M3	Screw terminals: Han D® AV, Han E® AV, Han® K 6/6 / K 6/12 (signal)	0.5	0.4	slotted 0.5 x 3.0
M3	Screw terminals: Han® 10 A ... 32 A, Han® E, Hv E®, Han® HsB	0.5	0.4	slotted 0.6 x 3.5 or PH 1
M3	Han® fixing screws	0.5	0.4	slotted 0.6 x 3.5 or PH 1 or PH 2
M3	Han® guiding pins and bushes	0.5	0.4	slotted 1 x 6.0
M3.5	Ground terminals: Han® 10 A, Han® 16 A, Han 15 D®, Han 25 D®	0.8	0.6	slotted 0.6 x 3.5 or PH 1
M4	Screw terminals: Han® HsB	1.20	0.90	slotted 0.6 x 3.5 or PH 1
M4	Ground terminals: Han E®, Han 40 D®, Han 64 D®, Han DD®, Han® K 8/24 / K 6/6 / K 8/0	1.20	0.90	slotted 0.8 x 4.5 or PH 2
M5	Ground terminals: Han® HsB, Han® K 12/2 / K 4/X / K 6/12 / K 6/36	2	1.40	slotted 0.8 x 4.5 or PH 2
M6	Screw terminals: Han® K power contacts, Han-Eco® PE module	for Han® K see chapter 05, Han-Eco® PE module (1.2-3 Nm)		slotted 0.8 x 4.5

Preferred size

Increasing the tightening torque does not improve considerably the contact resistances. The torque moments were determined when optimum mechanical, thermal and electrical circumstances were given. If the recommended figures are considerably exceeded the wire or the termination can be damaged.

Han

Han-Quick Lock® termination technique



This new termination technique from HARTING combines the reliability and the simple operation of the cage clamp termination with the low space requirements of crimp technology.

Han-Quick Lock® is ideally suited to high contact densities and is considerably superior over other termination techniques. No other technology is so simple, space saving and fast. For this vibration safe termination, no special tools are necessary.

- Fast, simple and robust termination technique
- Field assembly without a special tool
- Compatible also to inserts with other termination technologies
- Combines high contact density similar to crimp termination with the simple connection like a cage clamp terminal

Insert connectors:

Han® 3 A
Han® 4 A
Han® 7 D
Han® 8 D
Han® Q 4/2
Han® Q 5/0
Han® Q 8/0
Han® Q 12/0
Han® EE modules
Han® DD modules
Han® PushPull Power 4/0

Technical characteristics:

Material

Isolation body	Polycarbonate
Active termination element	Polycarbonate
Quick-Lock spring	Stainless steel
Contact	Copper alloy

Blue slide

Terminal cross-section
0.5 ... 2.5 mm² / AWG 20 ... 14

Black slide

Terminal cross-section
0.25 ... 1.5 mm² / AWG 23 ... 16

Stripping length

10 mm

Insulating resistance

> 10¹⁰ Ohm

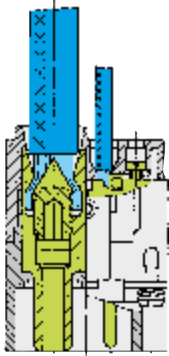
Flammability

according to UL 94 V 0

Termination tool

Screwdriver
0.4 x 2.5 mm bzw. 0.5 x 3.0 mm

Axial screw terminal



This termination combines the benefits of screw and crimp terminations:

- Less space required
- Easy handling
- No special tools

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Background:

According to DIN EN 60 228 for cables and insulated wires the wire gauge will be determined by conductance (Ω/km) and maximum wire diameter. A minimum cable diameter is not specified! (Example: nominal wire gauge = $95 \text{ mm}^2 \rightarrow$ real, geometric wire gauge = 89 mm^2)

Recommendation:

If you want to apply the axial screw technique in combination with cables that have cross sections extremely deviating from the nominal value, this must be checked separately.

Strain relief:

In order to ensure that the contact is protected against radial stress, you must fix the cable at an adequate distance from the terminal.

Details for professional strain relief design can be found in the standard DIN VDE 0100-520: 2003-06 (see enclosed table).

Outer cable diameter (mm)	Maximum fixing distance (mm)	
	horizontal	vertical
$D \leq 9$	250	400
$9 < D < 15$	300	400
$15 < D < 20$	350	450
$20 < D < 40$	400	550

Cables:

The axial screw technology is developed for wires according to DIN EN 60 228 class 5 (see table: Wire assembly according to DIN EN 60 228). Deviating cable assemblies have to be tested separately.

Assembly remarks:

Before starting the assembly the user must ensure that the axial cone is screwed fully downward to completely open the contact chamber.

After stripping the cable insulation the strands must not be twisted and the maximum cable insulation must not exceed the recommended dimension.

Insert the wire completely into the contact chamber until the copper strands reach the bottom. Keep the cable in position while applying the recommended tightening torque.

Maintenance of the axial screw termination:

In order to avoid damage to individual cable strands you must re-apply the tightening torque only once after the initial assembly of the application.

Wire gauge (mm^2)	Stranded wires DIN EN 60 228 class 2	Fine stranded wires DIN EN 60 228 class 5	Super fine stranded wires DIN EN 60 228 class 6			
0.5	7 x 0.30	16 x 0.20	28 x 0.15	64 x 0.10	131 x 0.07	256 x 0.05
0.75	7 x 0.37	24 x 0.20	42 x 0.15	96 x 0.10	195 x 0.07	384 x 0.05
1	7 x 0.43	32 x 0.20	56 x 0.15	128 x 0.10	260 x 0.07	512 x 0.05
1.5	7 x 0.52	30 x 0.25	84 x 0.15	192 x 0.10	392 x 0.07	768 x 0.05
2.5	7 x 0.67	50 x 0.25	140 x 0.15	320 x 0.10	651 x 0.07	1280 x 0.05
4	7 x 0.85	56 x 0.30	224 x 0.15	512 x 0.10	1040 x 0.07	
6	7 x 1.05	84 x 0.30	192 x 0.20	768 x 0.10	1560 x 0.07	
10	7 x 1.35	80 x 0.40	320 x 0.20	1280 x 0.10	2600 x 0.07	
16	7 x 1.70	128 x 0.40	512 x 0.20	2048 x 0.10		
25	7 x 2.13	200 x 0.40	800 x 0.20	3200 x 0.10		
35	7 x 2.52	280 x 0.40	1120 x 0.20			
50	19 x 1.83	400 x 0.40	705 x 0.30			
70	19 x 2.17	356 x 0.50	990 x 0.30			
95	19 x 2.52	485 x 0.50	1340 x 0.30			
120	37 x 2.03	614 x 0.50	1690 x 0.30			
150	37 x 2.27	765 x 0.50	2123 x 0.30			
185	37 x 2.52	944 x 0.50	1470 x 0.40			
240	61 x 2.24	1225 x 0.50	1905 x 0.40			

Wire assembly according to DIN EN 60 228

Insert	Wire gauge	Stripping length		Tightening torque		Max. cable insulation diameter	Size hexagon recess	Insert dimension for cable indication (ISK)
	(mm²)	(mm)		(Nm)		(mm)	(SW)	(mm)
Han® K 4/4 finger proofed	6 ... 16	6 mm²:	11+1	6 mm²:	2	8.9	2.5	7.4 PE: 8.9
		10 mm²:	11+1	10 mm²:	3			
		16 mm²:	11+1	16 mm²:	4			
	10 ... 22	10 mm²:	11+1	10 mm²:	3	8.9 8.9 11	2.5	7.4 7.4 5.4 PE: 8.9
		16 mm²:	11+1	16 mm²:	4			
		22 mm²:	11+1	22 mm²:	4			
Han® K 4/4	6 ... 16	6 mm²:	11+1	6 mm²:	2	8.9	2.5	7.4 PE: 8.9
		10 mm²:	11+1	10 mm²:	3			
		16 mm²:	11+1	16 mm²:	4			
	10 ... 22	10 mm²:	11+1	10 mm²:	3	8.9 8.9 11	2.5	7.4 7.4 5.4 PE: 8.9
		16 mm²:	11+1	16 mm²:	4			
		22 mm²:	13+1	22 mm²:	4			
Han® K 6/12	2.5 ... 8	2.5 mm²:	5+1	2.5 mm²:	1.5	6.2	2	7.4
		4 mm²:	5+1	4 mm²:	1.5			
		6 mm²:	8+1	6 mm²:	2			
		8 mm²:	8+1	8 mm²:	2			
	6 ... 10	6 mm²:	8+1	6 mm²:	2	6.2	2	4.7
		8 mm²:	8+1	8 mm²:	2			
		10 mm²:	8+1	10 mm²:	2			
Han® K 6/6	10 ... 25	10 mm²:	13+/-1	10 mm²:	6	11.4	4	4.9
		16 mm²:	13+/-1	16 mm²:	6			
		25 mm²:	13+/-1	25 mm²:	7			
	16 ... 35	16 mm²:	13+/-1	16 mm²:	6	11.4	4	4.9
		25 mm²:	13+/-1	25 mm²:	7			
		35 mm²:	13+/-1	35 mm²:	8			
Han® K 8/0	10 ... 25	10 mm²:	13+/-1	10 mm²:	6	11.4	4	4.75
		16 mm²:	13+/-1	16 mm²:	6			
		25 mm²:	13+/-1	25 mm²:	7			
Han® Q 2/0 Han® Q 2/0 High Voltage	2.5 ... 10	2.5 mm²:	8+1	2.5 mm²:	1.8	7.3	2	5.6
		4 mm²:	8+1	4 mm²:	1.8			
		6 mm²:	8+1	6 mm²:	1.8			
		10 mm²:	8+1	10 mm²:	1.8			
Han® Q 4/2 Han® Q 4/2 with Han-Quick Lock®	4 ... 10	4 mm²:	8+1	4 mm²:	1.8	7.3	2	5.6
		6 mm²:	8+1	6 mm²:	1.8			
		10 mm²:	8+1	10 mm²:	1.8			
Han® 200 A module without PE Han® 200 A module with PE	25 ... 40	25 mm²:	16	25 mm²:	8	12 16 16	5	0
		40 mm²:	16	40 mm²:	8			
		70 mm²:	16	70 mm²:	10			
	40 ... 70	40 mm²:	16	40 mm²:	9	12 16 16	5	0
		70 mm²:	16	70 mm²:	10			
		70 mm²:	16	70 mm²:	10			
Han® 100 A module	6 ... 10	6 mm²:	13+/-1	6 mm²:	4	11.4	2.5	4.9
		8 mm²:	13+/-1	8 mm²:	4			
		10 mm²:	13+/-1	10 mm²:	4			
	10 ... 25	10 mm²:	13+/-1	10 mm²:	6	11.4	4	4.9
		16 mm²:	13+/-1	16 mm²:	6			
		25 mm²:	13+/-1	25 mm²:	7			
	16 ... 35	16 mm²:	13+/-1	16 mm²:	6	11.4	4	4.9
		25 mm²:	13+/-1	25 mm²:	7			
		35 mm²:	13+/-1	35 mm²:	8			
	38	38 mm²:	13+/-1	38 mm²:	8	11.4	4	4.9
Han® 70 A module	6 ... 16	6 mm²:	11+1	6 mm²:	2	8.9	2.5	7.4
		10 mm²:	11+1	10 mm²:	3			
		16 mm²:	11+1	16 mm²:	4			
	14 ... 22	14 mm²:	12.5+1	14 mm²:	4	10	2.5	5.9
		16 mm²:	12.5+1	16 mm²:	4			
		22 mm²:	12.5+1	22 mm²:	4			
Han® 40 A module	2.5 ... 8	2.5 mm²:	5+1	2.5 mm²:	1.5	4 4 6 10.5	2	4.7
		4 mm²:	5+1	4 mm²:	1.5			
		6 mm²:	8+1	6 mm²:	2			
		8 mm²:	11+1	10 mm²:	2			
	6 ... 10	6 mm²:	8+1	6 mm²:	2	6 10.5	2	4.7
		10 mm²:	11+1	10 mm²:	2			


Insert	Wire gauge	Stripping length		Tightening torque		Max. cable insulation diameter	Size hexagon recess	Insert dimension for cable indication (ISK)
	(mm ²)	(mm)		(Nm)		(mm)	(SW)	(mm)
Han® C module with axial screw terminal	2.5 ... 8	2.5 mm ² :	5+1	2.5 mm ² :	1.5	4	2	5.2
		4 mm ² :	5+1	4 mm ² :	1.5	4		
		6 mm ² :	8+1	6 mm ² :	2	6		
		8 mm ² :	8+1	8 mm ² :	2	8.2		
Han® K3/0 straight	25 ... 40	6 mm ² :	8+1	6 mm ² :	2	6	2	5.2
		10 mm ² :	11+1	10 mm ² :	2	8.2		
		25 mm ² :	22	25 mm ² :	8	15		
		40 mm ² :	22	40 mm ² :	8	15		
Han® K3/0 angled	35 ... 70	35 mm ² :	22	35 mm ² :	8	15	5	8.2
		50 mm ² :	22	50 mm ² :	9	15		
		70 mm ² :	22	70 mm ² :	10	15		
		25 mm ² :	22	25 mm ² :	8	15		
Han® K3/2 straight	25 ... 40	40 mm ² :	22	40 mm ² :	8	15	5	9
		35 mm ² :	22	35 mm ² :	8	15		
		50 mm ² :	22	50 mm ² :	9	15		
		70 mm ² :	22	70 mm ² :	10	15		
Han® K3/2 angled	35 ... 70	35 mm ² :	22	35 mm ² :	8	15	5	8.2
		50 mm ² :	22	50 mm ² :	9	15		
		70 mm ² :	22	70 mm ² :	10	15		
		25 mm ² :	22	25 mm ² :	8	15		
Han® HC Modular 350	25 ... 40	25 mm ² :	22	25 mm ² :	8	15	5	9
		40 mm ² :	22	40 mm ² :	8	15		
		50 mm ² :	22	50 mm ² :	9	15		
		70 mm ² :	22	70 mm ² :	10	15		
Han® HC Modular 650	60 ... 70	60 mm ² :	23+2	60 mm ² :	12	27	8	28
		70 mm ² :	23+2	70 mm ² :	12	27		
		150 mm ² :	23+2	150 mm ² :	17	26.5		
		185 mm ² :	23+2	185 mm ² :	18	26.5		

Overview inserts with axial screw terminal

Insulating base dimension for the cable marking (ISK)

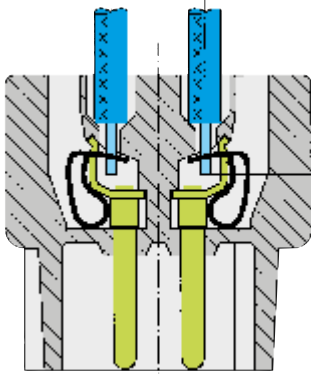
Marking the proper cable position for the axial screw connection contact point:

By marking the cable sheathing you can specify the proper point for tightening the axial screw on the connecting cable. If the cable is pushed into the insulating base up to the marker (where the marker is flush with the upper edge of the insulating base), then the cable is in the correct position for being connected. The following figure (on the next page) illustrates this process when using the Han® HC Modular 350 contact. The marker and the upper edge of the insulating base are at the same level (as indicated by the dashed line).



- ① stripping length
- ② insulator dimension (ISK dimension)
- ③ max. cable insulation diameter
- ④ sink line

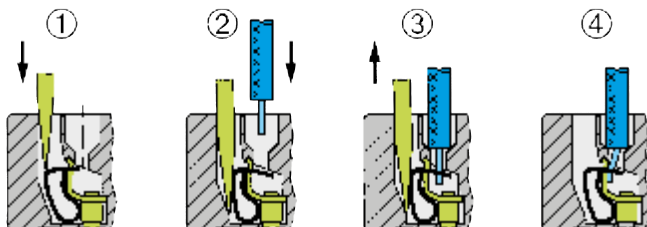

Cage-clamp terminal



This termination method requires very little preparation of the wire and no special tools, leading to a low installed cost and a high degree of mechanical security.

- For all stranded and solid wires with a cross section 0.14 to 2.5 mm².
- Ease of termination. Conductor and screwdriver are in same plane.
- No special preparation of stripped conductor.
- The larger the conductor the higher the clamping force.
- The termination is vibration-proof.
- Guaranteed constant low resistance connection of the cage-clamp terminal.
- The cage-clamp system is internationally approved. VDE, CSA, UL, ÖVE, SEMKO, LCIE (France), Germanischer Lloyd, DET Norske Veritas

One conductor per termination Slot for screwdriver



Screwdriver width: 0.6 x 3.5 mm

Kontakteinsätze	max. Leiterquerschnitt		Abisolierlänge
	(mm ²)	AWG	l (mm)
Han® ES, Han® Hv ES	0.14 ... 2.5	26 ... 14	7 ... 9
Han® ESS	0.14 ... 2.5	26 ... 14	9 ... 11
Han® ES Press	0.14 ... 2.5	26 ... 14	9 ... 11
Han® K 4/4	0.14 ... 2.5	26 ... 14	7 ... 9
Han® ES Modul	0.14 ... 2.5	26 ... 14	7 ... 9

Han® ES Press

The circular openings in the insert are used to hold the wire that is being connected. Note that there are two rows of rectangular holes (intended for plug-in jumpers) located between the contact openings of the Han® ES Press insert.

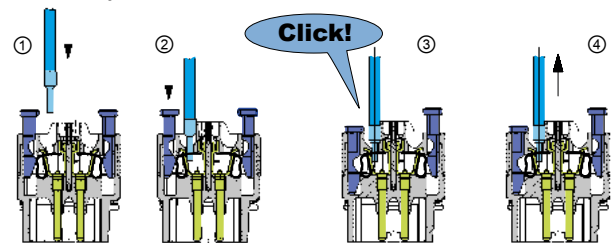
Note: Only one wire per termination point!

Each termination point is, in principle, only suited to hold a single wire. When required, two or more wires may be contacted per termination point; contact HARTING Technical Support first for more information.

Note!

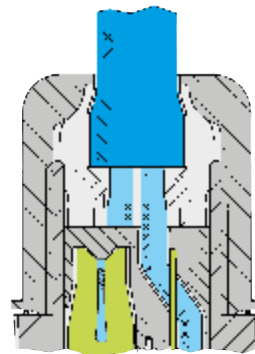
An effective and durable spring clamp connection requires that the wire is properly stripped. The correct stripping lengths for the Han® ES Press contacts are specified in the table below, left side.

Assembly



④ = Gentle test pull!

IDC (Insulation displacement terminal)



Inserts	max. wire gauge	
	(mm ²)	AWG
M8-S/M12-S	0.14 ... 0.34	26 ... 22
Circular connectors M12 angled	0.25 ... 0.50	24 (7/32) ... 22
Circular connectors M12-L	0.34 ... 0.75	22 ... 18
M12-L PROFIBUS	0.25 ... 0.34	24 ... 22
M12-L Ethernet	0.25 ... 0.34	24 ... 22
	0.34 ... 0.5	22 ... 18
Panel feed through Pg 13.5 /M20	0.75 ... 1.50	18 ... 16
Panel feed through Pg 9	0.25 ... 0.50	24 (7/32) ... 22
HARAX® 3 A	0.75 ... 1.5	18 ... 16

General

The choice of connectors entails more than just considering factors such as functionality, the number of contacts, current and voltage ratings. It is equally important to take account of where the connectors are to be used and the prevailing ambient conditions. This in turn means that, dependent on the conditions under which they are to be installed and pursuant to the relevant standards, different voltage and current ratings may apply for the same connectors.

The most important influencing factors and the corresponding electrical characteristics of the associated connectors are illustrated here in greater detail.

Overvoltage category

The overvoltage category is dependent on the mains voltage and the location at which the equipment is installed. It describes the maximum overvoltage resistance of a device in the event of a power supply system fault, e. g. in the event of a lightning strike.

The overvoltage category affects the dimensioning of components in that it determines the clearance air gap. Pursuant to the relevant standards, there are 4 overvoltage categories.

Equipment for industrial use, such as fall HARTING heavy duty Han connector, fall into Overvoltage Category III.

Extract from DIN VDE 0110-1 and IEC 60 664-1, Para. 2.2.2.1.1

Equipment of overvoltage category IV is for use at the origin of the installation.

Note 1: Examples of such equipment are electricity meters and primary overcurrent protection equipment.

Equipment of overvoltage category III is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirements.

Note 2: Examples of such equipment are switches in the fixed installation and equipment for industrial use with permanent connection to the fixed installation.

Equipment of overvoltage category II is energy-consuming equipment to be supplied from the fixed installation.



Note 3: Examples of such equipment are appliances, portable tools and other household equipment with similar loads.

If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies.

Equipment of overvoltage category I is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriately low level.

Note: Examples are protected electronic circuits.

Rated impulse voltages (Table B2 of DIN EN 60 664-1)

Voltage line-to-neutral derived from nominal voltages A.C. or D.C. up to and including	Nominal voltages presently used in the world (= Rated insulation voltage of equipment)				Rated impulse voltage for equipment				
	Three-phase 4-wire systems with earthed neutral	Three-phase 3-wire systems earthed or un-earthed	Single-phase 2-wire systems A.C. or D.C.	Single-phase 3-wire systems A.C. or D.C.	Overvoltage category				
					I Special protected levels	II Level for electrical equipment (household and others)	III Level for distribution supply systems	IV Input level	
V	V	V	V	V	V	V	V	V	
50			12.5 25 42	24 30 48	30 ... 60	330	500	800	1500
100	66/115	66	60		500	800	1500	2500	
150	120/208* 127/220	115, 120 127	100** 110, 220	100 ... 200** 110 ... 220 120 ... 240	800	1500	2500	4000	
300	220/380, 230/400 240/415, 260/440 277/480	200**, 220 230, 240 260, 277	220	220 ... 440	1500	2500	4000	6000	
600	347/600, 380/660 400/690, 417/720 480/830	347, 380, 400 415, 440, 480 500, 577, 600	480	480 ... 960	2500	4000	6000	8000	
1000		660 690, 720 830, 1000	1000		4000	6000	8000	12 000	

* ... Practice in the U.S.A and in Canada

** ... Practice in Japan

Pollution degree

The dimensioning of operating equipment is dependent on environmental conditions. Any pollution or contamination may give rise to conductivity that, in combination with moisture, may affect the insulating properties of the surface on which it is deposited. The pollution degree influences the design of components in terms of the creepage distance.

The pollution degree is defined for exposed, unprotected insulation on the basis of environmental conditions.

HARTING heavy duty Han connectors are designed as standard for Pollution Degree 3.

Pollution degree 1
in air-conditioned or clean, dry rooms, such as computer and measuring instrument rooms, for example.

Pollution degree 2
in residential, sales and other business premises, precision engineering workshops, laboratories, testing bays, rooms used for medical purposes. As a result of occasional moisture condensation, it is to be anticipated that pollution/contamination may be temporarily conductive.

Pollution degree 3
in industrial, commercial and agricultural premises, unheated storage premises, workshops or boiler rooms, also for the electrical components of assembly or mounting equipment and machine tools.

Pollution degree 4
in outdoor or exterior areas such as equipment mounted on the roofs of locomotives or tramcars.

Extract from DIN EN 60 664-1 (VDE 0110-1), Para. 4.6.2

Pollution degree 1: No pollution or only dry, non-conductive pollution occurs. The pollution has no influence.

Pollution degree 2: Only non-conductive pollution occurs except that occasionally a temporary conductivity caused by condensation is to be expected.

Pollution degree 3: Conductive pollution occurs or dry non-conductive pollution occurs which becomes conductive due to condensation which is to be expected.

Pollution degree 4: Continuous conductivity occurs due to conductive dust, rain or other wet conditions.

Special ruling for connectors

Subject to compliance with certain preconditions, the standard for connectors permits a lower pollution degree than that which applies to the installation as a whole. This means that in a pollution degree 3 environment, connectors may be used which are electrically rated for pollution degree 2.

The basis for this is contained in DIN EN 61 984, Para. 6.19.2.3.

Extract from DIN EN 61 984, Para. 6.19.2.3

For a connector with a degree of protection IP 54 or higher according to IEC 60 529 the insulating parts inside the enclosure may be dimensioned for a lower pollution degree.

This also applies to mated connectors where enclosure is ensured by the connector housing and which may only be disengaged for test and maintenance purposes.

The conditions fulfills,

- a connector which is protected to at least IP 54 as per IEC 60 529,
- a connector which is installed in a housing and which as described in the standard is disconnected for testing and maintenance purposes only,
- a connector which is installed in a housing and which when disconnected is protected by a cap or cover to at least IP 54,
- a connector located inside a switching cabinet to at least IP 54.

These conditions do not extend to connectors which when disconnected remain exposed to the industrial atmosphere for an indefinite period.

It should be noted that pollution can affect a connector from the inside of an installation outwards.

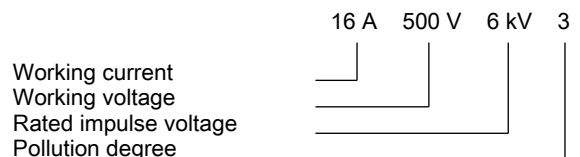
Typical applications in which to choose pollution degree 2 connectors:

- A connector serving a drive motor which is disconnected only for the purpose of replacing a defective motor, even when the plant or system otherwise calls for pollution degree 3.
- Connectors serving a machine of modular design which are disconnected for transport purposes only and enable rapid erection and reliable commissioning. In transit, protective covers or adequate packing must be provided to ensure that the connectors are not affected by pollution/contamination.
- Connectors located inside a switching cabinet to IP 54. In such cases, it is even possible to dispense with the IP 54 housings of the connectors themselves.

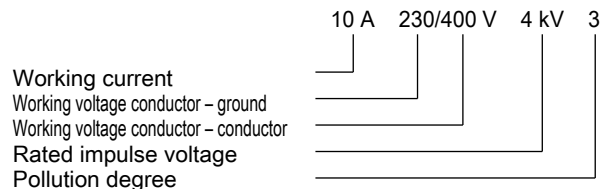
Specifying electrical data

Electrical data for connectors are specified as per DIN EN 61 984.

This example identifies a connector suitable for use in an unearthed power system or earthed delta circuit (see page 00.22, Table B2 of DIN EN 60 664-1):



This example identifies a connector suitable exclusively for use in earthed power systems (see page 00.22, Table B2 of DIN EN 60 664-1):



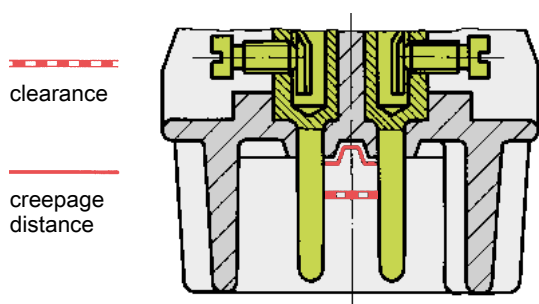
Other terms explained

Clearance air gap

The shortest distance through the air between two conductive elements (see DIN EN 60664-1 (VDE 0110-1), Para. 3.2). The air gaps are determined by the surge voltage withstand level.

Creepage distance

Shortest distance on the surface of an solid insulating material between two conductive elements (see DIN EN 60664-1 (VDE 0110-1), Para. 3.3). The creepage distances are dependent on the rated voltage, the pollution degree and the characteristics of the insulating material.

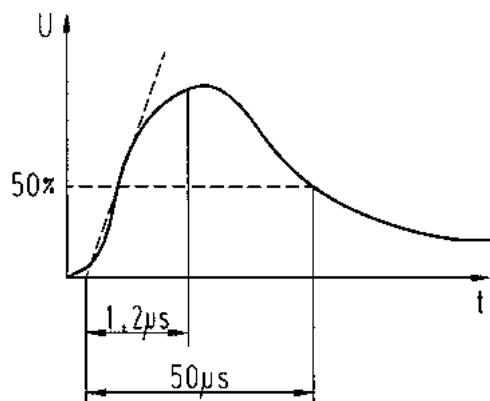


Working voltage

Fixed voltage value on which operating and performance data are based. More than one value for rated voltage or rated voltage range may be specified for the same connector.

Rated impulse voltage

The rated impulse voltage is determined on the basis of the overvoltage category and the nominal power supply voltage. This level in turn directly determines the test voltage for testing the overvoltage resistance of the connector (Waveform voltage in 1.2/50 μ s as per IEC 60060-1).



Working current

Fixed current, preferably at an ambient temperature of 40 °C, which the connector can carry on a permanent basis (without interruption), passing simultaneously through all contacts which are in turn connected to the largest possible conductors, without exceeding the upper temperature limit.

The dependence of the rated current on ambient temperature is illustrated in the respective derating diagrams.

Transient overvoltages

Short-term overvoltage lasting a few milliseconds or less, oscillatory or non-oscillatory, generally heavily damped (see DIN EN 60664-1 (VDE 0110-1, Para. 3.7.2). An overvoltage may occur as a result of switching activities, a defect or lightning surge, or may be intentionally created as a necessary function of the equipment or component.

Power-frequency withstand voltage

A power-frequency overvoltage (50/60 Hz).

Applied for a duration of one minute when testing dielectric strength. For test voltages in association with surge voltage withstand levels, see extract from Table 8, DIN EN 61984.

Test voltages (Extract from Table 8, DIN EN 61984)

Impulse withstand voltage kV (1.2/50 μ s) at an altitude of 2000 m	RMS withstand voltage kV (50/60 Hz)
0.5	0.37
0.8	0.50
1.5	0.84
2.5	1.39
4	2.21
6	3.31
8	4.26
12	6.6

CTI (Comparative Tracking Index)

This figure gives an indication of the conductivity of insulating materials and affects the specified creepage distances. The influence of the CTI value on the creepage distance is as follows: the higher the index value, the shorter the creepage distance. The CTI is used to divide plastics into insulation groups.

Breakdown of insulation groups:

- I 600 $\leq$ CTI
- II 400 $\leq$ CTI < 600
- IIIa 175 $\leq$ CTI < 400
- IIIb 100 $\leq$ CTI < 175

Protection levels as per IEC 60529

The protection level describes the leak-proof character of housing, e. g. for electrical equipment. It ranges from IP 00 to IP 68. HARTING heavy duty Han connectors feature a standard protection level of IP 65 (see page 00.5, table based on DIN EN 60529, IEC 60529).

Derating diagram as per DIN EN 60512-5-2

These diagrams are used to illustrate the maximum current carrying capacity of components. The illustration follows a curve which shows the current in relation to ambient temperature. Current carrying capacity is limited by the thermal characteristics of contacts and insulating elements which have an upper temperature limit which should not be exceeded.

Current carrying capacity

The current carrying capacity is determined in tests which are conducted on the basis of the DIN EN 60512-5-2. The current carrying capacity is limited by the thermal properties of materials which are used for inserts as well as by the insulating materials. These components have a limiting temperature which should not be exceeded.

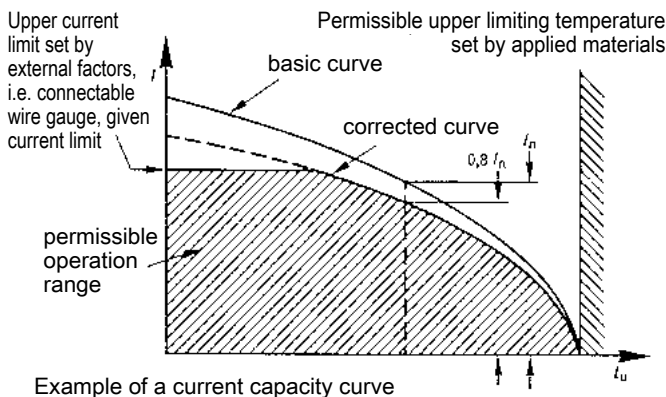
The relationship between the current, the temperature rise (loss at the contact resistance) and the ambient temperature of the connector is represented by a curve. On a linear coordinate system the current lies on the vertical line (ordinate) and the ambient temperature on the horizontal line (abscissa) which ends at the upper limiting temperature.

In another measurement the self-heating (Δt) at different currents is determined.

At least 3 points are determined which are connected to a parabolic curve, the basic curve.

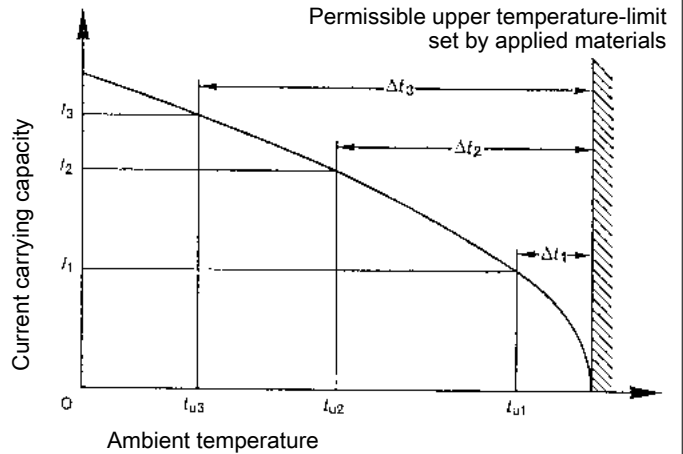
The corrected current carrying capacity curve is derived from this basic curve. The reasons for the correction are external factors that bring an additional limitation to the current carrying capacity, i.e. connectable wire gauge or an unequal dispersion of current.

The derating diagrams pictured as curve have been primarily determined with tin-plated cables as well as with physical cross sections close to the respective ISO-cable cross section.



Example of a current capacity curve

Definition: The rated current is the continuous, not interrupted current a connector can take when simultaneous power on all contacts is given, without exceeding the maximum temperature.



Example of a current carrying curve

Acc. to DIN EN 61984 the sum of ambient temperature and the temperature rise of a connector shall not exceed the upper limiting temperature. The limiting temperature is valid for a complete connector, that means insert plus housing.

As a result the insert gives the limit for the temperature of a complete connector and thus housings as well.

In practice it is not usual to load all terminals simultaneously with the maximum current. In such a case one contact can be loaded with a higher current as permitted by the current capacity curve, if less than 20 % of the whole is loaded.

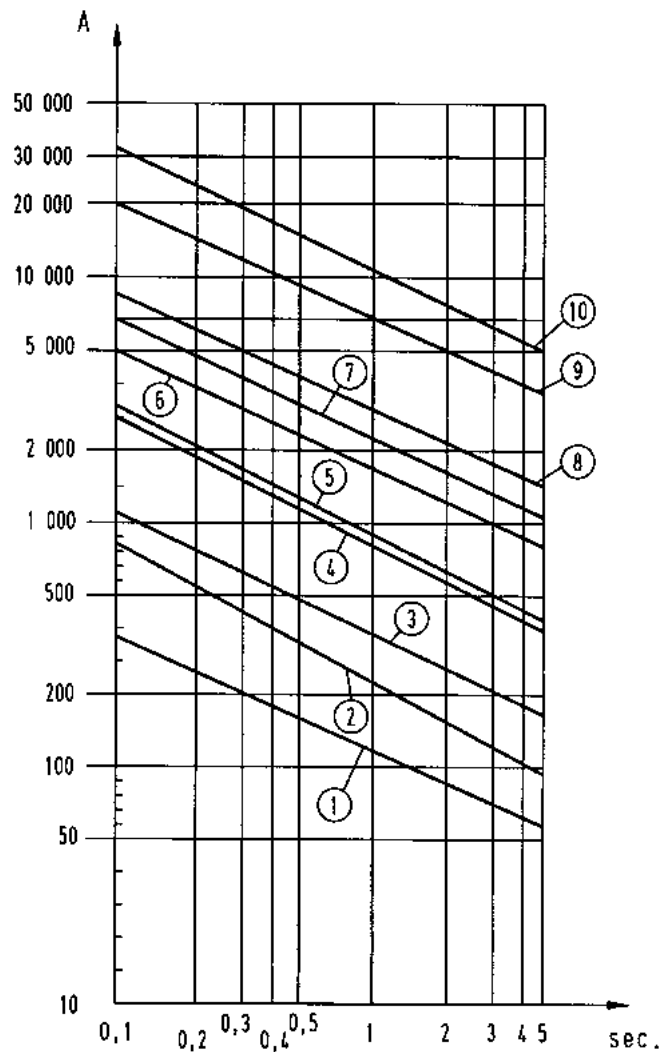
However, for these cases there are no universal rules. The limits have to be determined individually from case to case. It is recommended to proceed in accordance with the relevant rules of the DIN EN 60512-5-2.

Current carrying capacity of copper wires

Diameter [mm ²] of single wires in a three-phase system	0.75	1	1.5	2.5	4	6	10	16	25	35
Type of installation										
B1 Conductors/single core cables in conduit and cable trunking systems	8.6	10.3	13.5	18.3	24	31	44	59	77	96
B2 Cables in conduit and cable trunking systems	8.5	10.1	13.1	17.4	23	30	40	54	70	86
C Cables on walls	9.8	11.7	15.2	21	28	36	50	66	84	104
E Cables on open cable trays	10.4	12.4	16.1	22	30	37	52	70	88	110
Depiction in accordance with DIN EN 60204-1 for PVC-insulated copper wires in an ambient temperature of + 40 °C under permanent operating conditions.										
For different conditions and temperatures, installations, insulation materials or conductors the relevant corrections have to be carried out.										

Transient current carrying capacity

A transient current in circuits can be generated by switching operations such as the starting of a motor or a short circuit in a faulty installation. This can cause thermal stress at the contact. These short and very high increases cannot be dissipated quickly and therefore a local heating effect at the contact is the result. Contact design is an important feature when transient currents are encountered. HARTING contacts are machined from solid material and are therefore relatively unaffected by short overloads when compared to stamped and formed designs. For guidance please see the table below.



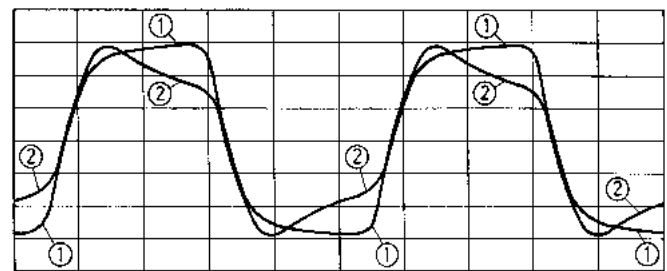
① Han D®	$I_N = 10 \text{ A}$
② Han® 3 A / 4 A	$I_N = 10 \text{ A}$
③ Han A® / Han E®, Han® ES, EE, Q 5/0	$I_N = 16 \text{ A}$
④ Han® 6 HsB	$I_N = 35 \text{ A}$
⑤ Han® C/K axial	$I_N = 40 \text{ A}$
⑥ Han® K 4/8, Han® 70 A Modul	$I_N = 80 \text{ A}$
⑦ Han® K 6/6	$I_N = 100 \text{ A}$
⑧ Han® K 3/0	$I_N = 200 \text{ A}$
⑨ Han® HC-Modular 350	$I_N = 350 \text{ A}$
⑩ Han® HC-Modular 650	$I_N = 650 \text{ A}$

Short circuit carrying capacity

Low currents and voltages

HARTING's standard contacts have a silver plated surface. This precious metal has excellent conductive properties. In the course of a contact's lifetime, the silver surface generates a black oxide layer due to its affinity to sulphur. This layer is smooth and very thin and is partly interrupted when the contacts are mated and unmated, thus guaranteeing very low contact resistances. In the case of very low currents or voltages small changes to the transmitted signal may be encountered. This is illustrated below where an artificially aged contact representing a twenty year life is compared with a new contact.

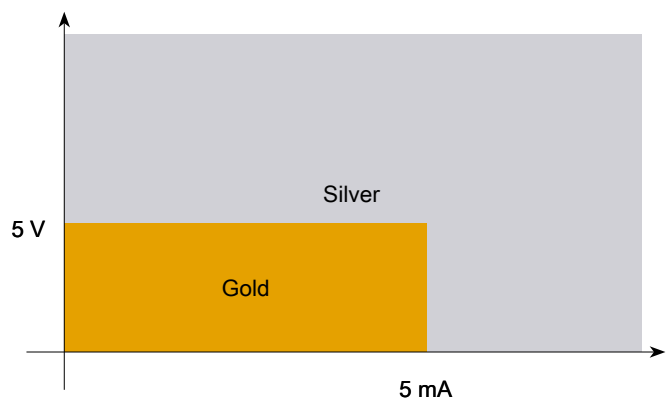
In systems where such a change to the transmitted signal could lead to faulty functions and also in extremely aggressive environments, HARTING recommend the use of gold plated contacts.



Changes to the transmitted signal after artificial ageing

- ① new contact
- ② after ageing

Below is a table derived from actual experiences.



Recommendation

Han

For easy identification, metric threaded hoods and housings are marked with an .

00
.
23

This Declaration of Conformity is suitable to the European Standard EN ISO/IEC 17050-1:2010 "Conformity assessment – supplier's declaration of conformity – Part 1: General requirements (ISO/IEC 17050-1:2004; corrected version 2007-06-15); German and English version EN ISO/IEC 17050-1:2010."

We

HARTING Electric GmbH & Co. KG
Wilhelm-Harting-Str. 1
32339 Espelkamp

declare under our own responsibility that the product series of

Heavy Duty Han® Connectors

is in conformity with the following standard(s) or other normative documents:

Connectors -
safety requirements and tests
IEC 61 984

This declaration of conformity refers to the Han®-series

Han A®	Han E®	Han® HsB
Han® B	Han E® AV	Han® K 3/0
Han-Brid®	Han® EE	Han® K 3/2
Han-Com®	Han® EEE	Han® M
Han D®	Han® ES	Han-Modular®
Han D® AV	Han® ESS	Han-Power®
Han DD®	Han® HC Modular 350	Han® Q
Han-Eco®	Han® HPR	Han-Yellock®

This declaration does not contain a warranty of characteristics.
 Safety references are to be considered.



Our testing laboratory is accredited and monitored by the German Accreditation Body Technology/ (DAkkS).
 Reg.-Nr. D-PL-12148-01-01



Our quality system is certified and monitored by DQS in conformity with the standard DIN EN ISO 9001:2008.
 Cert.-Nr. 2204-QM08

Espekkamp, 23.11.2012

Place and Date of publication


 Edgar Peter Dünning
 Managing Director

Espekkamp, 23.11.2012

Place and Date of publication


 Andre Beneke
 Director Product & Industry Segment Management

Contents

Page

Han® 3 A / Han® 4 A.....	01.2
Han® 10 A / Han® 16 A / Han® 32 A.....	01.5
Contacts	01.11

Features

- Innovative Han-Quick Lock® termination with reduced wiring times
- No special tools required
- Suitable for all metal and plastic hoods and housings of the series Han® 3 A
- for currents up to 10 A

Technical characteristics

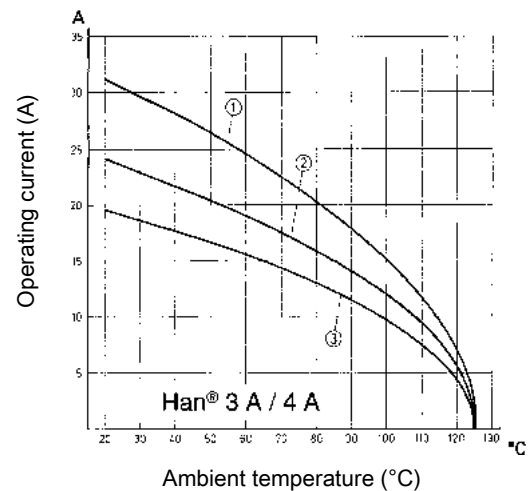
Number of contacts	3, 4
Electrical data acc. to IEC 61984	10 A 230/400 V 4 kV 3
Rated current	10 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Alternative electrical data	10 A 250 V 4 kV 3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 2.5 mm²
- ② Conductor cross-section 1.5 mm²
- ③ Conductor cross-section 1 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



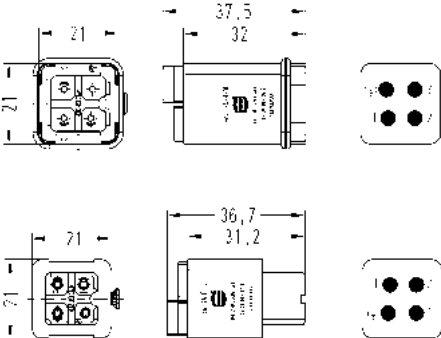
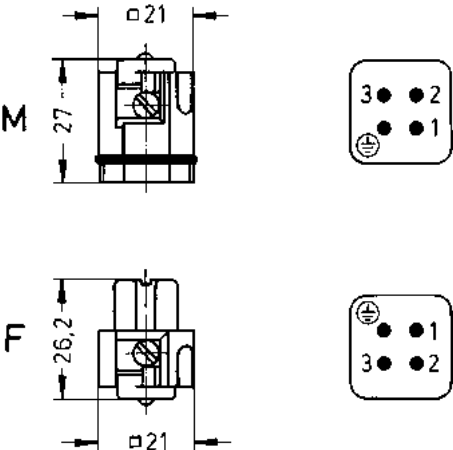


Number of contacts

3+

10 A 230/400 V 4 kV 3
10 A 250 V 4 kV 3

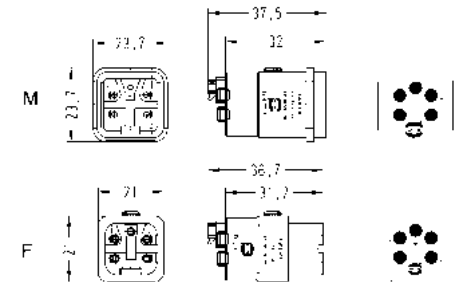
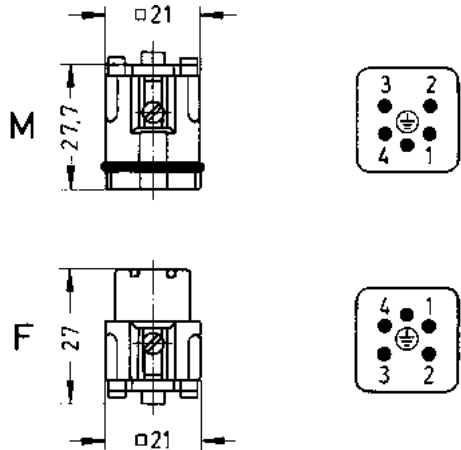
Han A

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han A®, Han-Quick Lock® termination, Contact surface: Silver plated  Blue slide	0,5 ... 2,5	09 20 003 2633	09 20 003 2733	
Han A®, Han-Quick Lock® termination, Contact surface: Silver plated  Black slide	0,25 ... 1,5	09 20 003 2634	09 20 003 2734	
Han A®, Screw termination, Contact surface: Silver plated 	0,75 ... 1,5	09 20 003 2611	09 20 003 2711	 Contact arrangement (view from termination side) Stripping length 4.5 mm Tightening torque 0.25 Nm

Number of contacts

4+ 

 10 A 230/400 V 4 kV 3
 10 A 250 V 4 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han A®, Han-Quick Lock® termination, Contact surface: Silver plated  Blue slide	0,5 ... 2,5	09 20 004 2633	09 20 004 2733	 Contact arrangement (view from termination side)
Han A®, Han-Quick Lock® termination, Contact surface: Silver plated  Black slide	0,25 ... 1,5	09 20 004 2634	09 20 004 2734	
Han A®, Screw termination, Contact surface: Silver plated 	0,75 ... 1,5	09 20 004 2611	09 20 004 2711	 Contact arrangement (view from termination side) Stripping length 4.5 mm Tightening torque 0.25 Nm

Features

- Small size
- Available with crimp and screw termination
- Screw termination also available with wire protection

Technical characteristics

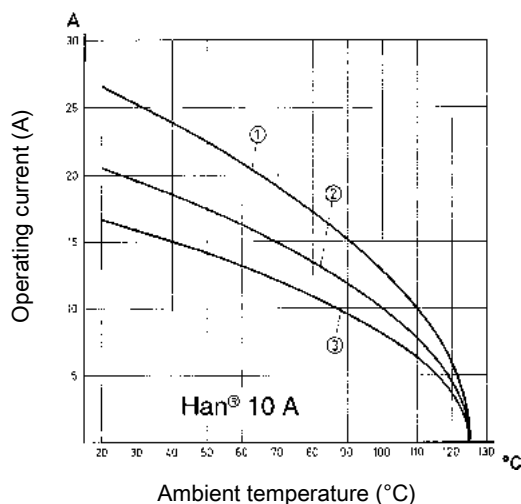
Number of contacts	10, 16, 32
Electrical data acc. to IEC 61984	16 A 250 V 4 kV 3
Rated current	16 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

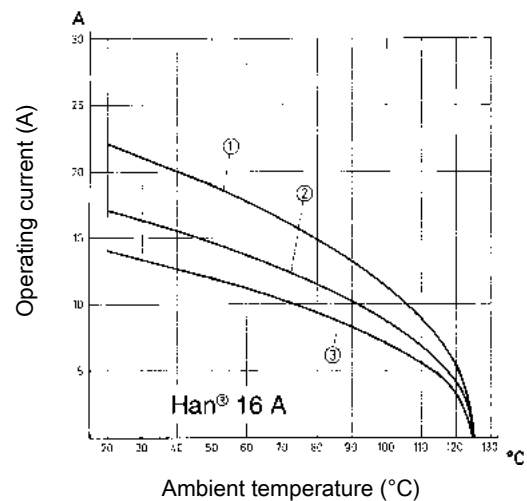
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 2.5 mm²
- ② Conductor cross-section 1.5 mm²
- ③ Conductor cross-section 1 mm²

Derating



- ① Conductor cross-section 2.5 mm²
- ② Conductor cross-section 1.5 mm²
- ③ Conductor cross-section 1 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
UL 2237 PVVA2.E318390

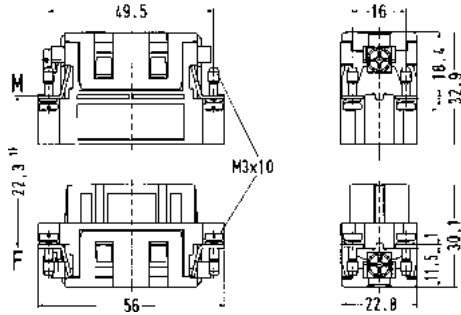
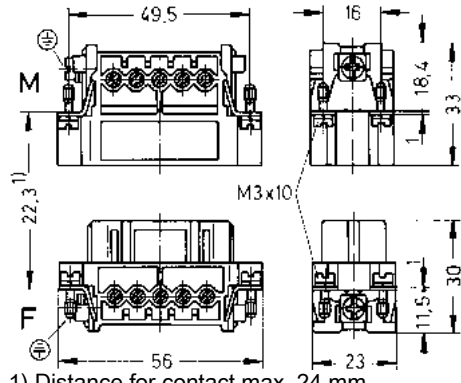

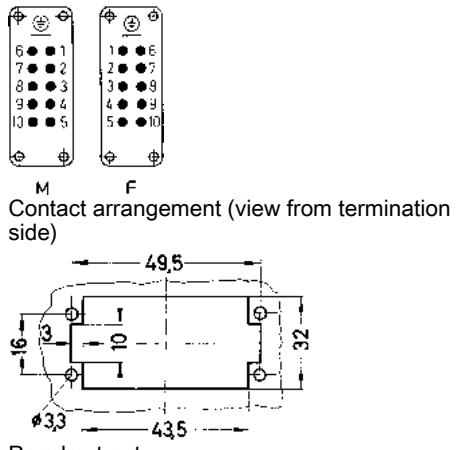


Number of contacts

10+

16 A 250 V 4 kV 3

Han A

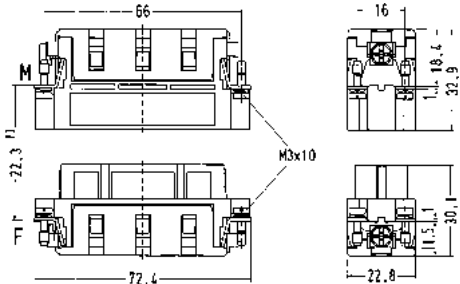
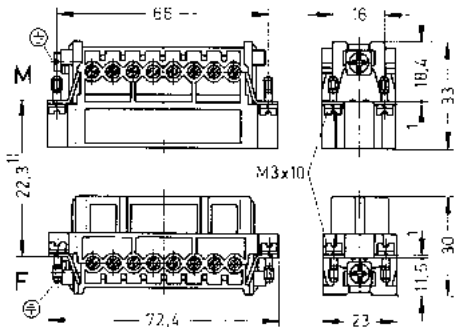


Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han A®, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 20 010 3001	09 20 010 3101	 1) Distance for contact max. 24 mm
Han A®, Screw termination, Contact surface: Silver plated 	0,75 ... 2,5	09 20 010 2612	09 20 010 2812	 1) Distance for contact max. 24 mm Stripping length 7.5 mm Tightening torque 0.5 Nm
Han A®, Screw termination, With wire protection, Contact surface: Silver plated 	0,75 ... 2,5	09 20 010 2614	09 20 010 2814	 Contact arrangement (view from termination side) Panel cut out for use without hood

Number of contacts

16+

16 A 250 V 4 kV 3

Han A


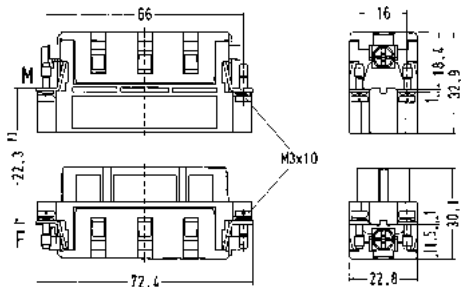

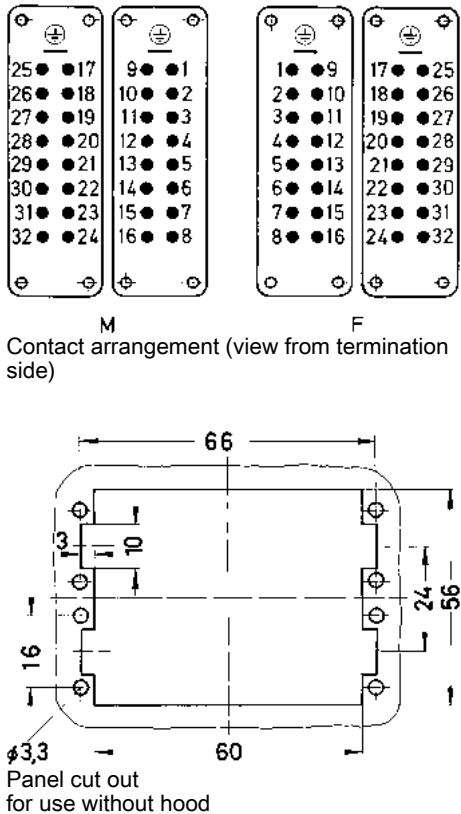
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han A®, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 20 016 3001	09 20 016 3101	 1) Distance for contact max. 24 mm
Han A®, Screw termination, Contact surface: Silver plated 	0,75 ... 2,5	09 20 016 2612	09 20 016 2812	 1) Distance for contact max. 24 mm Stripping length 7.5 mm Tightening torque 0.5 Nm
Han A®, Screw termination, With wire protection, Contact surface: Silver plated 	0,75 ... 2,5	09 20 016 2614	09 20 016 2814	 Contact arrangement (view from termination side)  Panel cut out for use without hood

Number of contacts

32+

16 A 250 V 4 kV 3

Han A

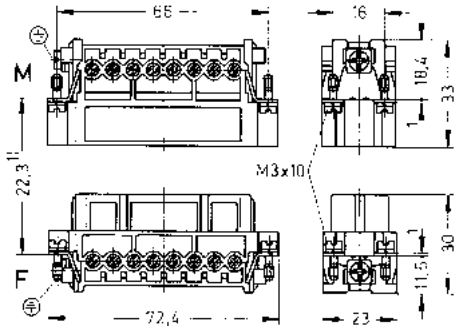

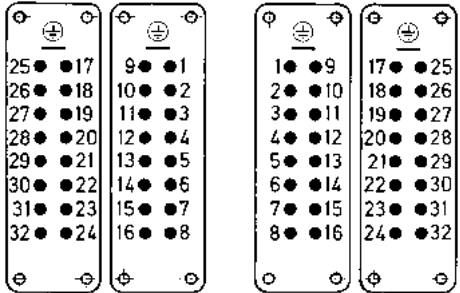
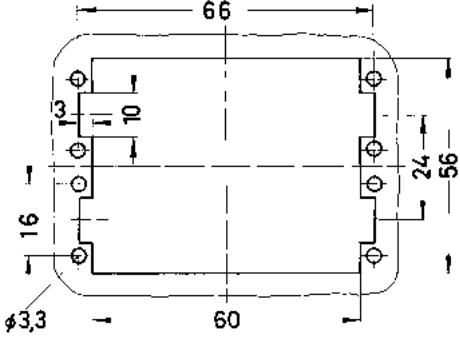
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han A®, Crimp termination, 1 ... 16  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,14 ... 4	09 20 016 3001	09 20 016 3101	 1) Distance for contact max. 24 mm
Han A®, Continuing marking, Crimp termination, 17 ... 32  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,14 ... 4	09 20 016 3011	09 20 016 3111	 Panel cut out for use without hood

Number of contacts

32+

16 A 250 V 4 kV 3

Han A


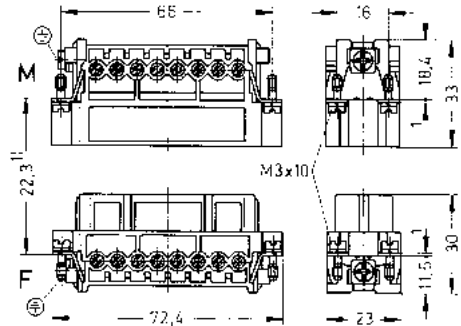

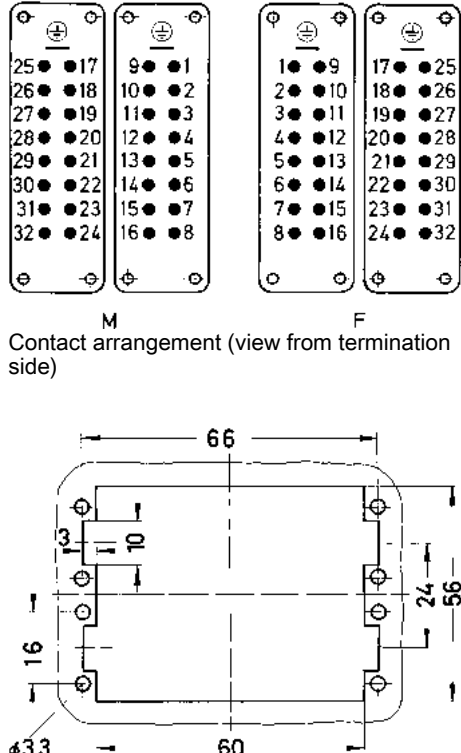
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han A®, Screw termination, 1 ... 16 Contact surface: Silver plated  You need two inserts for a complete assembly!	0,75 ... 2,5	09 20 016 2612	09 20 016 2812	 1) Distance for contact max. 24 mm Stripping length 7.5 mm Tightening torque 0.5 Nm
Han A®, Continuing marking, Screw termination, 17 ... 32 Contact surface: Silver plated  You need two inserts for a complete assembly!	0,75 ... 2,5	09 20 016 2613	09 20 016 2813	 Contact arrangement (view from termination side)  Panel cut out for use without hood

Number of contacts

32+

16 A 250 V 4 kV 3

Han A

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han A®, Screw termination, With wire protection, 1 ... 16 Contact surface: Silver plated  You need two inserts for a complete assembly!	0,75 ... 2,5	09 20 016 2614	09 20 016 2814	 1) Distance for contact max. 24 mm Stripping length 7.5 mm Tightening torque 0.5 Nm
Han A®, Continuing marking, Screw termination, With wire protection, 17 ... 32 Contact surface: Silver plated  You need two inserts for a complete assembly!	0,75 ... 2,5	09 20 016 2615	09 20 016 2815	 Contact arrangement (view from termination side) Panel cut out for use without hood

Technical characteristics

Contact resistance $\leq 1 \text{ m}\Omega$
Material (contacts) Copper alloy

Specifications and approvals

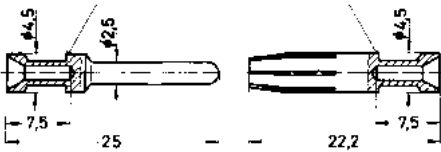
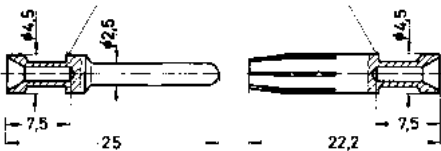
EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E [®] , Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5 3 4	09 33 000 6127	09 33 000 6227	
		09 33 000 6121	09 33 000 6220	
		09 33 000 6114	09 33 000 6214	
		09 33 000 6105	09 33 000 6205	
		09 33 000 6104	09 33 000 6204	
		09 33 000 6102	09 33 000 6202	
		09 33 000 6106	09 33 000 6206	
		09 33 000 6107	09 33 000 6207	
Han E [®] , Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5 4	09 33 000 6117	09 33 000 6217	
		09 33 000 6122	09 33 000 6222	
		09 33 000 6115	09 33 000 6215	
		09 33 000 6118	09 33 000 6218	
		09 33 000 6116	09 33 000 6216	
		09 33 000 6123	09 33 000 6223	
		09 33 000 6119	09 33 000 6221	

Conductor cross-section	Identification
0.14-0.37 mm ²	AWG 26-22 no groove
0.5 mm ²	AWG 20 no groove
0.75 mm ²	AWG 18 1 groove*
1 mm ²	AWG 18 1 groove
1.5 mm ²	AWG 16 2 grooves
2.5 mm ²	AWG 14 3 grooves
3 mm ²	AWG 12 wide groove
4 mm ²	AWG 12 no groove

* on the back crimp collar

Stripping length 7.5 mm

Conductor cross-section	Identification
0.14-0.37 mm ²	AWG 26-22 no groove
0.5 mm ²	AWG 20 no groove
0.75 mm ²	AWG 18 1 groove*
1 mm ²	AWG 18 1 groove
1.5 mm ²	AWG 16 2 grooves
2.5 mm ²	AWG 14 3 grooves
3 mm ²	AWG 12 wide groove
4 mm ²	AWG 12 no groove

* on the back crimp collar

Stripping length 7.5 mm



Wind turbine by ENERCON with Han® 3 A – for a fast and reliable installation.

Contents	Page
Han [®] 7 D.....	02.2
Han [®] 8 D.....	02.4
Han [®] 15-128 D.....	02.6
Contacts Han D [®]	02.14
Han DD [®]	02.16
Contacts Han DD [®]	02.23

Features

- Innovative Han-Quick Lock® termination with reduced wiring times
- Time saving rapid termination by use of crimping contacts
- for requirements up to 250 V / 10 A
- Gold and silver contacts available
- Suitable for thermo- and 1 mm FO contacts

Technical characteristics

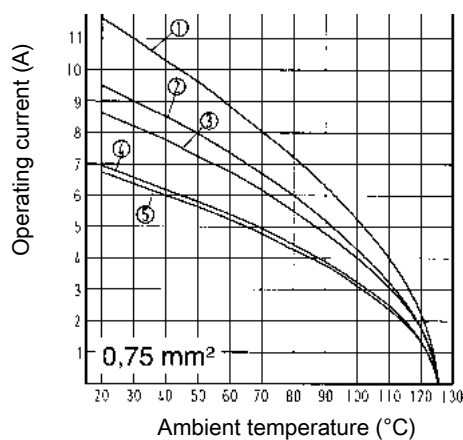
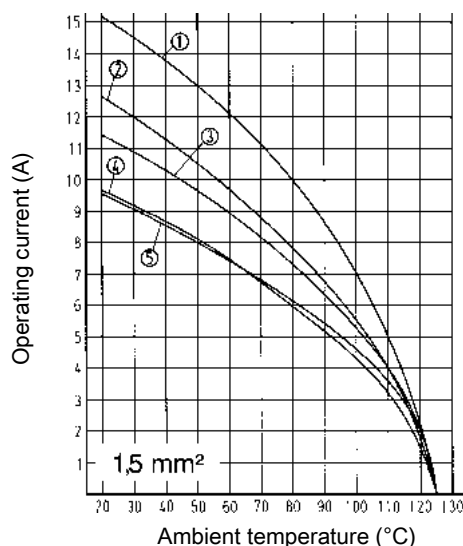
Number of contacts	7
Electrical data acc. to IEC 61984	10 A 250 V 4 kV 3
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	HB
Mating cycles	≥ 500
Material (insert)	Polyamide
Colour (insert)	RAL 7032 (pebble grey)
Material (seal)	NBR
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 7 D
- ② Han® 15 D
- ③ Han® 25 D
- ④ Han® 40 D
- ⑤ Han® 64 D

Specifications and approvals

EN 60664-1
IEC 61984
EN 175301-801
UL 1977 ECBT2.E235076

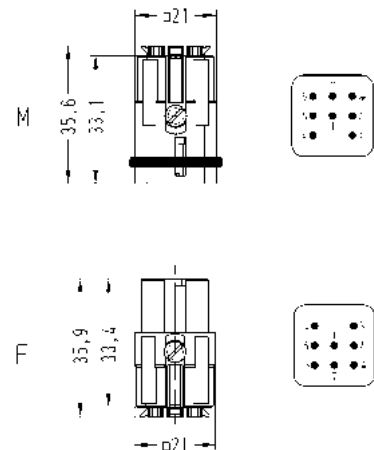
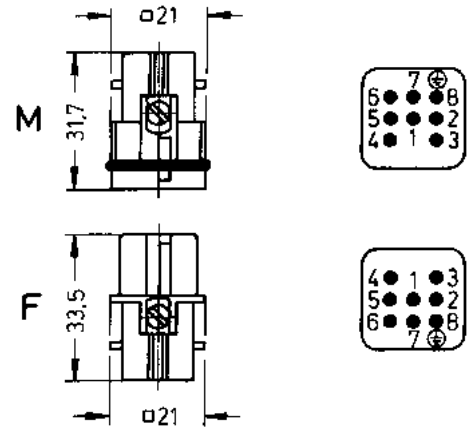


Number of contacts

7+ 

10 A 250 V 4 kV 3

Han
D/DD

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D®, Han-Quick Lock® termination, Contact surface: Silver plated  Only for thermoplastic hoods / housings	0,25 ... 1,5	09 21 007 2632	09 21 007 2732	 Contact arrangement (view from termination side)
Han D®, Crimp termination  Please order crimp contacts separately. Only for thermoplastic hoods / housings	0,14 ... 2,5	09 21 007 3031	09 21 007 3131	 Contact arrangement (view from termination side)

Features

- Innovative Han-Quick Lock® termination with reduced wiring times
- Time saving rapid termination by use of crimping contacts
- Gold and silver contacts available
- Suitable for metal hoods and housings size Han® 3 A
- High density of contacts

Technical characteristics

Number of contacts	8
Electrical data acc. to IEC 61984	10 A 50 V 0,8 kV 3
Rated current	10 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage	50 V AC, 120 V DC
Rated voltage acc. to UL	50 V
Rated voltage acc. to CSA	50 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	HB
Mating cycles	≥ 500
Material (insert)	Polyamide
Colour (insert)	RAL 7032 (pebble grey)
Material (seal)	NBR
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984
EN 175301-801
UL 1977 ECBT2.E235076

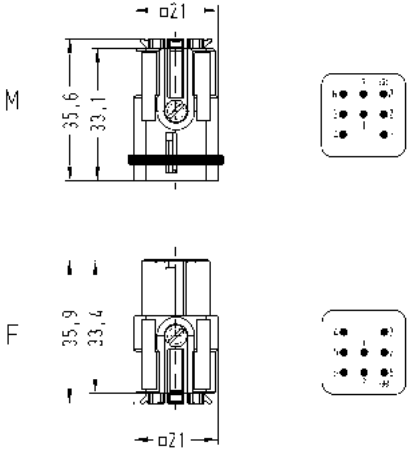
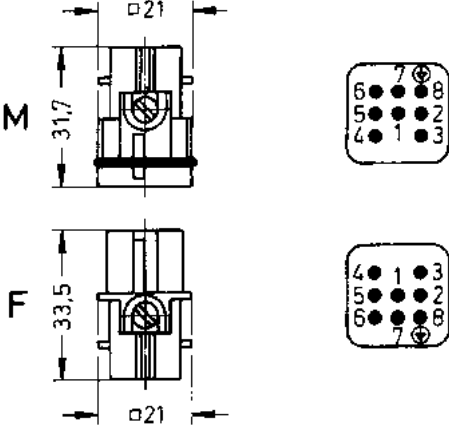


Number of contacts

8

10 A 50 V 0,8 kV 3

Han
D/DD

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D®, Han-Quick Lock® termination, Contact surface: Silver plated  for thermoplastics and metal hoods/housings	0,25 ... 1,5	09 36 008 2632	09 36 008 2732	 Contact arrangement (view from termination side)
Han D®, Crimp termination  Please order crimp contacts separately. for thermoplastics and metal hoods/housings	0,14 ... 2,5	09 36 008 3001	09 36 008 3101	 Contact arrangement (view from termination side)

Features

- High density of contacts
- for requirements up to 250 V / 10 A
- Time saving rapid termination by use of crimping contacts
- Gold and silver contacts available
- Suitable for thermo- and 1 mm FO contacts

Technical characteristics

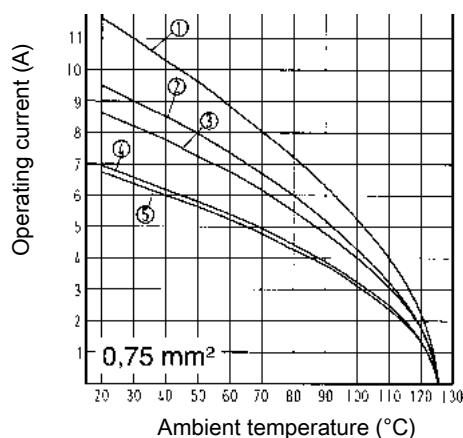
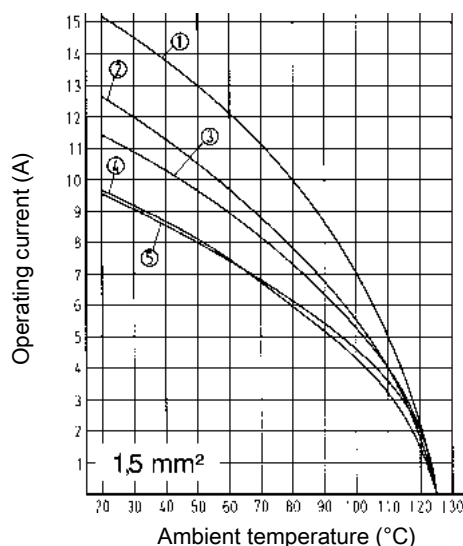
Number of contacts	15, 25, 40, 50, 64, 80, 128
Electrical data acc. to IEC 61984	10 A 250 V 4 kV 3
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0, HB
Mating cycles	≥ 500
Dimensions wire wrap post	1 x 1 mm
Termination length	22 mm
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 7 D
- ② Han® 15 D
- ③ Han® 25 D
- ④ Han® 40 D
- ⑤ Han® 64 D

Specifications and approvals

EN 60664-1
IEC 61984
EN 175301-801
UL 1977 ECBT2.E235076



Details

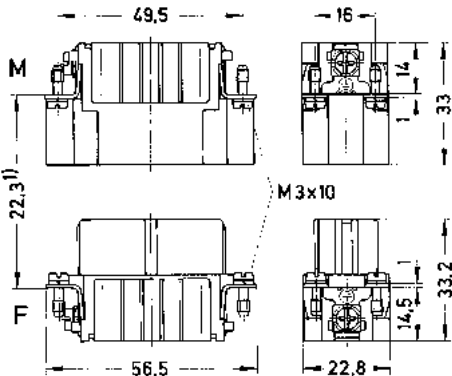


ATTENTION! Guide pins and bushes are prescribed (see chapter 80).

Number of contacts

15+ 

10 A 250 V 4 kV 3

Han
D/DD

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D® , Crimp termination  Please order crimp contacts separately.	0,14 ... 2,5	09 21 015 3001	09 21 015 3101	 1) distance for contact max. 24 mm
Han D® , Wrap termination 		09 21 015 2601	09 21 015 2701	 Panel cut out for use without hood

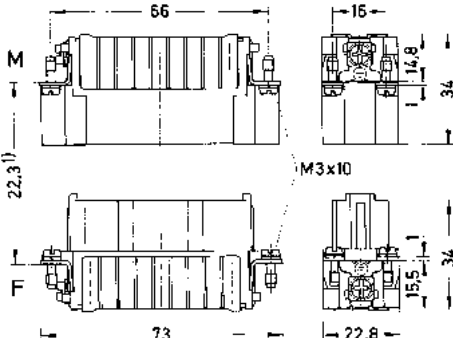

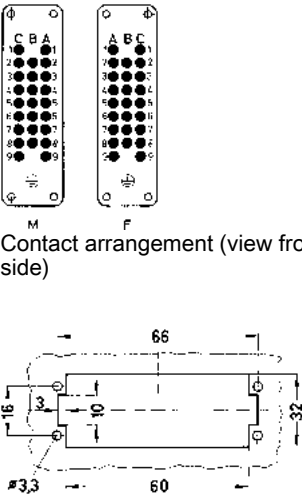


Number of contacts

25+

10 A 250 V 4 kV 3

Han
D/DD

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D®, Crimp termination  Please order crimp contacts separately.	0,14 ... 2,5	09 21 025 3001	09 21 025 3101	 1) distance for contact max. 24 mm
Han D®, Wrap termination 		09 21 025 2601	09 21 025 2701	 Contact arrangement (view from termination side) Panel cut out for use without hood

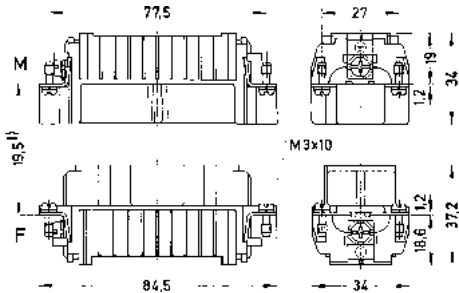




Number of contacts

40+

10 A 250 V 4 kV 3

Han
D/DD

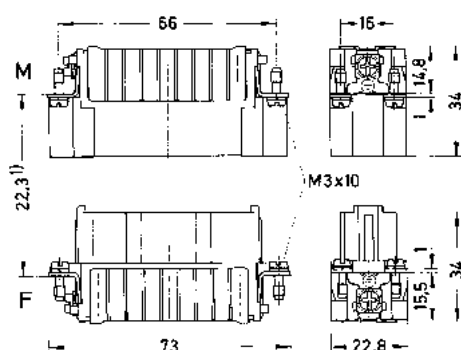

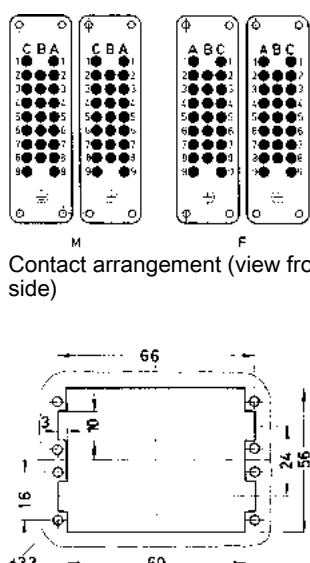
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D®, Crimp termination  Please order crimp contacts separately.	0,14 ... 2,5	09 21 040 3001	09 21 040 3101	 1) distance for contact max. 21 mm
Han D®, Wrap termination 		09 21 040 2601	09 21 040 2701	 Contact arrangement (view from termination side)  Panel cut out for use without hood

Number of contacts

50+ 

10 A 250 V 4 kV 3

Han
D/DD

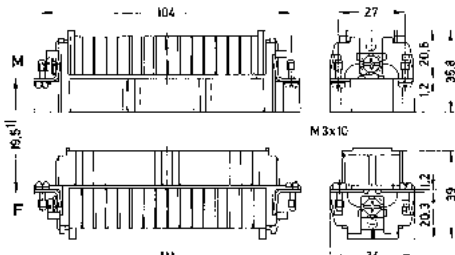
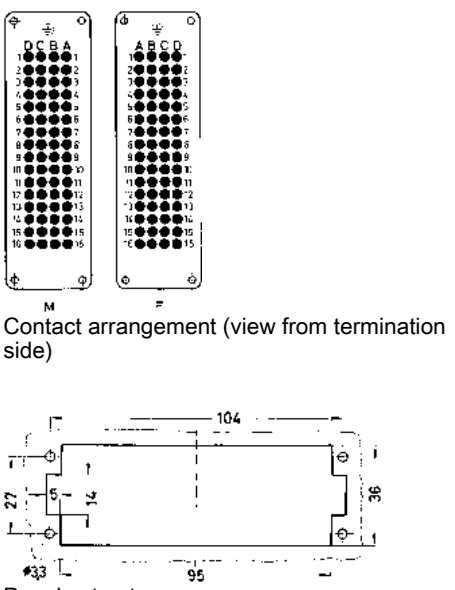
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D®, Crimp termination  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,14 ... 2,5	09 21 025 3001	09 21 025 3101	 1) distance for contact max. 24 mm
Han D®, Wrap termination  You need two inserts for a complete assembly!		09 21 025 2601	09 21 025 2701	 Panel cut out for use without hood

Number of contacts

64+ 

10 A 250 V 4 kV 3

Han
D/DD

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D®, Crimp termination	0,14 ... 2,5	09 21 064 3001	09 21 064 3101	 1) distance for contact max. 21 mm
Han D®, Wrap termination		09 21 064 2601	09 21 064 2701	 Contact arrangement (view from termination side) Panel cut out for use without hood

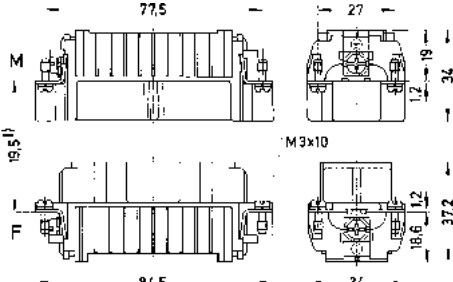
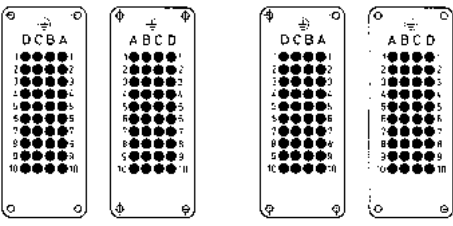



Number of contacts

80+

10 A 250 V 4 kV 3

Han
D/DD

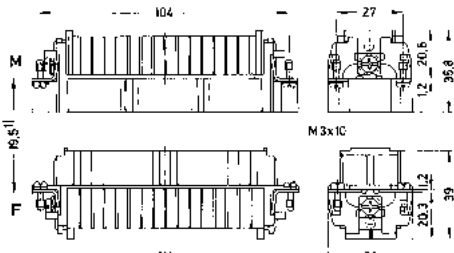

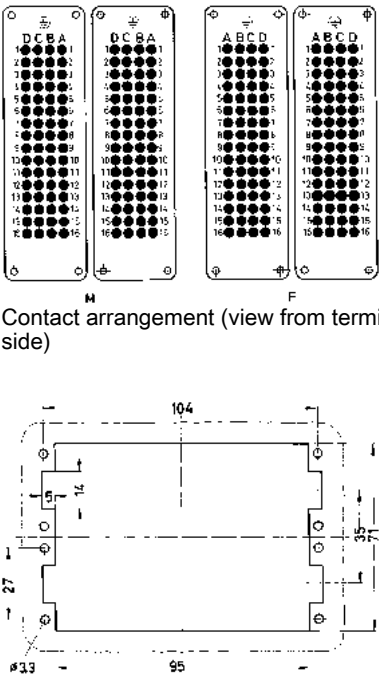
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D®, Crimp termination  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,14 ... 2,5	09 21 040 3001	09 21 040 3101	 1) distance for contact max. 21 mm
Han D®, Wrap termination  You need two inserts for a complete assembly!		09 21 040 2601	09 21 040 2701	 Contact arrangement (view from termination side)  Panel cut out for use without hood

Number of contacts

128+ 

10 A 250 V 4 kV 3

Han
D/DD

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D® , Crimp termination  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,14 ... 2,5	09 21 064 3001	09 21 064 3101	 1) distance for contact max. 21 mm
Han D® , Wrap termination  You need two inserts for a complete assembly!		09 21 064 2601	09 21 064 2701	 Contact arrangement (view from termination side) Panel cut out for use without hood

Technical characteristics

Contact resistance	≤3 mΩ
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic

Specifications and approvals

EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Coding pin

Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D® , Crimp contact, Contact surface: Silver plated	0,14 ... 0,37	09 15 000 6104	09 15 000 6204	

Han
D/DD

Features

- High density of contacts
- for requirements up to 250 V / 10 A
- Time saving rapid termination by use of crimping contacts
- Gold and silver contacts available
- Suitable for thermo- and 1 mm FO contacts

Technical characteristics

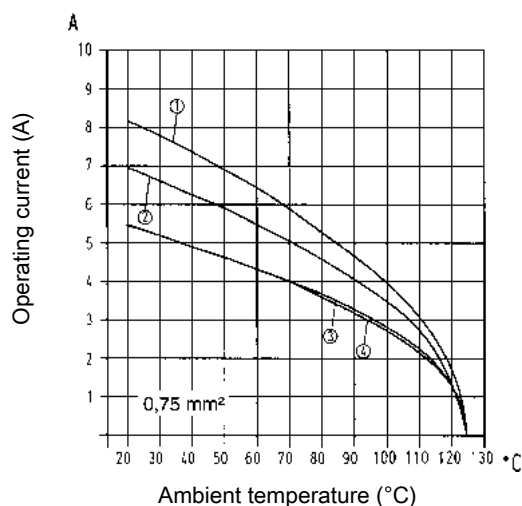
Number of contacts	24, 42, 72, 108, 144, 216
Electrical data acc. to IEC 61984	10 A 250 V 4 kV 3
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

Derating

Current carrying capacity

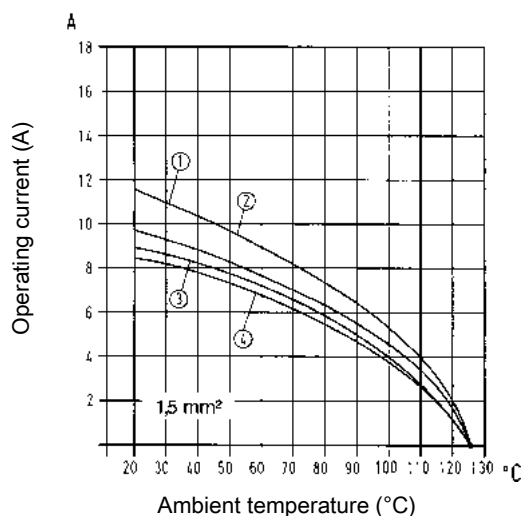
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 24 DD
- ② Han® 42 DD
- ③ Han® 72 DD
- ④ Han® 108 DD

Derating



- ① Han® 24 DD
- ② Han® 42 DD
- ③ Han® 72 DD
- ④ Han® 108 DD

Specifications and approvals

EN 60664-1
IEC 61984



Details

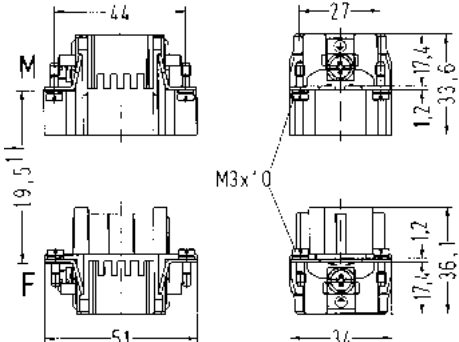


Guide pins and bushes are recommended (see chapter 80).

Number of contacts

24+ 

10 A 250 V 4 kV 3

Han
D/DD

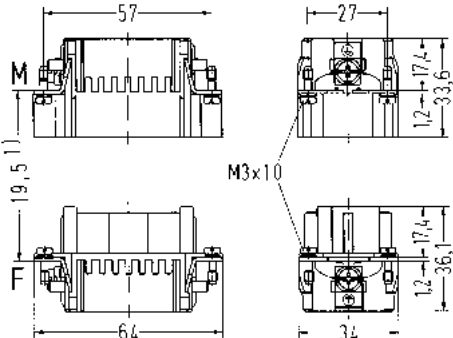


Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han DD®, Crimp termination  Please order crimp contacts separately.	0,14 ... 2,5	09 16 024 3001	09 16 024 3101	 1) distance for contact max. 21 mm  M F Contact arrangement (view from termination side)  Panel cut out for use without hood

Number of contacts

42+ 

10 A 250 V 4 kV 3

Han
D/DD


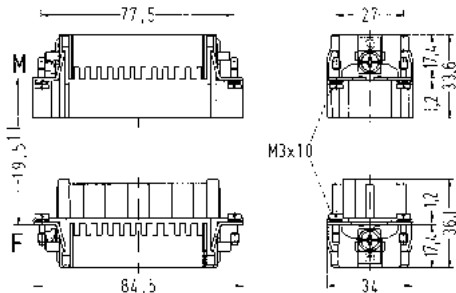


Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han DD®, Crimp termination  Please order crimp contacts separately.	0,14 ... 2,5	09 16 042 3001	09 16 042 3101	  1) distance for contact max. 21 mm Contact arrangement (view from termination side)  Panel cut out for use without hood

Number of contacts

72+ 

10 A 250 V 4 kV 3

Han
D/DD

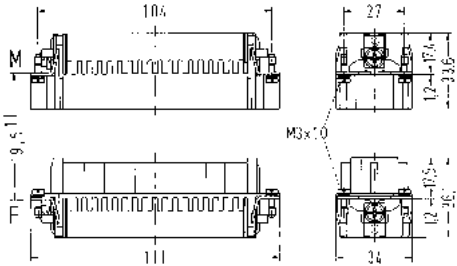

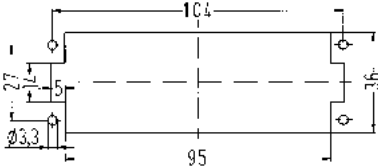
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han DD®, Crimp termination  Please order crimp contacts separately.	0,14 ... 2,5	09 16 072 3001	09 16 072 3101	  1) distance for contact max. 21 mm Contact arrangement (view from termination side)  Panel cut out for use without hood

Number of contacts

108+ 

10 A 250 V 4 kV 3

Han
D/DD

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han DD®, Crimp termination  Please order crimp contacts separately.	0,14 ... 2,5	09 16 108 3001	09 16 108 3101	 1) distance for contact max. 21 mm  Contact arrangement (view from termination side)  Panel cut out for use without hood

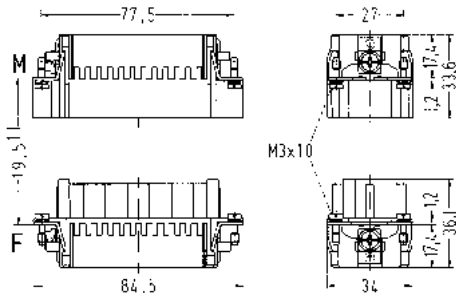
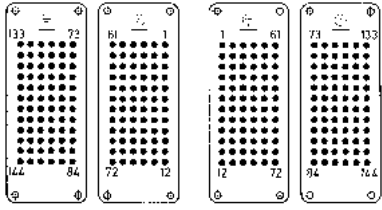



Number of contacts

144+

10 A 250 V 4 kV 3

Han
D/DD

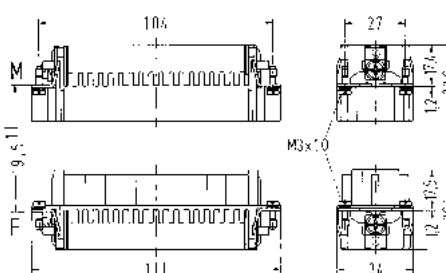
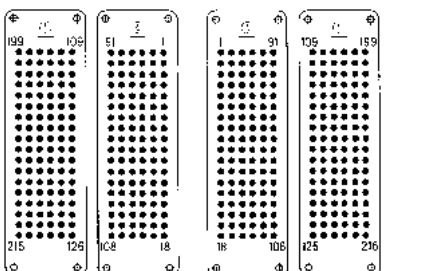
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han DD®, Crimp termination, 1 ... 72  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,14 ... 2,5	09 16 072 3001	09 16 072 3101	 1) distance for contact max. 21 mm
Han DD®, Continuing marking, Crimp termination, 73 ... 144  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,14 ... 2,5	09 16 072 3011	09 16 072 3111	 Contact arrangement (view from termination side)  Panel cut out for use without hood

Number of contacts

216+ 

10 A 250 V 4 kV 3

Han
D/DD

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han DD®, Crimp termination, 1 ... 108  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,14 ... 2,5	09 16 108 3001	09 16 108 3101	 1) distance for contact max. 21 mm
Han DD®, Continuing marking, Crimp termination, 109 ... 216  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,14 ... 2,5	09 16 108 3011	09 16 108 3111	 Contact arrangement (view from termination side) Panel cut out for use without hood

Technical characteristics

Contact resistance	≤3 mΩ
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic

Specifications and approvals

EN 60664-1
IEC 61984

Details


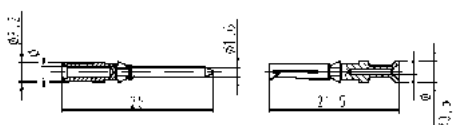

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Coding pin

Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D® , Crimp contact, Contact surface: Silver plated	0,14 ... 0,37	09 15 000 6104	09 15 000 6204	
	0,5	09 15 000 6103	09 15 000 6203	
	0,75	09 15 000 6105	09 15 000 6205	
	1	09 15 000 6102	09 15 000 6202	
	1,5	09 15 000 6101	09 15 000 6201	
	2,5	09 15 000 6106	09 15 000 6206	
				
Han D® , Crimp contact, Contact surface: Gold plated	0,14 ... 0,37	09 15 000 6124	09 15 000 6224	
	0,5	09 15 000 6123	09 15 000 6223	
	0,75	09 15 000 6125	09 15 000 6225	
	1	09 15 000 6122	09 15 000 6222	
	1,5	09 15 000 6121	09 15 000 6221	
	2,5	09 15 000 6126	09 15 000 6226	
				
FO contact, for 1 mm plastic fibre		20 10 001 3211	20 10 001 3221	
				20 10 001 3211 + 20 10 001 3221
Han D® Han DD® , Coding pin			09 33 000 9915	
				
Only for crimp termination With loss of one contact				

Modified contact arrangement

The connector series Han DD® and Han D® equipped with all contacts may be used for voltages up to 250 V, pollution degree 3. A modified contact loading arrangement permits use up to 500 V also in the same pollution degree.

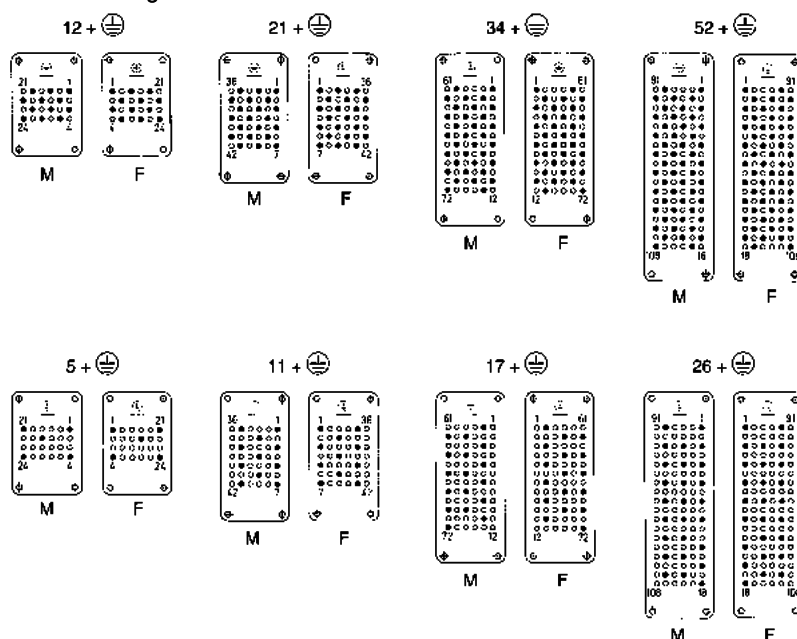
According to DIN EN 61 984 connectors should not be coupled or decoupled under electrical load.

Series Han DD®

Rated current 10 A 400 V 6 kV 3
Rated voltage 400 V
Rated impulse voltage 6 kV
Pollution degree 3

Rated current 10 A 500 V 6 kV 3
Rated voltage 500 V
Rated impulse voltage 6 kV
Pollution degree 3

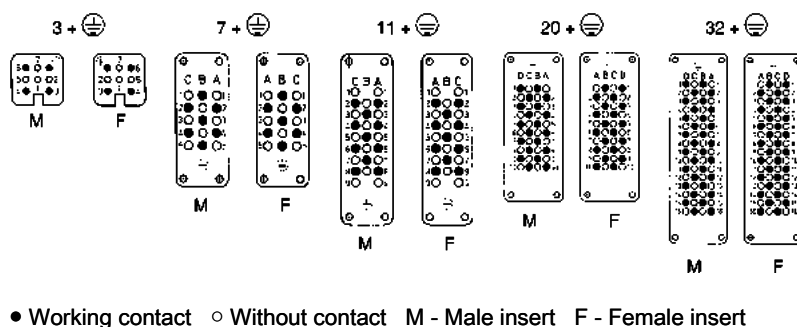
Contact arrangement view from termination side



Series Han D®

Rated current 10 A 500 V 6 kV 3
Rated voltage 500 V
Rated impulse voltage 6 kV
Pollution degree 3

Contact arrangement view from termination side



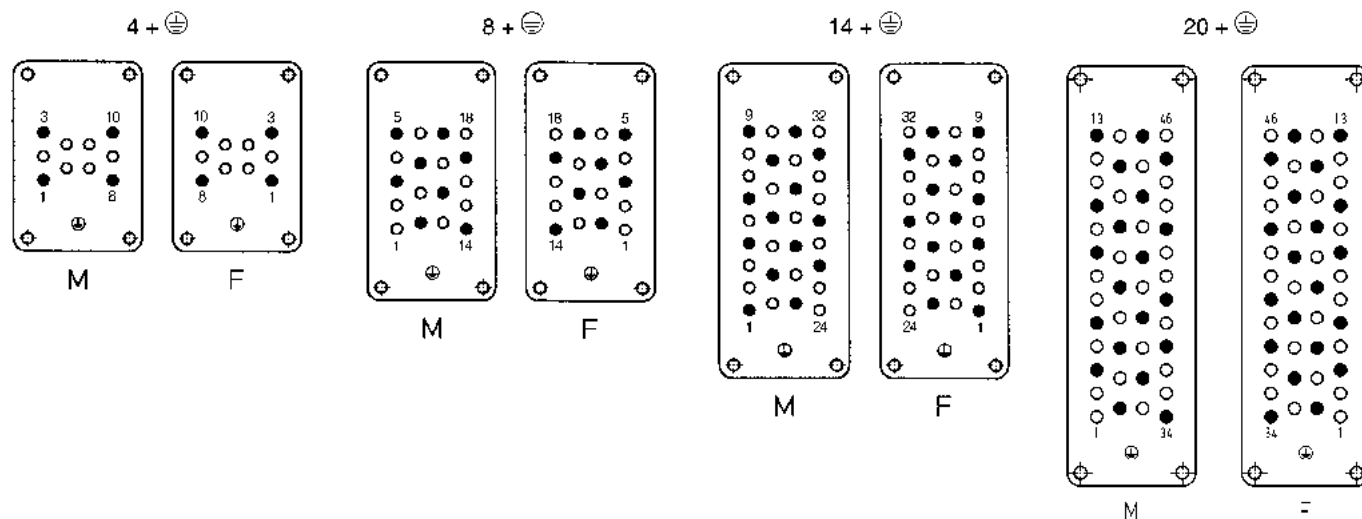
Contents	Page
Han E®	03.3
Han® ES/ES Press/ESS	03.12
Han® ES Press plug-in jumpers.....	03.28
Han® EE.....	03.30
Han® EEE	03.37
Contacts	03.40

The connector series Han® EE equipped with all contacts may be used for voltages up to 500 V ~ pollution degree 3. A modified contact loading arrangement permits use up to 1000 V ~ pollution degree also in pollution degree 3. Fully equipped connectors may also be used up to 1000 V ~ but in a lower pollution degree. See chapter 00. According to IEC 61984 connectors should not be coupled or decoupled under electrical load.

Han E/
EE

690 V Pollution degree 3

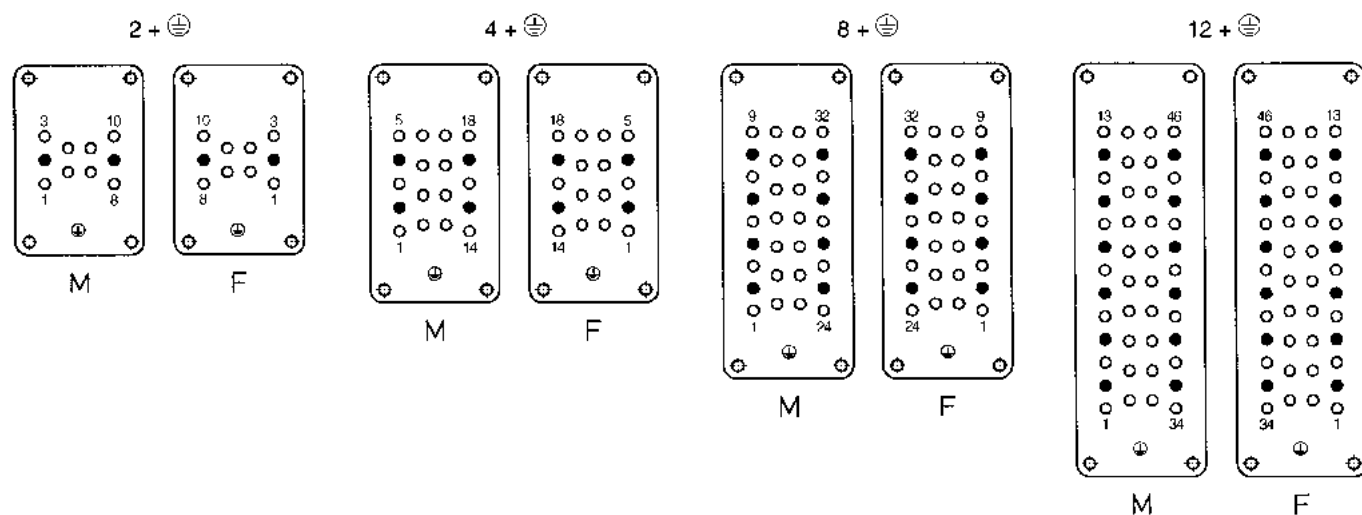
Contact arrangement view from termination side



• Working contact ○ Without contact M - Male insert F - Female insert

1000 V Pollution degree 3

Contact arrangement view from termination side



• Working contact ○ Without contact M - Male insert F - Female insert

Features

- Covers a wide range of cross-sections
- Screw termination with wire protection

Technical characteristics

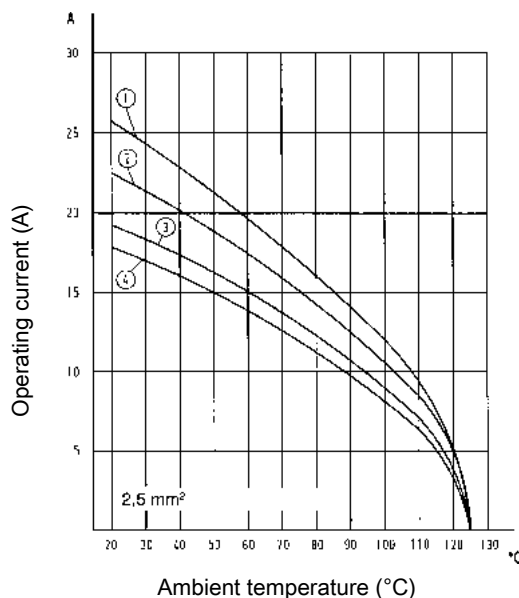
Number of contacts	6, 10, 16, 24, 32, 48
Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

Derating

Current carrying capacity

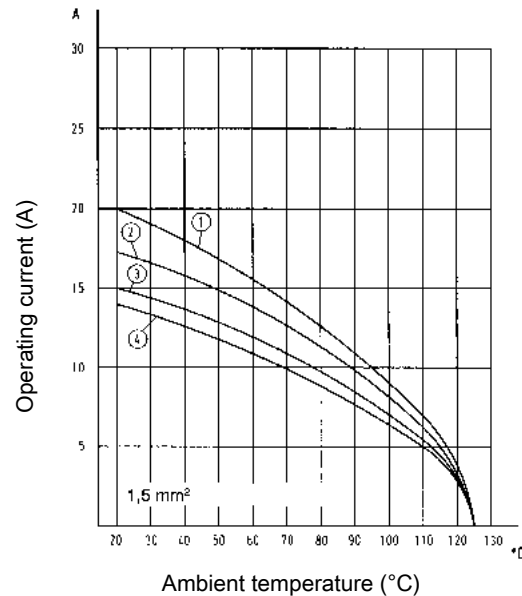
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 6 E
 ② Han® 10 E
 ③ Han® 16 E Han® 32 E
 ④ Han® 24 E Han® 48 E

Derating



- ① Han® 6 E
 ② Han® 10 E
 ③ Han® 16 E Han® 32 E
 ④ Han® 24 E Han® 48 E

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 UL 2237 PVVA2.E318390



Details

Internal use in the switch cabinet in conjunction with Han-Snap® (see chapter 11)

Suitable for hoods/housings of series Han® B, Han® M, Han® EMC, Han® HPR, Han® Easy Hood (see chapter 31)

Tightening torque 0.5 Nm

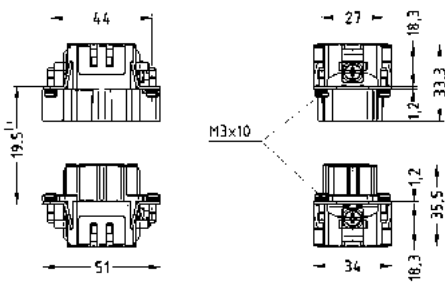
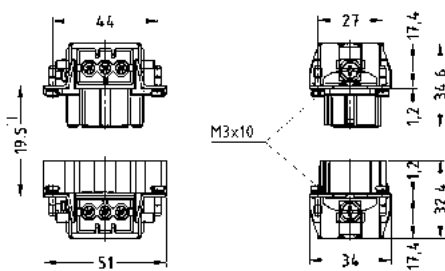


Tightening torque PE screw 1.2 Nm

Number of contacts

6+

16 A 500 V 6 kV 3

Han E/
EE

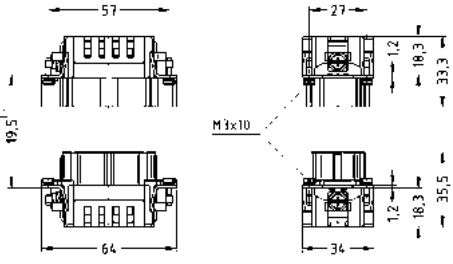
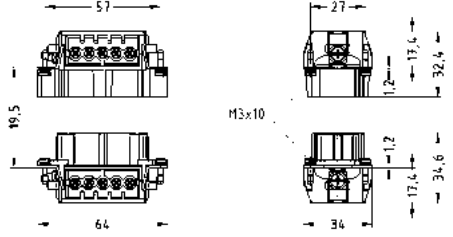



Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E®, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 33 006 2602	09 33 006 2702	 1) distance for contact max. 21 mm
Han E®, Screw termination, With wire protection 	0,75 ... 2,5	09 33 006 2601	09 33 006 2701	 1) distance for contact max. 21 mm  M F Contact arrangement (view from termination side)  Panel cut out

Number of contacts

10+

16 A 500 V 6 kV 3

Han E/
EE

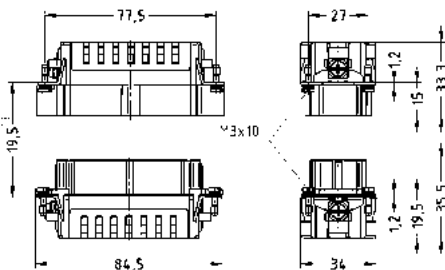

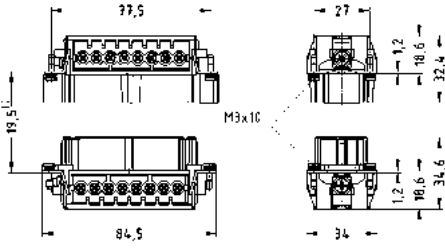


Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E®, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 33 010 2602	09 33 010 2702	 1) distance for contact max. 21 mm
Han E®, Screw termination, With wire protection 	0,75 ... 2,5	09 33 010 2601	09 33 010 2701	 1) distance for contact max. 21 mm  M  F Contact arrangement (view from termination side)  Panel cut out

Number of contacts

16+

16 A 500 V 6 kV 3

Han E/
EE

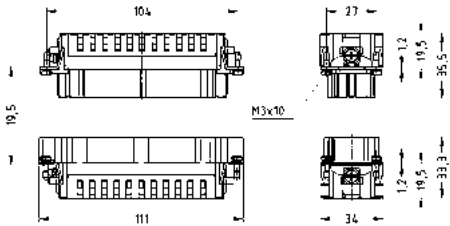

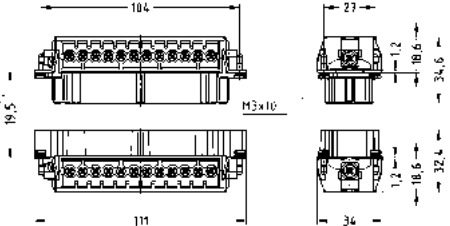

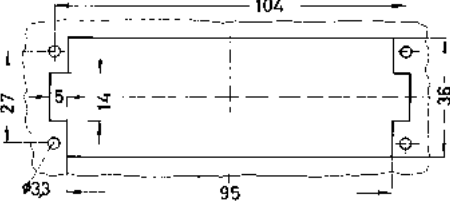
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E®, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 33 016 2602	09 33 016 2702	 1) distance for contact max. 21 mm
Han E®, Screw termination, With wire protection 	0,75 ... 2,5	09 33 016 2601	09 33 016 2701	 1) distance for contact max. 21 mm   M F Contact arrangement (view from termination side)  Panel cut out

Number of contacts

24+

16 A 500 V 6 kV 3

Han E/
EE


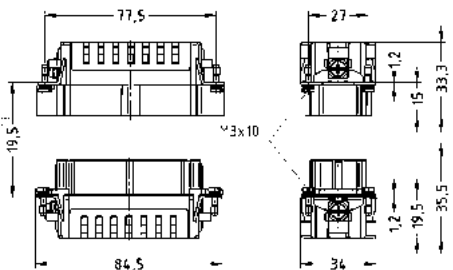

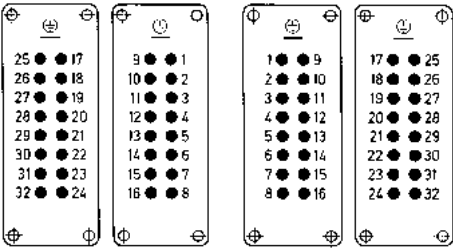
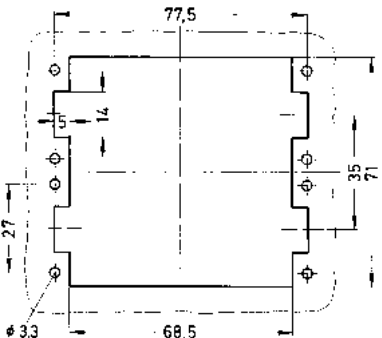
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E®, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 33 024 2602	09 33 024 2702	 1) distance for contact max. 21 mm
Han E®, Screw termination, With wire protection 	0,75 ... 2,5	09 33 024 2601	09 33 024 2701	 1) distance for contact max. 21 mm  M F Contact arrangement (view from termination side)  Panel cut out


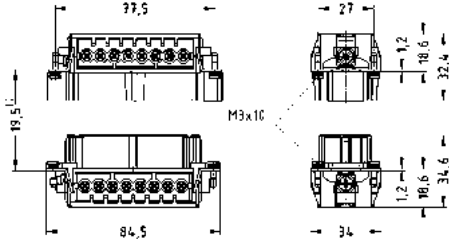

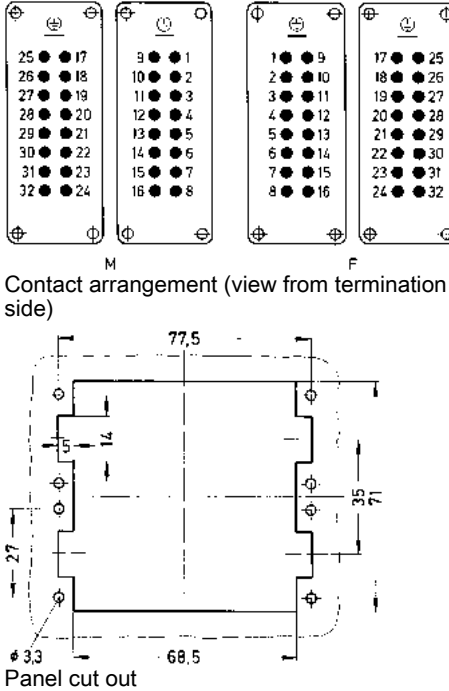
Number of contacts

32+

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E®, Crimp termination, 1 ... 16  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,14 ... 4	09 33 016 2602	09 33 016 2702	 1) distance for contact max. 21 mm
Han E®, Continuing marking, Crimp termination, 17 ... 32  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,14 ... 4	09 33 016 2612	09 33 016 2712	 M F Contact arrangement (view from termination side)  Panel cut out


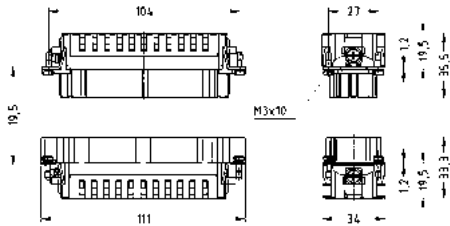

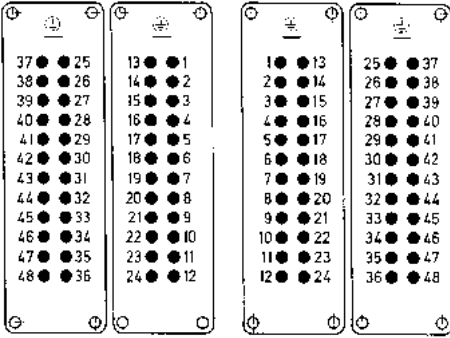
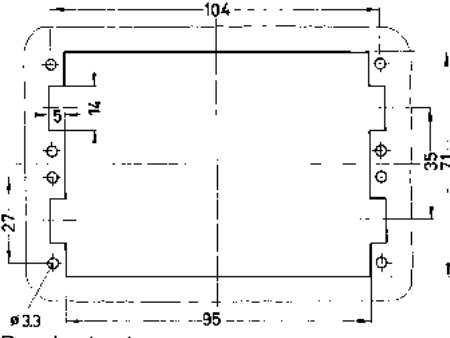
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E®, Screw termination, With wire protection, 1 ... 16  You need two inserts for a complete assembly!	0,75 ... 2,5	09 33 016 2601	09 33 016 2701	 1) distance for contact max. 21 mm
Han E®, Continuing marking, Screw termination, With wire protection, 17 ... 32  You need two inserts for a complete assembly!	0,75 ... 2,5	09 33 016 2611	09 33 016 2711	 Contact arrangement (view from termination side) Panel cut out


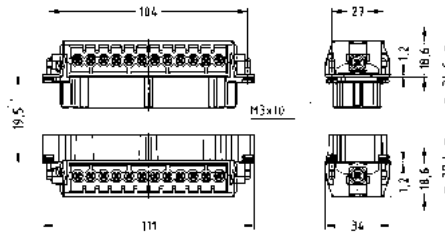

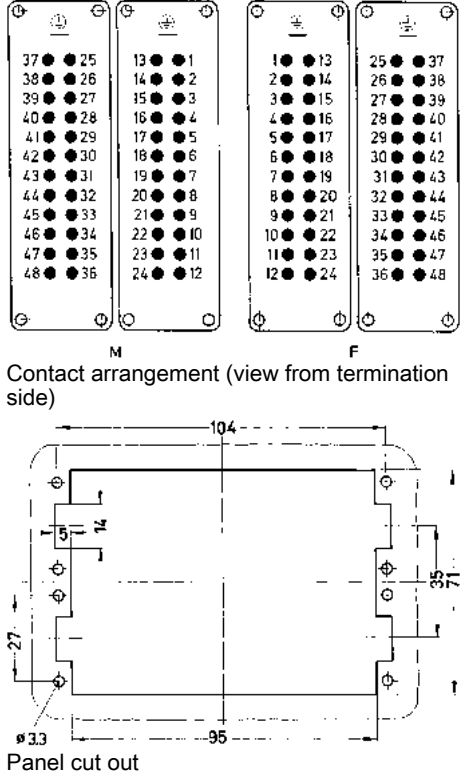
Number of contacts

48+

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E®, Crimp termination, 1 ... 24  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,14 ... 4	09 33 024 2602	09 33 024 2702	 1) distance for contact max. 21 mm
Han E®, Continuing marking, Crimp termination, 25 ... 48  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,14 ... 4	09 33 024 2612	09 33 024 2712	 M F Contact arrangement (view from termination side)  Panel cut out

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E®, Screw termination, With wire protection, 1 ... 24  You need two inserts for a complete assembly!	0,75 ... 2,5	09 33 024 2601	09 33 024 2701	 1) distance for contact max. 21 mm
Han E®, Continuing marking, Screw termination, With wire protection, 25 ... 48  You need two inserts for a complete assembly!	0,75 ... 2,5	09 33 024 2611	09 33 024 2711	 Contact arrangement (view from termination side)

Features

- Rapid termination technology without tools for a time saving assembly and for optimal processreliability
- Vibration-proved
- Han® ES Press: Easy bridging functionality of contacts by means of plug-in jumpers directly on the connector
- Han® ES Press: Fast realisation of potential multiplication as well as star and delta bridges
- Han® ESS: two termination points per contact

Technical characteristics

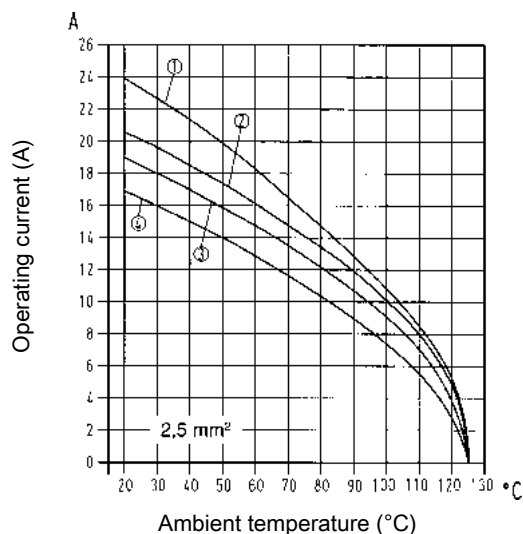
Number of contacts	6, 10, 16, 24, 32, 48
Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

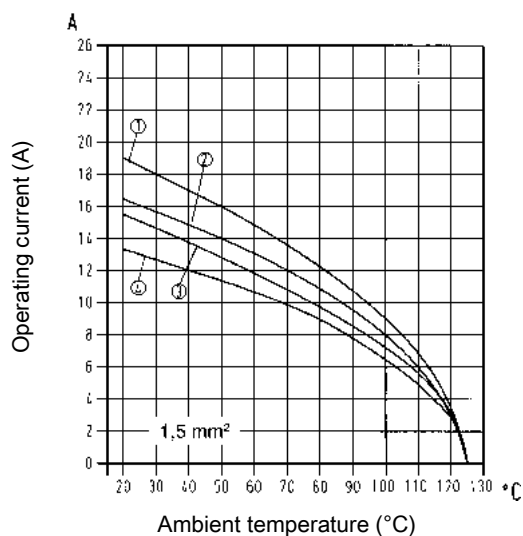
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

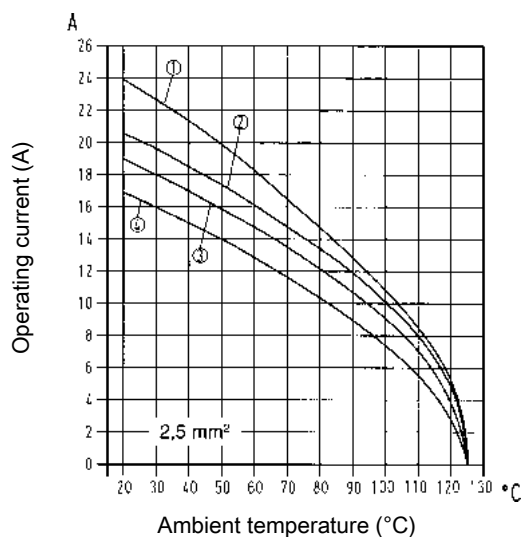


- ① Han® 6 ES
- ② Han® 10 ES
- ③ Han® 16 ES Han® 32 ES
- ④ Han® 24 ES Han® 48 ES

Derating

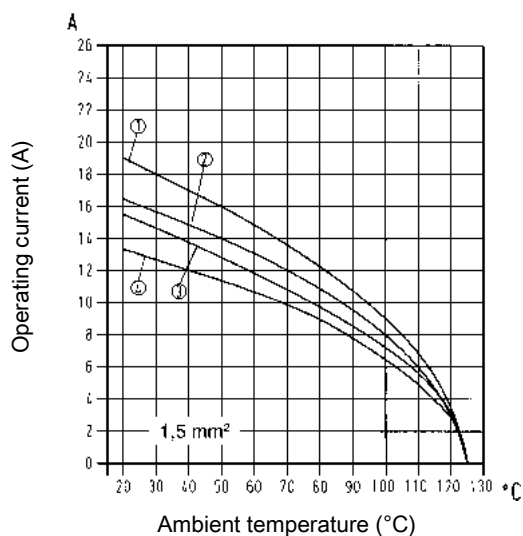


- ① Han® 6 ES
- ② Han® 10 ES
- ③ Han® 16 ES Han® 32 ES
- ④ Han® 24 ES Han® 48 ES

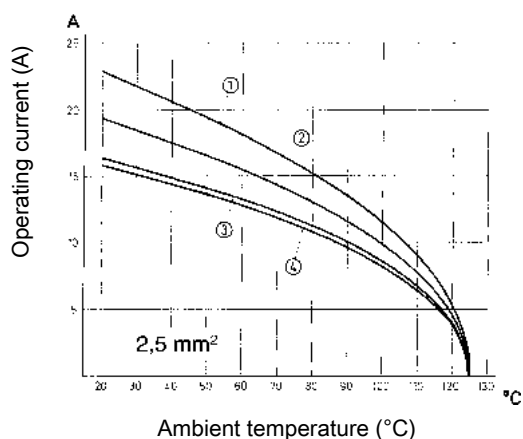


- ① Han® 6 ES Press
- ② Han® 10 ES Press
- ③ Han® 16 ES Press Han® 32 ES Press
- ④ Han® 24 ES Press Han® 48 ES Press

Derating

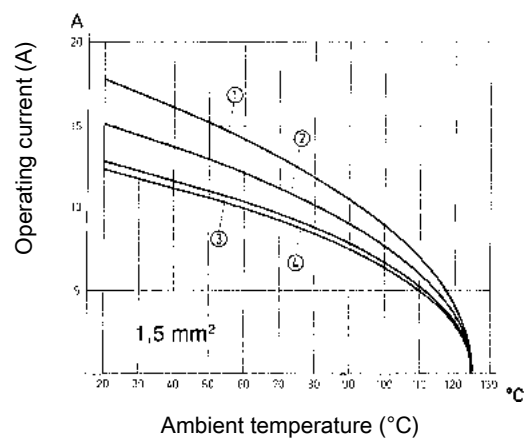


- ① Han® 6 ES Press
- ② Han® 10 ES Press
- ③ Han® 16 ES Press Han® 32 ES Press
- ④ Han® 24 ES Press Han® 48 ES Press



- ① Han® 6 ESS
- ② Han® 10 ESS
- ③ Han® 16 ESS Han® 32 ESS
- ④ Han® 24 ESS Han® 48 ESS

Derating



- ① Han® 6 ESS
- ② Han® 10 ESS
- ③ Han® 16 ESS Han® 32 ESS
- ④ Han® 24 ESS Han® 48 ESS

Specifications and approvals

EN 60664-1
IEC 61984
UL 2237 PVVA2.E318390
UL 1977 ECBT2.E235076



Details

Internal use in the switch cabinet in conjunction with Han-Snap® (see chapter 11)

Suitable for hoods/housings of series Han® B, Han® M, Han® EMC, Han® HPR, Han® Easy Hood (see chapter 31)

Tightening torque 0.5 Nm

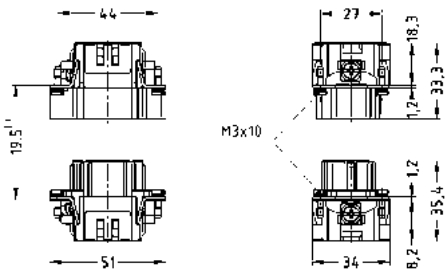
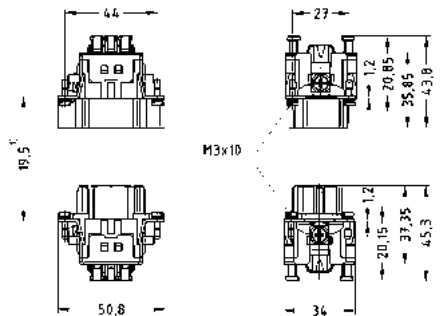



Tightening torque PE screw 1.2 Nm


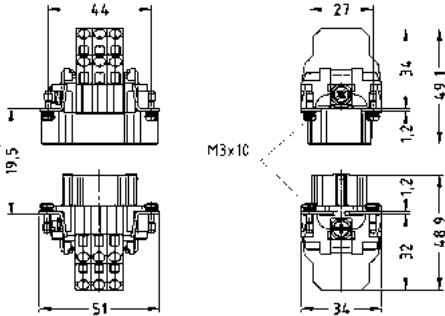



Number of contacts

6+

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® ES , Cage-clamp termination, Contact surface: Silver plated 	0,14 ... 2,5	09 33 006 2616	09 33 006 2716	 1) distance for contact max. 21 mm
Han® ES Press , Cage-clamp termination, Contact surface: Silver plated  Blue slide	0,14 ... 2,5	09 33 006 2648	09 33 006 2748	 Distance for contact max. 21 mm   M F Contact arrangement (view from termination side)  Panel cut out

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® ESS , Cage-clamp termination, Contact surface: Silver plated  two terminations per contact	0,14 ... 2,5	09 33 006 2672	09 33 006 2772	 1) distance for contact max. 21 mm  M  F Contact arrangement (view from termination side)  Panel cut out


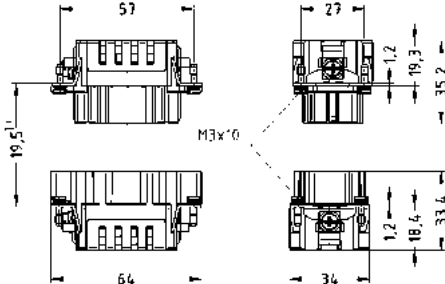
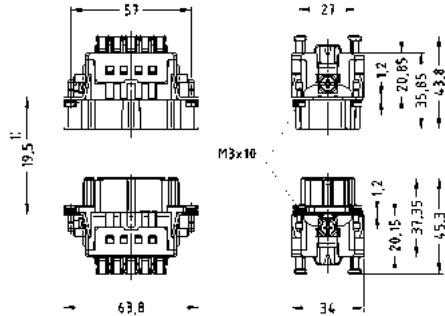



Han E/
EE

Number of contacts

10+

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® ES , Cage-clamp termination, Contact surface: Silver plated 	0,14 ... 2,5	09 33 010 2616	09 33 010 2716	 1) distance for contact max. 21 mm
Han® ES Press , Cage-clamp termination, Contact surface: Silver plated  Blue slide	0,14 ... 2,5	09 33 010 2648	09 33 010 2748	 Distance for contact max. 21 mm   M F Contact arrangement (view from termination side)  Panel cut out

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® ESS , Cage-clamp termination, Contact surface: Silver plated two terminations per contact	0,14 ... 2,5	09 33 010 2672	09 33 010 2772	Contact arrangement (view from termination side) Panel cut out

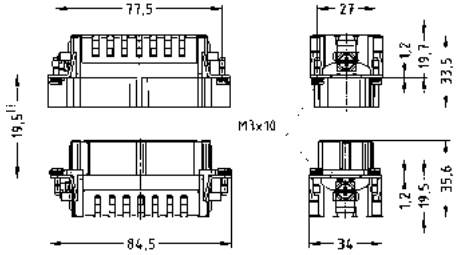
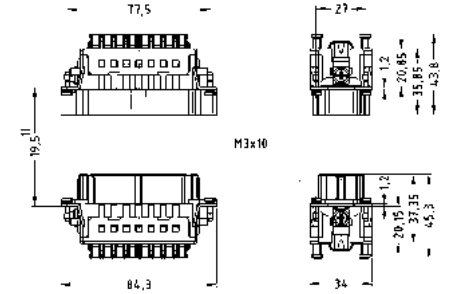


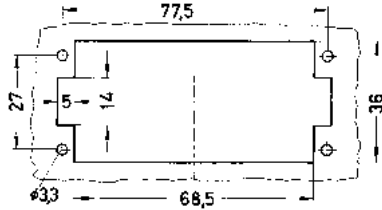
Han E/
EE

Number of contacts

16+

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® ES , Cage-clamp termination, Contact surface: Silver plated 	0,14 ... 2,5	09 33 016 2616	09 33 016 2716	 1) distance for contact max. 21 mm
Han® ES Press , Cage-clamp termination, Contact surface: Silver plated  Blue slide	0,14 ... 2,5	09 33 016 2648	09 33 016 2748	 Distance for contact max. 21 mm   M F Contact arrangement (view from termination side)  Panel cut out

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® ESS , Cage-clamp termination, Contact surface: Silver plated two terminations per contact	0,14 ... 2,5	09 33 016 2672	09 33 016 2772	1) distance for contact max. 21 mm 9 10 11 12 13 14 15 16 1 2 3 4 5 6 7 8 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 M F Contact arrangement (view from termination side) Panel cut out

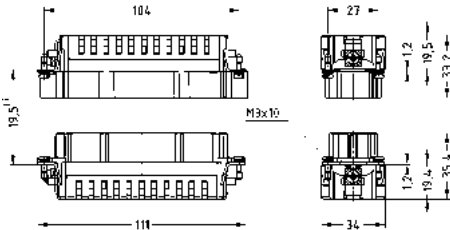
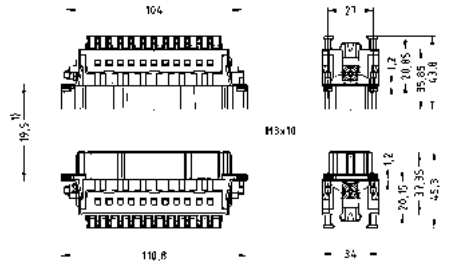

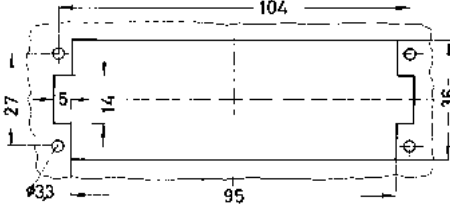
Han E/
EE

Number of contacts

24+ 

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® ES , Cage-clamp termination, Contact surface: Silver plated 	0,14 ... 2,5	09 33 024 2616	09 33 024 2716	 1) distance for contact max. 21 mm
Han® ES Press , Cage-clamp termination, Contact surface: Silver plated  Blue slide	0,14 ... 2,5	09 33 024 2648	09 33 024 2748	 Distance for contact max. 21 mm  M F Contact arrangement (view from termination side)  Panel cut out

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® ESS , Cage-clamp termination, Contact surface: Silver plated two terminations per contact	0,14 ... 2,5	09 33 024 2672	09 33 024 2772	1) distance for contact max. 21 mm Contact arrangement (view from termination side) Panel cut out

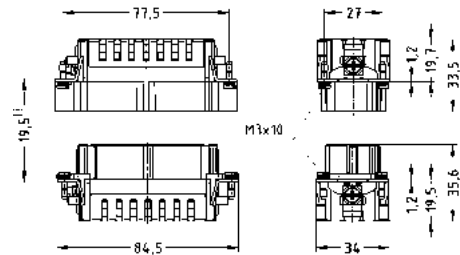
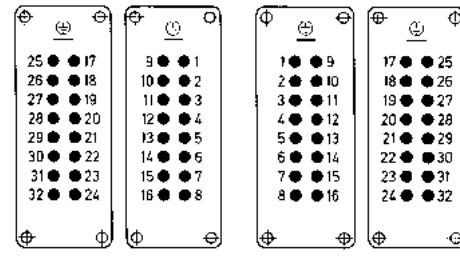
Han E/ EE

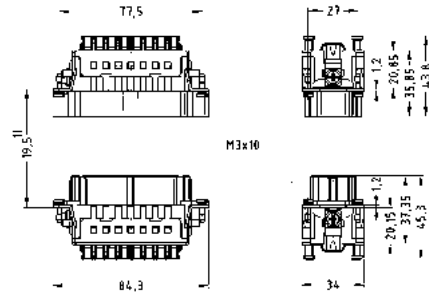
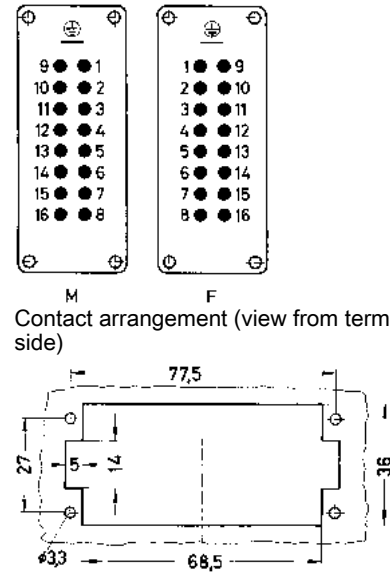
Number of contacts

32+ 

16 A 500 V 6 kV 3


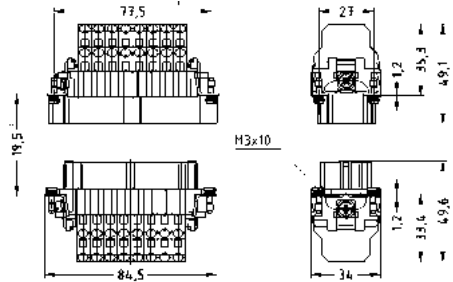
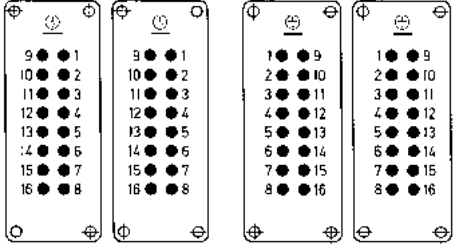
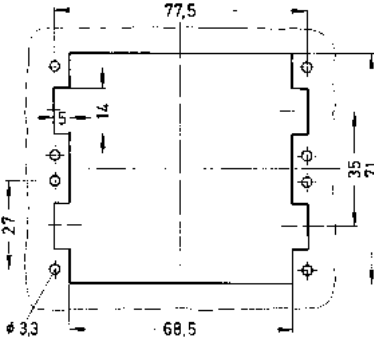
Han E/
EE

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® ES , Cage-clamp termination, 1 ... 16 Contact surface: Silver plated  You need two inserts for a complete assembly!	0,14 ... 2,5	09 33 016 2616	09 33 016 2716	 1) distance for contact max. 21 mm
Han® ES , Continuing marking, Cage-clamp termination, 17 ... 32 Contact surface: Silver plated  You need two inserts for a complete assembly!	0,14 ... 2,5	09 33 016 2626	09 33 016 2726	 1) distance for contact max. 21 mm

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® ES Press , Cage-clamp termination, 1 ... 16 Contact surface: Silver plated  Blue slide You need two inserts for a complete assembly!	0,14 ... 2,5	09 33 016 2648	09 33 016 2748	 Distance for contact max. 21 mm
Han® ES Press , Continuing marking, Cage-clamp termination, 17 ... 32 Contact surface: Silver plated  You need two inserts for a complete assembly!		09 33 016 2688	09 33 016 2788	 Panel cut out



Han E/
EE


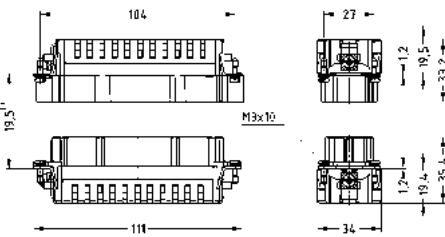

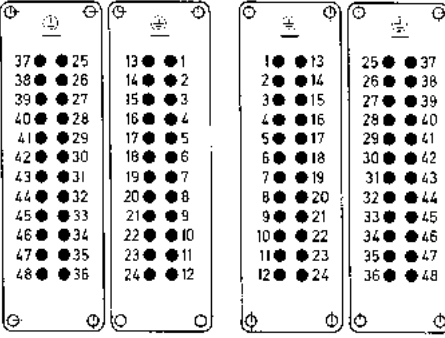
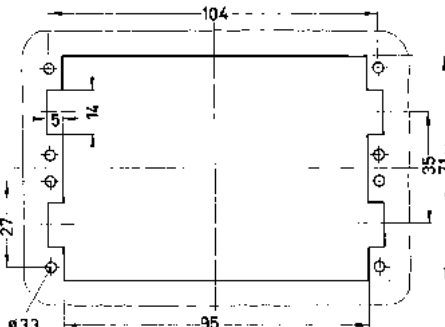
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® ESS , Cage-clamp termination, 1 ... 16 Contact surface: Silver plated  two terminations per contact You need two inserts for a complete assembly!	0,14 ... 2,5	09 33 016 2672	09 33 016 2772	 1) distance for contact max. 21 mm  M F Contact arrangement (view from termination side)  Panel cut out



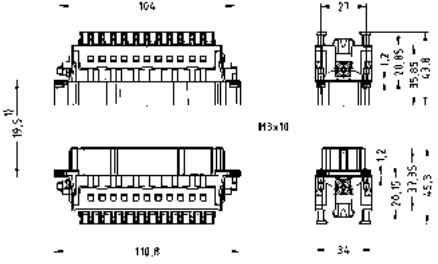

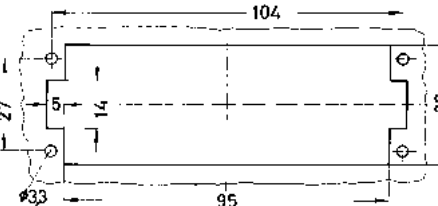

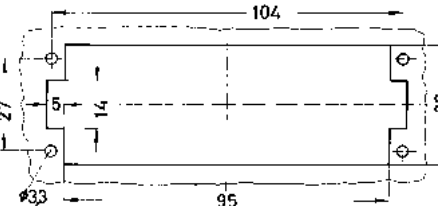
Number of contacts


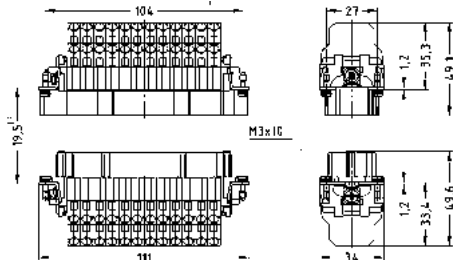
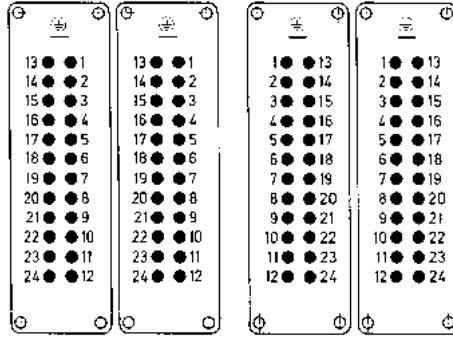
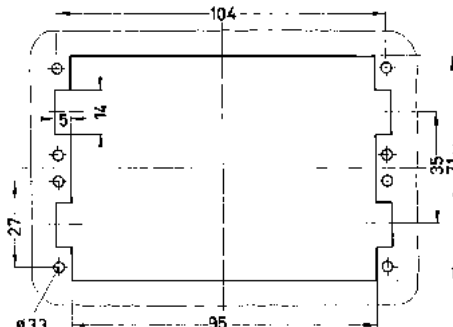
48+

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® ES , Cage-clamp termination, 1 ... 24 Contact surface: Silver plated  You need two inserts for a complete assembly!	0,14 ... 2,5	09 33 024 2616	09 33 024 2716	 1) distance for contact max. 21 mm
Han® ES , Continuing marking, Cage-clamp termination, 25 ... 48 Contact surface: Silver plated  You need two inserts for a complete assembly!	0,14 ... 2,5	09 33 024 2626	09 33 024 2726	 Contact arrangement (view from termination side)  Panel cut out

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® ES Press , Cage-clamp termination, 1 ... 24 Contact surface: Silver plated  Blue slide You need two inserts for a complete assembly! Han® ES Press , Continuing marking, Cage-clamp termination, 25 ... 48 Contact surface: Silver plated  You need two inserts for a complete assembly!	0,14 ... 2,5	09 33 024 2648	09 33 024 2748	 Distance for contact max. 21 mm  Contact arrangement (view from termination side)  Panel cut out
		09 33 024 2688	09 33 024 2788	 Contact arrangement (view from termination side)  Panel cut out

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® ESS , Cage-clamp termination, 1 ... 24 Contact surface: Silver plated  two terminations per contact You need two inserts for a complete assembly!	0,14 ... 2,5	09 33 024 2672	09 33 024 2772	 1) distance for contact max. 21 mm  M F Contact arrangement (view from termination side)  Panel cut out

16 A 500 V 6 kV 3



Han E/
EE

Technical characteristics		Technical characteristics	
Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3	Colour (accessories)	RAL 3018 (strawberry red), RAL 5012 (light blue), RAL 5004 (black blue)
Rated current	16 A	Specifications and approvals	
Rated voltage	500 V		
Rated impulse voltage	6 kV		
Pollution degree	3		
Rated voltage acc. to UL	600 V	Details	
Insulation resistance	≥10 ¹⁰ Ω		
Contact resistance	≤1 mΩ	When using plug-in jumpers within Han® ES Press hoods of high construction must be used.	
Limiting temperature	-40 ... +125 °C		
Flammability acc. to UL 94	V-0		
Mating cycles	≥5		
Material (contacts)	Copper alloy		
Material (accessories)	Polyamide		

Identification		Part number	Drawing (dimensions in mm)	
Han® ES Press , Plug-in jumper, 2 x 1, Transverse, Contact surface: Tin plated	Black Blue Red	09 33 000 9822 09 33 000 9821 09 33 000 9820		
				
Han® ES Press , Plug-in jumper, 1 x 2, Longitudinal, Contact surface: Tin plated	Black Blue Red	09 33 000 9852 09 33 000 9841 09 33 000 9830		
				

Identification			Part number	Drawing (dimensions in mm)	
Han® ES Press , Plug-in jumper, 1 x 3, Longitudinal, Contact surface: Tin plated		Black Blue Red	09 33 000 9853 09 33 000 9842 09 33 000 9831		
Han® ES Press , Plug-in jumper, 1 x 5, Longitudinal, Contact surface: Tin plated		Black Blue Red	09 33 000 9855 09 33 000 9844 09 33 000 9833		
Han® ES Press , Plug-in jumper, 1 x 8, Longitudinal, Contact surface: Tin plated		Black Blue Red	09 33 000 9858 09 33 000 9847 09 33 000 9836		
Han® ES Press , Plug-in jumper, 1 x 12, Longitudinal, Contact surface: Tin plated		Black Blue Red	09 33 000 9862 09 33 000 9851 09 33 000 9840		

Features

- Higher density of crimping contacts
- Coded insert
- Gold and silver contacts available

Technical characteristics

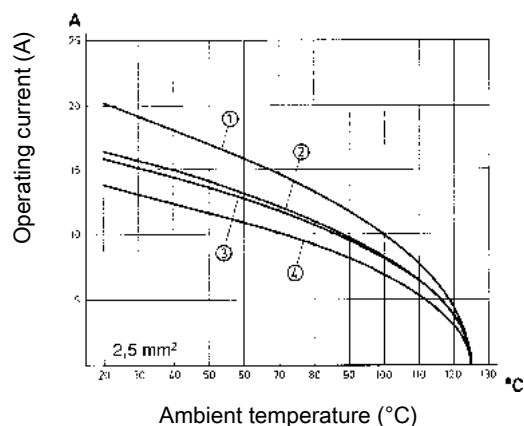
Number of contacts	10, 18, 32, 46, 64, 92
Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

Derating

Current carrying capacity

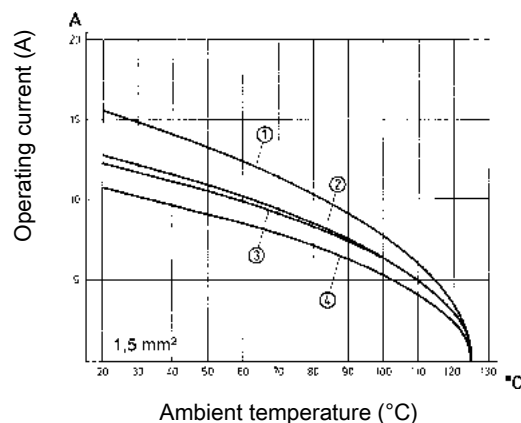
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 10 EE
 ② Han® 18 EE
 ③ Han® 32 EE Han® 64 EE
 ④ Han® 46 EE Han® 92 EE

Derating



- ① Han® 10 EE
 ② Han® 18 EE
 ③ Han® 32 EE Han® 64 EE
 ④ Han® 46 EE Han® 92 EE

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 2237 PVVA2.E318390



Details

Internal use in the switch cabinet in conjunction with Han-Snap® (see chapter 11)

Suitable for hoods/housings of series Han® B, Han® M, Han® EMC, Han® HPR, Han® Easy Hood (see chapter 31)

Tightening torque 0.5 Nm


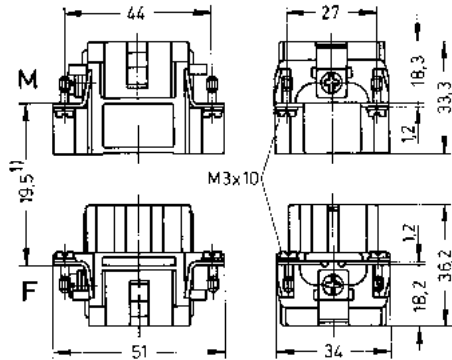



Tightening torque PE screw 1.2 Nm

Number of contacts

10+ 

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® EE , Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 32 010 3001	09 32 010 3101	   M F Contact arrangement (view from termination side)  Panel cut out

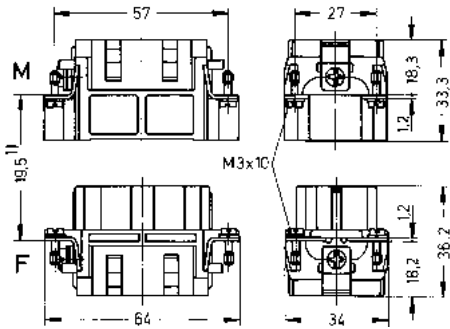





Number of contacts

18+

16 A 500 V 6 kV 3

Han E/
EE

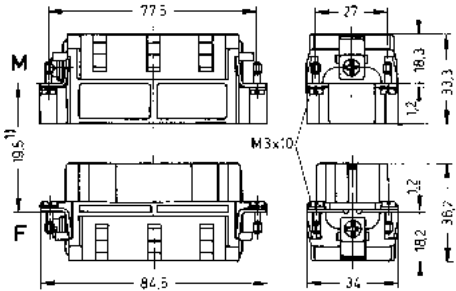

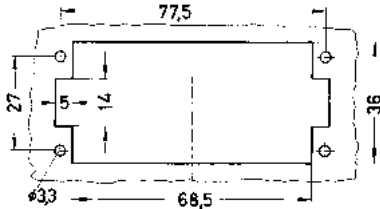
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® EE , Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 32 018 3001	09 32 018 3101	 1) distance for contact max. 21 mm   M F Contact arrangement (view from termination side)  Panel cut out

Number of contacts

32+ 

16 A 500 V 6 kV 3

Han E/
EE

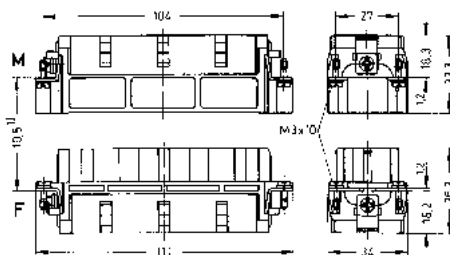

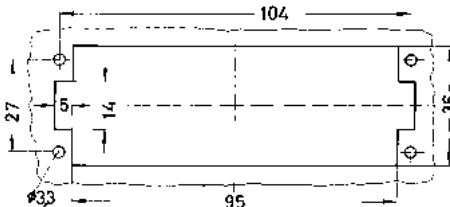
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® EE , Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 32 032 3001	09 32 032 3101	 1) distance for contact max. 21 mm  Contact arrangement (view from termination side)  Panel cut out

Number of contacts

46+ 

16 A 500 V 6 kV 3

Han E/
EE

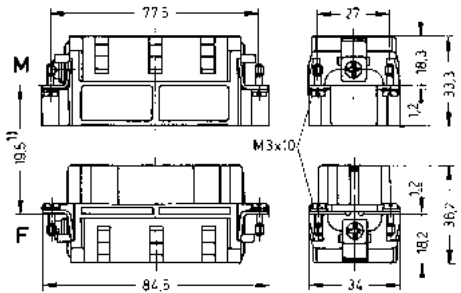
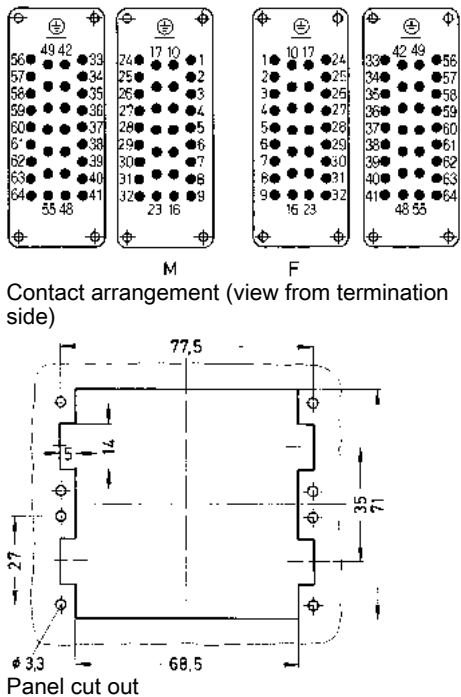
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® EE , Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 32 046 3001	09 32 046 3101	 1) distance for contact max. 21 mm  Contact arrangement (view from termination side)  Panel cut out

Number of contacts

64+

16 A 500 V 6 kV 3

Han E/
EE

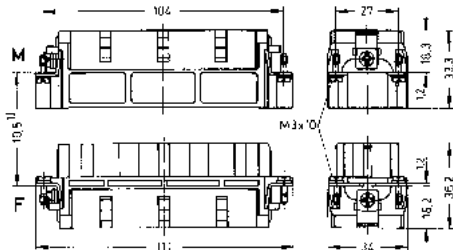
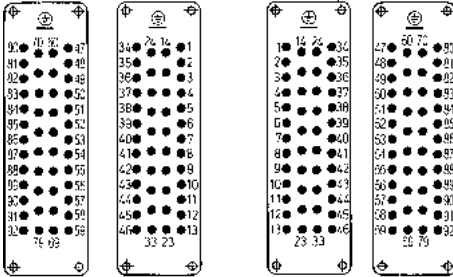
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® EE , Crimp termination, 1 ... 32  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,14 ... 4	09 32 032 3001	09 32 032 3101	 1) distance for contact max. 21 mm
Han® EE , Continuing marking, Crimp termination, 33 ... 64  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,14 ... 4	09 32 032 3011	09 32 032 3111	 Panel cut out

Number of contacts

 $92+ \text{Ⓢ}$

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® EE , Crimp termination, 1 ... 46  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,14 ... 4	09 32 046 3001	09 32 046 3101	 1) distance for contact max. 21 mm
Han® EE , Continuing marking, Crimp termination, 47 ... 92  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,14 ... 4	09 32 046 3011	09 32 046 3111	 1) distance for contact max. 21 mm

Features

- Highest density of crimping contacts
- Coded insert
- Gold and silver contacts available

Technical characteristics

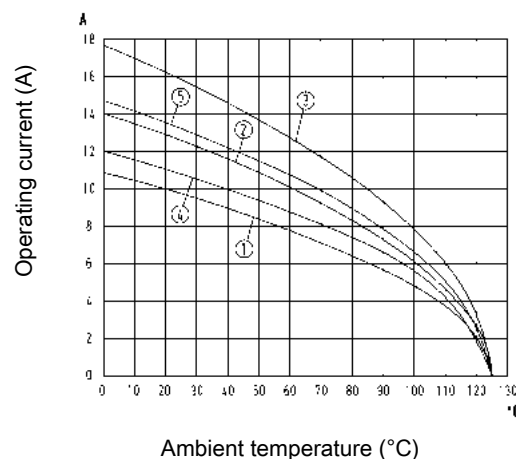
Number of contacts	40, 64
Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 64 EEE / 1.5 mm²
- ② Han® 64 EEE / 2.5 mm²
- ③ Han® 64 EEE / 4 mm²
- ④ Han® 40 EEE / 1.5 mm²
- ⑤ Han® 40 EEE / 2.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

Internal use in the switch cabinet in conjunction with Han-Snap® (see chapter 11)

Suitable for hoods/housings of series Han® B, Han® M, Han® EMC, Han® HPR, Han® Easy Hood (see chapter 31)

Tightening torque 0.5 Nm

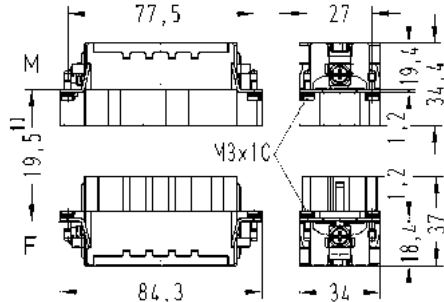

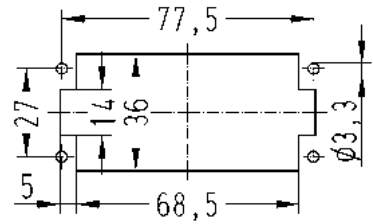
Tightening torque PE screw 1.2 Nm

Number of contacts

40+ 

16 A 500 V 6 kV 3

Han E/
EE

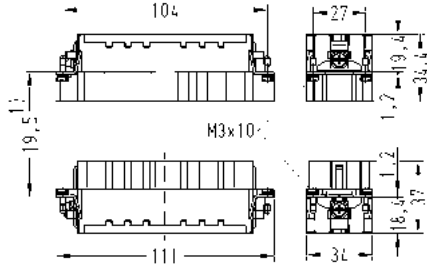

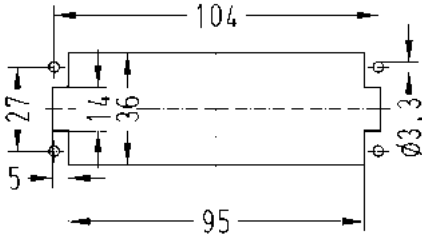
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® EEE , Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 32 040 3001	09 32 040 3101	 1) distance for contact max. 21 mm  Contact arrangement (view from termination side)  Panel cut out

Number of contacts

64+ 

16 A 500 V 6 kV 3

Han E/
EE

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® EEE , Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 32 064 3001	09 32 064 3101	 1) distance for contact max. 21 mm  Contact arrangement (view from termination side)  Panel cut out

Technical characteristics

Contact resistance	≤1 mΩ
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic

Specifications and approvals

EN 60664-1
IEC 61984

Details

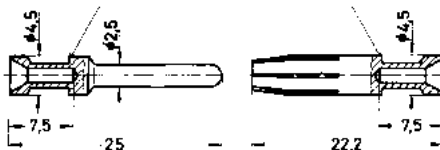
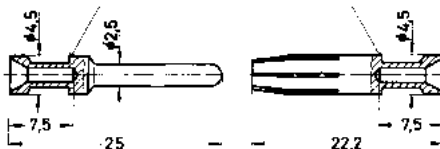
Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Coding pin

Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.



Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
Han E® , Crimp contact, Contact surface: Silver plated	0,14 ... 0,37	09 33 000 6127	09 33 000 6227		
	0,5	09 33 000 6121	09 33 000 6220		
	0,75	09 33 000 6114	09 33 000 6214		
	1	09 33 000 6105	09 33 000 6205		
	1,5	09 33 000 6104	09 33 000 6204		
	2,5	09 33 000 6102	09 33 000 6202		
	3	09 33 000 6106	09 33 000 6206		
	4	09 33 000 6107	09 33 000 6207		
Han E® , Crimp contact, Contact surface: Gold plated	0,14 ... 0,37	09 33 000 6117	09 33 000 6217		
	0,5	09 33 000 6122	09 33 000 6222		
	0,75	09 33 000 6115	09 33 000 6215		
	1	09 33 000 6118	09 33 000 6218		
	1,5	09 33 000 6116	09 33 000 6216		
	2,5	09 33 000 6123	09 33 000 6223		
	4	09 33 000 6119	09 33 000 6221		

Conductor cross-section		Identification
0.14-0.37 mm²	AWG 26-22	no groove
0.5 mm²	AWG 20	no groove
0.75 mm²	AWG 18	1 groove*
1 mm²	AWG 18	1 groove
1.5 mm²	AWG 16	2 grooves
2.5 mm²	AWG 14	3 grooves
3 mm²	AWG 12	wide groove
4 mm²	AWG 12	no groove
* on the back crimp collar		

Stripping length 7.5 mm

Conductor cross-section		Identification
0.14-0.37 mm²	AWG 26-22	no groove
0.5 mm²	AWG 20	no groove
0.75 mm²	AWG 18	1 groove*
1 mm²	AWG 18	1 groove
1.5 mm²	AWG 16	2 grooves
2.5 mm²	AWG 14	3 grooves
3 mm²	AWG 12	wide groove
4 mm²	AWG 12	no groove
* on the back crimp collar		

Stripping length 7.5 mm

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E [®] , Crimp contact, Relay contact, Contact surface: Silver plated 	0,75 ... 1 1,5 2,5	09 33 000 6109 09 33 000 6110 09 33 000 6111		
FO contact, for 1 mm plastic fibre 		20 10 001 3311	20 10 001 3321	 Crimp zone
Han E [®] Han [®] EE Han [®] EEE, Coding pin  for crimp inserts only			09 33 000 9954	

Han E/
EE

Contents	Page
Han Hv E [®]	04.3
Han [®] 16 / 32 Hv E.....	04.9
Han [®] Hv ES	04.12
Contacts	04.18
Hoods/Housings	04.19

Han
Hv E

Standard Hoods/Housings Han® B

Suitable for
Han® Hv ES cage-clamp terminal
and Han Hv E® crimp terminal

Coding bar



Special hood/housing Han Hv E®

Suitable for
Han Hv E® screw terminal

Coding Han Hv E®

Isolation
to increase the
electric strength



Features

- Designed for application up to 830 V
- Available in multiple termination techniques

Technical characteristics

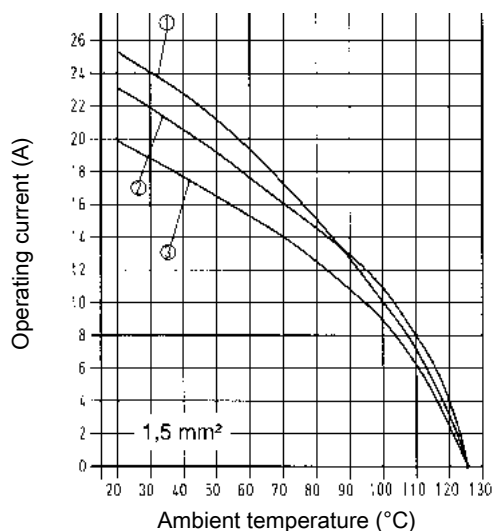
Number of contacts	3, 6, 10, 12, 20
Additional contacts	+ 2 additional relay contacts, + 4 additional relay contacts
Electrical data acc. to IEC 61984	16 A 830 V 8 kV 3
Rated current	16 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

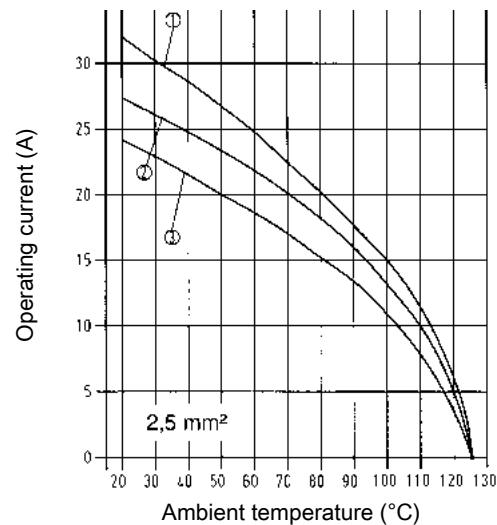
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 3 Hv E
② Han® 6 / 12 Hv E
③ Han® 10 / 16 / 20 / 32 Hv E

Derating



- ① Han® 3 Hv E
② Han® 6 / 12 Hv E
③ Han® 10 / 16 / 20 / 32 Hv E

Specifications and approvals

EN 60664-1
IEC 61984



Details

Han Hv E® screw requires special Han Hv E® housings

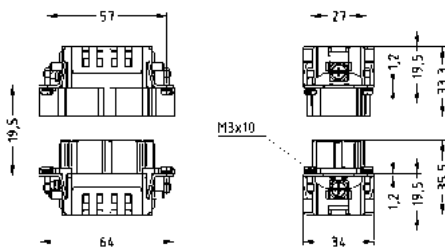

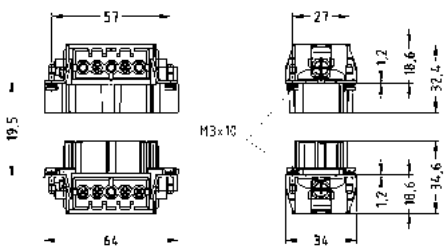


Tightening torque 0.5 Nm

Tightening torque PE screw 1.2 Nm

Number of contacts

3+

 16 A 830 V 8 kV 3
 + 2 additional relay contacts
Han
Hv E

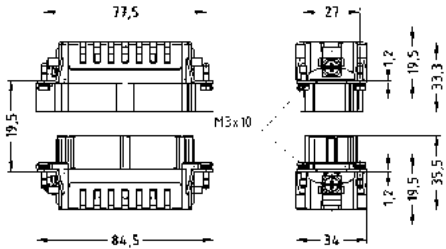
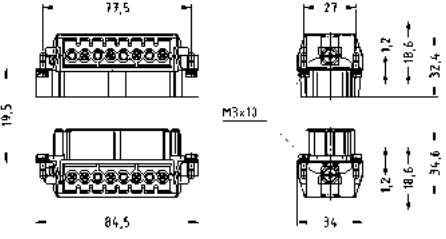

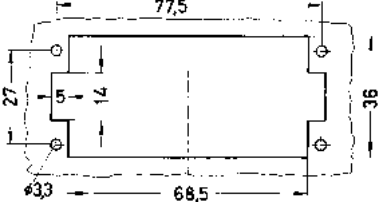
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han Hv E®, Crimp termination  Please order crimp contacts separately.	0,5 ... 4	09 34 003 2602	09 34 003 2702	
Han Hv E®, Screw termination, Contact surface: Silver plated 	0,75 ... 2,5	09 34 003 2601	09 34 003 2701	  M F Contact arrangement (view from termination side) Han® 3 Hv E ♦ Power contacts ● Relay contact ○ Without contact  Panel cut out for use without hood



Number of contacts

6+

16 A 830 V 8 kV 3
+ 2 additional relay contacts


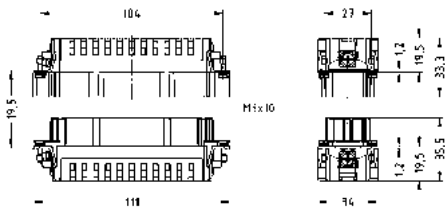
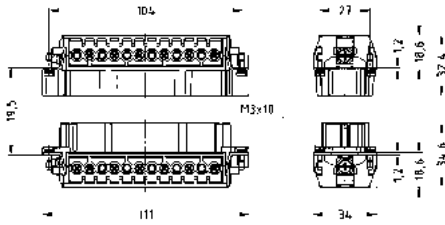

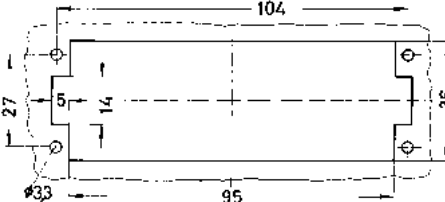
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han Hv E®, Crimp termination  Please order crimp contacts separately.	0,5 ... 4	09 34 006 2602	09 34 006 2702	
Han Hv E®, Screw termination, Contact surface: Silver plated 	0,75 ... 2,5	09 34 006 2601	09 34 006 2701	  Contact arrangement (view from termination side) Han® 6 Hv E ◆ Power contacts ● Relay contact ○ Without contact  Panel cut out for use without hood

Han
Hv E

Number of contacts

10+


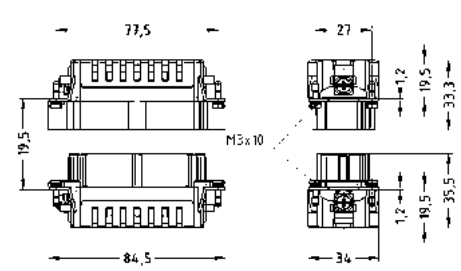
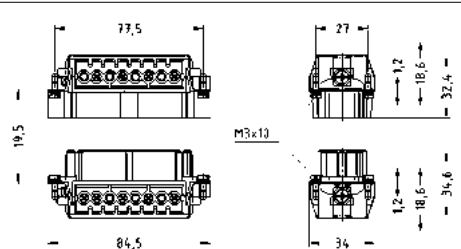
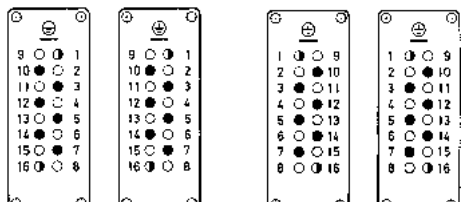
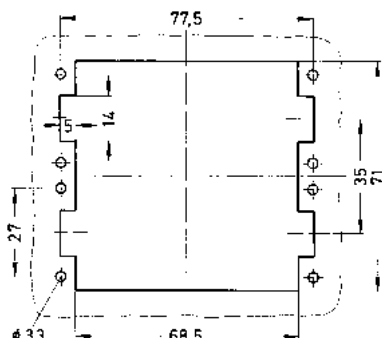
 16 A 830 V 8 kV 3
 + 2 additional relay contacts
Han
Hv E

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han Hv E®, Crimp termination  Please order crimp contacts separately.	0,5 ... 4	09 34 010 2602	09 34 010 2702	
Han Hv E®, Screw termination, Contact surface: Silver plated 	0,75 ... 2,5	09 34 010 2601	09 34 010 2701	  M F Contact arrangement (view from termination side) Han® 10 Hv E ♦ Power contacts ● Relay contact ○ Without contact  Panel cut out for use without hood

Number of contacts

12+


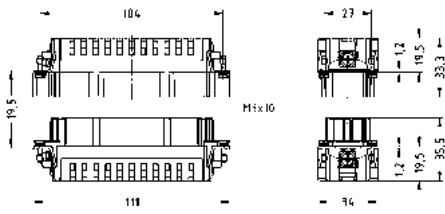
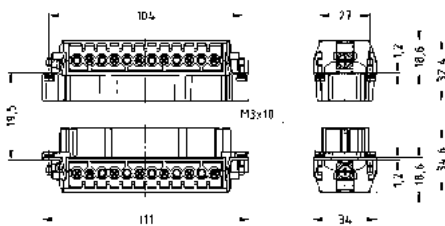


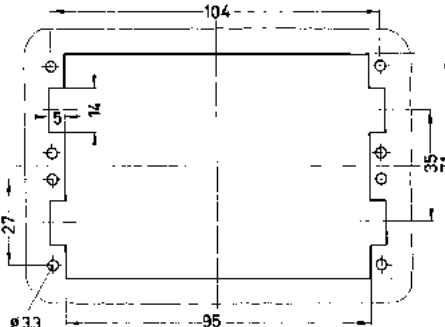
 16 A 830 V 8 kV 3
 + 4 additional relay contacts
Han
Hv E

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han Hv E®, Crimp termination  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,5 ... 4	09 34 006 2602	09 34 006 2702	
Han Hv E®, Screw termination, Contact surface: Silver plated  You need two inserts for a complete assembly!	0,75 ... 2,5	09 34 006 2601	09 34 006 2701	  M F Contact arrangement (view from termination side) Han® 12 Hv E • Power contacts ♦ Relay contact ○ Without contact  Panel cut out for use without hood

Number of contacts

20+

 16 A 830 V 8 kV 3
 + 4 additional relay contacts
Han
Hv E

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han Hv E®, Crimp termination  Please order crimp contacts separately. You need two inserts for a complete assembly!	0,5 ... 4	09 34 010 2602	09 34 010 2702	
Han Hv E®, Screw termination, Contact surface: Silver plated  You need two inserts for a complete assembly!	0,75 ... 2,5	09 34 010 2601	09 34 010 2701	  M  F Contact arrangement (view from termination side) Han® 20 Hv E • Power contacts • Relay contact ○ Without contact  Panel cut out for use without hood

Features

- Designed for application up to 690 V
- No special tools required

Technical characteristics

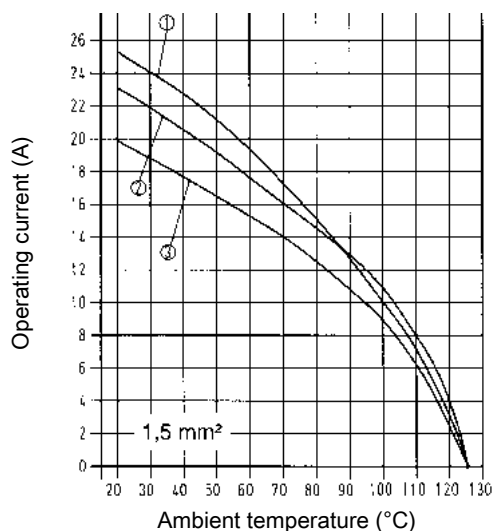
Number of contacts	16, 32
Additional contacts	+ 2 additional relay contacts, + 4 additional relay contacts
Electrical data acc. to IEC 61984	16 A 400/690 V 6 kV 3
Rated current	16 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

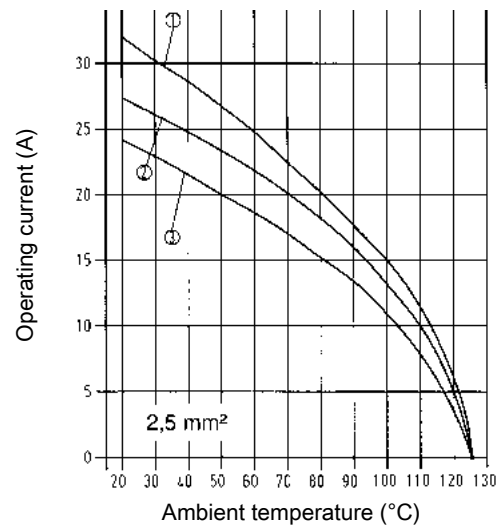
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 3 Hv E
 ② Han® 6 / 12 Hv E
 ③ Han® 10 / 16 / 20 / 32 Hv E

Derating



- ① Han® 3 Hv E
 ② Han® 6 / 12 Hv E
 ③ Han® 10 / 16 / 20 / 32 Hv E

Specifications and approvals

EN 60664-1
 IEC 61984



Details

Han Hv E® screw requires special Han Hv E® housings

Tightening torque 0.5 Nm

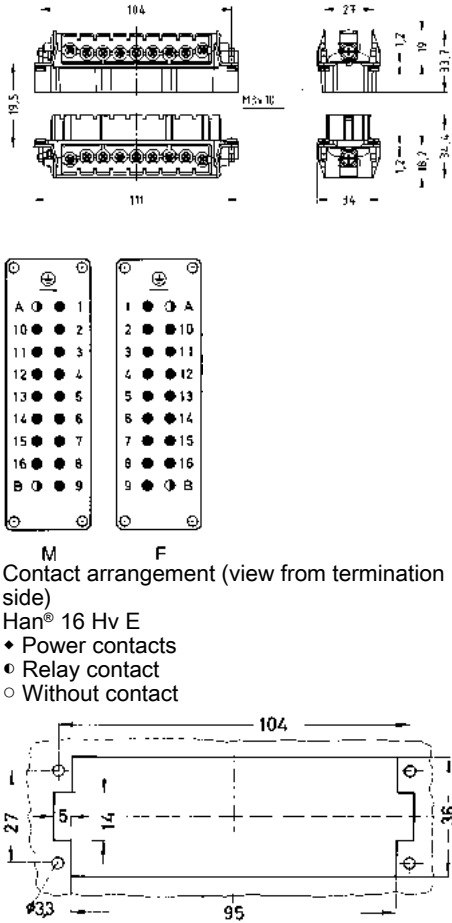
Tightening torque PE screw 1.2 Nm

Number of contacts

16+

16 A 400/690 V 6 kV 3
+ 2 additional relay contacts

Han
Hv E


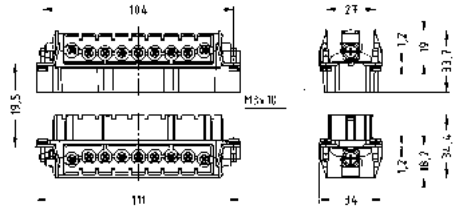
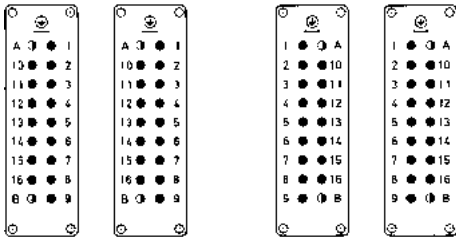
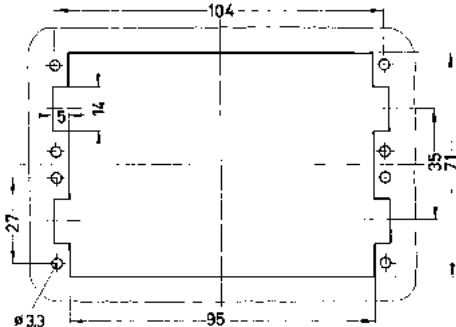
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han Hv E®, Screw termination, Contact surface: Silver plated 	0,75 ... 2,5	09 34 016 2601	09 34 016 2701	 Panel cut out for use without hood



Number of contacts

32+

16 A 400/690 V 6 kV 3
+ 4 additional relay contacts

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han Hv E®, Screw termination, Contact surface: Silver plated  You need two inserts for a complete assembly!	0,75 ... 2,5	09 34 016 2601	09 34 016 2701	  M F Contact arrangement (view from termination side) Han® 32 Hv E • Power contacts • Relay contact ○ Without contact  Panel cut out for use without hood

Han
Hv E

Features

- Designed for application up to 830 V
- Reliable cage clamp termination
- No special tools required
- Vibration-proved

Technical characteristics

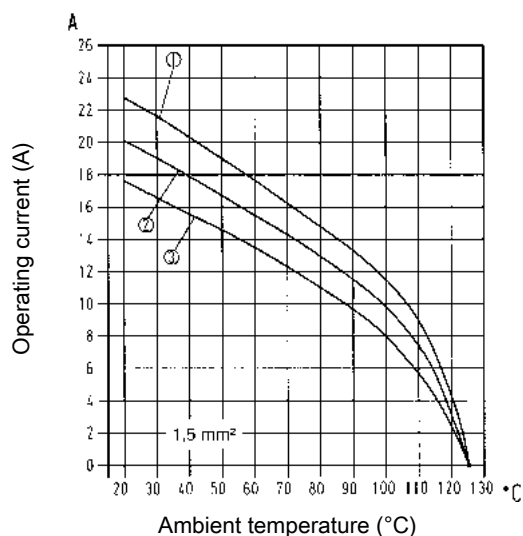
Number of contacts	3, 6, 10, 12, 20
Additional contacts	+ 2 additional relay contacts, + 4 additional relay contacts
Electrical data acc. to IEC 61984	16 A 830 V 8 kV 3
Rated current	16 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

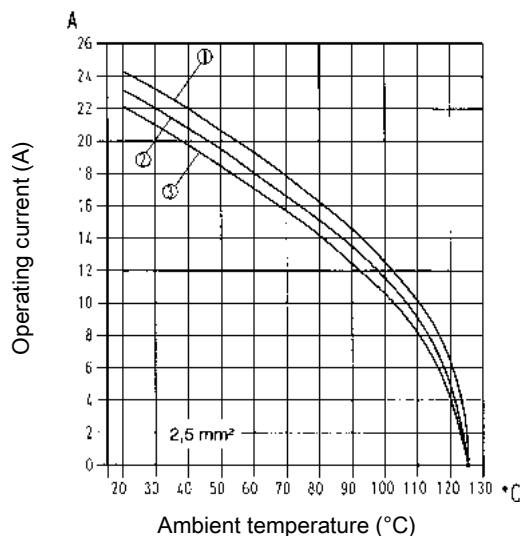
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 3 Hv ES
 ② Han® 6 Hv ES / Han® 12 Hv ES
 ③ Han® 10 Hv ES / Han® 20 Hv ES

Derating



- ① Han® 3 Hv ES
 ② Han® 6 Hv ES / Han® 12 Hv ES
 ③ Han® 10 Hv ES / Han® 20 Hv ES

Specifications and approvals

EN 60664-1
 IEC 61984



Details

Not mating compatible to Han Hv E® screw/crimp termination

Tightening torque 0.5 Nm

Tightening torque PE screw 1.2 Nm

Number of contacts

3+

16 A 830 V 8 kV 3
+ 2 additional relay contacts

Han
Hv E

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Hv ES , Cage-clamp termination, Contact surface: Silver plated	0,14 ... 2,5	09 34 003 2616	09 34 003 2716	M F Contact arrangement (view from termination side) Han® 3 Hv ES ♦ Power contacts ● Relay contact ○ Without contact Panel cut out for use without hood

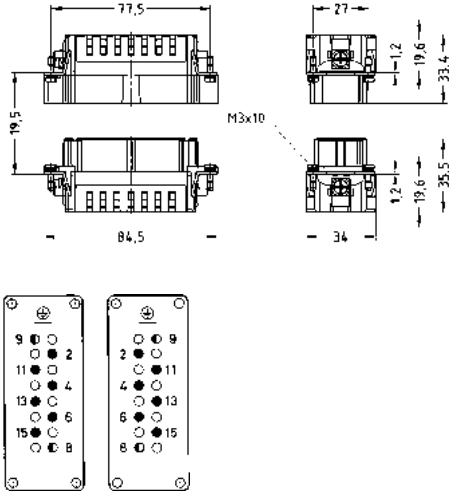
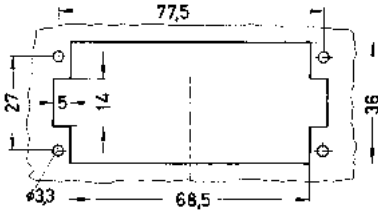


Number of contacts

6+

16 A 830 V 8 kV 3
+ 2 additional relay contacts

Han
Hv E

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Hv ES , Cage-clamp termination, Contact surface: Silver plated 	0,14 ... 2,5	09 34 006 2616	09 34 006 2716	 M F Contact arrangement (view from termination side) Han® 6 Hv ES ◆ Power contacts ● Relay contact ○ Without contact  Panel cut out for use without hood

Number of contacts

10+

16 A 830 V 8 kV 3
+ 2 additional relay contacts

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Hv ES , Cage-clamp termination, Contact surface: Silver plated	0,14 ... 2,5	09 34 010 2616	09 34 010 2716	Contact arrangement (view from termination side) Han® 10 Hv ES ♦ Power contacts ● Relay contact ○ Without contact Panel cut out for use without hood


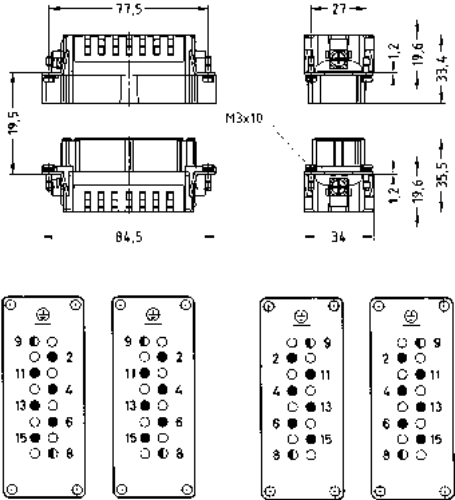
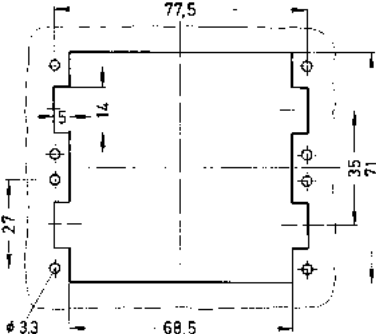
Han
Hv E

Number of contacts

12+

16 A 830 V 8 kV 3
+ 4 additional relay contacts

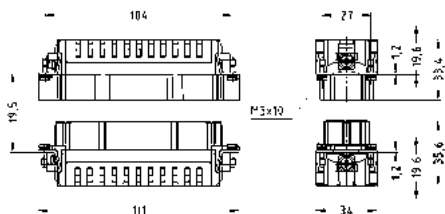
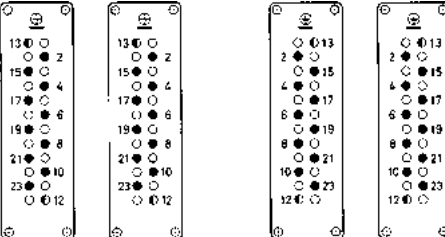
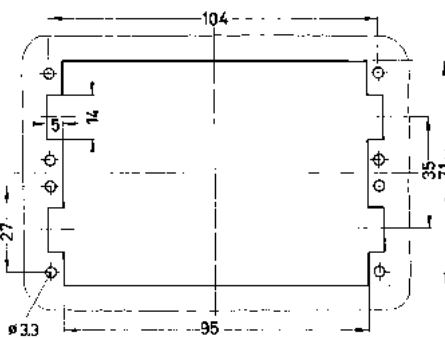
Han
Hv E

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Hv ES , Cage-clamp termination, Contact surface: Silver plated  You need two inserts for a complete assembly!	0,14 ... 2,5	09 34 006 2616	09 34 006 2716	 M F Contact arrangement (view from termination side) Han® 12 Hv ES ♦ Power contacts • Relay contact ○ Without contact  Panel cut out for use without hood

Number of contacts

20+

 16 A 830 V 8 kV 3
 + 4 additional relay contacts
Han
Hv E

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Hv ES , Cage-clamp termination, Contact surface: Silver plated  You need two inserts for a complete assembly!	0,14 ... 2,5	09 34 010 2616	09 34 010 2716	  M F Contact arrangement (view from termination side) Han® 20 Hv ES ♦ Power contacts ● Relay contact ○ Without contact  Panel cut out for use without hood

Han
Hv E

Technical characteristics

Contact resistance ≤1 mΩ
Material (contacts) Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.


Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E® , Crimp contact, Contact surface: Silver plated	0,5	09 33 000 6121	09 33 000 6220	
	0,75	09 33 000 6114	09 33 000 6214	
	1	09 33 000 6105	09 33 000 6205	
	1,5	09 33 000 6104	09 33 000 6204	
	2,5	09 33 000 6102	09 33 000 6202	
	3	09 33 000 6106	09 33 000 6206	
	4	09 33 000 6107	09 33 000 6207	

Han E® , Crimp contact, Relay contact , Contact surface: Silver plated	0,75 ... 1	09 33 000 6109
	1,5	09 33 000 6110
	2,5	09 33 000 6111

Conductor cross-section		Identification
0.14-0.37 mm²	AWG 26-22	no groove
0.5 mm²	AWG 20	no groove
0.75 mm²	AWG 18	1 groove*
1 mm²	AWG 18	1 groove
1.5 mm²	AWG 16	2 grooves
2.5 mm²	AWG 14	3 grooves
3 mm²	AWG 12	wide groove
4 mm²	AWG 12	no groove

* on the back crimp collar

Stripping length 7.5 mm



Technical characteristics

Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94 (locking levers)	V-0
Degree of protection acc. to IEC 60529	IP65
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)

Specifications and approvals



Details

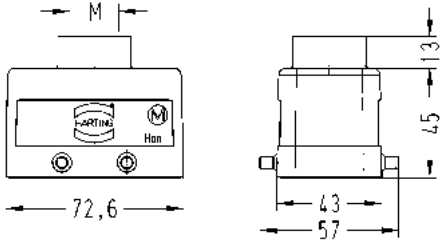
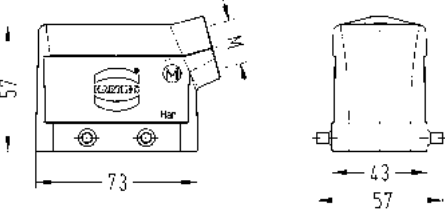
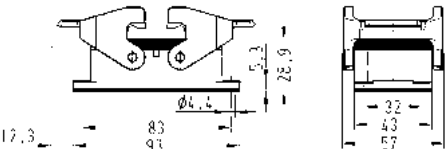
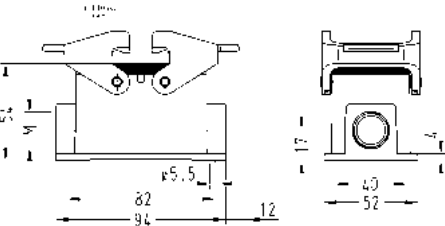
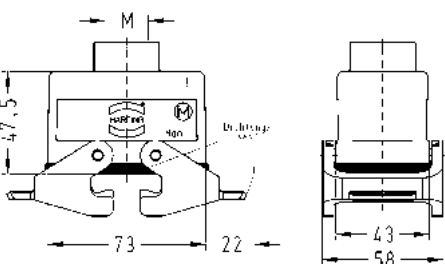
Special hoods/housings for Han Hv E® screw terminal

Standard hoods/housings see chapter 31

Han
Hv E

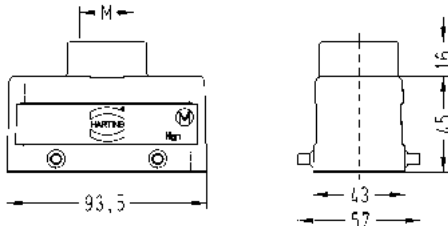
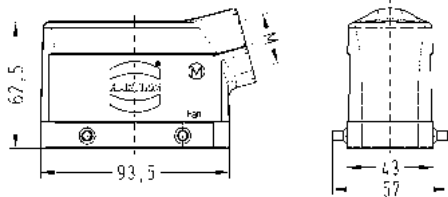
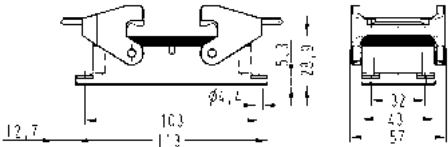
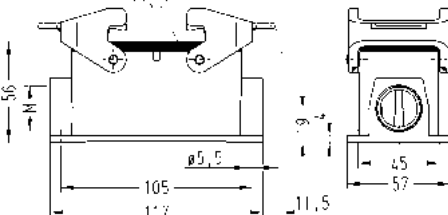
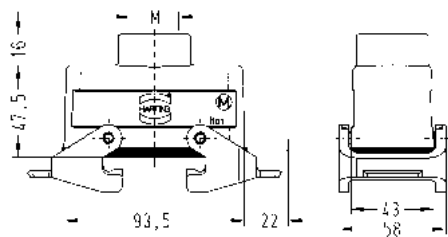
Special hoods/housings for Han Hv E® screw terminal
Double locking lever

Han
Hv E

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han Hv E®, Hoods, Top entry 	1x M20 1x M25	19 34 003 0420 19 34 003 0421	
Han Hv E®, Hoods, Side entry 	1x M20	19 34 003 0520	
Han Hv E®, Bulkhead mounted housings, Han-Easy Lock® 		09 34 003 0301	 Panel cut out 60 x 35 mm
Han Hv E®, Surface mounted housing, Side entry, Han-Easy Lock® 	2x M20	19 34 003 0270	
Han Hv E®, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M20 1x M25	19 34 003 0730 19 34 003 0731	

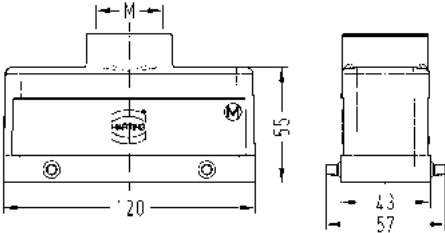
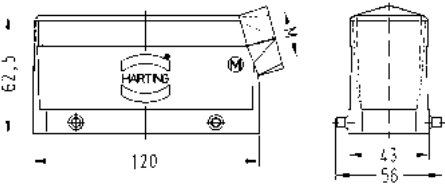
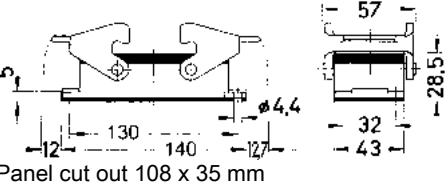
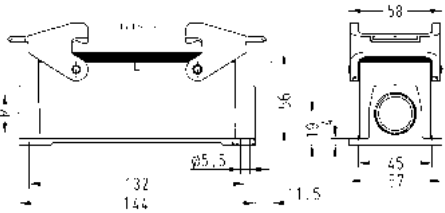
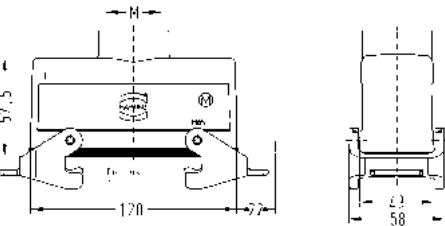
Special hoods/housings for Han Hv E® screw terminal
Double locking lever

Han
Hv E











Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han Hv E®, Hoods, Top entry 	1x M25	19 34 006 0421	
Han Hv E®, Hoods, Side entry 	1x M25	19 34 006 0521	
Han Hv E®, Bulkhead mounted housings, Han-Easy Lock® 		09 34 006 0301	 Panel cut out 82 x 35mm
Han Hv E®, Surface mounted housing, Side entry, Han-Easy Lock® 	2x M25	19 34 006 0271	
Han Hv E®, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M25 1x M32	19 34 006 0731 19 34 006 0732	

Special hoods/housings for Han Hv E® screw terminal
Double locking lever

Han
Hv E

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han Hv E®, Hoods, Top entry 	1x M32	19 34 010 0422	
Han Hv E®, Hoods, Side entry 	1x M25	19 34 010 0521	
Han Hv E®, Bulkhead mounted housings, Han-Easy Lock® 		09 34 010 0301	 Panel cut out 108 x 35 mm
Han Hv E®, Surface mounted housing, Side entry, Han-Easy Lock® 	2x M25	19 34 010 0271	
Han Hv E®, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M32	19 34 010 0732	

Contents	Page
Han® K 4/4	05.8
Han® K 8/24	05.10
Han® K 32/55	05.13
Han® K 4/0	05.15
Han® K 4/2	05.17
Han® K 6/12	05.19
Han® K 6/36	05.21
Han® K 12/2	05.24
Han® K 4/8	05.27
Han® K 6/6	05.29
Han® K 8/0	05.31

Size	Description
10 B	   Han® K 8/24 16 A / 230/400 V 10 A / 160 V Han® K 4/4 63 A / 690 V 16 A / 230 V Han® K 32/55 10 A / 250 V 4 A / 50 V
16 B	    Han® K 4/0, 4/2 80 A / 830 V 16 A / 400 V Han® K 6/12 40 A / 690 V 10 A / 230/400 V Han® K 6/36 40 A / 690 V 10 A / 160 V Han® K 12/2 40 A / 690 V 10 A / 250 V
24 B	   Han® K 4/8 80 A / 400 V 16 A / 400 V Han® K 6/6 100 A / 690 V 16 A / 400 V Han® K 8/0 100 A / 690 V
32 B	suitable for 2 inserts of size 16 B
48 B	suitable for 2 inserts of size 24 B

Summary

Type	Technical characteristics								Suitable Hoods/ Housings
	Power area				Signal area				
	Number of contacts	A	V ~	Termination	Number of contacts	A	V ~	Termination	Size
Han® K 4/0	4+PE	80	830	screw	—	—	—	—	16 B, 32 B
Han® K 4/2	4+PE	80	830	screw	2	16	400	screw	16 B, 32 B
Han® K 4/4	4+PE	63	690	axial screw	4	16	250	cage clamp	10 B
Han® K 4/8	4+PE	80	400	screw	8	16	400	screw	24 B, 48 B
Han® K 6/6	6+PE	100	690	axial screw	6	16	400	screw	24 B, 48 B
Han® K 6/12	6+PE	40	690	axial screw	12	10	230/400	screw	16 B, 32 B
Han® K 6/36	6+PE	40	690	crimp	36	10	160	crimp	16 B, 32 B
Han® K 8/0	8+PE	100	690	axial screw	—	—	—	—	24 B, 48 B
Han® K 8/24	8+PE	16	230/400	crimp	24	10	160	crimp	10 B
Han® K 12/2	12+PE	40	690	crimp	2	10	250	crimp	16 B, 32 B
Han® K 32/55	32+PE	10	250	crimp	55	4	50	crimp	10 B

Han-
Com

Type identification

Han® K 6/12

Han® Industrial connectors Han®
 K Series Han® K / Han-Com®
 6 Number of power contacts
 12 Number of signal contacts

Identification of contact position

Han® K connectors from 1 to ... (power area)
 from 11 to... (signal area)

Exceptions
 Han® K 4/8 and Han® K 8/24 from 1 to ... (consecutively)
 Han® K 12/2 from 1 to 12 (power area)
 with „a“ and „b“ (signal area)

Comment for users

For the combination of several circuits in one cable and/or e.g. one connector the following standards are valid:
 DIN VDE 0100-410/06.2007 § 411.3.1.1 and DIN EN 60 204/06.2007 § 13.1.3

Accessories

Crimping tools chapter 90
 Cable clamps chapter 80
 Coding of hoods/housings chapter 80
 Label acc. to CSA-approval chapter 80
 Han-Snap® chapter 11
 PCB adapter chapter 80

Description	Depiction	Dimensions in mm

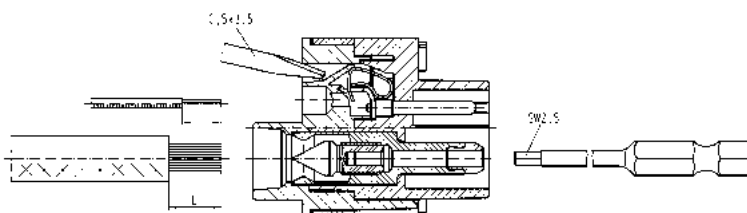
Step 1:

Signal contacts:

Push screwdriver (0.5 x 3.5) into rectangular chamber. Strip insulation from the wire with a length and insert the wire into the round contact chamber.

Power contacts:

Strip insulation from the wire with a length and insert the wire into the contact chamber until insulation is flush with contact. Do not twist the strands of the wire.



I: Stripping length for signal contacts

L: Stripping length for power contacts

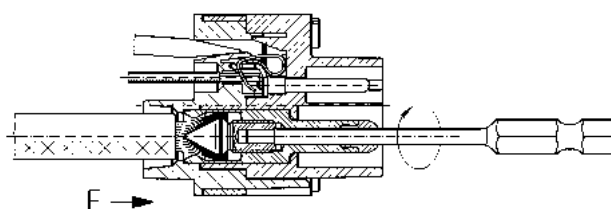
Step 2:

Signal contacts:

Push screwdriver (0.5 x 3.5) out of rectangular chamber.

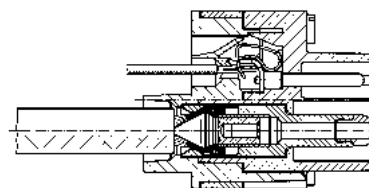
Power contacts:

Hold the wire in position and tighten by a hexagonal driver (SW 2.5) from the mating side with a tightening torque.



Step 3:

Complete connection



Description	Depiction	Dimensions in mm

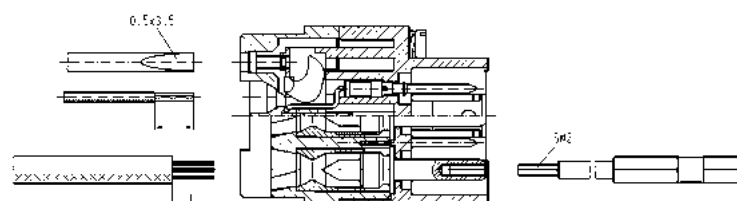
Step 1:

Signal contacts:

Strip insulation from the wire with a length and insert the wire into the rectangular contact chamber.

Power contacts:

Strip insulation from the wire with a length and insert the wire into the contact chamber until insulation is flush with contact. Do not twist the strands of the wire.



I: Stripping length for signal contacts

L: Stripping length for power contacts

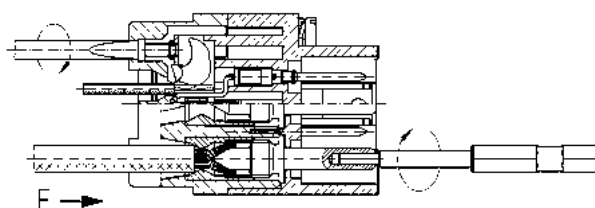
Step 2:

Signal contacts:

Tighten screw termination with screwdriver (0.5 x 3.5) with a tightening torque.


Power contacts:

Hold the wire in position and tighten by a hexagonal driver (SW 2) from the mating side with a tightening torque.



Step 3:

Complete connection



Han-
Com

Description	Depiction	Dimensions in mm

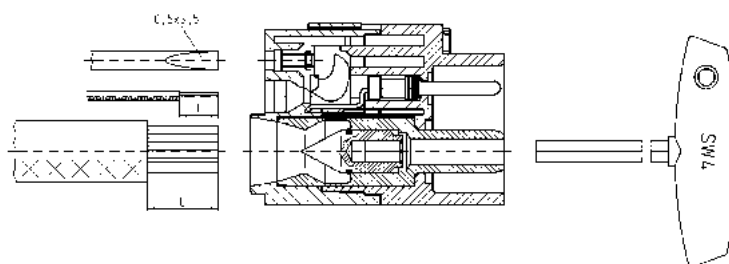
Step 1:

Signal contacts:

Strip insulation from the wire with a length and insert the wire into the rectangular contact chamber.

Power contacts:

Strip insulation from the wire with a length and insert the wire into the contact chamber until insulation is flush with contact. Do not twist the strands of the wire.



I: Stripping length for signal contacts

L: Stripping length for power contacts

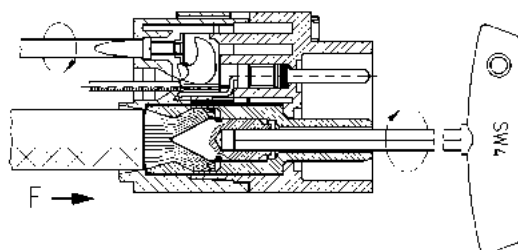
Step 2:

Signal contacts:

Tighten screw termination with screwdriver (0.5 x 3.5) with a tightening torque.

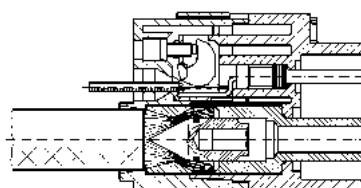
Power contacts:

Hold the wire in position and tighten by a hexagonal driver (SW 4) from the mating side with a tightening torque.



Step 3:

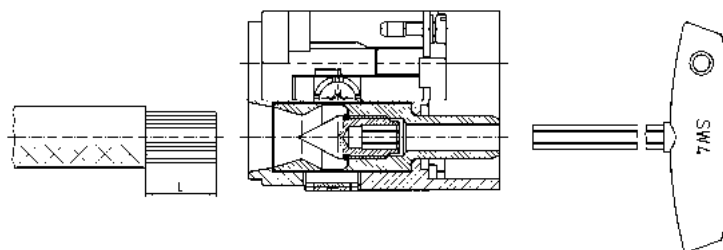
Complete connection



Description	Depiction	Dimensions in mm

Step 1:

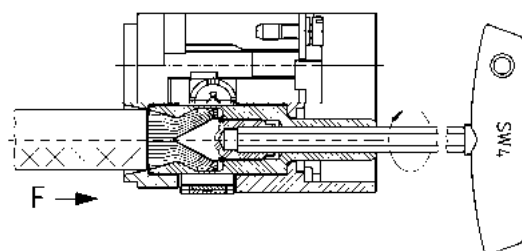
Strip insulation from the wire with a length and insert the wire into the contact chamber until insulation is flush with contact. Do not twist the strands of the wire.



L: Stripping length for power contacts

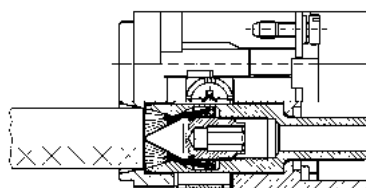
Step 2:

Hold the wire in position and tighten by a hexagonal driver (SW 4) from the mating side with a tightening torque.



Step 3:

Complete connection



Han-
Com

Features

- Combination of signal and power in one connector
- Axial screw termination for power area
- Cage clamp termination for signal area
- Same range of cross-section for PE contacts and power contacts

Technical characteristics

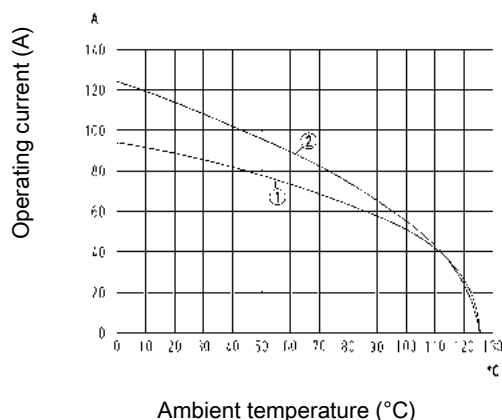
Number of contacts	4
Additional contacts	+ 4 additional signal contacts
Electrical data acc. to IEC 61984	63 A 690 V 8 kV 3
Rated current	63 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Electrical data, signal	16 A 250 V 4 kV 3
Rated current (signal)	16 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	230 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.5 \text{ m}\Omega$
Contact resistance, signal area	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

Hoods/Housings see chapter 31

Hex key (A/F 2.5) see chapter 90

Remarks on the axial screw technique

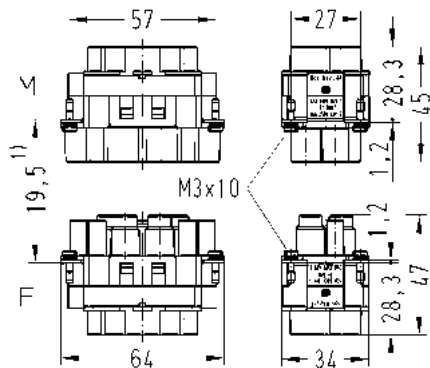

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.



Number of contacts

4+

63 A 690 V 8 kV 3
+ 4 additional signal contacts
16 A 250 V 4 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																								
		Male	Female																									
Han-Com® , Axial screw termination / cage-clamp termination, Contact surface: Silver plated  Finger safe	6 ... 16 10 ... 22	09 38 008 2601 09 38 008 2602	09 38 008 2701 09 38 008 2702	 1) distance for contact max. 21 mm																								
Han-Com® , Axial screw termination / cage-clamp termination, Contact surface: Silver plated  Not finger safe	6 ... 16 10 ... 22	09 38 008 2611 09 38 008 2612		 Contact arrangement (view from termination side) <table><tr><th colspan="4">power contacts</th></tr><tr><th>wire gauge</th><th>tightening torque</th><th>stripping length</th><th>max. insulation diameter</th></tr><tr><td>6 mm²</td><td>2 Nm</td><td>11 ... 12 mm</td><td>8.9 mm</td></tr><tr><td>10 mm²</td><td>3 Nm</td><td>11 ... 12 mm</td><td>8.9 mm</td></tr><tr><td>16 mm²</td><td>4 Nm</td><td>11 ... 12 mm</td><td>8.9 mm</td></tr><tr><td>22 mm²</td><td>4 Nm</td><td>13 ... 14 mm</td><td>11 mm</td></tr></table> Signal contacts : Conductor cross-section 0.14 ... 2.5 mm² Stripping length 7 ... 9 mm	power contacts				wire gauge	tightening torque	stripping length	max. insulation diameter	6 mm²	2 Nm	11 ... 12 mm	8.9 mm	10 mm²	3 Nm	11 ... 12 mm	8.9 mm	16 mm²	4 Nm	11 ... 12 mm	8.9 mm	22 mm²	4 Nm	13 ... 14 mm	11 mm
power contacts																												
wire gauge	tightening torque	stripping length	max. insulation diameter																									
6 mm²	2 Nm	11 ... 12 mm	8.9 mm																									
10 mm²	3 Nm	11 ... 12 mm	8.9 mm																									
16 mm²	4 Nm	11 ... 12 mm	8.9 mm																									
22 mm²	4 Nm	13 ... 14 mm	11 mm																									

Han-Com

Features

- Combination of signal and power in one connector
- Crimp termination for power and signal area
- Use of standard Han E® and Han D® contacts

Technical characteristics

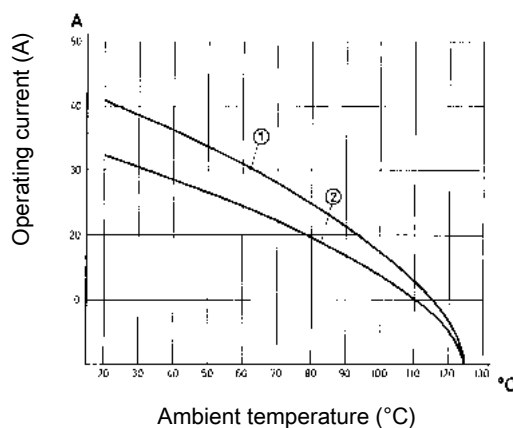
Number of contacts	8
Additional contacts	+ 24 additional signal contacts
Electrical data acc. to IEC 61984	16 A 230/400 V 4 kV 3
Rated current	16 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Electrical data, signal	10 A 160 V 2,5 kV 3
Rated current (signal)	10 A
Rated voltage (signal)	160 V
Rated impulse voltage (signal)	2,5 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	600 V
Rated voltage acc. to CSA	300 V
Rated voltage acc. to CSA (signal)	300 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega, \leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	HB
Mating cycles	≥ 500
Material (insert)	Polyamide
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 4 mm²
 ② Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
 IEC 61984



Details

Hoods/Housings see chapter 31

Contact resistance Han D® crimp contact: $\leq 3 \text{ m}\Omega$

Contact resistance Han E® crimp contact: $\leq 1 \text{ m}\Omega$

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Removal of power contacts (Han E®)


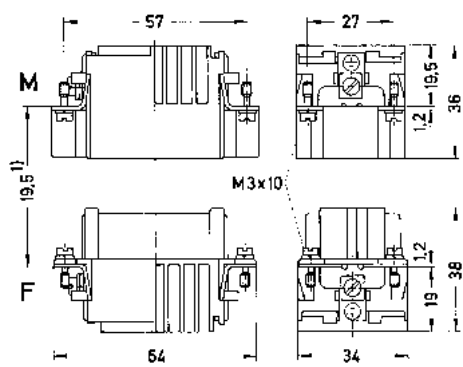





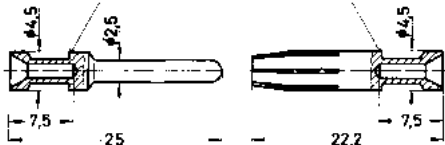

- ① Push cross-slotted screw driver (size 0) in the relevant hole of the contact until it reaches the bottom
- ② Withdraw the crimped contact from the insert

Number of contacts

8+ 

16 A 230/400 V 4 kV 3
+ 24 additional signal contacts
10 A 160 V 2,5 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han-Com®, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 38 032 3001	09 38 032 3101	 1) distance for contact max. 21 mm  M F Contact arrangement (view from termination side)																					
Han D®, Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm	0.5 mm² AWG 20	1.1 mm	8 mm	0.75 mm² AWG 18	1.3 mm	8 mm	1 mm² AWG 18	1.45 mm	8 mm	1.5 mm² AWG 16	1.75 mm	8 mm	2.5 mm² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm																							
0.5 mm² AWG 20	1.1 mm	8 mm																							
0.75 mm² AWG 18	1.3 mm	8 mm																							
1 mm² AWG 18	1.45 mm	8 mm																							
1.5 mm² AWG 16	1.75 mm	8 mm																							
2.5 mm² AWG 14	2.25 mm	6 mm																							
Han D®, Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm	0.5 mm² AWG 20	1.1 mm	8 mm	0.75 mm² AWG 18	1.3 mm	8 mm	1 mm² AWG 18	1.45 mm	8 mm	1.5 mm² AWG 16	1.75 mm	8 mm	2.5 mm² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm																							
0.5 mm² AWG 20	1.1 mm	8 mm																							
0.75 mm² AWG 18	1.3 mm	8 mm																							
1 mm² AWG 18	1.45 mm	8 mm																							
1.5 mm² AWG 16	1.75 mm	8 mm																							
2.5 mm² AWG 14	2.25 mm	6 mm																							

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han E® , Crimp contact, Contact surface: Silver plated	0,5 0,75 1 1,5 2,5 4	09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102 09 33 000 6107	09 33 000 6220 09 33 000 6214 09 33 000 6205 09 33 000 6204 09 33 000 6202 09 33 000 6207																			
<table><tr><th>Conductor cross-section</th><th>Identification</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22 no groove</td></tr><tr><td>0.5 mm²</td><td>AWG 20 no groove</td></tr><tr><td>0.75 mm²</td><td>AWG 18 1 groove*</td></tr><tr><td>1 mm²</td><td>AWG 18 1 groove</td></tr><tr><td>1.5 mm²</td><td>AWG 16 2 grooves</td></tr><tr><td>2.5 mm²</td><td>AWG 14 3 grooves</td></tr><tr><td>3 mm²</td><td>AWG 12 wide groove</td></tr><tr><td>4 mm²</td><td>AWG 12 no groove</td></tr></table> * on the back crimp collar Stripping length 7.5 mm					Conductor cross-section	Identification	0.14-0.37 mm²	AWG 26-22 no groove	0.5 mm²	AWG 20 no groove	0.75 mm²	AWG 18 1 groove*	1 mm²	AWG 18 1 groove	1.5 mm²	AWG 16 2 grooves	2.5 mm²	AWG 14 3 grooves	3 mm²	AWG 12 wide groove	4 mm²	AWG 12 no groove
Conductor cross-section	Identification																					
0.14-0.37 mm²	AWG 26-22 no groove																					
0.5 mm²	AWG 20 no groove																					
0.75 mm²	AWG 18 1 groove*																					
1 mm²	AWG 18 1 groove																					
1.5 mm²	AWG 16 2 grooves																					
2.5 mm²	AWG 14 3 grooves																					
3 mm²	AWG 12 wide groove																					
4 mm²	AWG 12 no groove																					
Han E® , Crimp contact, Contact surface: Gold plated	0,5 0,75 1 1,5 2,5 4	09 33 000 6122 09 33 000 6115 09 33 000 6118 09 33 000 6116 09 33 000 6123 09 33 000 6119	09 33 000 6222 09 33 000 6215 09 33 000 6218 09 33 000 6216 09 33 000 6223 09 33 000 6221																			
<table><tr><th>Conductor cross-section</th><th>Identification</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22 no groove</td></tr><tr><td>0.5 mm²</td><td>AWG 20 no groove</td></tr><tr><td>0.75 mm²</td><td>AWG 18 1 groove*</td></tr><tr><td>1 mm²</td><td>AWG 18 1 groove</td></tr><tr><td>1.5 mm²</td><td>AWG 16 2 grooves</td></tr><tr><td>2.5 mm²</td><td>AWG 14 3 grooves</td></tr><tr><td>3 mm²</td><td>AWG 12 wide groove</td></tr><tr><td>4 mm²</td><td>AWG 12 no groove</td></tr></table> * on the back crimp collar Stripping length 7.5 mm					Conductor cross-section	Identification	0.14-0.37 mm²	AWG 26-22 no groove	0.5 mm²	AWG 20 no groove	0.75 mm²	AWG 18 1 groove*	1 mm²	AWG 18 1 groove	1.5 mm²	AWG 16 2 grooves	2.5 mm²	AWG 14 3 grooves	3 mm²	AWG 12 wide groove	4 mm²	AWG 12 no groove
Conductor cross-section	Identification																					
0.14-0.37 mm²	AWG 26-22 no groove																					
0.5 mm²	AWG 20 no groove																					
0.75 mm²	AWG 18 1 groove*																					
1 mm²	AWG 18 1 groove																					
1.5 mm²	AWG 16 2 grooves																					
2.5 mm²	AWG 14 3 grooves																					
3 mm²	AWG 12 wide groove																					
4 mm²	AWG 12 no groove																					
Han E® , Crimp contact, Relay contact , Contact surface: Silver plated	0,75 ... 1 1,5 2,5	09 33 000 6109 09 33 000 6110 09 33 000 6111																				
FO contact, for 1 mm plastic fibre		20 10 001 3211	20 10 001 3221	 20 10 001 3211 + 20 10 001 3221																		

Features

- Combination of signal and power in one connector
- Crimp termination for power and signal area
- Use of standard Han D® and Han® D-sub contacts

Technical characteristics

Number of contacts	32
Additional contacts	+ 55 additional signal contacts
Electrical data acc. to IEC 61984	10 A 250 V 4 kV 2
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	2
Electrical data, signal	4 A 50 V 0,8 kV 2
Rated current (signal)	4 A
Rated voltage (signal)	50 V
Rated impulse voltage (signal)	0.8 kV
Pollution degree (signal)	2
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique


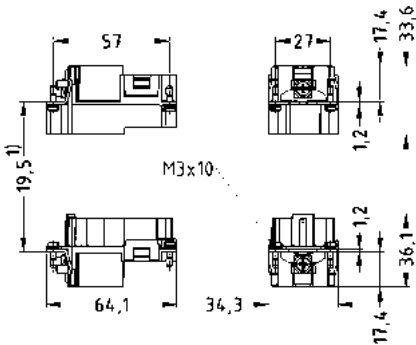
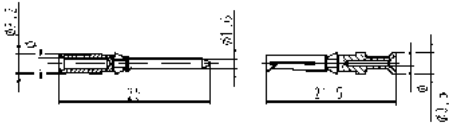
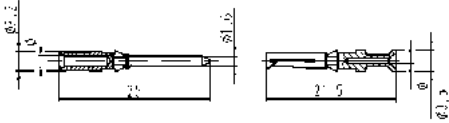
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

32+

 10 A 250 V 4 kV 2
 + 55 additional signal contacts
 4 A 50 V 0,8 kV 2

Han-Com

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han-Com[®], Crimp termination  Please order crimp contacts separately.	0,09 ... 2,5	09 38 087 3001	09 38 087 3101																						
Han D[®], Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
Han D[®], Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm	0.5 mm ² AWG 20	1.1 mm	8 mm	0.75 mm ² AWG 18	1.3 mm	8 mm	1 mm ² AWG 18	1.45 mm	8 mm	1.5 mm ² AWG 16	1.75 mm	8 mm	2.5 mm ² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm																							
0.5 mm ² AWG 20	1.1 mm	8 mm																							
0.75 mm ² AWG 18	1.3 mm	8 mm																							
1 mm ² AWG 18	1.45 mm	8 mm																							
1.5 mm ² AWG 16	1.75 mm	8 mm																							
2.5 mm ² AWG 14	2.25 mm	6 mm																							
D-Sub , Crimp contact, Turned , Pack contents: Single contact 	0,09 ... 0,25 0,13 ... 0,33 0,25 ... 0,52	09 67 000 7576 09 67 000 5576 09 67 000 8576	09 67 000 7476 09 67 000 5476 09 67 000 8476	<table><tr><th>Wire gauge</th><th>max. insulation diameter</th><th>Stripping length</th></tr><tr><td>0.09-0.25 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.13-0.33 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.25-0.52 mm²</td><td>1.7</td><td>4 mm</td></tr></table>	Wire gauge	max. insulation diameter	Stripping length	0.09-0.25 mm ²	1.7	4 mm	0.13-0.33 mm ²	1.7	4 mm	0.25-0.52 mm ²	1.7	4 mm									
Wire gauge	max. insulation diameter	Stripping length																							
0.09-0.25 mm ²	1.7	4 mm																							
0.13-0.33 mm ²	1.7	4 mm																							
0.25-0.52 mm ²	1.7	4 mm																							

Features

- Screw termination
- No signal contacts

Technical characteristics

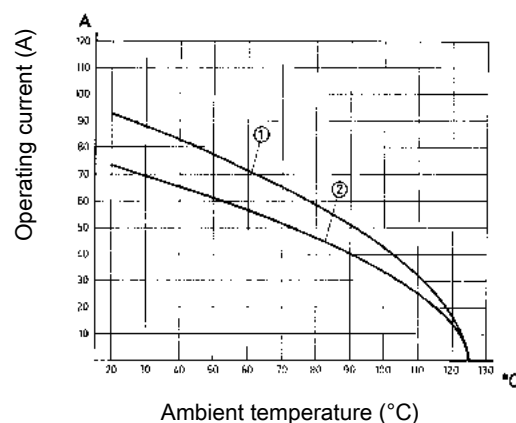
Number of contacts	4
Electrical data acc. to IEC 61984	80 A 830 V 8 kV 3
Rated current	80 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	300 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 16 mm²
② Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
IEC 61984



Details

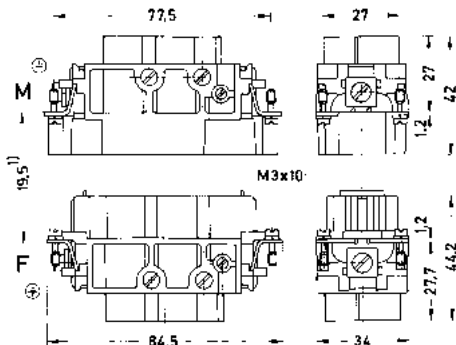

Hoods/Housings see chapter 31

In accordance with the appropriate regulations a wire-end sleeve has to be used at clamps without wire protection (see "screw terminal", chapter 00).

Number of contacts

4+ 

80 A 830 V 8 kV 3

Han-Com	Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																								
			Male	Female																									
	Han-Com® , Screw termination, Contact surface: Silver plated 	1,5 ... 16	09 38 006 2611	09 38 006 2711	  Contact arrangement (view from termination side) <table><tr><th colspan="3">power contacts</th></tr><tr><th>wire gauge</th><th>tightening torque</th><th>stripping length</th></tr><tr><td>1.5 mm²</td><td>1.2 Nm</td><td>14 mm</td></tr><tr><td>2.5 mm²</td><td>2 Nm</td><td>14 mm</td></tr><tr><td>4 mm²</td><td>3 Nm</td><td>14 mm</td></tr><tr><td>6 mm²</td><td>3 Nm</td><td>14 mm</td></tr><tr><td>10 mm²</td><td>3 Nm</td><td>14 mm</td></tr><tr><td>16 mm²</td><td>3 Nm</td><td>14 mm</td></tr></table>	power contacts			wire gauge	tightening torque	stripping length	1.5 mm²	1.2 Nm	14 mm	2.5 mm²	2 Nm	14 mm	4 mm²	3 Nm	14 mm	6 mm²	3 Nm	14 mm	10 mm²	3 Nm	14 mm	16 mm²	3 Nm	14 mm
power contacts																													
wire gauge	tightening torque	stripping length																											
1.5 mm²	1.2 Nm	14 mm																											
2.5 mm²	2 Nm	14 mm																											
4 mm²	3 Nm	14 mm																											
6 mm²	3 Nm	14 mm																											
10 mm²	3 Nm	14 mm																											
16 mm²	3 Nm	14 mm																											

05
·
16

Features

- Combination of signal and power in one connector
- Screw termination for power and signal area

Technical characteristics

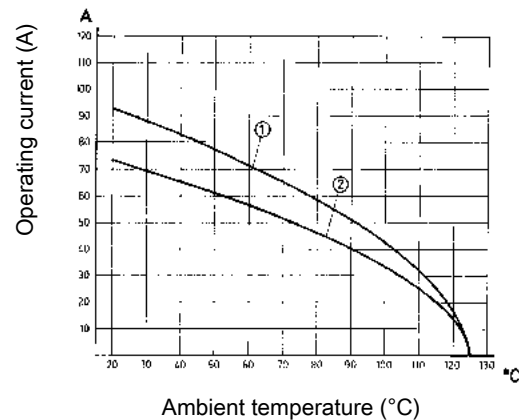
Number of contacts	4
Additional contacts	+ 2 additional signal contacts
Electrical data acc. to IEC 61984	80 A 830 V 8 kV 3
Rated current	80 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Electrical data, signal	16 A 400 V 6 kV 3
Rated current (signal)	16 A
Rated voltage (signal)	400 V
Rated impulse voltage (signal)	6 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	600 V
Rated voltage acc. to CSA	300 V
Rated voltage acc. to CSA (signal)	300 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega$
Contact resistance, signal area	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 16 mm²
② Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

Hoods/Housings see chapter 31

In accordance with the appropriate regulations a wire-end sleeve has to be used at clamps without wire protection (see "screw terminal", chapter 00).



Number of contacts

4+

80 A 830 V 8 kV 3
+ 2 additional signal contacts
16 A 400 V 6 kV 3

Han-Com	Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																								
			Male	Female																									
	Han-Com® , Screw termination, Contact surface: Silver plated	1,5 ... 16	09 38 006 2601	09 38 006 2701	1) distance for contact max. 21 mm Contact arrangement (view from termination side) <table><tr><th colspan="3">power contacts</th></tr><tr><th>wire gauge</th><th>tightening torque</th><th>stripping length</th></tr><tr><td>1.5 mm²</td><td>1.2 Nm</td><td>14 mm</td></tr><tr><td>2.5 mm²</td><td>2 Nm</td><td>14 mm</td></tr><tr><td>4 mm²</td><td>3 Nm</td><td>14 mm</td></tr><tr><td>6 mm²</td><td>3 Nm</td><td>14 mm</td></tr><tr><td>10 mm²</td><td>3 Nm</td><td>14 mm</td></tr><tr><td>16 mm²</td><td>3 Nm</td><td>14 mm</td></tr></table> Signal contacts : Conductor cross-section 0.5 ... 2.5 mm² Stripping length 7.5 mm Tightening torque 0.5 Nm	power contacts			wire gauge	tightening torque	stripping length	1.5 mm²	1.2 Nm	14 mm	2.5 mm²	2 Nm	14 mm	4 mm²	3 Nm	14 mm	6 mm²	3 Nm	14 mm	10 mm²	3 Nm	14 mm	16 mm²	3 Nm	14 mm
power contacts																													
wire gauge	tightening torque	stripping length																											
1.5 mm²	1.2 Nm	14 mm																											
2.5 mm²	2 Nm	14 mm																											
4 mm²	3 Nm	14 mm																											
6 mm²	3 Nm	14 mm																											
10 mm²	3 Nm	14 mm																											
16 mm²	3 Nm	14 mm																											

05
.
18

Features

- Combination of signal and power in one connector
- Axial screw termination for power area
- Screw termination for signal area

Technical characteristics

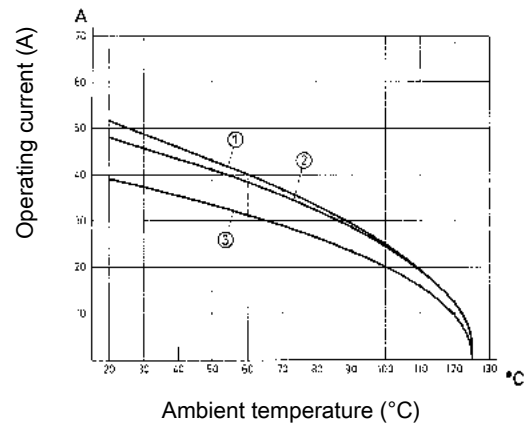
Number of contacts	6
Additional contacts	+ 12 additional signal contacts
Electrical data acc. to IEC 61984	40 A 690 V 8 kV 3
Rated current	40 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Electrical data, signal	10 A 230/400 V 4 kV 3
Rated current (signal)	10 A
Rated voltage conductor-earth (signal)	230 V
Rated voltage conductor-conductor (signal)	400 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	600 V
Rated voltage acc. to CSA	300 V
Rated voltage acc. to CSA (signal)	300 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.5 \text{ m}\Omega$
Contact resistance, signal area	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 10 mm²
- ② Conductor cross-section 6 mm²
- ③ Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
IEC 61984



Details

Hoods/Housings see chapter 31

Hex key (A/F 2) see chapter 90

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.



Number of contacts

6+

40 A 690 V 8 kV 3
+ 12 additional signal contacts
10 A 230/400 V 4 kV 3

Han-Com	Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																								
			Male	Female																									
	Han-Com® , Axial screw termination / screw termination, Contact surface: Silver plated	2,5 ... 8 6 ... 10	09 38 018 2601 09 38 018 2602	09 38 018 2701 09 38 018 2702	1) distance for contact max. 21 mm Contact arrangement (view from termination side) <table><tr><th colspan="4">Power contacts</th></tr><tr><th>Conductor cross-section</th><th>Tightening torque</th><th>Stripping length</th><th>max. insulation diameter</th></tr><tr><td>2.5 mm²</td><td>1.5 Nm</td><td>5 ... 6 mm</td><td>6.1 mm</td></tr><tr><td>4 mm²</td><td>1.5 Nm</td><td>5 ... 6 mm</td><td>6.1 mm</td></tr><tr><td>6 mm²</td><td>2 Nm</td><td>8 ... 9 mm</td><td>6.1 mm</td></tr><tr><td>10 mm²</td><td>2 Nm</td><td>8 ... 9 mm</td><td>6.1 mm</td></tr></table> Signal contacts : Conductor cross-section 0.2 ... 2.5 mm² Stripping length 7.5 mm Tightening torque 0.5 Nm	Power contacts				Conductor cross-section	Tightening torque	Stripping length	max. insulation diameter	2.5 mm²	1.5 Nm	5 ... 6 mm	6.1 mm	4 mm²	1.5 Nm	5 ... 6 mm	6.1 mm	6 mm²	2 Nm	8 ... 9 mm	6.1 mm	10 mm²	2 Nm	8 ... 9 mm	6.1 mm
Power contacts																													
Conductor cross-section	Tightening torque	Stripping length	max. insulation diameter																										
2.5 mm²	1.5 Nm	5 ... 6 mm	6.1 mm																										
4 mm²	1.5 Nm	5 ... 6 mm	6.1 mm																										
6 mm²	2 Nm	8 ... 9 mm	6.1 mm																										
10 mm²	2 Nm	8 ... 9 mm	6.1 mm																										

Features

- Combination of signal and power in one connector
- Crimp termination for power and signal area
- Use of standard Han® C and Han D® contacts

Technical characteristics

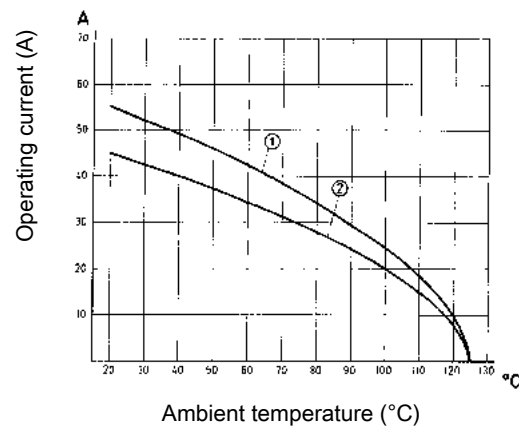
Number of contacts	6
Additional contacts	+ 36 additional signal contacts
Electrical data acc. to IEC 61984	40 A 690 V 8 kV 3
Rated current	40 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Electrical data, signal	10 A 160 V 2,5 kV 3
Rated current (signal)	10 A
Rated voltage (signal)	160 V
Rated impulse voltage (signal)	2,5 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	600 V
Rated voltage acc. to CSA	300 V
Rated voltage acc. to CSA (signal)	300 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega, \leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 6 mm²
 ② Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076



Details

Hoods/Housings see chapter 31

Contact resistance Han D® crimp contact: $\leq 3 \text{ m}\Omega$

Contact resistance Han® C crimp contact: $\leq 0.3 \text{ m}\Omega$

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

6+ 

40 A 690 V 8 kV 3
+ 36 additional signal contacts
10 A 160 V 2.5 kV 3

Han-Com

Identification

Conductor cross-section (mm²)

Part number

Male Female

Drawing
(dimensions in mm)

Han-Com[®],
Crimp termination

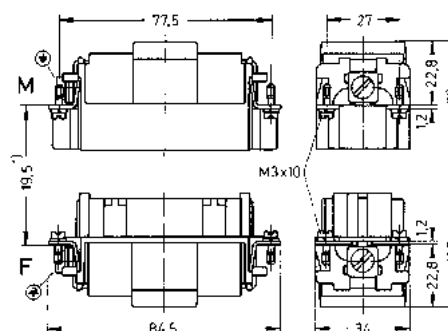


Please order crimp contacts separately.


0,14 ... 6

09 38 042 3001

09 38 042 3101



1) distance for contact max. 21 mm
max. insulation diameter 5 mm



M F
 Contact arrangement (view from termination side)

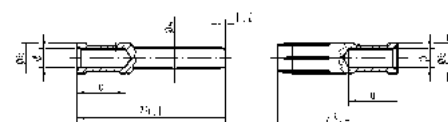
Han® C ,
Crimp contact,
Contact surface:
Silver plated



1,5
2,5
4
6

```
09 32 000 6104
09 32 000 6105
09 32 000 6107
09 32 000 6108
```

09 32 000 6204
09 32 000 6205
09 32 000 6207
09 32 000 6208



Conductor cross-section	Ø	Stripping length
1.5 mm ² AWG 16	1.75 mm	9.5 mm
2.5 mm ² AWG 14	2.25 mm	9.5 mm
4 mm ² AWG 12	2.85 mm	9.5 mm
6 mm ² AWG 10	3.5 mm	9.5 mm
10 mm ² AWG 8	4.3 mm	12 mm


Han D[®],
Crimp contact,
Contact surface:
Silver plated



0,14 ... 0,37
0,5
0,75
1
1,5
2,5

09 15 000 6104
09 15 000 6103
09 15 000 6105
09 15 000 6102
09 15 000 6101
09 15 000 6106

09	15	000	6204
09	15	000	6203
09	15	000	6205
09	15	000	6202
09	15	000	6201
09	15	000	6206



Wire gauge	Ø	Stripping length
0.14-0.37 mm ² AWG 26-22	0.9 mm	8 mm
0.5 mm ² AWG 20	1.1 mm	8 mm
0.75 mm ² AWG 18	1.3 mm	8 mm
1 mm ² AWG 18	1.45 mm	8 mm
1.5 mm ² AWG 16	1.75 mm	8 mm
2.5 mm ² AWG 14	2.25 mm	6 mm

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D®, Crimp contact, Contact surface: Gold plated	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	
FO contact, for 1 mm plastic fibre		20 10 001 3211	20 10 001 3221	

Features

- Combination of signal and power in one connector
- Crimp termination for power and signal area
- Use of standard Han® C and Han D® contacts

Technical characteristics

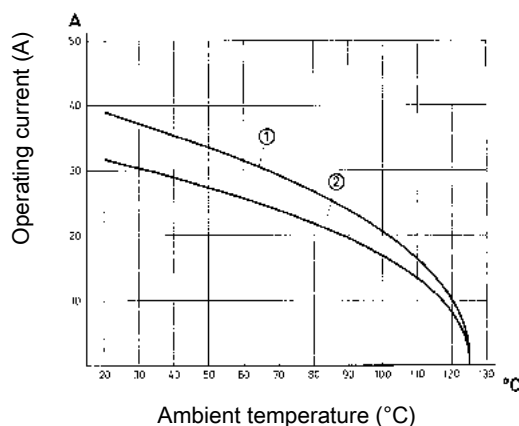
Number of contacts	12
Additional contacts	+ 2 additional signal contacts
Electrical data acc. to IEC 61984	40 A 690 V 8 kV 3
Rated current	40 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Electrical data, signal	10 A 250 V 4 kV 3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	600 V
Rated voltage acc. to CSA	300 V
Rated voltage acc. to CSA (signal)	300 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega, \leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 6 mm²
 ② Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076



Details

Hoods/Housings see chapter 31

Contact resistance Han D® crimp contact: $\leq 3 \text{ m}\Omega$

Contact resistance Han® C crimp contact: $\leq 0.3 \text{ m}\Omega$

Crimping tools see chapter 90

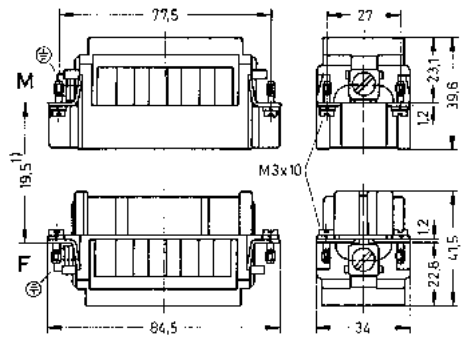



Remarks on the crimp technique

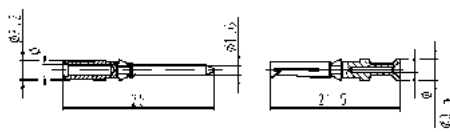
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

12+

 40 A 690 V 8 kV 3
 + 2 additional signal contacts
 10 A 250 V 4 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han-Com®, Crimp termination  Please order crimp contacts separately.	0,14 ... 6	09 32 012 3001	09 32 012 3101	 1) distance for contact max. 21 mm max. insulation diameter 5 mm  Contact arrangement (view from termination side)																					
Han® C , Crimp contact, Contact surface: Silver plated 	1,5 2,5 4 6	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208	 <table><tr><th>Conductor cross-section</th><th>Ø</th><th>Stripping length</th></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>9.5 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>9.5 mm</td></tr><tr><td>4 mm² AWG 12</td><td>2.85 mm</td><td>9.5 mm</td></tr><tr><td>6 mm² AWG 10</td><td>3.5 mm</td><td>9.5 mm</td></tr><tr><td>10 mm² AWG 8</td><td>4.3 mm</td><td>12 mm</td></tr></table>	Conductor cross-section	Ø	Stripping length	1.5 mm² AWG 16	1.75 mm	9.5 mm	2.5 mm² AWG 14	2.25 mm	9.5 mm	4 mm² AWG 12	2.85 mm	9.5 mm	6 mm² AWG 10	3.5 mm	9.5 mm	10 mm² AWG 8	4.3 mm	12 mm			
Conductor cross-section	Ø	Stripping length																							
1.5 mm² AWG 16	1.75 mm	9.5 mm																							
2.5 mm² AWG 14	2.25 mm	9.5 mm																							
4 mm² AWG 12	2.85 mm	9.5 mm																							
6 mm² AWG 10	3.5 mm	9.5 mm																							
10 mm² AWG 8	4.3 mm	12 mm																							
Han D®, Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm	0.5 mm² AWG 20	1.1 mm	8 mm	0.75 mm² AWG 18	1.3 mm	8 mm	1 mm² AWG 18	1.45 mm	8 mm	1.5 mm² AWG 16	1.75 mm	8 mm	2.5 mm² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm																							
0.5 mm² AWG 20	1.1 mm	8 mm																							
0.75 mm² AWG 18	1.3 mm	8 mm																							
1 mm² AWG 18	1.45 mm	8 mm																							
1.5 mm² AWG 16	1.75 mm	8 mm																							
2.5 mm² AWG 14	2.25 mm	6 mm																							

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D®, Crimp contact, Contact surface: Gold plated	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	
FO contact, for 1 mm plastic fibre		20 10 001 3211	20 10 001 3221	

Features

- Combination of signal and power in one connector
- Screw termination for power and signal area

Technical characteristics

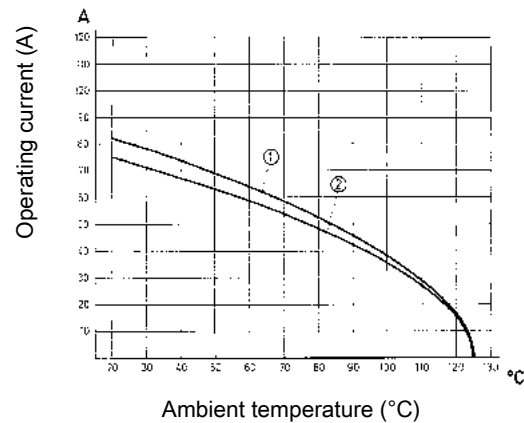
Number of contacts	4
Additional contacts	+ 8 additional signal contacts
Electrical data acc. to IEC 61984	80 A 400 V 6 kV 3
Rated current	80 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Electrical data, signal	16 A 400 V 6 kV 3
Rated current (signal)	16 A
Rated voltage (signal)	400 V
Rated impulse voltage (signal)	6 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	600 V
Rated voltage acc. to CSA	600 V
Rated voltage acc. to CSA (signal)	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega$
Contact resistance, signal area	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	HB
Mating cycles	≥ 500
Material (insert)	Polyamide
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 16 mm²
 ② Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076



Details

Hoods/Housings see chapter 31

In accordance with the appropriate regulations a wire-end sleeve has to be used at clamps without wire protection (see "screw terminal", chapter 00).

Number of contacts

4+ 

80 A 400 V 6 kV 3
+ 8 additional signal contacts
16 A 400 V 6 kV 3

Han-Com

Identification

Conductor cross-section (mm²)

Part number

Male Female

Drawing
(dimensions in mm)

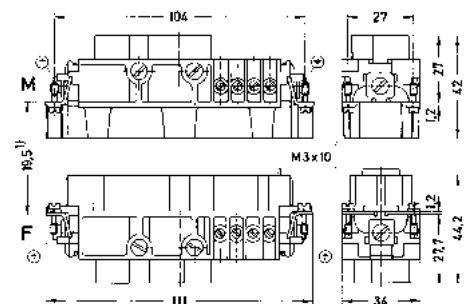
Han-Com®,
Screw termination,
Contact surface:
Silver plated




1,5 ... 16

09 38 012 2601

09 38 012 2701



1) distance for contact max. 21 mm



Contact arrangement (view from termination side)

power contacts		
wire gauge	tightening torque	stripping length
1.5 mm ²	1.2 Nm	14 mm
2.5 mm ²	2 Nm	14 mm
4 mm ²	3 Nm	14 mm
6 mm ²	3 Nm	14 mm
10 mm ²	3 Nm	14 mm
16 mm ²	3 Nm	14 mm

Signal contacts :
Conductor cross-section 0.5 ... 2.5 mm²
Stripping length 7.5 mm
Tightening torque 0.5 Nm

Features

- Combination of signal and power in one connector
- Axial screw termination for power area
- Screw termination for signal area

Technical characteristics

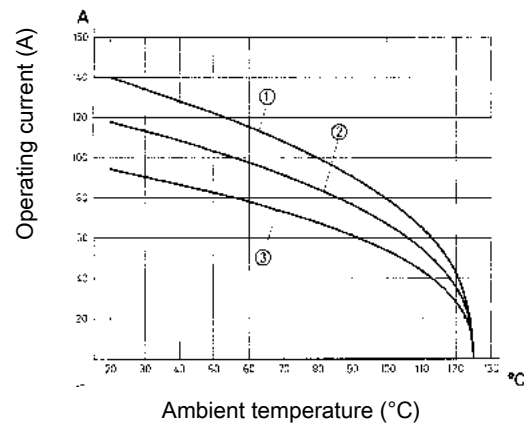
Number of contacts	6
Additional contacts	+ 6 additional signal contacts
Electrical data acc. to IEC 61984	100 A 690 V 8 kV 3
Rated current	100 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Electrical data, signal	16 A 400 V 6 kV 3
Rated current (signal)	16 A
Rated voltage (signal)	400 V
Rated impulse voltage (signal)	6 kV
Pollution degree (signal)	3
Rated current acc. to CSA	100 A
Rated current acc. to CSA (signal)	15 A
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	300 V
Rated voltage acc. to CSA	600 V
Rated voltage acc. to CSA (signal)	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.5 \text{ m}\Omega$
Contact resistance, signal area	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 35 mm²
- ② Conductor cross-section 25 mm²
- ③ Conductor cross-section 16 mm²

Specifications and approvals

EN 60664-1
IEC 61984



Details

Hoods/Housings see chapter 31

Hex key (A/F 4) see chapter 90

Adapter 3/8" 09 99 000 0370 see chapter 90

Remarks on the axial screw technique

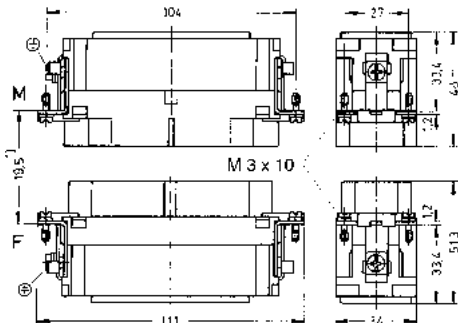

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.



Number of contacts

6+

100 A 690 V 8 kV 3
+ 6 additional signal contacts
16 A 400 V 6 kV 3

Han-Com	Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																				
			Male	Female																					
	Han-Com® , Axial screw termination / screw termination, Contact surface: Silver plated 	16 ... 35	09 38 012 2651	09 38 012 2751	 1) distance for contact max. 21 mm  Contact arrangement (view from termination side) <table><tr><th colspan="4">power contacts</th></tr><tr><th>wire gauge</th><th>tightening torque</th><th>stripping length</th><th>max. insulation diameter</th></tr><tr><td>10 mm²</td><td>6 Nm</td><td>13 ... 14 mm</td><td>11.4 mm</td></tr><tr><td>25 mm²</td><td>7 Nm</td><td>13 ... 14 mm</td><td>11.4 mm</td></tr><tr><td>35 mm²</td><td>8 Nm</td><td>13 ... 14 mm</td><td>11.4 mm</td></tr></table> Signal contacts : Conductor cross-section 0.2 ... 2.5 mm² Stripping length 7.5 mm Tightening torque 0.5 Nm	power contacts				wire gauge	tightening torque	stripping length	max. insulation diameter	10 mm²	6 Nm	13 ... 14 mm	11.4 mm	25 mm²	7 Nm	13 ... 14 mm	11.4 mm	35 mm²	8 Nm	13 ... 14 mm	11.4 mm
power contacts																									
wire gauge	tightening torque	stripping length	max. insulation diameter																						
10 mm²	6 Nm	13 ... 14 mm	11.4 mm																						
25 mm²	7 Nm	13 ... 14 mm	11.4 mm																						
35 mm²	8 Nm	13 ... 14 mm	11.4 mm																						

05 . 30

Features

- Axial screw termination
- No signal contacts

Technical characteristics

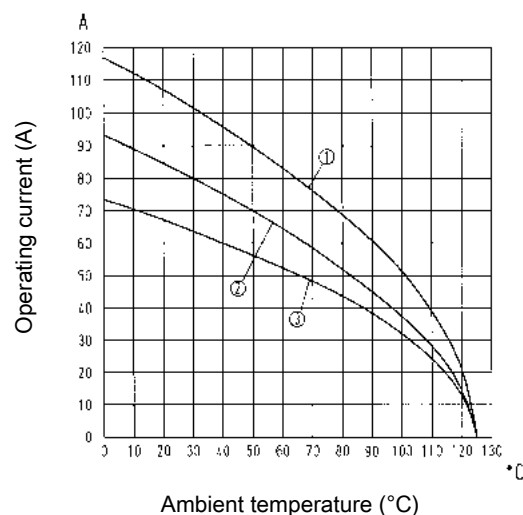
Number of contacts	8
Electrical data acc. to IEC 61984	100 A 690 V 8 kV 3
Rated current	100 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current acc. to UL	82 A
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.5 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 25 mm²
- ② Conductor cross-section 16 mm²
- ③ Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

Hoods/Housings see chapter 31

Hex key (A/F 4) see chapter 90

Adapter 3/8" 09 99 000 0370 see chapter 90

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

8+ 

100 A 690 V 8 kV 3

Han-Com

Identification

Conductor cross-section (mm²)

Part number

Male Female

Drawing
(dimensions in mm)

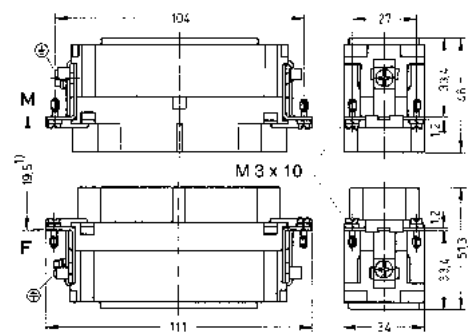
Han-Com® ,
Axial screw termination,
Contact surface:
Silver plated




10 ... 25

09 38 008 2653

09 38 008 2753



1) distance for contact max. 21 mm



M F
 Contact arrangement (view from termination side)

power contacts			
wire gauge	tightening torque	stripping length	max. insulation diameter
10 mm²	6 Nm	13 ... 14 mm	11.4 mm
16 mm²	7 Nm	13 ... 14 mm	11.4 mm
25 mm²	7 Nm	13 ... 14 mm	11.4 mm

Contents	Page
Summary	06.5
Han-Modular® hinged frames	06.9
Han-Modular® docking frames	06.14
Han® PE module	06.18
Han® 200 A module	06.20
Han® 200 A PE module	06.22
Han® 100 A module	06.24
Han® 100 A Single module	06.26
Han® 70 A module	06.28
Han® 70 A Hybrid module	06.31
Han® 40 A module	06.34
Han® C module	06.37
Han® CC Protected module	06.39
Han® CD module	06.41
Han E® module	06.44
Han E® Screw module	06.47
Han E® Protected module	06.48
Han® EE module	06.51
Han® EEE module	06.54
Han® ES module	06.57
Han® HV module	06.59
Han® HV Single module	06.62
Han DD® module	06.64

Contents	Page
Han DD® Quad Module.....	06.67
Han® DDD module.....	06.69
Han® High Density module	06.71
Han® D-Sub module	06.73
Han® USB module	06.76
Han® FireWire module	06.78
Han® RJ45 module, female	06.79
Han® RJ45 module, male	06.81
RJ45 patch cable.....	06.85
Han® Gigabit module	06.87
Han® Shielded module.....	06.89
Han® Megabit module.....	06.91
Accessories for Gigabit, Shielded and Megabit.....	06.96
Han-Quintax® module	06.98
Han-Quintax® High Density module.....	06.100
Han® D Coax	06.102
Han® E Coax.....	06.104
Han® Multi module	06.106
Han® Pneumatic module.....	06.113
Han® SC module.....	06.116
Han® LC module	06.119
Han® ID CAN module	06.121
smart Han®	06.122

Contents	Page
Han-Modular® Compact.....	06.123
Han-Modular® Twin.....	06.127
Han-Modular® ECO	06.130
Accessories	06.135

Description of the Han-Modular® system



The Han-Modular® series is designed for combining different transmission media in one connector. The multifaceted system of inserts, contacts, frames, hoods and housings fulfils individual customer requirements. To continuously enable new configurations, the Han-Modular® series grows constantly.

More than 50 different modules for different transmission media are available. These cover various termination techniques. The patented Han-Modular® hinged frame enables the configuration of all modules in the well-accepted Han® hoods and housings size 6B-48B. Further additional solutions are available, e.g. suitable docking frames for drawer units.

Individual customer requirements can be realized. Combining various transmission media in one single connector results in lower expenditures in installation time and production downtime. Space savings and cost savings are further benefits. The easy extension possibilities secure a future safe design.

Product features at a glance

- ☐ Flexible solutions according to specific customer requirements
- ☐ Reduction of installation time and production downtimes
- ☐ Space savings
- ☐ Cost savings
- ☐ Future safe design, easy extension

Assembly details



		Han® 200 A Axial Module	Han® 200 A PE Module	Han® 100 A Axial Module	Han® PE Module
100 - 200 A					
	Number of contacts	1*	1 x PE*	1*	1 x PE
	Electrical data	200 A / 1000 V	200 A	100 A / 1000 V	100 A
	Termination type	Axial screw termination	Axial screw termination	Axial screw termination	Axial screw termination
	Cross-section	40 ... 70 mm²	40 ... 70 mm²	16 ... 35 mm²	16 ... 35 mm²
	Male module (M)	09 14 001 2662	09 14 001 2667	09 14 002 2651	09 14 001 2633
	Female module (F)	09 14 001 2762	09 14 001 2767	09 14 002 2751	09 14 001 2733
	Cross-section	25 ... 40 mm²	25 ... 40 mm²	10 ... 25 mm²	10 ... 25 mm²
40 - 70 A					
	Number of contacts	2	1 + (4 x Han E®)	2	3
	Electrical data	70 A / 1000 V	70 A / 1000 V	40 A / 1000 V	40 A / 690 V
	Termination type	Axial screw termination	Axial screw termination	Axial screw termination	Axial screw termination
	Cross-section	14 ... 22 mm²	14 ... 22 mm²	6 ... 10 mm²	6 ... 10 mm²
	Male module (M)	09 14 002 2647	09 14 005 2647	09 14 002 2602	09 14 003 2602
	Female module (F)	09 14 002 2742	09 14 005 2742	09 14 002 2702	09 14 003 2702
	Cross-section	6 ... 16 mm²	6 ... 16 mm²	2.5 ... 8 mm²	2.5 ... 8 mm²
16 A					
	Number of contacts	6	8	5	5
	Electrical data	16 A / 500 V	16 A / 400 V	16 A / 400 V	16 A / 230/400 V
	Termination type	Quick Lock termination	Quick Lock termination	Cage clamp termination	Screw termination
	Cross-section	0.5 ... 2.5 mm²	0.5 ... 2.5 mm²	0.14 ... 2.5 mm²	0.5 ... 2.5 mm²
	Male module (M)	09 14 006 2633	09 14 008 2633	09 14 005 2616	09 14 005 2601
	Female module (F)	09 14 006 2733	09 14 008 2733	09 14 005 2716	09 14 005 2701
	Cross-section	0.5 ... 2.5 mm²	0.5 ... 2.5 mm²	0.14 ... 2.5 mm²	0.5 ... 2.5 mm²
≤ 10 A					
	Number of contacts	12, silver plated	12, gold plated		
	Electrical data	10 A / 250 V	10 A / 250 V		
	Termination type	Quick Lock termination	Quick Lock termination		
	Cross-section	0.25 ... 1.5 mm²	0.25 ... 1.5 mm²		
	Male module (M)	09 14 012 2632	09 14 012 2634		
	Female module (F)	09 14 012 2732	09 14 012 2734		
	Cross-section	0.25 ... 1.5 mm²	0.25 ... 1.5 mm²		
Axial screw termination	Hexagonal drivers	with grip	Bit 1/4"	Adapter 3/8"	Hexagonal torque set
	2 mm (40 A)	09 99 000 0313	09 99 000 0369		09 99 000 0834
	2.5 mm (70 A)		09 99 000 0375		09 99 000 0834
	4 mm (100 A)	09 99 000 0363		09 99 000 0370	09 99 000 0833
	5 mm (200 A)	09 99 000 0364		09 99 000 0371	09 99 000 0833

* Double module, requires two places in the frame

Modu-
lar

Summary



Modu-
lar

Han® PE module (Including crimp contact for earthing)					
PE	Number of contacts	1 x PE	1 x PE	1 x PE	
	Cross-section	35 mm²	25 mm²	16 mm²	
	Termination type	Crimp termination, Han® HC	Crimp termination, Han® HC	Crimp termination, Han® HC	
	Male module (M)	09 14 001 3074	09 14 001 3073	09 14 001 3072	
	Female module (F)	09 14 001 3174	09 14 001 3173	09 14 001 3172	
70 - 200 A		Han® 200 A Crimp module	Han® 100 A Crimp module	Han® 100 A Single module	Han® 70 A Crimp module
					
	Number of contacts	1*	2*	1	2
	Electrical data	200 A / 1000 V	100 A / 1000 V	100 A / 830 V	70 A / 1000 V
	Cross-section	25 ... 70 mm²	10 ... 35 mm²	10 ... 35 mm²	6 ... 25 mm²
	Termination type	Crimp termination, Han® HC	Crimp termination, Han® HC	Crimp termination, Han® HC	Crimp termination, Han® HC
	Male module (M)	09 14 001 3001	09 14 002 3051	09 14 001 3031	09 14 002 3041
	Female module (F)	09 14 001 3101	09 14 002 3151	09 14 001 3131	09 14 002 3141
40 A		Han® 40 A Crimp module	Han® C module	Han® CC module	Han® CD module
					
	Number of contacts	2	3	4	3 + 4
	Electrical data	40 A / 1000 V	40 A / 690 V	40 A / 830 V	40 A + 10 A / 830 V
	Cross-section	1.5 ... 10 mm²	1.5 ... 6 mm²	1.5 ... 6 mm²	0.14 ... 6 mm²
	Termination type	Crimp termination, Han® C	Crimp termination, Han® C	Crimp termination, Han® C	Crimp, Han® C + Han D®
	Male module (M)	09 14 002 3002	09 14 003 3001	09 14 004 3041	09 14 007 3001
	Female module (F)	09 14 002 3102	09 14 003 3101	09 14 004 3141	09 14 007 3101
16 A		Han E® module	Han® EE module	Han® EEE module	Han E® Protected module
					
	Number of contacts	6	8	20*	6
	Electrical data	16 A / 500 V	16 A / 400 V	16 A / 500 V	16 A / 830 V
	Cross-section	0.14 ... 4 mm²	0.14 ... 4 mm²	0.14 ... 4 mm²	0.14 ... 4 mm²
	Termination type	Crimp termination, Han E®	Crimp termination, Han E®	Crimp termination, Han E®	Crimp termination, Han E®
	Male module (M)	09 14 006 3001	09 14 008 3001	09 14 020 3001	09 14 006 3041
	Female module (F)	09 14 006 3101	09 14 008 3101	09 14 020 3101	09 14 006 3141
≤ 10 A		Han DD® module	Han® DDD module	Han DD® Quad module	Han® High Density module
					
	Number of contacts	12	17	42*	25
	Electrical data	10 A / 250 V	10 A / 150 V	10 A / 150 V	4 A / 50 V
	Cross-section	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.08 ... 0.52 mm²
	Termination type	Crimp termination, Han D®	Crimp termination, Han D®	Crimp termination, Han D®	Crimp termination, D-Sub
	Male module (M)	09 14 012 3002	09 14 017 3001	09 14 042 3001	09 14 025 3001
	Female module (F)	09 14 012 3102	09 14 017 3101	09 14 042 3101	09 14 025 3101
High Voltage		Han® HV module 40 A	Han® HV module 16 A	Han® HV single module	
					
	Number of contacts	2*	2*	2	
	Electrical data	40 A / 2900/5000 V	16 A / 2900/5000 V	16 A / 2500 V	
	Cross-section	1.5 ... 10 mm²	0.14 ... 4 mm²	0.14 ... 4 mm²	
	Termination type	Crimp termination, Han® C	Crimp termination, Han E®	Crimp termination, Han E®	
	Male module (M)	09 14 002 3023	09 14 002 3021	09 14 002 3025	
	Female module (F)	09 14 002 3123	09 14 002 3121	09 14 002 3125	

* Double module, requires two places in the frame

Han® RJ45 module		for patch cable	for IDC	for patch cable	for IDC and preLink
	- 8 contacts - cat. 6A - 10 Gbit/s				
	Part numbers	Male module (M) 09 14 001 4623	Male module (M) 09 14 001 4623	Female module (F) 09 14 001 4721	Female module (F) 09 14 001 4722
		Adapter for patch cable: 09 14 000 9966	RJ Industrial IDC: 09 45 400 1560		RJ45 female IDC: 09 14 545 1561
		Patch cable cat. 6: 09 47 474 71xx			RJ45 female preLink: 09 14 008 4720
Han-Quintax® Modules		Han-Quintax®	Han® High Density Quintax	Han D® Coax	Han E® Coax
	Quintax modul				
	Number of contacts	2 x 4*	2 x 8*	2 x Coax*	2 x Coax*
	Male module (M)	09 14 002 3001	09 14 002 3001	09 14 002 3001	09 14 002 3001
	Female module (F)	09 14 002 3101	09 14 002 3101	09 14 002 3101	09 14 002 3101
	Insert (Cable Ø ≤ 9.5 mm)				
	Data rate	100 Mbit/s (cat. 5e)	100 Mbit/s (cat. 5e)	≤ 500 Mhz / 75 Ω	≤ 500 Mhz / 50 Ω
	Electrical data	10 A / 50 V	5 A / 50 V	10 A / 50 V	16 A / 50 V
	Cross-section	0.14 ... 2.5 mm²	0.09 ... 0.52 mm²	0.14 ... 2.5 mm²	0.14 ... 4 mm²
	Termination type	Crimp termination, Han D®	Crimp termination, D-Sub	Crimp termination, Han D®	Crimp termination, Han E®
Han® GigaBit – Han® MegaBit Modules		Han® GigaBit module	Han® MegaBit module with 2 cable entries	Han® MegaBit module with 1 cable entry	Han® Shielded Module
	Adapter Module				
	Male module (M)	09 14 001 3011	09 14 001 3011	09 14 001 3011	09 14 001 3011
	Female module (F)	09 14 001 3111	09 14 001 3111	09 14 001 3111	09 14 001 3111
	Insert (Cable Ø ≤ 14 mm)				
	Number of contacts	8	2 x 4	8	20
	Data rate	10 Gbit/s (cat. 6A)	2 x 100 Mbit/s (cat. 5e)	1 Gbit/s (cat. 5e)	4 A / 32 V
	Electrical data	5 A / 50 V	10 A / 50 V	10 A / 50 V	0.09 ... 0.52 mm²
	Cross-section	0.09 ... 0.52 mm²	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.09 ... 0.52 mm²
	Termination type	Crimp termination, D-Sub	Crimp termination, Han D®	Crimp termination, Han D®	Crimp termination, D-Sub
Serial Bus Modules		Han D-Sub module	Han® USB module	Han® FireWire module	Han® ID CAN module
	Number of contacts	9 + shielding	8	6	7
	Data rate	12 Mbit/s (Profibus)	5 Gbit/s (USB 3.0)	400 Mbit/s (IEEE 1394a)	1 Mbit/s (CAN bus)
	Electrical data	5 A / 50 V	1 A / 50 V	1 A / 50 V	24 V
	Cross-section	0.09 ... 0.52 mm²			0.13 ... 1.5 mm²
	Termination type	Crimp termination, D-Sub	USB patch cable	FireWire patch cable	Cage clamp termination
	Male module (M)	09 14 009 3001	09 14 001 4601	09 14 001 4611	09 80 015 0100
	Female module (F)	09 14 009 3101	09 14 001 4703	09 14 001 4711	09 80 115 0200

* Double module, requires two places in the frame

Modu-
lar

Coaxial Modules		Han® Multi Module (for D-Sub coaxial contacts)		Han® Multi Module (for DIN 41626 coaxial contacts)	
	Number of contacts	4	4	12*	12*
	Male module (M)	09 14 004 4501	09 14 004 4501	09 14 012 4501	09 14 012 4501
	Female module (F)	09 14 004 4513	09 14 004 4513	09 14 012 4512	09 14 012 4512
	Coaxial contacts (≤ 2 GHz)				
	Impedance	75 Ω	50 Ω	75 Ω	50 Ω
	Coaxial cable	RG179, RG187	RG174, RG188, RG316	RG179, RG187	RG174, RG188, RG316
	Termination type	Crimp /crimp termination	Crimp /crimp termination	Solder /crimp termination	Solder /crimp termination
Optical Modules	Male contact	09 69 282 5230	09 69 282 5140	09 14 000 6221	09 14 000 6211
	Female contact	09 69 182 5230	09 69 182 5140	09 14 000 6121	09 14 000 6111
		Han® LC module	Han® SC module	Han® Multi module	Han® Multi module
	Number of contacts	6	4	4	12*
	Male module (M)	09 14 006 4701	09 14 004 4701	09 14 004 4501	09 14 012 4501
	Female module (F)	09 14 006 4711	09 14 004 4711	09 14 004 4512	09 14 012 4512
	Contacts				
	1 mm POF		20 10 001 5211	Male: 20 10 001 4211 Female: 20 10 001 4221	Male: 20 10 001 4211 Female: 20 10 001 4221
	1 mm POF Fast assembly termination		20 10 001 5217		
Pneumatic Modules	SI-Fibre 200 / 230 µm Multi-Mode		20 10 230 5211	Male: 20 10 230 4211 Female: 20 10 230 4221	Male: 20 10 230 4211 Female: 20 10 230 4221
	GI-Fibre 50-62,5 / 125 µm Multi-Mode	20 10 125 8211	20 10 125 5211	Male: 20 10 125 4212 Female: 20 10 125 4222	Male: 20 10 125 4212 Female: 20 10 125 4222
	GI-Fibre 9 / 125 µm Single-Mode	20 10 125 8220	20 10 125 5220		
		Han® Pneumatic module		Han® Pneumatic module	
	Number of contacts	2	3	Contacts	Tube
	Male module	09 14 002 4501	09 14 003 4501		
	Female module	09 14 002 4501	09 14 003 4501		
	Tube Ø (inner)	6 mm	4 mm	3 mm	1.6 mm
Special Modules	Contacts - max. 8 bar				
	Male contact	09 14 000 6174	09 14 000 6153	09 14 000 6152	09 14 000 6151
	Female without valve seal	09 14 000 6274	09 14 000 6253	09 14 000 6252	09 14 000 6251
	Female with valve seal	09 14 000 6279	09 14 000 6258	09 14 000 6257	09 14 000 6256
		Han-Yellok® Multiplier	Han-Eco® PE module	Han-Eco® Monoblock	Han® Dummy module
	Field of application	for contact bridges	for Han-Eco® hoods/housings only	for Han-Eco® hoods/housings only	to fill-up empty module places
Special Modules	Number of contacts	3 x 5	1 x PE	10, 14, 20, 28 + PE	
	Electrical data	16 A / 500 V		16 A / 500 V	
	Cross-section	0.14 ... 4 mm²	1.5 ... 16 mm²	0.5 ... 2.5 mm²	
	Termination type	Crimp termination, Han E®	Screw termination	Screw termination	
Special Modules	Male module (M)	09 14 015 3001	19 41 001 2600	19 41 0xx 2601	09 14 000 9950
	Female module (F)	09 14 015 3101	19 41 001 2700	19 41 0xx 2701	

* Double module, requires two places in the frame

Features

- Suitable for more than 100 different modules
- Quick and easy assembly supported by an audible “Click”
- Very robust mechanical characteristics
- Modules can be assembled/removed without tools
- Two leading PE contacts
- Easy handling

Technical characteristics

Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Mating cycles with other HMC components	≥10000
Material (frames)	Zinc die-cast, Stainless steel

Specifications and approvals

EN 60664-1
IEC 61984



Details

Both different markings must be used for one connector!

Conductor cross-section PE (power side) 4 ... 10 mm²

Conductor cross-section 10 mm² only with ferrule crimping tool
09 99 000 0374

Conductor cross-section PE (signal side) 1 ... 2.5 mm²

Locking element 09 14 000 9960 see accessories in chapter 06



Modu-
lar

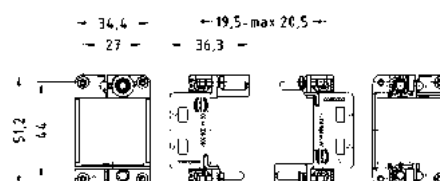
Identification

Part number

Drawing (dimensions in mm)

Han-Modular®,
Hinged frame,
for 2 modules,
A ... B,
Mating cycles ≥500

09 14 006 0361



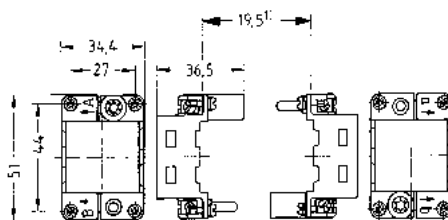
Han-Modular®,
Hinged frame,
for 2 modules,
a ... b,
Mating cycles ≥500

09 14 006 0371



Han-Modular®,
Hinged frame,
HMC version,
for 2 modules,
A ... B,
Mating cycles ≥10000

09 14 206 0303



Han-Modular®,
Hinged frame,
HMC version,
for 2 modules,
a ... b,
Mating cycles ≥10000

09 14 206 0313





Identification	Part number	Drawing (dimensions in mm)
Han-Modular [®] , Hinged frame, for 3 modules, A ... C, Mating cycles ≥500	09 14 010 0361	
Han-Modular [®] , Hinged frame, for 3 modules, a ... C, Mating cycles ≥500	09 14 010 0371	
Han-Modular [®] , Hinged frame, HMC version, for 3 modules, A ... C, Mating cycles ≥10000	09 14 210 0303	
Han-Modular [®] , Hinged frame, HMC version, for 3 modules, a ... C, Mating cycles ≥10000	09 14 210 0313	




Modu-
lar

Identification

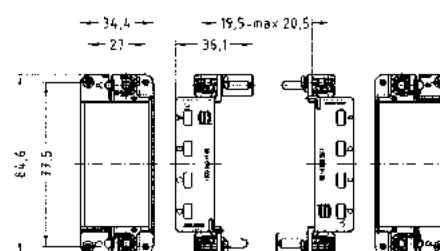
Part number

Drawing (dimensions in mm)


Han-Modular®,
Hinged frame,
for 4 modules,
A ... D,
Mating cycles ≥500



09 14 016 0361




Han-Modular®,
Hinged frame,
for 4 modules,
a ... d,
Mating cycles ≥500

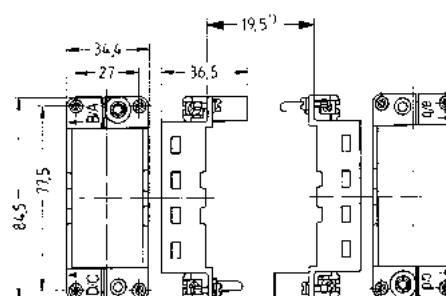


09 14 016 0371

Han-Modular®,
Hinged frame,
HMC version,
for 4 modules,
A ... D,
Mating cycles ≥10000



09 14 216 0303



1) Distance max. 20.5 mm

Han-Modular®,
Hinged frame,
HMC version,
for 4 modules,
a ... d,
Mating cycles ≥10000



09 14 216 0313



Identification	Part number	Drawing (dimensions in mm)
Han-Modular®, Hinged frame, for 6 modules, A ... F, Mating cycles ≥500	09 14 024 0361	
Han-Modular®, Hinged frame, for 6 modules, a ... f, Mating cycles ≥500	09 14 024 0371	
Han-Modular®, Hinged frame, HMC version, for 6 modules, A ... F, Mating cycles ≥10000	09 14 224 0303	
Han-Modular®, Hinged frame, HMC version, for 6 modules, a ... f, Mating cycles ≥10000	09 14 224 0313	

Modu-
lar



Features

- Blind mating connector system for drawer systems
- Leading centring system compensates for tolerances of +/- 2 mm
- Very robust mechanical characteristics
- Compatible with HMC components for 10,000 mating cycles

Technical characteristics

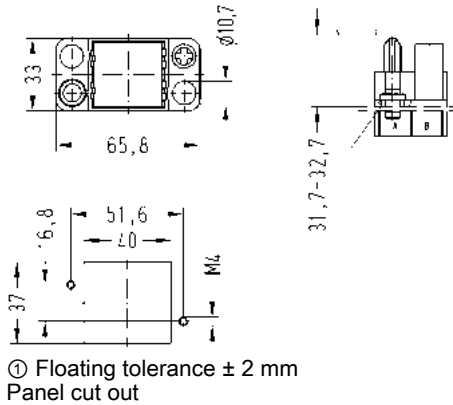
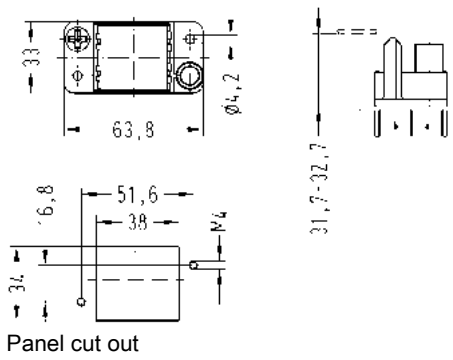
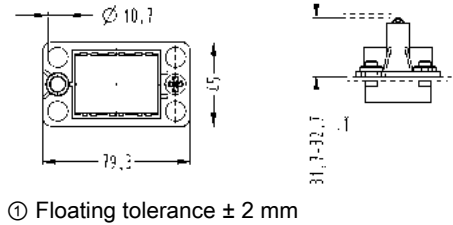
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Mating cycles with other HMC components	≥10000
Degree of protection acc. to IEC 60529	IP20
Lock-in range	±4 mm
Material (frames)	Polycarbonate
Material (accessories)	Zinc die-cast

Specifications and approvals

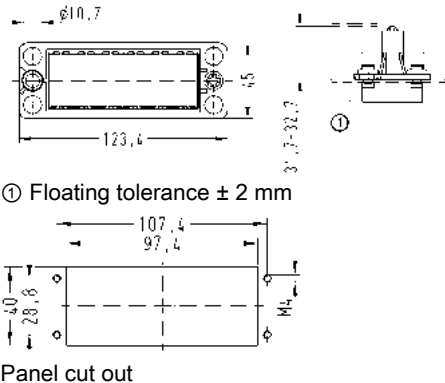
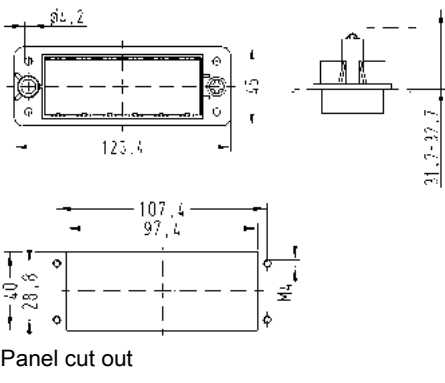
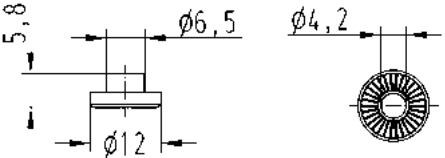
EN 60664-1
IEC 61984

Details

Due the plastic material used in the docking frame without PE, the panel will need to be grounded separately.

Identification		Part number	Drawing (dimensions in mm)
Han-Modular®, Docking frame, Float mount, for 2 modules, A ... B		09 14 006 1701	 ① Floating tolerance ± 2 mm Panel cut out
Han-Modular®, Docking frame, Fixed, for 2 modules, a ... b		09 14 006 1711	 Panel cut out
Han-Modular®, Docking frame, Float mount, for 3 modules, A ... C		09 14 010 1701	 ① Floating tolerance ± 2 mm

Identification	Part number	Drawing (dimensions in mm)
Han-Modular®, Docking frame, Fixed, for 3 modules, a ... c	09 14 010 1711	Panel cut out
Han-Modular®, Docking frame, Float mount, for 4 modules, A ... D	09 14 016 1701	① Floating tolerance ± 2 mm Panel cut out
Han-Modular®, Docking frame, Fixed, for 4 modules, a ... d	09 14 016 1711	Panel cut out

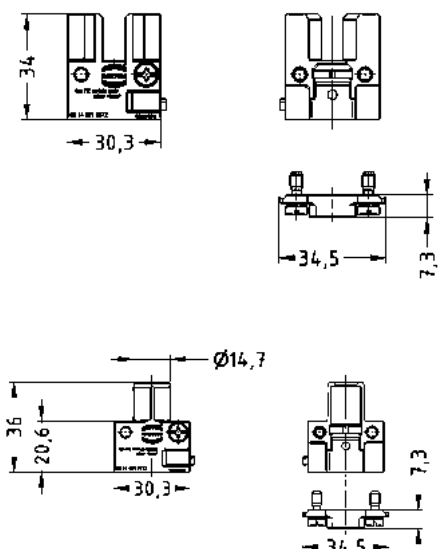
Identification	Part number	Drawing (dimensions in mm)
Han-Modular®, Docking frame, Float mount, for 6 modules, A ... F 	09 14 024 1701	 ① Floating tolerance ± 2 mm Panel cut out
Han-Modular®, Docking frame, Fixed, for 6 modules, a ... f 	09 14 024 1711	 Panel cut out
Han-Modular®, Float washer  To enable the frame to be float mounted using standard M4 fixing screws	09 14 000 9936	

Technical characteristics

Contact resistance	≥0.3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Zinc die-cast, nickel-plated
Material (contacts)	Copper alloy

Specifications and approvals

UL 1977 ECBT2.E235076

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)										
		Male	Female											
Han-Modular® , Han® PE module, Crimp termination, Pack contents: 2 PE module halves, 1 contact pressure plate, 1 crimp contact Contact surface: Silver plated	16 25 35	09 14 001 3072 09 14 001 3073 09 14 001 3074	09 14 001 3172 09 14 001 3173 09 14 001 3174	 Stripping length <table><tr><td>mm²</td><td>10</td><td>16</td><td>25</td><td>35</td></tr><tr><td>mm</td><td>19</td><td>19</td><td>19</td><td>16</td></tr></table>	mm²	10	16	25	35	mm	19	19	19	16
mm²	10	16	25	35										
mm	19	19	19	16										

Technical characteristics

Contact resistance	≥0.3 mΩ
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Material (insert)	Zinc die-cast, nickel-plated
Material (contacts)	Copper alloy

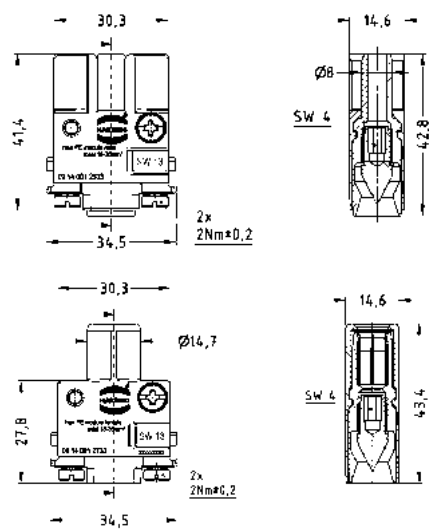
Specifications and approvals

UL 1977 ECBT2.E235076

Details

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)										
		Male	Female											
Han-Modular®, Han® PE module, Axial screw termination, Pack contents: PE module with pre-assembled axial screw contact Contact surface: Silver plated	10 ... 25 16 ... 35 22 ... 38	09 14 001 2632 09 14 001 2633 09 14 001 2634	09 14 001 2732 09 14 001 2733 09 14 001 2734	 Stripping length 13 mm Tightening torque <table border="1"> <tr> <td>mm²</td><td>10</td><td>16</td><td>25</td><td>35</td></tr> <tr> <td>Nm</td><td>6</td><td>6</td><td>7</td><td>8</td></tr> </table>	mm²	10	16	25	35	Nm	6	6	7	8
mm²	10	16	25	35										
Nm	6	6	7	8										

Features

- Crimp- and axial module are compatible modules
- Contacts can be unlocked from the mating side
- Power module for big cross-sections up to 70 mm²
- Suitable as a 3 + PE connector in a Han® 32 B housing

Technical characteristics

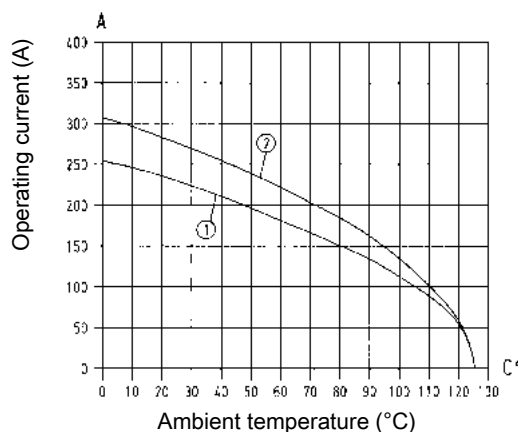
Number of contacts	1
Electrical data acc. to IEC 61984	200 A 1.000 V 8 kV 3
Rated current	200 A
Rated voltage	1000 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.2 \text{ m}\Omega, \leq 0.3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



① 24 B hoods/housings with 3 modules Conductor cross-section 50 mm²

② 24 B hoods/housings with 3 modules Conductor cross-section 70 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

Contact resistance crimp contact: $\leq 0.3 \text{ m}\Omega$

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Contact resistance axial screw contact: $\leq 0.2 \text{ m}\Omega$

for more technical details (i.e. number of crimping operations or crimping position) see eCatalogue

Crimping tools see chapter 90

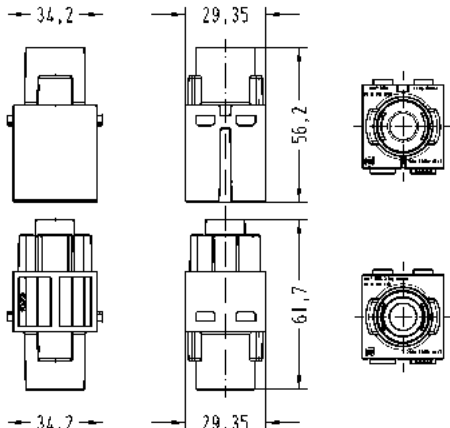
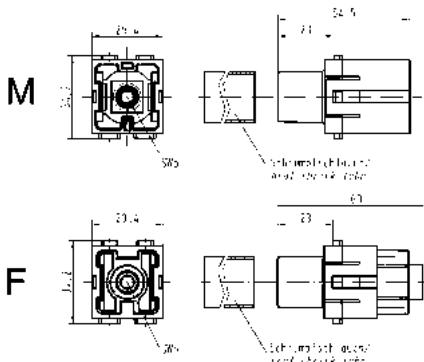
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

1

200 A 1.000 V 8 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han-Modular® , Han® 200 A module, Crimp termination  Please order crimp contacts separately.	25 ... 70	09 14 001 3001	09 14 001 3101	 Removal tool 09 99 000 0820 See chapter 90															
Han-Modular® , Han® 200 A module, Axial screw termination, Contact surface: Silver plated 	25 ... 40 40 ... 70	09 14 001 2663 09 14 001 2662	09 14 001 2763 09 14 001 2762	 Stripping length 16 mm Tightening torque 8 Nm @ 25 ... 40 mm², 9 Nm @ 40 mm², 10 Nm @ 70 mm²															
TC 200 , Crimp contact, Contact surface: Silver plated 	25 35 50 70	09 11 000 6120 09 11 000 6121 09 11 000 6122 09 11 000 6123	09 11 000 6220 09 11 000 6221 09 11 000 6222 09 11 000 6223	<table><tr><th>Wire gauge</th><th>∅</th><th>Stripping length A</th></tr><tr><td>25 mm²</td><td>7</td><td>19 mm</td></tr><tr><td>35 mm²</td><td>8.2</td><td>20 mm</td></tr><tr><td>50 mm²</td><td>10</td><td>22.5 mm</td></tr><tr><td>70 mm²</td><td>11.5</td><td>22.5 mm</td></tr></table> for stranded wire according to IEC 60 228 Class 5	Wire gauge	∅	Stripping length A	25 mm²	7	19 mm	35 mm²	8.2	20 mm	50 mm²	10	22.5 mm	70 mm²	11.5	22.5 mm
Wire gauge	∅	Stripping length A																	
25 mm²	7	19 mm																	
35 mm²	8.2	20 mm																	
50 mm²	10	22.5 mm																	
70 mm²	11.5	22.5 mm																	

Modu-
lar

Technical characteristics

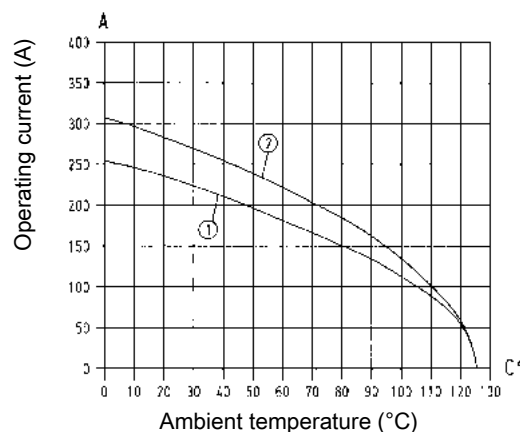
Contact resistance	≤0.2 mΩ
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



① 24 B hoods/housings with 3 modules Conductor cross-section 50 mm²

② 24 B hoods/housings with 3 modules Conductor cross-section 70 mm²

Specifications and approvals

EN 60664-1
IEC 61984



Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Han® 200 A PE module, Axial screw termination, Contact surface: Silver plated	25 ... 40 40 ... 70	09 14 001 2668 09 14 001 2667	09 14 001 2768 09 14 001 2767	Hex key with grip 09 99 000 0364 Adapter 3/8" 09 99 000 0371 See chapter 90 Stripping length 16 mm Tightening torque 8 Nm @ 25 ... 40 mm², 9 Nm @ 40 mm², 10 Nm @ 70 mm²

Modu-
lar

Features

- Crimp- and axial module are compatible modules
- Contacts can be unlocked from the mating side

Technical characteristics

Number of contacts	2
Electrical data acc. to IEC 61984	100 A 1.000 V 8 kV 3
Rated current	100 A
Rated voltage	1000 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

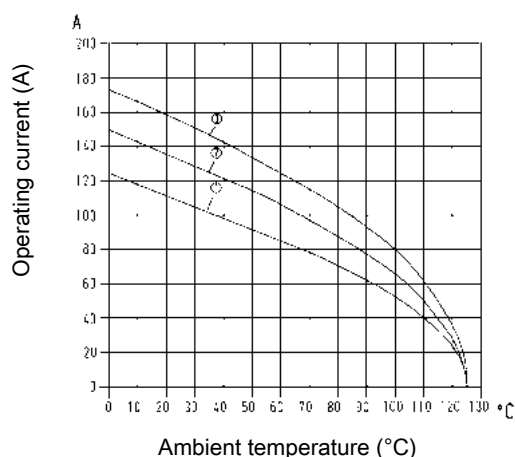
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

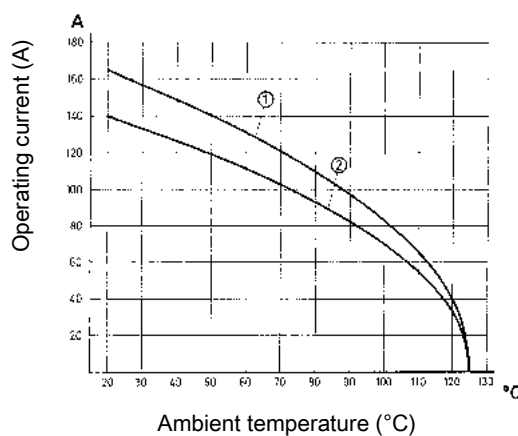
Crimp termination



- ① 24 B hoods/housings with 3 modules Conductor cross-section 16 mm²
- ② 24 B hoods/housings with 3 modules Conductor cross-section 25 mm²
- ③ 24 B hoods/housings with 3 modules Conductor cross-section 35 mm²

Derating

Axial screw termination



- ① 24 B hoods/housings with 3 modules Conductor cross-section 35 mm²
- ② 24 B hoods/housings with 3 modules Conductor cross-section 25 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

for more technical details (i.e. number of crimping operations or crimping position) see eCatalogue

Crimping tools see chapter 90




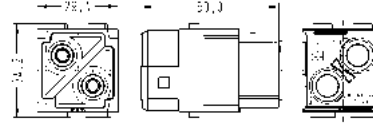
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

2

100 A 1.000 V 8 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han-Modular® , Han® 100 A module, Crimp termination  Please order crimp contacts separately.	10 ... 35	09 14 002 3051	09 14 002 3151	M  F 															
Han-Modular® , Han® 100 A module, Axial screw termination, Contact surface: Silver plated 	10 ... 25 16 ... 35 38	09 14 002 2653 09 14 002 2651 09 14 002 2650	09 14 002 2753 09 14 002 2751 09 14 002 2750	M  F  Stripping length 12 ... 14 mm Tightening torque 6 Nm @ 10 ... 16 mm², 7 Nm @ 25 mm², 8 Nm @ 35 ... 38 mm²															
TC 100 , Crimp contact, Contact surface: Silver plated 	10 16 25 35	09 11 000 6114 09 11 000 6116 09 11 000 6125 09 11 000 6135	09 11 000 6214 09 11 000 6216 09 11 000 6225 09 11 000 6235	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length A</th></tr><tr><td>10 mm²</td><td>4.3</td><td>19 mm</td></tr><tr><td>16 mm²</td><td>5.5</td><td>19 mm</td></tr><tr><td>25 mm²</td><td>7</td><td>19 mm</td></tr><tr><td>35 mm²</td><td>8.2</td><td>16 mm</td></tr></table> for stranded wire according to IEC 60 228 Class 5	Wire gauge	Ø	Stripping length A	10 mm²	4.3	19 mm	16 mm²	5.5	19 mm	25 mm²	7	19 mm	35 mm²	8.2	16 mm
Wire gauge	Ø	Stripping length A																	
10 mm²	4.3	19 mm																	
16 mm²	5.5	19 mm																	
25 mm²	7	19 mm																	
35 mm²	8.2	16 mm																	

Modu-
lar

Features

- Crimp or axial screw termination available
- Unlock of contacts with a screw driver from mating side
- Separate axial screw contacts can be terminated without any special tools directly to the wire

Technical characteristics

Number of contacts	1
Electrical data acc. to IEC 61984	100 A 830 V 8 kV 3
Rated current	100 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

Hex key (A/F 4) see chapter 90

for more technical details (i.e. number of crimping operations or crimping position) see eCatalogue

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Crimping tools see chapter 90

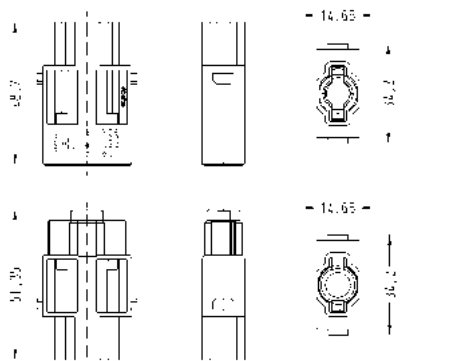
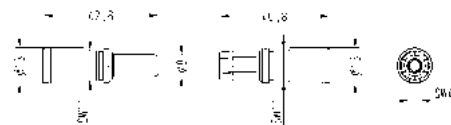
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

1

100 A 830 V 8 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han-Modular® , Han® 100 A module, Single module  Please order contacts separately.	10 ... 35	09 14 001 3031	09 14 001 3131																
TC 100 , Crimp contact, Contact surface: Silver plated 	10 16 25 35	09 11 000 6114 09 11 000 6116 09 11 000 6125 09 11 000 6135	09 11 000 6214 09 11 000 6216 09 11 000 6225 09 11 000 6235	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length A</th></tr><tr><td>10 mm²</td><td>4.3</td><td>19 mm</td></tr><tr><td>16 mm²</td><td>5.5</td><td>19 mm</td></tr><tr><td>25 mm²</td><td>7</td><td>19 mm</td></tr><tr><td>35 mm²</td><td>8.2</td><td>16 mm</td></tr></table> for stranded wire according to IEC 60 228 Class 5	Wire gauge	Ø	Stripping length A	10 mm²	4.3	19 mm	16 mm²	5.5	19 mm	25 mm²	7	19 mm	35 mm²	8.2	16 mm
Wire gauge	Ø	Stripping length A																	
10 mm²	4.3	19 mm																	
16 mm²	5.5	19 mm																	
25 mm²	7	19 mm																	
35 mm²	8.2	16 mm																	
TC 100 , Axial screw contact, Contact surface: Silver plated 	10 ... 25 16 ... 35	09 11 000 6112 09 11 000 6113	09 11 000 6212 09 11 000 6213	 Stripping length 13 mm Tightening torque <table><tr><th>mm²</th><th>10</th><th>16</th><th>25</th><th>35</th></tr><tr><th>Nm</th><td>6</td><td>6</td><td>7</td><td>8</td></tr></table>	mm²	10	16	25	35	Nm	6	6	7	8					
mm²	10	16	25	35															
Nm	6	6	7	8															

Modu-
lar

Features

- for power circuits
- Male inserts with protection collar
- Polarisation of module

Technical characteristics

Number of contacts	2
Electrical data acc. to IEC 61984	70 A 1.000 V 8 kV 3
Rated current	70 A
Rated voltage	1000 V
Rated impulse voltage	8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.5 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

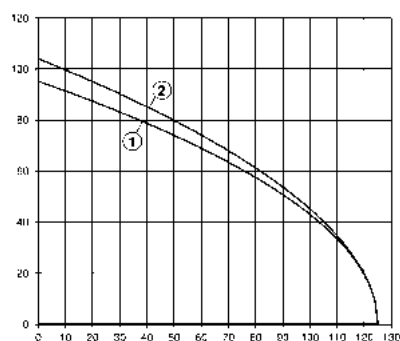
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

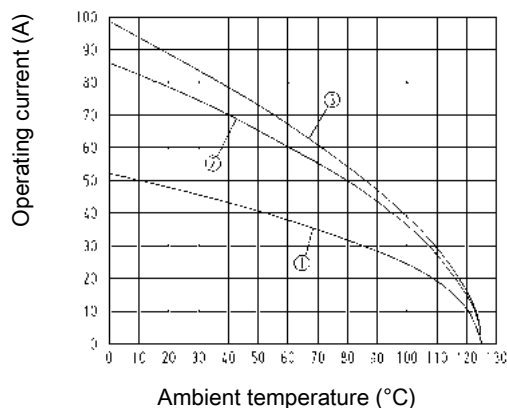
Crimp termination



- ① 24 B hoods/housings with 6 modules Conductor cross-section 16 mm²
 ② 24 B hoods/housings with 6 modules Conductor cross-section 25 mm²

Derating

Axial screw termination



- ① 24 B hoods/housings with 6 modules Conductor cross-section 6 mm²
 ② 24 B hoods/housings with 6 modules Conductor cross-section 16 mm²
 ③ 24 B hoods/housings with 6 modules Conductor cross-section 22 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076



Details

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Hex key (A/F 2.5) see chapter 90

for more technical details (i.e. number of crimping operations or crimping position) see eCatalogue

Crimping tools see chapter 90


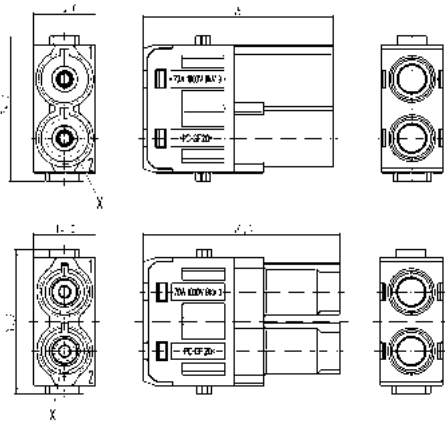
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

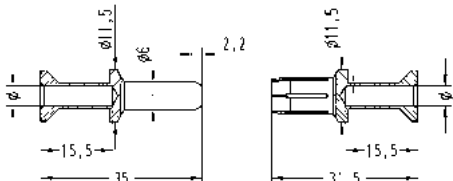
2

70 A 1.000 V 8 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Han® 70 A module, Crimp termination  Please order crimp contacts separately.	10 ... 25	09 14 002 3041	09 14 002 3141	
Han-Modular®, Han® 70 A module, Axial screw termination, Contact surface: Silver plated  Finger safe Han-Modular®, Han® 70 A module, Axial screw termination, Contact surface: Silver plated 	6 ... 16 14 ... 22 6 ... 16 14 ... 22	09 14 002 2641 09 14 002 2642 09 14 002 2646 09 14 002 2647	09 14 002 2741 09 14 002 2742	 6 ... 16 mm²: Stripping length 11 ... 12 mm 14 ... 22 mm²: Stripping length 12,5 ... 13,5 mm Tightening torque 2 Nm @ 6 mm², 3 Nm @ 10 mm², 4 Nm @ 14 mm², 4 Nm @ 16 mm², 4 Nm @ 22 mm²

Modu-
lar



Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)												
		Male	Female													
TC 70 , Crimp contact, Contact surface: Silver plated	10 16 25	09 11 000 6131 09 11 000 6132 09 11 000 6133	09 11 000 6231 09 11 000 6232 09 11 000 6233	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length A</th></tr><tr><td>10 mm²</td><td>4.3</td><td>15.5 mm</td></tr><tr><td>16 mm²</td><td>5.5</td><td>15.5 mm</td></tr><tr><td>25 mm²</td><td>7</td><td>15.5 mm</td></tr></table> for stranded wire according to IEC 60 228 Class 5	Wire gauge	Ø	Stripping length A	10 mm²	4.3	15.5 mm	16 mm²	5.5	15.5 mm	25 mm²	7	15.5 mm
Wire gauge	Ø	Stripping length A														
10 mm²	4.3	15.5 mm														
16 mm²	5.5	15.5 mm														
25 mm²	7	15.5 mm														

Modu-
lar

Features

- Axial screw termination
- for power circuits
- Male inserts with protection collar
- Polarisation of module

Technical characteristics

Number of contacts	1
Additional contacts	+ 4 additional signal contacts
Electrical data acc. to IEC 61984	70 A 1.000 V 8 kV 3
Rated current	70 A
Rated voltage	1000 V
Rated impulse voltage	8 kV
Pollution degree	3
Electrical data, signal	16 A 400 V 6 kV 3
Rated current (signal)	16 A
Rated voltage (signal)	400 V
Rated impulse voltage (signal)	6 kV
Pollution degree (signal)	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

Hex key (A/F 2.5) see chapter 90

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

1

70 A 1.000 V 8 kV 3
+ 4 additional signal contacts
16 A 400 V 6 kV 3

Modu-
lar

Han-Modular®,
Han® 70 A Hybrid module,
Axial screw termination / crimp
termination



Please order signal contacts
separately.

Conductor
cross-section
(mm²)

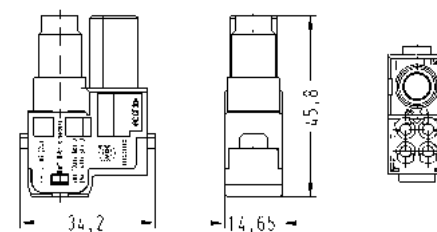
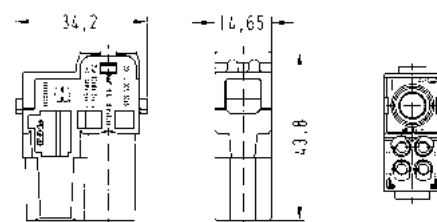
Part number
Male Female

Drawing
(dimensions in mm)

6 ... 16
14 ... 22

09 14 005 2646
09 14 005 2647

09 14 005 2741
09 14 005 2742



6 ... 16 mm²: Stripping length 11 ... 12 mm
14 ... 22 mm²: Stripping length 12,5 ... 13,5 mm
Tightening torque
2 Nm @ 6 mm², 3 Nm @ 10 mm², 4 Nm @
14 mm², 4 Nm @ 16 mm², 4 Nm @ 22 mm²

Han E®,
Crimp contact,
Contact surface:
Silver plated



0,14 ... 0,37
0,5
0,75
1
1,5
2,5
3
4

09 33 000 6127
09 33 000 6121
09 33 000 6114
09 33 000 6105
09 33 000 6104
09 33 000 6102
09 33 000 6106
09 33 000 6107

09 33 000 6227
09 33 000 6220
09 33 000 6214
09 33 000 6205
09 33 000 6204
09 33 000 6202
09 33 000 6206
09 33 000 6207



Conductor cross-section	Identification
0.14-0.37 mm²	AWG 26-22 no groove
0.5 mm²	AWG 20 no groove
0.75 mm²	AWG 18 1 groove*
1 mm²	AWG 18 1 groove
1.5 mm²	AWG 16 2 grooves
2.5 mm²	AWG 14 3 grooves
3 mm²	AWG 12 wide groove
4 mm²	AWG 12 no groove

* on the back crimp collar

Stripping length 7.5 mm

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																										
		Male	Female																											
Han E® , Crimp contact, Contact surface: Gold plated	0,14 ... 0,37	09 33 000 6117	09 33 000 6217																											
	0,5	09 33 000 6122	09 33 000 6222																											
	0,75	09 33 000 6115	09 33 000 6215																											
	1	09 33 000 6118	09 33 000 6218																											
	1,5	09 33 000 6116	09 33 000 6216																											
	2,5	09 33 000 6123	09 33 000 6223																											
	4	09 33 000 6119	09 33 000 6221																											
<table><tr><th colspan="2">Conductor cross-section</th><th>Identification</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22</td><td>no groove</td></tr><tr><td>0.5 mm²</td><td>AWG 20</td><td>no groove</td></tr><tr><td>0.75 mm²</td><td>AWG 18</td><td>1 groove*</td></tr><tr><td>1 mm²</td><td>AWG 18</td><td>1 groove</td></tr><tr><td>1.5 mm²</td><td>AWG 16</td><td>2 grooves</td></tr><tr><td>2.5 mm²</td><td>AWG 14</td><td>3 grooves</td></tr><tr><td>3 mm²</td><td>AWG 12</td><td>wide groove</td></tr><tr><td>4 mm²</td><td>AWG 12</td><td>no groove</td></tr></table> * on the back crimp collar Stripping length 7.5 mm				Conductor cross-section		Identification	0.14-0.37 mm²	AWG 26-22	no groove	0.5 mm²	AWG 20	no groove	0.75 mm²	AWG 18	1 groove*	1 mm²	AWG 18	1 groove	1.5 mm²	AWG 16	2 grooves	2.5 mm²	AWG 14	3 grooves	3 mm²	AWG 12	wide groove	4 mm²	AWG 12	no groove
Conductor cross-section		Identification																												
0.14-0.37 mm²	AWG 26-22	no groove																												
0.5 mm²	AWG 20	no groove																												
0.75 mm²	AWG 18	1 groove*																												
1 mm²	AWG 18	1 groove																												
1.5 mm²	AWG 16	2 grooves																												
2.5 mm²	AWG 14	3 grooves																												
3 mm²	AWG 12	wide groove																												
4 mm²	AWG 12	no groove																												

Features

- Crimp or axial screw termination available
- No special tools required for axial-screw termination

Technical characteristics

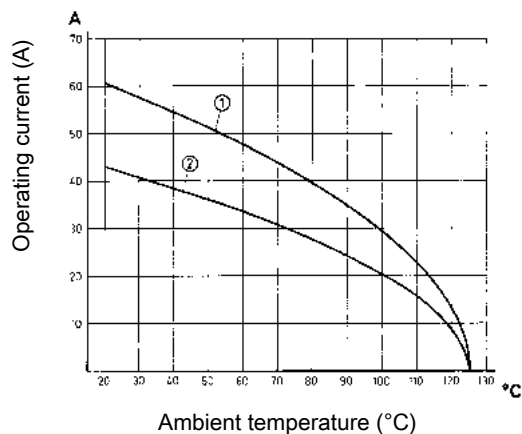
Number of contacts	2
Electrical data acc. to IEC 61984	40 A 1.000 V 8 kV 3
Rated current	40 A
Rated voltage	1000 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega, \leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 6 modules Conductor cross-section 10 mm²
 ② 24 B hoods/housings with 6 modules Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076



Details

Contact resistance Han® C crimp contact: $\leq 0.3 \text{ m}\Omega$

Contact resistance axial screw contact: $\leq 0.3 \text{ m}\Omega$

Hex key (A/F 2) see chapter 90

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Crimping tools see chapter 90

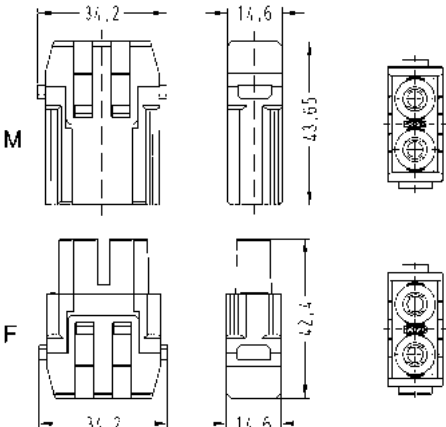
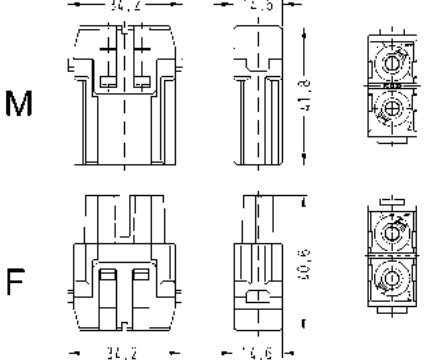
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

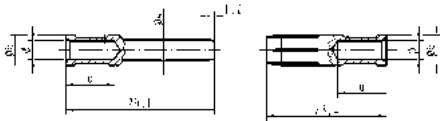
2

40 A 1.000 V 8 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																				
		Male	Female																					
Han-Modular®, Han® 40 A module, Crimp termination  Please order crimp contacts separately.	1,5 ... 10	09 14 002 3002	09 14 002 3102	 Contact arrangement (view from termination side)																				
Han-Modular®, Han® 40 A module, Axial screw termination, Contact surface: Silver plated 	2,5 ... 8 6 ... 10	09 14 002 2601 09 14 002 2602	09 14 002 2701 09 14 002 2702	 Contact arrangement (view from termination side) Stripping length <table border="1"> <tr> <td>mm²</td><td>2,5</td><td>4</td><td>6</td><td>10</td></tr> <tr> <td>mm</td><td>5⁺¹</td><td>5⁺¹</td><td>8⁺¹</td><td>11⁺¹</td></tr> </table> Tightening torque <table border="1"> <tr> <td>mm²</td><td>2,5</td><td>4</td><td>6</td><td>10</td></tr> <tr> <td>Nm</td><td>1,5</td><td>1,5</td><td>2</td><td>2</td></tr> </table>	mm²	2,5	4	6	10	mm	5 ⁺¹	5 ⁺¹	8 ⁺¹	11 ⁺¹	mm²	2,5	4	6	10	Nm	1,5	1,5	2	2
mm²	2,5	4	6	10																				
mm	5 ⁺¹	5 ⁺¹	8 ⁺¹	11 ⁺¹																				
mm²	2,5	4	6	10																				
Nm	1,5	1,5	2	2																				

Modu-
lar



Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han® C , Crimp contact, Contact surface: Silver plated	1,5	09 32 000 6104	09 32 000 6204																			
	2,5	09 32 000 6105	09 32 000 6205																			
	4	09 32 000 6107	09 32 000 6207																			
	6	09 32 000 6108	09 32 000 6208																			
	10	09 32 000 6109	09 32 000 6209																			
				<table><tr><th>Conductor cross-section</th><th>Ø</th><th>Stripping length</th></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>9.5 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>9.5 mm</td></tr><tr><td>4 mm² AWG 12</td><td>2.85 mm</td><td>9.5 mm</td></tr><tr><td>6 mm² AWG 10</td><td>3.5 mm</td><td>9.5 mm</td></tr><tr><td>10 mm² AWG 8</td><td>4.3 mm</td><td>12 mm</td></tr></table>	Conductor cross-section	Ø	Stripping length	1.5 mm² AWG 16	1.75 mm	9.5 mm	2.5 mm² AWG 14	2.25 mm	9.5 mm	4 mm² AWG 12	2.85 mm	9.5 mm	6 mm² AWG 10	3.5 mm	9.5 mm	10 mm² AWG 8	4.3 mm	12 mm
Conductor cross-section	Ø	Stripping length																				
1.5 mm² AWG 16	1.75 mm	9.5 mm																				
2.5 mm² AWG 14	2.25 mm	9.5 mm																				
4 mm² AWG 12	2.85 mm	9.5 mm																				
6 mm² AWG 10	3.5 mm	9.5 mm																				
10 mm² AWG 8	4.3 mm	12 mm																				

Modu-
lar

Features

- Standard module for power up to 40 A
- No special tools required for axial-screw termination

Technical characteristics

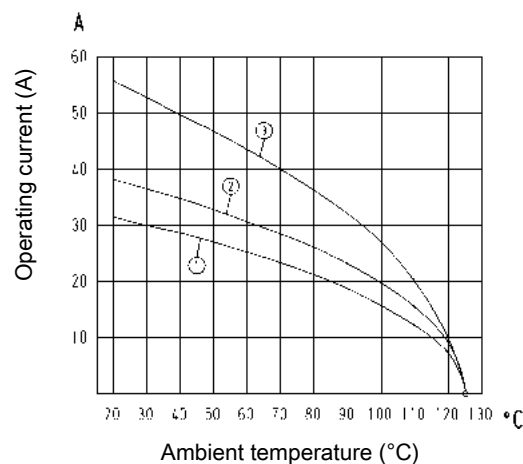
Number of contacts	3
Electrical data acc. to IEC 61984	40 A 690 V 8 kV 3
Rated current	40 A
Rated voltage	690 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current acc. to UL	40 A
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega, \leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 6 modules Conductor cross-section 4 mm²
 ② 24 B hoods/housings with 6 modules Conductor cross-section 6 mm²
 ③ 24 B hoods/housings with 6 modules Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076



Details

Contact resistance Han® C crimp contact: $\leq 0.3 \text{ m}\Omega$

Contact resistance axial screw contact: $\leq 0.3 \text{ m}\Omega$

Hex key (A/F 2) see chapter 90

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Crimping tools see chapter 90

Remarks on the crimp technique

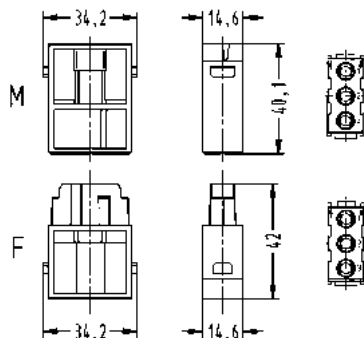
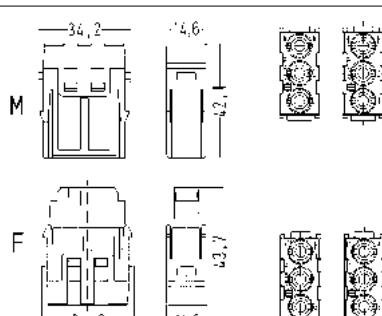

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

3

40 A 690 V 8 kV 3

Modu-
lar

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																				
		Male	Female																					
Han-Modular® , Han® C module, Crimp termination  Please order crimp contacts separately.	1,5 ... 6	09 14 003 3001	09 14 003 3101	 Contact arrangement (view from termination side)																				
Han-Modular® , Han® C module, Axial screw termination, Contact surface: Silver plated 	2,5 ... 8 6 ... 10	09 14 003 2601 09 14 003 2602	09 14 003 2701 09 14 003 2702	 Stripping length <table><tr><td>mm²</td><td>2,5</td><td>4</td><td>6</td><td>10</td></tr><tr><td>mm</td><td>5⁺¹</td><td>5⁺¹</td><td>8⁺¹</td><td>11⁺¹</td></tr></table> Tightening torque <table><tr><td>mm²</td><td>2,5</td><td>4</td><td>6</td><td>10</td></tr><tr><td>Nm</td><td>1,5</td><td>1,5</td><td>2</td><td>2</td></tr></table>	mm²	2,5	4	6	10	mm	5 ⁺¹	5 ⁺¹	8 ⁺¹	11 ⁺¹	mm²	2,5	4	6	10	Nm	1,5	1,5	2	2
mm²	2,5	4	6	10																				
mm	5 ⁺¹	5 ⁺¹	8 ⁺¹	11 ⁺¹																				
mm²	2,5	4	6	10																				
Nm	1,5	1,5	2	2																				
Han® C , Crimp contact, Contact surface: Silver plated 	1,5 2,5 4 6	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208	 <table><tr><th>Conductor cross-section</th><th>Ø</th><th>Stripping length</th></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>9.5 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>9.5 mm</td></tr><tr><td>4 mm² AWG 12</td><td>2.85 mm</td><td>9.5 mm</td></tr><tr><td>6 mm² AWG 10</td><td>3.5 mm</td><td>9.5 mm</td></tr><tr><td>10 mm² AWG 8</td><td>4.3 mm</td><td>12 mm</td></tr></table>	Conductor cross-section	Ø	Stripping length	1.5 mm² AWG 16	1.75 mm	9.5 mm	2.5 mm² AWG 14	2.25 mm	9.5 mm	4 mm² AWG 12	2.85 mm	9.5 mm	6 mm² AWG 10	3.5 mm	9.5 mm	10 mm² AWG 8	4.3 mm	12 mm		
Conductor cross-section	Ø	Stripping length																						
1.5 mm² AWG 16	1.75 mm	9.5 mm																						
2.5 mm² AWG 14	2.25 mm	9.5 mm																						
4 mm² AWG 12	2.85 mm	9.5 mm																						
6 mm² AWG 10	3.5 mm	9.5 mm																						
10 mm² AWG 8	4.3 mm	12 mm																						

Features

- Suitable for Han® C crimp contacts
- Designed for a high working voltage up to 830 V
- Finger safe male and female contacts
- High density of contacts

Technical characteristics

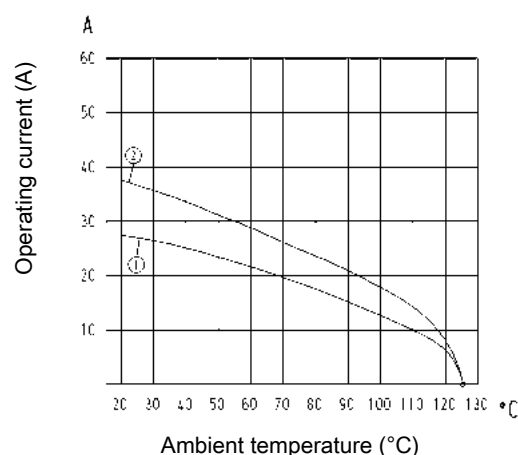
Number of contacts	4
Electrical data acc. to IEC 61984	40 A 830 V 8 kV 3
Rated current	40 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 6 modules Conductor cross-section 4 mm²
 ② 24 B hoods/housings with 6 modules Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076



Details

Crimping tools see chapter 90

Remarks on the crimp technique


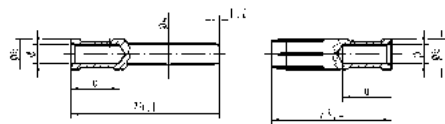
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

4

40 A 830 V 8 kV 3

Modu-
lar

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han-Modular®, Han® CC Protected module, Crimp termination  Please order crimp contacts separately.	1,5 ... 6	09 14 004 3041	09 14 004 3141																			
Han® C , Crimp contact, Contact surface: Silver plated 	1,5 2,5 4 6	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208	 <table><tr><th>Conductor cross-section</th><th>Ø</th><th>Stripping length</th></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>9.5 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>9.5 mm</td></tr><tr><td>4 mm² AWG 12</td><td>2.85 mm</td><td>9.5 mm</td></tr><tr><td>6 mm² AWG 10</td><td>3.5 mm</td><td>9.5 mm</td></tr><tr><td>10 mm² AWG 8</td><td>4.3 mm</td><td>12 mm</td></tr></table>	Conductor cross-section	Ø	Stripping length	1.5 mm² AWG 16	1.75 mm	9.5 mm	2.5 mm² AWG 14	2.25 mm	9.5 mm	4 mm² AWG 12	2.85 mm	9.5 mm	6 mm² AWG 10	3.5 mm	9.5 mm	10 mm² AWG 8	4.3 mm	12 mm
Conductor cross-section	Ø	Stripping length																				
1.5 mm² AWG 16	1.75 mm	9.5 mm																				
2.5 mm² AWG 14	2.25 mm	9.5 mm																				
4 mm² AWG 12	2.85 mm	9.5 mm																				
6 mm² AWG 10	3.5 mm	9.5 mm																				
10 mm² AWG 8	4.3 mm	12 mm																				

Features

- 3 contacts (40 A) for power circuits and 4 contacts (10 A) for signal circuits
- Ideal as motor drive connector
- Finger safe male and female contacts

Technical characteristics

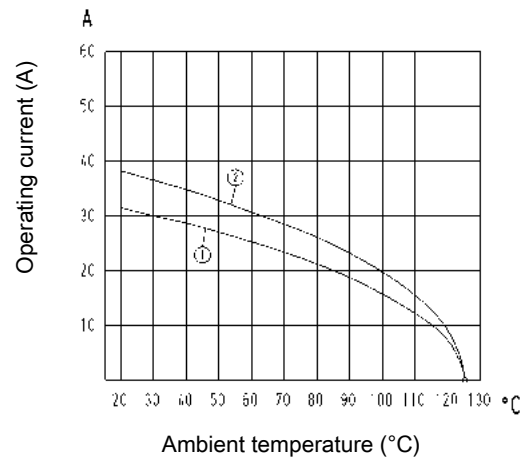
Number of contacts	3
Additional contacts	+ 4 additional signal contacts
Electrical data acc. to IEC 61984	40 A 830 V 8 kV 3
Rated current	40 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Electrical data, signal	10 A 830 V 8 kV 3
Rated current (signal)	10 A
Rated voltage (signal)	830 V
Rated impulse voltage (signal)	8 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$, $\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 6 modules Conductor cross-section 4 mm²
 ② 24 B hoods/housings with 6 modules Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076



Details

Contact resistance Han D® crimp contact: $\leq 3 \text{ m}\Omega$

Contact resistance Han® C crimp contact: $\leq 0.3 \text{ m}\Omega$

Crimping tools see chapter 90

Remarks on the crimp technique




The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

3

40 A 830 V 8 kV 3
+ 4 additional signal contacts
10 A 830 V 8 kV 3

Modu-
lar

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han-Modular® , Han® CD module, Crimp termination  Please order crimp contacts separately.	0,14 ... 6	09 14 007 3001	09 14 007 3101	 Contact arrangement (view from termination side) max. insulation diameter 5 mm																					
Han® C , Crimp contact, Contact surface: Silver plated 	1,5 2,5 4 6	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208	 <table><tr><th>Conductor cross-section</th><th>Ø</th><th>Stripping length</th></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>9.5 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>9.5 mm</td></tr><tr><td>4 mm² AWG 12</td><td>2.85 mm</td><td>9.5 mm</td></tr><tr><td>6 mm² AWG 10</td><td>3.5 mm</td><td>9.5 mm</td></tr><tr><td>10 mm² AWG 8</td><td>4.3 mm</td><td>12 mm</td></tr></table>	Conductor cross-section	Ø	Stripping length	1.5 mm² AWG 16	1.75 mm	9.5 mm	2.5 mm² AWG 14	2.25 mm	9.5 mm	4 mm² AWG 12	2.85 mm	9.5 mm	6 mm² AWG 10	3.5 mm	9.5 mm	10 mm² AWG 8	4.3 mm	12 mm			
Conductor cross-section	Ø	Stripping length																							
1.5 mm² AWG 16	1.75 mm	9.5 mm																							
2.5 mm² AWG 14	2.25 mm	9.5 mm																							
4 mm² AWG 12	2.85 mm	9.5 mm																							
6 mm² AWG 10	3.5 mm	9.5 mm																							
10 mm² AWG 8	4.3 mm	12 mm																							
Han D® , Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm	0.5 mm² AWG 20	1.1 mm	8 mm	0.75 mm² AWG 18	1.3 mm	8 mm	1 mm² AWG 18	1.45 mm	8 mm	1.5 mm² AWG 16	1.75 mm	8 mm	2.5 mm² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm																							
0.5 mm² AWG 20	1.1 mm	8 mm																							
0.75 mm² AWG 18	1.3 mm	8 mm																							
1 mm² AWG 18	1.45 mm	8 mm																							
1.5 mm² AWG 16	1.75 mm	8 mm																							
2.5 mm² AWG 14	2.25 mm	6 mm																							

Modu-
lar

Features

- Standard module for power up to 16 A
- Han-Quick Lock® or crimp termination available

Technical characteristics

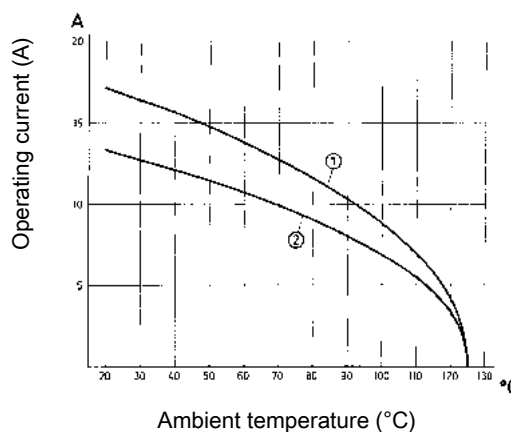
Number of contacts	6
Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Mating cycles with other HMC components	≥ 10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



① 24 B hoods/housings with 6 modules Conductor cross-section 2.5 mm²

② 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

Crimping tools see chapter 90

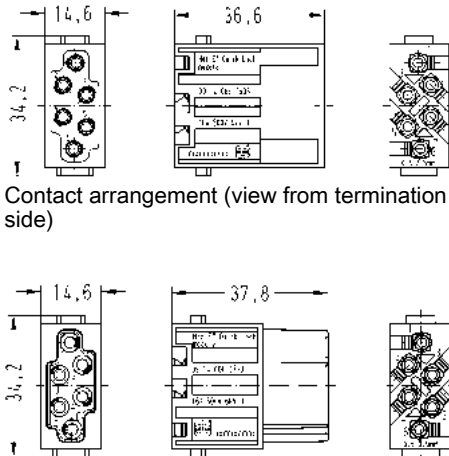
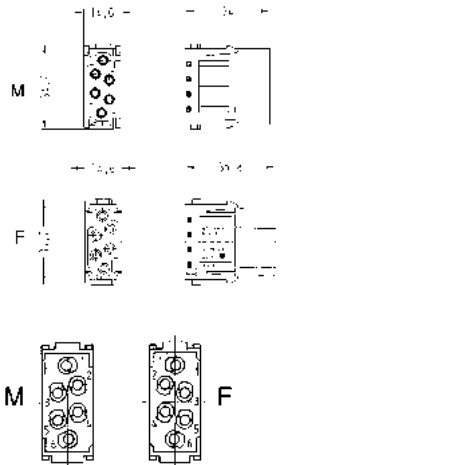
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

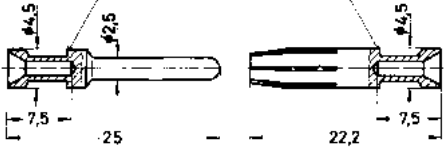
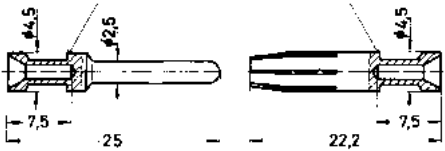
Number of contacts

6

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Han E® module, Han-Quick Lock® termination, Contact surface: Silver plated 	0,5 ... 2,5	09 14 006 2633	09 14 006 2733	 Contact arrangement (view from termination side)
Han-Modular®, Han E® module, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 14 006 3001	09 14 006 3101	 Contact arrangement (view from termination side)

Modu-
lar

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E®, Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37	09 33 000 6127	09 33 000 6227	
	0,5	09 33 000 6121	09 33 000 6220	
	0,75	09 33 000 6114	09 33 000 6214	
	1	09 33 000 6105	09 33 000 6205	
	1,5	09 33 000 6104	09 33 000 6204	
	2,5	09 33 000 6102	09 33 000 6202	
	3	09 33 000 6106	09 33 000 6206	
	4	09 33 000 6107	09 33 000 6207	
Han E®, Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37	09 33 000 6117	09 33 000 6217	
	0,5	09 33 000 6122	09 33 000 6222	
	0,75	09 33 000 6115	09 33 000 6215	
	1	09 33 000 6118	09 33 000 6218	
	1,5	09 33 000 6116	09 33 000 6216	
	2,5	09 33 000 6123	09 33 000 6223	
	4	09 33 000 6119	09 33 000 6221	

Conductor cross-section	Identification
0.14-0.37 mm²	AWG 26-22 no groove
0.5 mm²	AWG 20 no groove
0.75 mm²	AWG 18 1 groove*
1 mm²	AWG 18 1 groove
1.5 mm²	AWG 16 2 grooves
2.5 mm²	AWG 14 3 grooves
3 mm²	AWG 12 wide groove
4 mm²	AWG 12 no groove

* on the back crimp collar

Stripping length 7.5 mm

Conductor cross-section	Identification
0.14-0.37 mm²	AWG 26-22 no groove
0.5 mm²	AWG 20 no groove
0.75 mm²	AWG 18 1 groove*
1 mm²	AWG 18 1 groove
1.5 mm²	AWG 16 2 grooves
2.5 mm²	AWG 14 3 grooves
3 mm²	AWG 12 wide groove
4 mm²	AWG 12 no groove

* on the back crimp collar

Stripping length 7.5 mm

Number of contacts

5

16 A 230/400 V 4 kV 3

Features

- Screw connection, suitable for all users around the world
- No special tools required
- for flexible and solid conductors from 0.5 to 2.5 mm²
- Additional protection against voltage and accidental contact by a sliding insulation cover which closes automatically during mating.

Technical characteristics

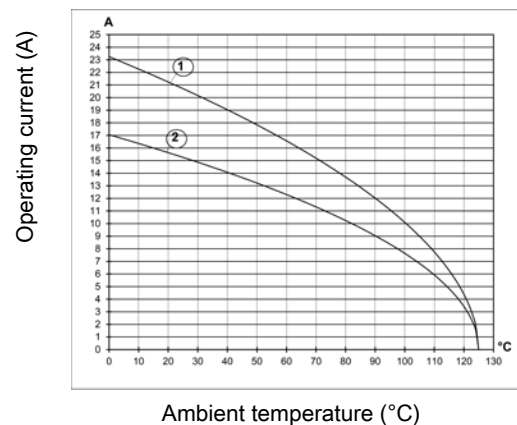
Number of contacts	5
Electrical data acc. to IEC 61984	16 A 230/400 V 4 kV 3
Rated current	16 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤1 mΩ
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2


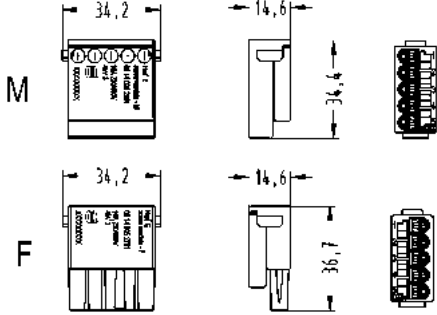


- ① Conductor cross-section 2.5 mm²
 ② Conductor cross-section 1.5 mm²

Specifications and approvals

EN 60664-1
 IEC 61984



Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Han E® module, Screw termination, Contact surface: Silver plated 	0,5 ... 2,5	09 14 005 2601	09 14 005 2701	 Stripping length 7.5 mm Tightening torque 0.5 Nm

Features

- Suitable for Han E® crimp contacts
- Designed for a high working voltage up to 830 V
- Finger safe male and female contacts

Technical characteristics

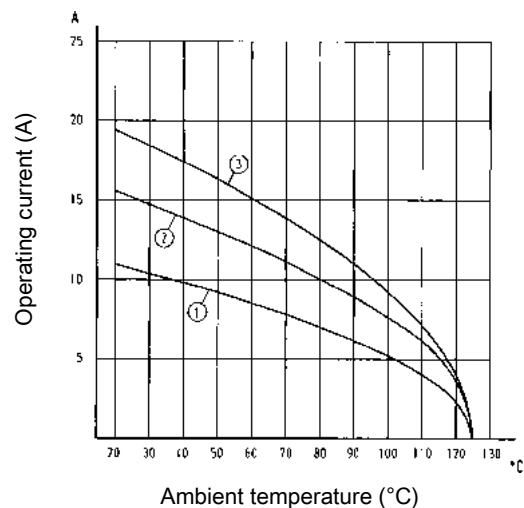
Number of contacts	6
Electrical data acc. to IEC 61984	16 A 830 V 8 kV 3
Rated current	16 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Mating cycles with other HMC components	≥ 10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²
 ② 24 B hoods/housings with 6 modules Conductor cross-section 2.5 mm²
 ③ 24 B hoods/housings with 6 modules Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076



Details

Crimping tools see chapter 90

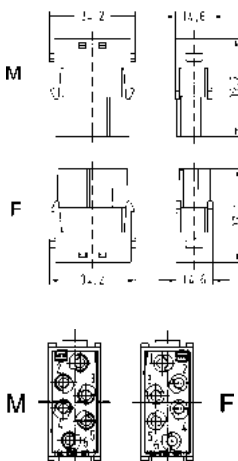
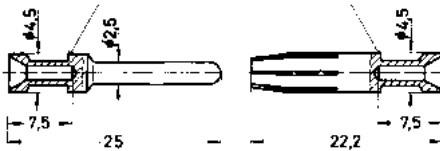
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

6

16 A 830 V 8 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han-Modular® , Han E® Protected module, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 14 006 3041	09 14 006 3141	 Contact arrangement (view from termination side)																		
Han E® , Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5 3 4	09 33 000 6127 09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102 09 33 000 6106 09 33 000 6107	09 33 000 6227 09 33 000 6220 09 33 000 6214 09 33 000 6205 09 33 000 6204 09 33 000 6202 09 33 000 6206 09 33 000 6207	 <table><tr><th>Conductor cross-section</th><th>Identification</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22 no groove</td></tr><tr><td>0.5 mm²</td><td>AWG 20 no groove</td></tr><tr><td>0.75 mm²</td><td>AWG 18 1 groove*</td></tr><tr><td>1 mm²</td><td>AWG 18 1 groove</td></tr><tr><td>1.5 mm²</td><td>AWG 16 2 grooves</td></tr><tr><td>2.5 mm²</td><td>AWG 14 3 grooves</td></tr><tr><td>3 mm²</td><td>AWG 12 wide groove</td></tr><tr><td>4 mm²</td><td>AWG 12 no groove</td></tr></table> * on the back crimp collar Stripping length 7.5 mm	Conductor cross-section	Identification	0.14-0.37 mm²	AWG 26-22 no groove	0.5 mm²	AWG 20 no groove	0.75 mm²	AWG 18 1 groove*	1 mm²	AWG 18 1 groove	1.5 mm²	AWG 16 2 grooves	2.5 mm²	AWG 14 3 grooves	3 mm²	AWG 12 wide groove	4 mm²	AWG 12 no groove
Conductor cross-section	Identification																					
0.14-0.37 mm²	AWG 26-22 no groove																					
0.5 mm²	AWG 20 no groove																					
0.75 mm²	AWG 18 1 groove*																					
1 mm²	AWG 18 1 groove																					
1.5 mm²	AWG 16 2 grooves																					
2.5 mm²	AWG 14 3 grooves																					
3 mm²	AWG 12 wide groove																					
4 mm²	AWG 12 no groove																					

Modu-
lar

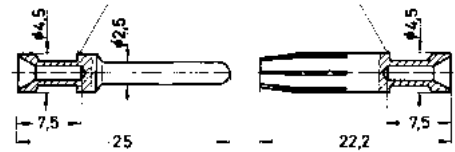
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	

Han E®,
Crimp contact,
Contact surface:
Gold plated



0,14 ... 0,37
0,5
0,75
1
1,5
2,5
4

Part number	
Male	Female
09 33 000 6117	09 33 000 6217
09 33 000 6122	09 33 000 6222
09 33 000 6115	09 33 000 6215
09 33 000 6118	09 33 000 6218
09 33 000 6116	09 33 000 6216
09 33 000 6123	09 33 000 6223
09 33 000 6119	09 33 000 6221



Conductor cross-section	Identification
0.14-0.37 mm²	AWG 26-22 no groove
0.5 mm²	AWG 20 no groove
0.75 mm²	AWG 18 1 groove*
1 mm²	AWG 18 1 groove
1.5 mm²	AWG 16 2 grooves
2.5 mm²	AWG 14 3 grooves
3 mm²	AWG 12 wide groove
4 mm²	AWG 12 no groove

* on the back crimp collar

Stripping length 7.5 mm

Features

- Han-Quick Lock® or crimp termination available
- High packing density

Technical characteristics

Number of contacts	8
Electrical data acc. to IEC 61984	16 A 400 V 6 kV 3
Rated current	16 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Mating cycles with other HMC components	≥ 10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

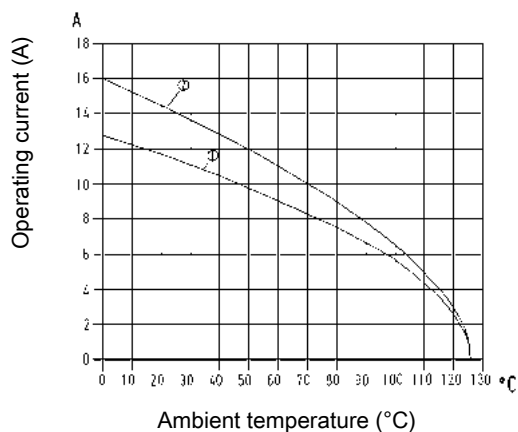
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

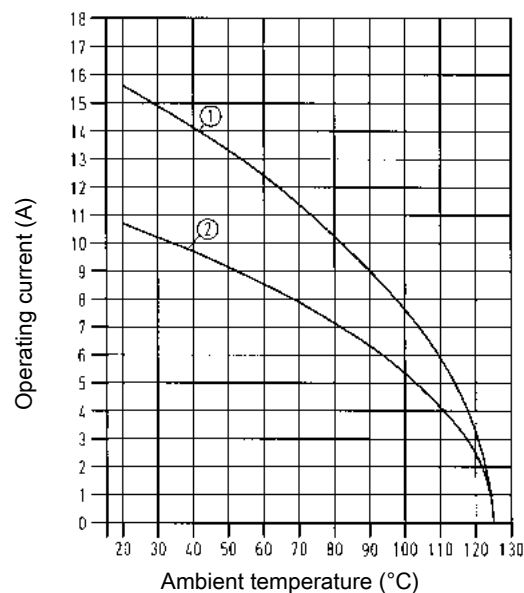
Han-Quick Lock® termination



- ① 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²
 ② 24 B hoods/housings with 6 modules Conductor cross-section 2.5 mm²

Derating

Crimp termination



- ① 24 B hoods/housings with 6 modules Conductor cross-section 2.5 mm²
 ② 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076



Details

Crimping tools see chapter 90

Remarks on the crimp technique


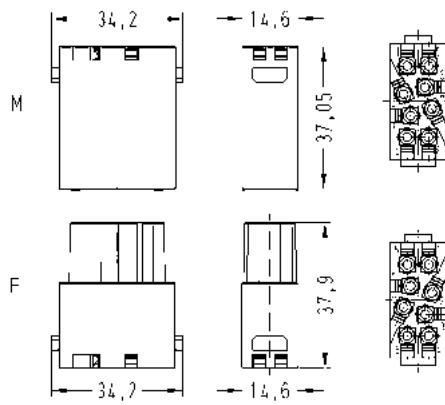
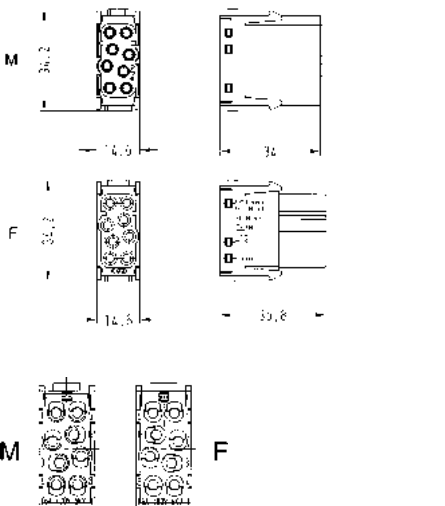
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

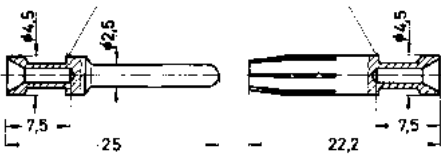
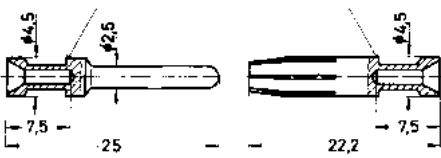
Number of contacts

8

16 A 400 V 6 kV 3

Modu-
lar

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Han® EE module, Han-Quick Lock® termination, Contact surface: Silver plated  Blue slide	0,5 ... 2,5	09 14 008 2633	09 14 008 2733	 Contact arrangement (view from termination side) Stripping length 10 mm
Han-Modular®, Han® EE module, Han-Quick Lock® termination, Contact surface: Silver plated Black slide	0,25 ... 1,5	09 14 008 2634	09 14 008 2734	
Han-Modular®, Han® EE module, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 14 008 3001	09 14 008 3101	 Contact arrangement (view from termination side) Stripping length 7.5 mm

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E®, Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37	09 33 000 6127	09 33 000 6227	
	0,5	09 33 000 6121	09 33 000 6220	
	0,75	09 33 000 6114	09 33 000 6214	
	1	09 33 000 6105	09 33 000 6205	
	1,5	09 33 000 6104	09 33 000 6204	
	2,5	09 33 000 6102	09 33 000 6202	
	3	09 33 000 6106	09 33 000 6206	
	4	09 33 000 6107	09 33 000 6207	
Han E®, Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37	09 33 000 6117	09 33 000 6217	
	0,5	09 33 000 6122	09 33 000 6222	
	0,75	09 33 000 6115	09 33 000 6215	
	1	09 33 000 6118	09 33 000 6218	
	1,5	09 33 000 6116	09 33 000 6216	
	2,5	09 33 000 6123	09 33 000 6223	
	4	09 33 000 6119	09 33 000 6221	

Conductor cross-section	Identification
0.14-0.37 mm²	AWG 26-22 no groove
0.5 mm²	AWG 20 no groove
0.75 mm²	AWG 18 1 groove*
1 mm²	AWG 18 1 groove
1.5 mm²	AWG 16 2 grooves
2.5 mm²	AWG 14 3 grooves
3 mm²	AWG 12 wide groove
4 mm²	AWG 12 no groove

* on the back crimp collar

Stripping length 7.5 mm

Conductor cross-section	Identification
0.14-0.37 mm²	AWG 26-22 no groove
0.5 mm²	AWG 20 no groove
0.75 mm²	AWG 18 1 groove*
1 mm²	AWG 18 1 groove
1.5 mm²	AWG 16 2 grooves
2.5 mm²	AWG 14 3 grooves
3 mm²	AWG 12 wide groove
4 mm²	AWG 12 no groove

* on the back crimp collar

Stripping length 7.5 mm

Features

- Suitable for Han E® crimp contacts
- Higher density of crimping contacts
- Standard module for power up to 16 A
- Also suitable as a reliable signal connector

Technical characteristics

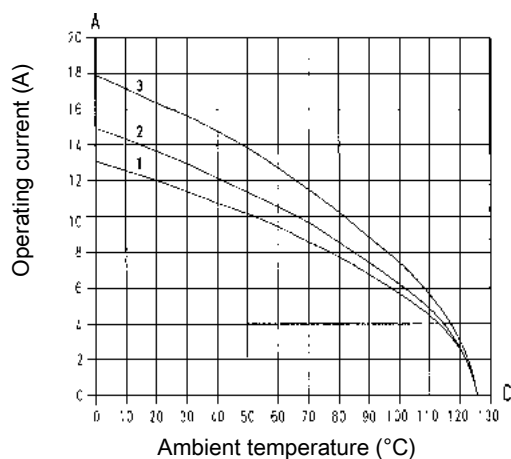
Number of contacts	20
Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Mating cycles with other HMC components	≥ 10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 3 modules Conductor cross-section 1.5 mm²
- ② 24 B hoods/housings with 3 modules Conductor cross-section 2.5 mm²
- ③ 24 B hoods/housings with 3 modules Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

Crimping tools see chapter 90

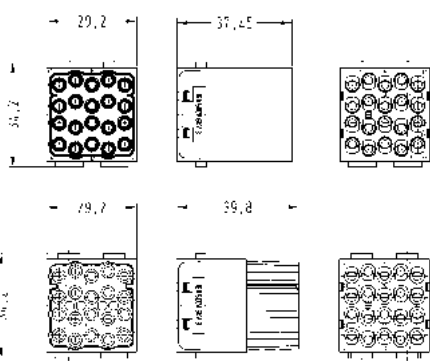
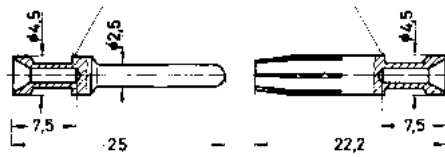
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

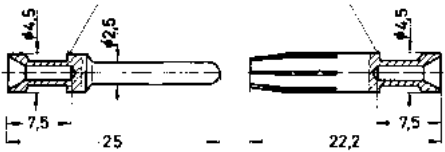
Number of contacts

20

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
Han-Modular® , Han® EEE module, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 14 020 3001	09 14 020 3101	 Contact arrangement (view from termination side)																											
Han E® , Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5 3 4	09 33 000 6127 09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102 09 33 000 6106 09 33 000 6107	09 33 000 6227 09 33 000 6220 09 33 000 6214 09 33 000 6205 09 33 000 6204 09 33 000 6202 09 33 000 6206 09 33 000 6207	 <table><tr><th colspan="2">Conductor cross-section</th><th>Identification</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22</td><td>no groove</td></tr><tr><td>0.5 mm²</td><td>AWG 20</td><td>no groove</td></tr><tr><td>0.75 mm²</td><td>AWG 18</td><td>1 groove*</td></tr><tr><td>1 mm²</td><td>AWG 18</td><td>1 groove</td></tr><tr><td>1.5 mm²</td><td>AWG 16</td><td>2 grooves</td></tr><tr><td>2.5 mm²</td><td>AWG 14</td><td>3 grooves</td></tr><tr><td>3 mm²</td><td>AWG 12</td><td>wide groove</td></tr><tr><td>4 mm²</td><td>AWG 12</td><td>no groove</td></tr></table> * on the back crimp collar Stripping length 7.5 mm	Conductor cross-section		Identification	0.14-0.37 mm²	AWG 26-22	no groove	0.5 mm²	AWG 20	no groove	0.75 mm²	AWG 18	1 groove*	1 mm²	AWG 18	1 groove	1.5 mm²	AWG 16	2 grooves	2.5 mm²	AWG 14	3 grooves	3 mm²	AWG 12	wide groove	4 mm²	AWG 12	no groove
Conductor cross-section		Identification																													
0.14-0.37 mm²	AWG 26-22	no groove																													
0.5 mm²	AWG 20	no groove																													
0.75 mm²	AWG 18	1 groove*																													
1 mm²	AWG 18	1 groove																													
1.5 mm²	AWG 16	2 grooves																													
2.5 mm²	AWG 14	3 grooves																													
3 mm²	AWG 12	wide groove																													
4 mm²	AWG 12	no groove																													

Modu-
lar

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																	
		Male	Female																		
Han E® , Crimp contact, Contact surface: Gold plated	0,14 ... 0,37	09 33 000 6117	09 33 000 6217																		
	0,5	09 33 000 6122	09 33 000 6222																		
	0,75	09 33 000 6115	09 33 000 6215																		
	1	09 33 000 6118	09 33 000 6218																		
	1,5	09 33 000 6116	09 33 000 6216																		
	2,5	09 33 000 6123	09 33 000 6223																		
	4	09 33 000 6119	09 33 000 6221																		
<table><tr><th>Conductor cross-section</th><th>Identification</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22 no groove</td></tr><tr><td>0.5 mm²</td><td>AWG 20 no groove</td></tr><tr><td>0.75 mm²</td><td>AWG 18 1 groove*</td></tr><tr><td>1 mm²</td><td>AWG 18 1 groove</td></tr><tr><td>1.5 mm²</td><td>AWG 16 2 grooves</td></tr><tr><td>2.5 mm²</td><td>AWG 14 3 grooves</td></tr><tr><td>3 mm²</td><td>AWG 12 wide groove</td></tr><tr><td>4 mm²</td><td>AWG 12 no groove</td></tr></table>				Conductor cross-section	Identification	0.14-0.37 mm²	AWG 26-22 no groove	0.5 mm²	AWG 20 no groove	0.75 mm²	AWG 18 1 groove*	1 mm²	AWG 18 1 groove	1.5 mm²	AWG 16 2 grooves	2.5 mm²	AWG 14 3 grooves	3 mm²	AWG 12 wide groove	4 mm²	AWG 12 no groove
Conductor cross-section	Identification																				
0.14-0.37 mm²	AWG 26-22 no groove																				
0.5 mm²	AWG 20 no groove																				
0.75 mm²	AWG 18 1 groove*																				
1 mm²	AWG 18 1 groove																				
1.5 mm²	AWG 16 2 grooves																				
2.5 mm²	AWG 14 3 grooves																				
3 mm²	AWG 12 wide groove																				
4 mm²	AWG 12 no groove																				
* on the back crimp collar																					
Stripping length 7.5 mm																					

Modu-
lar

Features

- Reliable cage clamp termination
- No special tools required

Technical characteristics

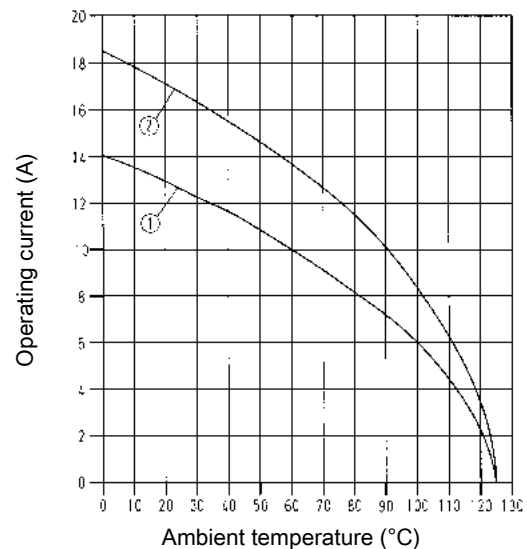
Number of contacts	5
Electrical data acc. to IEC 61984	16 A 400 V 6 kV 3
Rated current	16 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²
 ② 24 B hoods/housings with 6 modules Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076



Number of contacts

5
16 A 400 V 6 kV 3

Modu-
lar

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Han® ES module, Cage-clamp termination, Contact surface: Silver plated	0,14 ... 2,5	09 14 005 2616	09 14 005 2716	
Han-Modular®, Han® ES module, Cage-clamp termination, Contact surface: Gold plated	0,14 ... 2,5	09 14 005 2617	09 14 005 2717	Contact arrangement (view from termination side)

Features

- Available in two versions: for Han® C or Han E® crimp contacts
- 2 contacts up to 5000 V
- Insulator out of a voltage resistant teflon material
- Combination with all other modules (pneumatic, signal etc.)

Technical characteristics

Number of contacts	2
Electrical data acc. to IEC 61984	40 A 2.900/5.000 V 15 kV 3, 16 A 2.900/5.000 V 15 kV 3
Rated current	40 A, 16 A
Rated voltage conductor-earth	2900 V
Rated voltage conductor-conductor	5000 V
Rated impulse voltage	15 kV
Pollution degree	3
Rated voltage acc. to UL	5000 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate / Teflon (PTFE)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

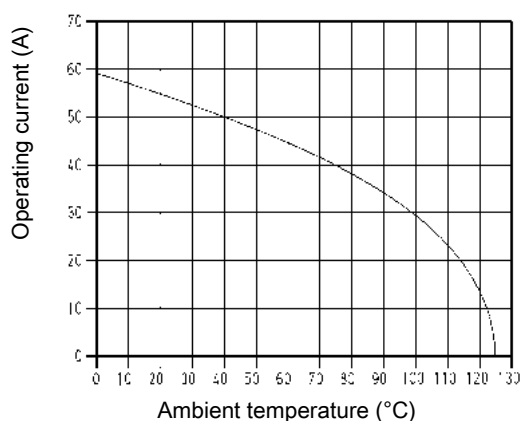
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

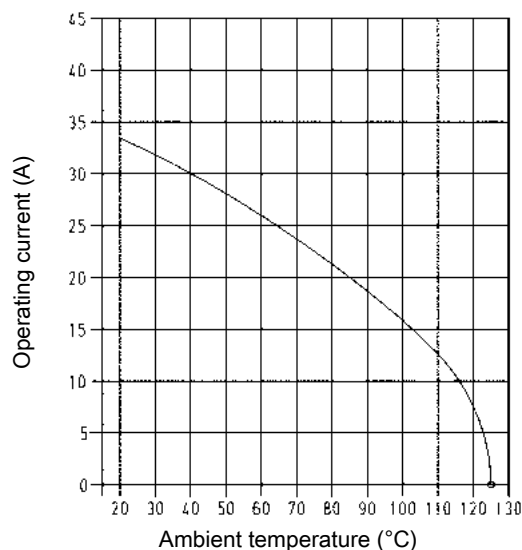
Han® C crimp contacts



① 24 B hoods/housings with 3 modules Conductor cross-section 6 mm²

Derating

Han E® crimp contacts



① Housing Han® 16 B with 1 Han® HV module Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
EN 50124-1
IEC 60352-4
UL 1977 ECBT2.E235076



Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

2

40 A 2.900/5.000 V 15 kV 3

Modu-
lar

Han-Modular®,
Han® HV module,
for Han® C crimp contacts,
Crimp termination,
Pack contents:
1 module,
2 locking sleeves,
2 heat shrink tubes



Please order crimp contacts
separately.

Conductor
cross-section
(mm²)

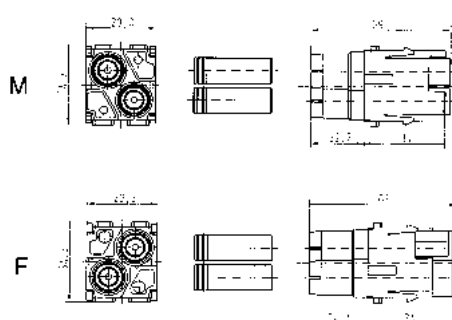
1,5 ... 10

Part number
Male Female



09 14 002 3023

09 14 002 3123

Drawing
(dimensions in mm)



Assembly instructions



ATTENTION! Stripping length 13 mm
Crimp with tool 09 99 000 0888, 09 99 000
0110 or 09 99 000 0377
Snap crimped cable in the insert.
Shrink the heat shrink tube over the rear of
contact.

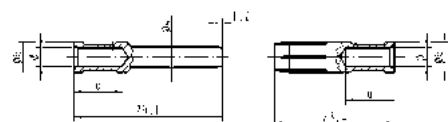
Han® C ,
Crimp contact,
Contact surface:
Silver plated



1,5
2,5
4
6
10

09 32 000 6104
09 32 000 6105
09 32 000 6107
09 32 000 6108
09 32 000 6109

09 32 000 6204
09 32 000 6205
09 32 000 6207
09 32 000 6208
09 32 000 6209



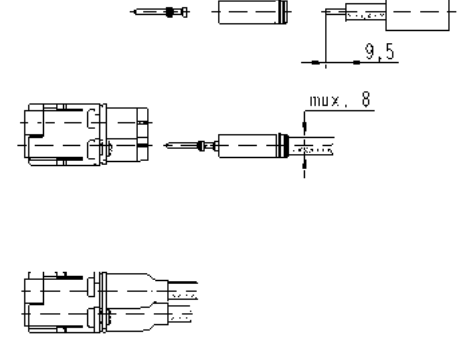
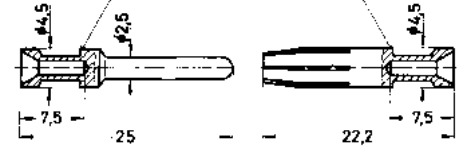


Conductor cross-section	Ø	Stripping length
1.5 mm² AWG 16	1.75 mm	9.5 mm
2.5 mm² AWG 14	2.25 mm	9.5 mm
4 mm² AWG 12	2.85 mm	9.5 mm
6 mm² AWG 10	3.5 mm	9.5 mm
10 mm² AWG 8	4.3 mm	12 mm

Number of contacts

2

16 A 2.900/5.000 V 15 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
Han-Modular® , Han® HV module, for Han E® crimp contacts, Crimp termination, Pack contents: 1 module, 2 locking sleeves, 2 heat shrink tubes 	0,5 ... 4	09 14 002 3021	09 14 002 3121	M  F  Assembly instructions  ATTENTION! Stripping length 9.5 mm Crimp with crimping tool 09 99 000 0888 Snap crimped cable in the insert. Shrink the heat shrink tube over the rear of contact.																											
Han E® , Crimp contact, Contact surface: Silver plated 	0,5 0,75 1 1,5 2,5 3 4	09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102 09 33 000 6106 09 33 000 6107	09 33 000 6220 09 33 000 6214 09 33 000 6205 09 33 000 6204 09 33 000 6202 09 33 000 6206 09 33 000 6207	 <table><tr><th colspan="2">Conductor cross-section</th><th>Identification</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22</td><td>no groove</td></tr><tr><td>0.5 mm²</td><td>AWG 20</td><td>no groove</td></tr><tr><td>0.75 mm²</td><td>AWG 18</td><td>1 groove*</td></tr><tr><td>1 mm²</td><td>AWG 18</td><td>1 groove</td></tr><tr><td>1.5 mm²</td><td>AWG 16</td><td>2 grooves</td></tr><tr><td>2.5 mm²</td><td>AWG 14</td><td>3 grooves</td></tr><tr><td>3 mm²</td><td>AWG 12</td><td>wide groove</td></tr><tr><td>4 mm²</td><td>AWG 12</td><td>no groove</td></tr></table> * on the back crimp collar Stripping length 7.5 mm	Conductor cross-section		Identification	0.14-0.37 mm²	AWG 26-22	no groove	0.5 mm²	AWG 20	no groove	0.75 mm²	AWG 18	1 groove*	1 mm²	AWG 18	1 groove	1.5 mm²	AWG 16	2 grooves	2.5 mm²	AWG 14	3 grooves	3 mm²	AWG 12	wide groove	4 mm²	AWG 12	no groove
Conductor cross-section		Identification																													
0.14-0.37 mm²	AWG 26-22	no groove																													
0.5 mm²	AWG 20	no groove																													
0.75 mm²	AWG 18	1 groove*																													
1 mm²	AWG 18	1 groove																													
1.5 mm²	AWG 16	2 grooves																													
2.5 mm²	AWG 14	3 grooves																													
3 mm²	AWG 12	wide groove																													
4 mm²	AWG 12	no groove																													

Modu-
lar

Features

- Suitable for Han E® crimp contacts
- 2 contacts up to 2500 V
- Insulator out of a voltage resistant teflon material
- Combination with all other modules (pneumatic, signal etc.)

Technical characteristics

Number of contacts	2
Electrical data acc. to IEC 61984	16 A 2.500 V 15 kV 3
Rated current	16 A
Rated voltage	2500 V
Rated impulse voltage	15 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate / Teflon (PTFE)
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

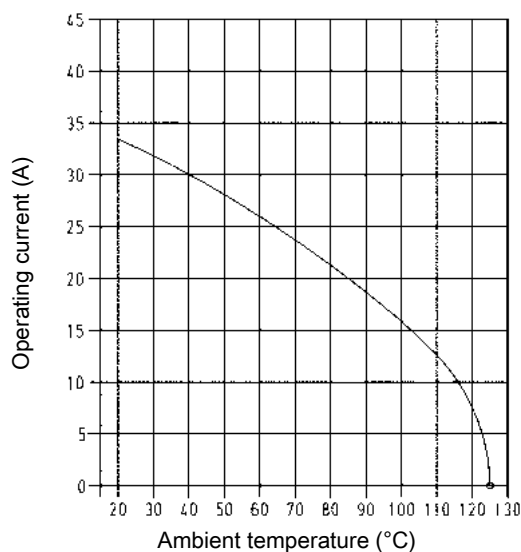
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

Han E® crimp contacts



① Housing Han® 16 B with 1 Han® HV module Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
EN 50124-1



Details

Crimping tools see chapter 90

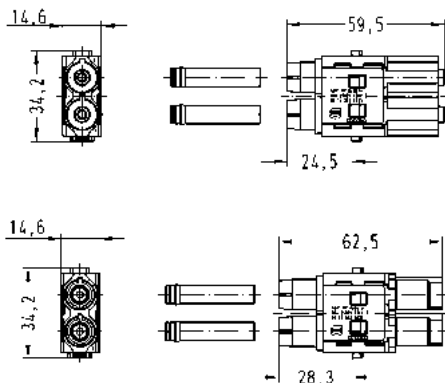
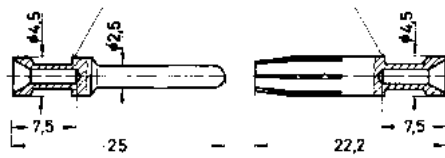
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

2

16 A 2.500 V 15 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
Han-Modular® , Han® HV module, Single module, Crimp termination, Pack contents: 1 module, 2 locking sleeves, 2 heat shrink tubes  Please order crimp contacts separately.	0,5 ... 4	09 14 002 3025	09 14 002 3125																												
Han E® , Crimp contact, Contact surface: Silver plated 	0,5 0,75 1 1,5 2,5 3 4	09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102 09 33 000 6106 09 33 000 6107	09 33 000 6220 09 33 000 6214 09 33 000 6205 09 33 000 6204 09 33 000 6202 09 33 000 6206 09 33 000 6207	 <table><tr><th colspan="2">Conductor cross-section</th><th>Identification</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22</td><td>no groove</td></tr><tr><td>0.5 mm²</td><td>AWG 20</td><td>no groove</td></tr><tr><td>0.75 mm²</td><td>AWG 18</td><td>1 groove*</td></tr><tr><td>1 mm²</td><td>AWG 18</td><td>1 groove</td></tr><tr><td>1.5 mm²</td><td>AWG 16</td><td>2 grooves</td></tr><tr><td>2.5 mm²</td><td>AWG 14</td><td>3 grooves</td></tr><tr><td>3 mm²</td><td>AWG 12</td><td>wide groove</td></tr><tr><td>4 mm²</td><td>AWG 12</td><td>no groove</td></tr></table> * on the back crimp collar Stripping length 7.5 mm	Conductor cross-section		Identification	0.14-0.37 mm²	AWG 26-22	no groove	0.5 mm²	AWG 20	no groove	0.75 mm²	AWG 18	1 groove*	1 mm²	AWG 18	1 groove	1.5 mm²	AWG 16	2 grooves	2.5 mm²	AWG 14	3 grooves	3 mm²	AWG 12	wide groove	4 mm²	AWG 12	no groove
Conductor cross-section		Identification																													
0.14-0.37 mm²	AWG 26-22	no groove																													
0.5 mm²	AWG 20	no groove																													
0.75 mm²	AWG 18	1 groove*																													
1 mm²	AWG 18	1 groove																													
1.5 mm²	AWG 16	2 grooves																													
2.5 mm²	AWG 14	3 grooves																													
3 mm²	AWG 12	wide groove																													
4 mm²	AWG 12	no groove																													

Modu-
lar

Features

- Han-Quick Lock[®] or crimp termination available
- Standard module for signal up to 10 A

Technical characteristics

Number of contacts	12
Electrical data acc. to IEC 61984	10 A 250 V 4 kV 3
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Mating cycles with other HMC components	≥10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

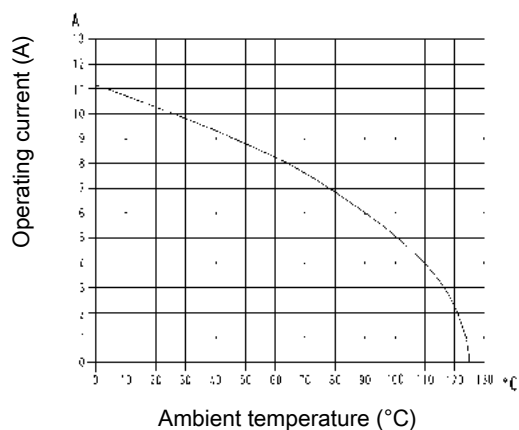
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

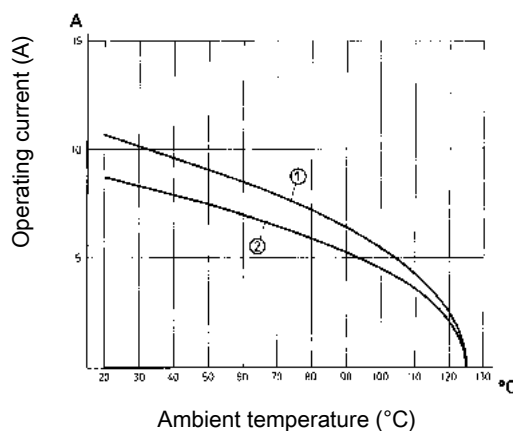
Han-Quick Lock[®] termination



① 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²

Derating

Crimp termination



① 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²

② 24 B hoods/housings with 6 modules Conductor cross-section 1 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

Crimping tools see chapter 90

Remarks on the crimp technique


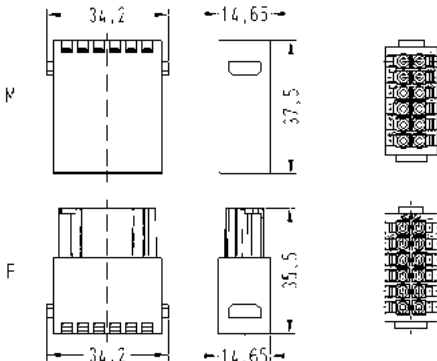

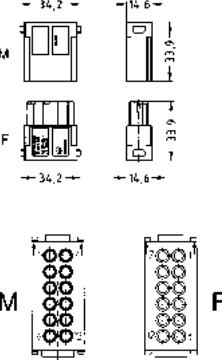
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

12

10 A 250 V 4 kV 3



Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Han DD® module, Han-Quick Lock® termination, Contact surface: Silver plated  Black slide	0,25 ... 1,5	09 14 012 2632	09 14 012 2732	 Contact arrangement (view from termination side) Stripping length 10 mm
Han-Modular®, Han DD® module, Han-Quick Lock® termination, Contact surface: Gold plated Black slide	0,25 ... 1,5	09 14 012 2634	09 14 012 2734	
Han-Modular®, Han DD® module, Crimp termination  Please order crimp contacts separately.	0,14 ... 2,5	09 14 012 3002	09 14 012 3102	 Contact arrangement (view from termination side)

Modular

Modu-
lar

Technical characteristics

Number of contacts	42
Electrical data acc. to IEC 61984	10 A 150 V 2,5 kV 3
Rated current	10 A
Rated voltage	150 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Rated voltage acc. to UL	250 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	LCP
Material (contacts)	Copper alloy

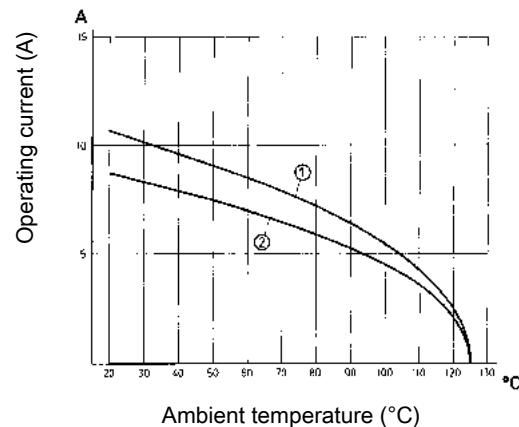
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

Crimp termination



① 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²

② 24 B hoods/housings with 6 modules Conductor cross-section 1 mm²

Specifications and approvals

UL 1977 ECBT2.E235076
EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

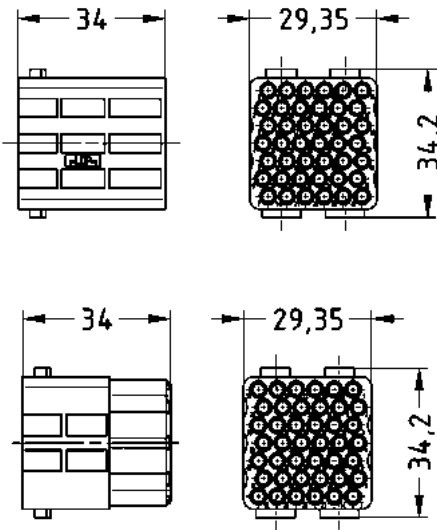

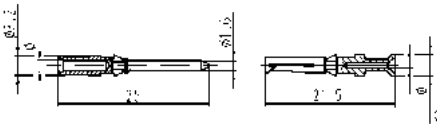

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

42

10 A 150 V 2,5 kV 3

Modu-
lar

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han-Modular®, Han DD® Quad Module, Crimp termination  Please order crimp contacts separately.	0,14 ... 2,5	09 14 042 3001	09 14 042 3101																						
Han D®, Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6104 09 15 000 6107 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6207 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm	0.5 mm² AWG 20	1.1 mm	8 mm	0.75 mm² AWG 18	1.3 mm	8 mm	1 mm² AWG 18	1.45 mm	8 mm	1.5 mm² AWG 16	1.75 mm	8 mm	2.5 mm² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm																							
0.5 mm² AWG 20	1.1 mm	8 mm																							
0.75 mm² AWG 18	1.3 mm	8 mm																							
1 mm² AWG 18	1.45 mm	8 mm																							
1.5 mm² AWG 16	1.75 mm	8 mm																							
2.5 mm² AWG 14	2.25 mm	6 mm																							
Han D®, Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm	0.5 mm² AWG 20	1.1 mm	8 mm	0.75 mm² AWG 18	1.3 mm	8 mm	1 mm² AWG 18	1.45 mm	8 mm	1.5 mm² AWG 16	1.75 mm	8 mm	2.5 mm² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm																							
0.5 mm² AWG 20	1.1 mm	8 mm																							
0.75 mm² AWG 18	1.3 mm	8 mm																							
1 mm² AWG 18	1.45 mm	8 mm																							
1.5 mm² AWG 16	1.75 mm	8 mm																							
2.5 mm² AWG 14	2.25 mm	6 mm																							
FO contact, for 1 mm plastic fibre 		20 10 001 3211	20 10 001 3221	 20 10 001 3211 + 20 10 001 3221																					

Features

- Suitable for Han D® crimp contacts
- High packing density

Technical characteristics

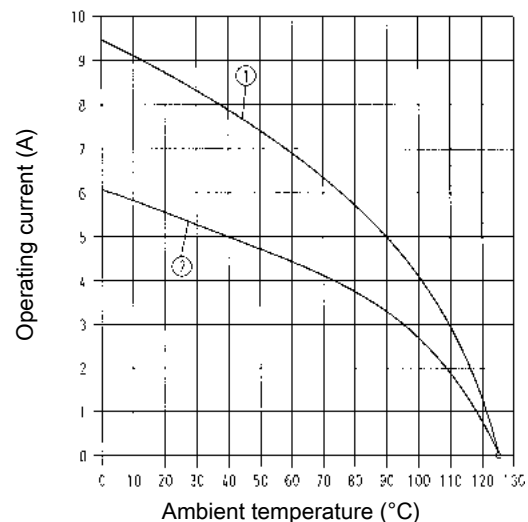
Number of contacts	17
Electrical data acc. to IEC 61984	10 A 160 V 2,5 kV 3
Rated current	10 A
Rated voltage	160 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Rated voltage acc. to UL	250 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Mating cycles with other HMC components	≥ 10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 6 modules Conductor cross-section 1.5 mm²
 ② 24 B hoods/housings with 6 modules Conductor cross-section 1 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076



Details

Crimping tools see chapter 90

Remarks on the crimp technique

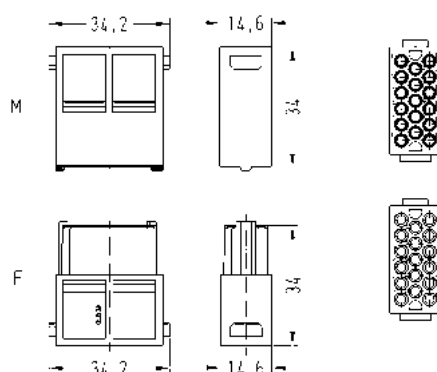



The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

17

10 A 160 V 2,5 kV 3

Modu-
lar

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han-Modular®, Han® DDD module, Crimp termination  Please order crimp contacts separately.	0,14 ... 2,5	09 14 017 3001	09 14 017 3101	 Contact arrangement (view from termination side)																					
Han D®, Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm	0.5 mm² AWG 20	1.1 mm	8 mm	0.75 mm² AWG 18	1.3 mm	8 mm	1 mm² AWG 18	1.45 mm	8 mm	1.5 mm² AWG 16	1.75 mm	8 mm	2.5 mm² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm																							
0.5 mm² AWG 20	1.1 mm	8 mm																							
0.75 mm² AWG 18	1.3 mm	8 mm																							
1 mm² AWG 18	1.45 mm	8 mm																							
1.5 mm² AWG 16	1.75 mm	8 mm																							
2.5 mm² AWG 14	2.25 mm	6 mm																							
Han D®, Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm	0.5 mm² AWG 20	1.1 mm	8 mm	0.75 mm² AWG 18	1.3 mm	8 mm	1 mm² AWG 18	1.45 mm	8 mm	1.5 mm² AWG 16	1.75 mm	8 mm	2.5 mm² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm																							
0.5 mm² AWG 20	1.1 mm	8 mm																							
0.75 mm² AWG 18	1.3 mm	8 mm																							
1 mm² AWG 18	1.45 mm	8 mm																							
1.5 mm² AWG 16	1.75 mm	8 mm																							
2.5 mm² AWG 14	2.25 mm	6 mm																							
FO contact, for 1 mm plastic fibre 		20 10 001 3211	20 10 001 3221	 20 10 001 3211 + 20 10 001 3221																					

Features

- Suitable for D-Sub crimp contacts
- High packing density

Technical characteristics

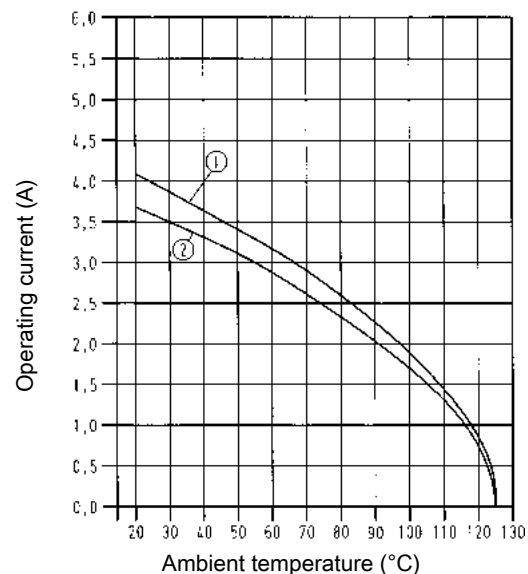
Number of contacts	25
Electrical data acc. to IEC 61984	4 A 50 V 0,8 kV 3
Rated current	4 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage acc. to UL	30 V
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① 24 B hoods/housings with 6 modules; turned contacts Conductor cross-section 0.5 mm²
- ② 24 B hoods/housings with 6 modules; stamped contacts Conductor cross-section 0.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details



Guide pins and bushes are recommended (see chapter 80).

Number of contacts

25

4 A 50 V 0,8 kV 3

Modu-
lar

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)												
		Male	Female													
Han-Modular® , Han® High Density module, Crimp termination  Please order crimp contacts separately.	0,09 ... 0,52	09 14 025 3001	09 14 025 3101	 Contact arrangement (view from termination side) 												
D-Sub , Crimp contact, Turned , Pack contents: Single contact 	0,09 ... 0,25 0,13 ... 0,33 0,25 ... 0,52	09 67 000 7576 09 67 000 5576 09 67 000 8576	09 67 000 7476 09 67 000 5476 09 67 000 8476	<table><tr><th>Wire gauge</th><th>max. insulation diameter</th><th>Stripping length</th></tr><tr><td>0.09-0.25 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.13-0.33 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.25-0.52 mm²</td><td>1.7</td><td>4 mm</td></tr></table>	Wire gauge	max. insulation diameter	Stripping length	0.09-0.25 mm²	1.7	4 mm	0.13-0.33 mm²	1.7	4 mm	0.25-0.52 mm²	1.7	4 mm
Wire gauge	max. insulation diameter	Stripping length														
0.09-0.25 mm²	1.7	4 mm														
0.13-0.33 mm²	1.7	4 mm														
0.25-0.52 mm²	1.7	4 mm														

Features

- 9-pin D-Sub connector of the Han-Modular® system
- Suitable for the transmission of sensitive signals
- Compatible to crimp, solder or IDC termination

Technical characteristics

Number of contacts	9
Electrical data acc. to IEC 61984	5 A 50 V 0,8 kV 3
Rated current	5 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage acc. to UL	30 V
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate, Zinc die-cast
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details


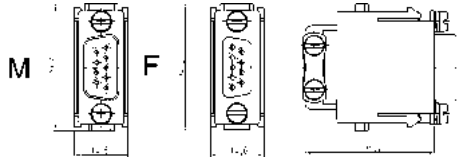
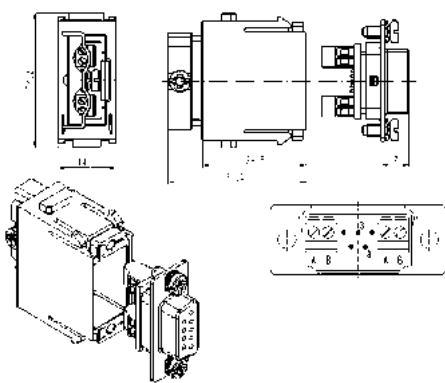

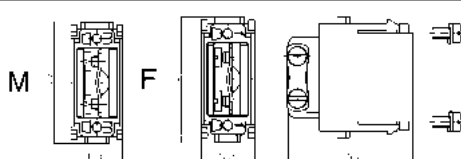
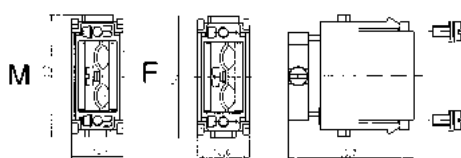
Guide pins and bushes are recommended (see chapter 80).

Number of contacts

9

5 A 50 V 0,8 kV 3

Modu-
lar

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Han® D-Sub module, Crimp termination  Please order crimp contacts separately.	0,08 ... 0,52	09 14 009 3001	09 14 009 3101	
Han-Modular®, Han® D-Sub module, Screw termination  for RS 485-based bus systems with T-functionality	0,08 ... 0,52		09 14 009 3151	 Contact arrangement (view from termination side) Signal A: Contact no. 8 Signal B: Contact no. 3
Han-Modular®, Adapter module, for 9-pin D-Sub  for one cabel Han-Modular®, Adapter module, for 9-pin D-Sub  for two cabels		09 14 000 9930	09 14 000 9931	
		09 14 000 9932	09 14 000 9933	

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)												
		Male	Female													
D-Sub , Crimp contact, Turned , Pack contents: Single contact	0,09 ... 0,25 0,13 ... 0,33 0,25 ... 0,52	09 67 000 7576 09 67 000 5576 09 67 000 8576	09 67 000 7476 09 67 000 5476 09 67 000 8476	<table><tr><td>Wire gauge</td><td>max. insulation diameter</td><td>Stripping length</td></tr><tr><td>0.09-0.25 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.13-0.33 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.25-0.52 mm²</td><td>1.7</td><td>4 mm</td></tr></table>	Wire gauge	max. insulation diameter	Stripping length	0.09-0.25 mm²	1.7	4 mm	0.13-0.33 mm²	1.7	4 mm	0.25-0.52 mm²	1.7	4 mm
Wire gauge	max. insulation diameter	Stripping length														
0.09-0.25 mm²	1.7	4 mm														
0.13-0.33 mm²	1.7	4 mm														
0.25-0.52 mm²	1.7	4 mm														
																



Features

- According to USB 2.0 / USB 3.0 specification
- Simple and cost effective termination by plug in patch cable
- Cable tie strain relief

Technical characteristics

Number of contacts	4, 8
Electrical data acc. to IEC 61984	1 A 50 V 0,8 kV 3
Rated current	1 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage acc. to UL	30 V
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

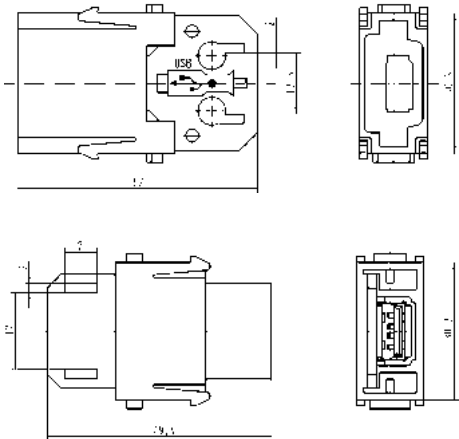
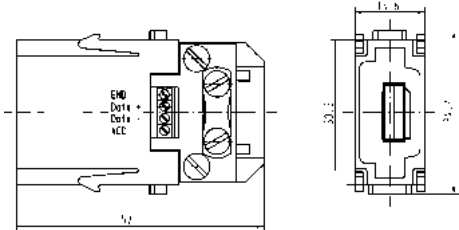
Specifications and approvals

EN 60664-1
IEC 60352-4
UL 1977 ECBT2.E235076



Modu-
lar

4

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular®, Han® USB module, for patch cable  USB 2.0	09 14 001 4601	09 14 001 4701	
Han-Modular®, Han® USB module, for patch cable  USB 3.0		09 14 001 4703	
Han-Modular®, Han® USB module, for screw termination  USB 2.0	09 14 001 4651		

Number of contacts

6
1 A 50 V 0,8 kV 3

Features

- Compatibel to IEEE 1394
- Simple and cost effective termination by plug in patch cable
- Cable tie strain relief


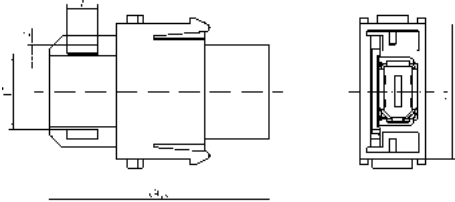
Technical characteristics

Number of contacts	6
Electrical data acc. to IEC 61984	1 A 50 V 0,8 kV 3
Rated current	1 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular®, Han® FireWire module, for patch cable 	09 14 001 4611	09 14 001 4711	 

Number of contacts

8

Features

Specifications and approvals

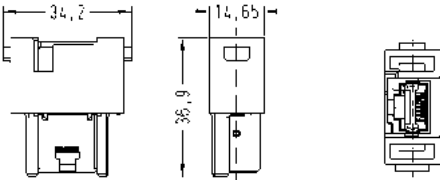
- Single module with standard shielded RJ45 plug and jack
- Cat. 6 for all data pairs (8-pin)
- Patch cables are assembled/removed without tools

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
 

Modu-
lar

Technical characteristics

Number of contacts	8, 4
Electrical data acc. to IEC 61984	1 A 50 V 0,8 kV 3
Rated current	1 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage acc. to UL	30 V
Insulation resistance	≥10 ¹⁰ Ω
Limiting temperature	-40 ... +70 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Transmission characteristics	Category, 6 _A , 5
Material (insert)	Zinc die-cast, nickel-plated, Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

Identification	Part number	Drawing (dimensions in mm)
Han-Modular®, Han® RJ45 module, Single module  Please order insert separately. Han-Modular®, Han® RJ45 module, Gender changer, for patch cable, 8-pins, Cat. 6_A 	09 14 001 4722 09 14 001 4721	

Modu-
lar

Identification		Part number		Drawing (dimensions in mm)
Data connectors, Han® RJ45 cable jack, preLink® termination, 8-pins, Cat. 6_A 	AWG 23 ... AWG 22	09 14 008 4720		
Data connectors, Han® RJ45 cable jack, IDC termination, 4-pin, Cat. 5 	AWG 24 ... AWG 22	09 14 545 1120		
Data connectors, Han® RJ45 cable jack, IDC termination, 8-pins, Cat. 6_A 	AWG 24 ... AWG 22 AWG 28 ... AWG 24	09 14 545 1562 09 14 545 1561		

Number of contacts

8

1 A 50 V 0,8 kV 3

Features

Specifications and approvals

- Single module with standard shielded RJ45 plug and jack
- The RJ45 inserts are protected by a reliable plastic insulator

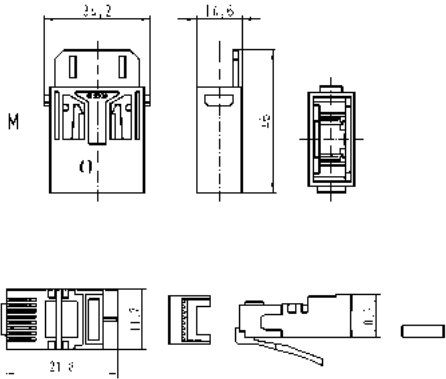
Technical characteristics

Number of contacts	8
Electrical data acc. to IEC 61984	1 A 50 V 0,8 kV 3
Rated current	1 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage acc. to UL	30 V
Insulation resistance	≥10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C, -40 ... +70 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Transmission characteristics	Category, 5
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076

Modu-
lar

Identification	Part number	Drawing (dimensions in mm)
Han-Modular® , Han® RJ45 module  for data connectors 	09 14 001 4622 09 12 000 9958	

Features

- Single module with standard shielded RJ45 plug and jack
- The RJ45 inserts are protected by a reliable plastic insulator
- 360° shielded contact
- Field assembly without tools possible by means of *HARAX*® rapid termination in IDC technology
- Gigalink: Field assembly by means of piercing contacts (Assembly tool 09 45 800 0520)
- Suitable for termination of massive and flexible wires
- Gigalink: Suitable for termination of flexible wires

Technical characteristics

Number of contacts	4, 8
Limiting temperature	-40 ... +125 °C, -40 ... +70 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Transmission characteristics	Category, 5, 6 _A , 6
Data rate	10 Mbit/s, 100 Mbit/s, 1000 Mbit/s, 10000 Mbit/s
Material (insert)	Polycarbonate, Polyamide
Colour (insert)	RAL 7032 (pebble grey)

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
IEC 60603-7



Identification

Part number

Drawing (dimensions in mm)

Han-Modular®,
Han® RJ45 module,
Single module,
for adapter



Please order adapter separately.

Data connectors,
RJ Industrial RJ45 connector set,
Cat. 5,
100 Mbit/s,
4-pin



Data connectors,
RJ Industrial RJ45 Gigalink connector set,
Cat. 6_A,
10000 Mbit/s,
8-pins



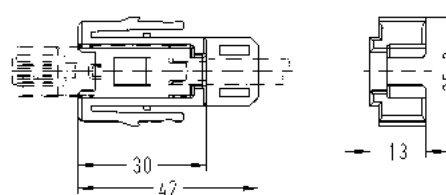
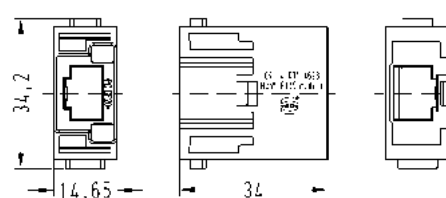
AWG 24 ... AWG 22
AWG 26

AWG 28 ... AWG 24

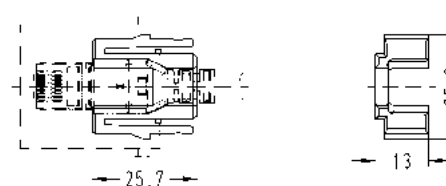
09 14 001 4623

09 45 400 1100
09 45 400 1109

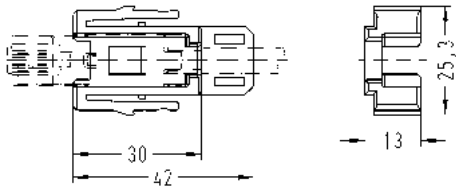
09 45 400 1520



Wire outer diameter ≤ 1.6 mm



Wire outer diameter ≤ 1.05 mm

Identification		Part number	Drawing (dimensions in mm)
Data connectors, RJ Industrial RJ45 connector set, Cat. 6, 10000 Mbit/s, 8-pins 	AWG 27 ... AWG 22	09 45 400 1560	 Wire outer diameter ≤ 1.5 mm

Features

- Single module with standard shielded RJ45 plug and jack
- The RJ45 inserts are protected by a reliable plastic insulator
- Patch cables are assembled/removed without tools

Technical characteristics

Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Identification

Han-Modular®,
Han® RJ45 module,
Single module,
for adapter



Please order adapter separately.

Han-Modular®,
Han® RJ45 module,
Adapter,
for patch cable

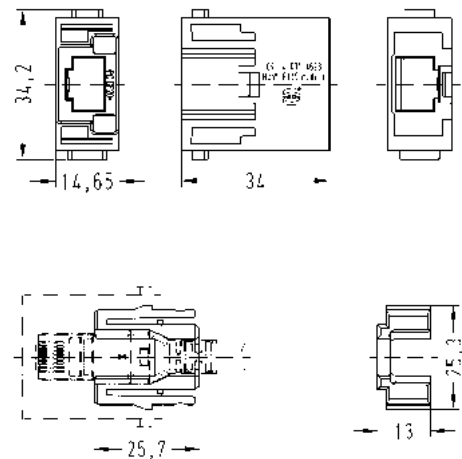


Part number

09 14 001 4623

09 14 000 9966

Drawing (dimensions in mm)





Features

- Locking lever protection for RJ45 connector latch
- Very short plug design in combination with robust bend protection
- Fully EMC screened (aluminium-clad foil and braid)


Technical characteristics

Core structure	4x 2 Twisted Pair
Connector 1	HARTING RJ Industrial®
Connector 2	HARTING RJ Industrial®
Limiting temperature	-30 ... +75 °C, -5 ... +50 °C moved
Degree of protection acc. to IEC 60529	IP20
Transmission characteristics	Category, 5e
Data rate	10 Mbit/s, 100 Mbit/s, 1000 Mbit/s
Material (cable)	PUR (polyurethane)
Colour (cable)	Yellow

Specifications and approvals

IEC 11801
IEC 24702
IEC 61935-2
IEC 60754-1

Modular

Identification	Cable length	Part number	Drawing (dimensions in mm)
RJ45 , Copper cable (round), Halogen-free, oil resistant, Pre-assembled on both sides	0.2 m	09 47 474 7001	
	0.3 m	09 47 474 7002	
	0.4 m	09 47 474 7003	
	0.5 m	09 47 474 7004	
	0.6 m	09 47 474 7005	
	0.7 m	09 47 474 7006	
	0.8 m	09 47 474 7007	
	0.9 m	09 47 474 7008	
	1 m	09 47 474 7009	
	1.5 m	09 47 474 7010	
	2 m	09 47 474 7011	
	2.5 m	09 47 474 7012	
	3 m	09 47 474 7013	
	3.5 m	09 47 474 7024	
	4 m	09 47 474 7014	
	5 m	09 47 474 7015	
	6 m	09 47 474 7016	
	7 m	09 47 474 7017	
	7.5 m	09 47 474 7018	
	8 m	09 47 474 7019	
	9 m	09 47 474 7020	
	10 m	09 47 474 7021	
	12 m	09 47 474 7035	
	15 m	09 47 474 7022	
	20 m	09 47 474 7023	
	25 m	09 47 474 7025	
	30 m	09 47 474 7027	
	35 m	09 47 474 7026	
	40 m	09 47 474 7028	
	50 m	09 47 474 7029	



Features

- Locking lever protection for RJ45 connector latch
- Very short plug design in combination with robust bend protection
- Fully EMC screened (aluminium-clad foil and braid)

Technical characteristics

Core structure	4x 2 Twisted Pair
Connector 1	HARTING RJ Industrial®
Connector 2	HARTING RJ Industrial®
Limiting temperature	-30 ... +75 °C, +5 ... +50 °C moved
Degree of protection acc. to IEC 60529	IP20
Transmission characteristics	Category, 6
Data rate	10 Mbit/s, 100 Mbit/s, 1000 Mbit/s, 10 Gbit/s
Material (cable)	PUR (polyurethane)
Colour (cable)	Yellow

Specifications and approvals

IEC 11801
IEC 60754-1
IEC 61156-6
IEC 24702

Identification	Cable length	Part number	Drawing (dimensions in mm)
RJ45 , Copper cable (round), Wiring 1:1, Halogen-free, oil resistant, Pre-assembled on both sides	0.2 m	09 47 474 7101	
	0.3 m	09 47 474 7102	
	0.4 m	09 47 474 7103	
	0.5 m	09 47 474 7104	
	0.6 m	09 47 474 7105	
	0.7 m	09 47 474 7106	
	0.8 m	09 47 474 7107	
	0.9 m	09 47 474 7108	
	1 m	09 47 474 7109	
	1.5 m	09 47 474 7110	
	2 m	09 47 474 7111	
	2.5 m	09 47 474 7112	
	3 m	09 47 474 7113	
	4 m	09 47 474 7114	
	5 m	09 47 474 7115	
	6 m	09 47 474 7116	
	7 m	09 47 474 7117	
	7.5 m	09 47 474 7118	
	8 m	09 47 474 7119	
	9 m	09 47 474 7120	
	10 m	09 47 474 7121	
	15 m	09 47 474 7122	
	16 m	09 47 474 7124	
	20 m	09 47 474 7123	
	25 m	09 47 474 7126	
	30 m	09 47 474 7125	
	100 m	09 47 474 7199	

Features

- Shielding bus separate from housing potential
- Suitable for the transmission of sensitive signals (e.g. bus signals)
- Usable for Gigabit Ethernet cat. 6_A

Technical characteristics

Number of contacts	8
Additional contacts	+ shielding
Electrical data acc. to IEC 61984	5 A 50 V 0,8 kV 3
Rated current	5 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Transmission characteristics	Category, 6 _A
Material (insert)	Zinc die-cast, nickel-plated, Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076

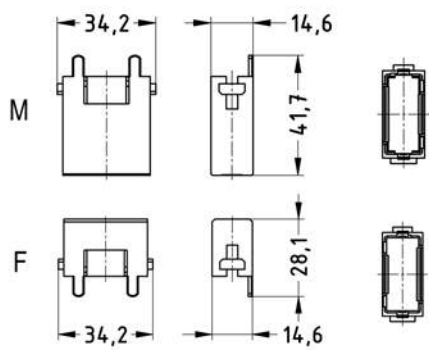




Number of contacts

8

5 A 50 V 0,8 kV 3
+ shielding

Modu-
lar

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)												
		Male	Female													
Han-Modular® , Adapter module 		09 14 001 3011	09 14 001 3111													
Han® Gigabit insert, Crimp termination  Please order crimp contacts separately. Please order adapter module separately.	0,09 ... 0,52	09 14 008 3011	09 14 008 3111	 Cable outer diameter 5 ... 12												
D-Sub , Crimp contact, Turned , Pack contents: Single contact 	0,09 ... 0,25 0,13 ... 0,33 0,25 ... 0,52	09 67 000 7576 09 67 000 5576 09 67 000 8576	09 67 000 7476 09 67 000 5476 09 67 000 8476	<table><tr><th>Wire gauge</th><th>max. insulation diameter</th><th>Stripping length</th></tr><tr><td>0.09-0.25 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.13-0.33 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.25-0.52 mm²</td><td>1.7</td><td>4 mm</td></tr></table>	Wire gauge	max. insulation diameter	Stripping length	0.09-0.25 mm²	1.7	4 mm	0.13-0.33 mm²	1.7	4 mm	0.25-0.52 mm²	1.7	4 mm
Wire gauge	max. insulation diameter	Stripping length														
0.09-0.25 mm²	1.7	4 mm														
0.13-0.33 mm²	1.7	4 mm														
0.25-0.52 mm²	1.7	4 mm														

Features

- Shielding bus separate from housing potential
- Suitable for the transmission of sensitive signals (e.g. bus signals)

Technical characteristics

Number of contacts	20
Electrical data acc. to IEC 61984	4 A 32 V 0,8 kV 3
Rated current	4 A
Rated voltage	32 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 4 \text{ m}\Omega$
Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Zinc die-cast, nickel-plated, LCP, Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Specifications and approvals

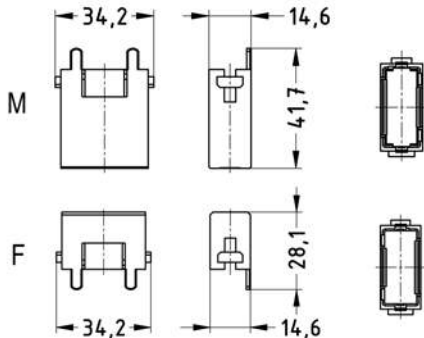

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Number of contacts

20
4 A 32 V 0,8 kV 3

Modu-
lar

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)												
		Male	Female													
Han-Modular®, Adapter module 		09 14 001 3011	09 14 001 3111	M F 												
Han® Shielded Module insert, Crimp termination  Please order crimp contacts separately.	0,09 ... 0,52	09 14 020 3013	09 14 020 3113													
D-Sub , Crimp contact, Turned , Pack contents: Single contact 	0,09 ... 0,25 0,13 ... 0,33 0,25 ... 0,52	09 67 000 7576 09 67 000 5576 09 67 000 8576	09 67 000 7476 09 67 000 5476 09 67 000 8476	<table><tr><th>Wire gauge</th><th>max. insulation diameter</th><th>Stripping length</th></tr><tr><td>0.09-0.25 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.13-0.33 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.25-0.52 mm²</td><td>1.7</td><td>4 mm</td></tr></table>	Wire gauge	max. insulation diameter	Stripping length	0.09-0.25 mm²	1.7	4 mm	0.13-0.33 mm²	1.7	4 mm	0.25-0.52 mm²	1.7	4 mm
Wire gauge	max. insulation diameter	Stripping length														
0.09-0.25 mm²	1.7	4 mm														
0.13-0.33 mm²	1.7	4 mm														
0.25-0.52 mm²	1.7	4 mm														

Features

- Shielding bus separate from housing potential
- Usable for Megabit Ethernet cat. 5e
- Suitable for Han B, Han M, Han EMC and Han HPR hoods/housings, high construction

Technical characteristics

Number of contacts	8
Additional contacts	+ shielding
Electrical data acc. to IEC 61984	10 A 50 V 0,8 kV 3
Rated current	10 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Zinc die-cast, nickel-plated, Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

Crimping tools see chapter 90

Remarks on the crimp technique

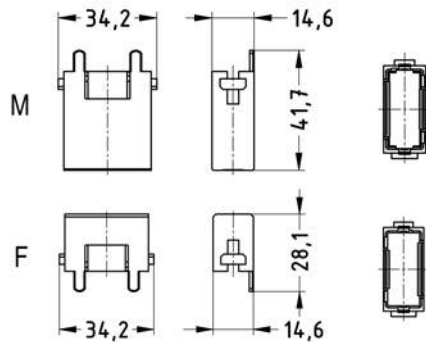


The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

8

10 A 50 V 0,8 kV 3

Modu-
lar

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Adapter module 		09 14 001 3011	09 14 001 3111	
Han® Megabit insert, 2 x 4 contacts, 2 cable entries, Crimp termination  Please order crimp contacts separately. Please order adapter module separately.	0,14 ... 2,5	09 14 008 3016	09 14 008 3116	
Han® Megabit insert, 2 x 4 contacts, One entry, Crimp termination  2 x 4 contacts Please order crimp contacts separately. Please order adapter module separately.	0,14 ... 2,5	09 14 008 3021	09 14 008 3121	

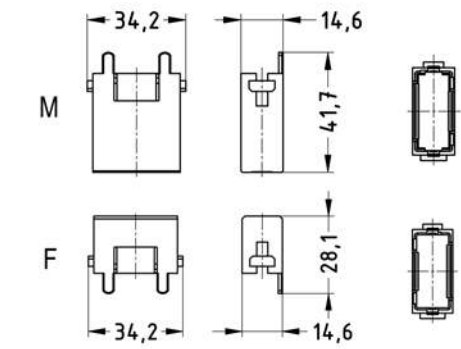


Modu-
lar

Number of contacts

8

10 A 50 V 0,8 kV 3
+ shielding

Modu-
lar

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Adapter module 		09 14 001 3011	09 14 001 3111	
Han® Megabit insert, 2 x 4 contacts, 2 cable entries, Crimp termination  With additional shield connection to the hinged frame Please order crimp contacts separately. Please order adapter module separately.	0,14 ... 2,5	09 14 008 3017	09 14 008 3117	
Han® Megabit insert, 2 x 4 contacts, One entry, Crimp termination  2 x 4 contacts With additional shield connection to the hinged frame Please order crimp contacts separately. Please order adapter module separately.	0,14 ... 2,5	09 14 008 3022	09 14 008 3122	

Modu-
lar

Details

61 03 000 0143 only for modules with one cable entry

Modu-
lar


Identification	Cable diameter (mm)	Part number	Drawing (dimensions in mm)

Cable clamp



5 ... 7
7 ... 10
9 ... 12

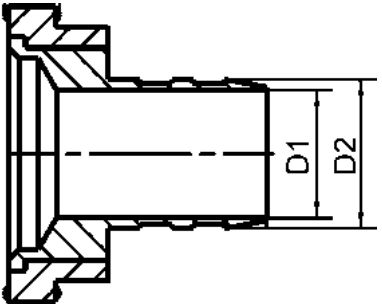
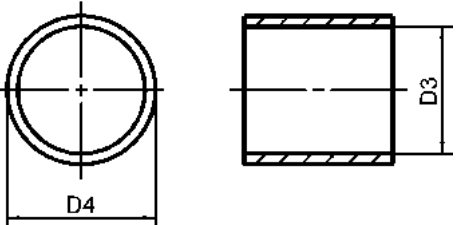
61 03 000 0141
61 03 000 0044
61 03 000 0143



Details

HARTING offers to test and define the best crimp flange and ferrule combination for customer specific cables.

Modu-
lar

Identification	Inner diameter	Outer diameter	Part number	Drawing (dimensions in mm)
D-Sub , Crimp flange, D-Sub 9 ... 37	3 mm	4 mm	61 03 000 0062	 D1 = Inner diameter D2 = Outer diameter
	3.5 mm	4.5 mm	61 03 000 0063	
	4 mm	5 mm	61 03 000 0064	
	4.5 mm	5.5 mm	61 03 000 0065	
	5 mm	6 mm	61 03 000 0066	
	5.5 mm	6.5 mm	61 03 000 0166	
	6 mm	7 mm	61 03 000 0067	
	6.5 mm	7.5 mm	61 03 000 0068	
	7 mm	8 mm	61 03 000 0069	
	7.5 mm	8.5 mm	61 03 000 0070	
	8 mm	9 mm	61 03 000 0071	
	8.5 mm	9.5 mm	61 03 000 0165	
	9 mm	10 mm	61 03 000 0072	
D-Sub , Crimp ferrule	5 mm	6 mm	61 03 000 0045	 D4 = Outer diameter D3 = Inner diameter
	5.5 mm	6.5 mm	61 03 000 0046	
	6 mm	7 mm	61 03 000 0047	
	6.5 mm	7.5 mm	61 03 000 0048	
	7 mm	8 mm	61 03 000 0049	
	7.5 mm	8.5 mm	61 03 000 0050	
	8 mm	9 mm	61 03 000 0051	
	8.5 mm	9.5 mm	61 03 000 0052	
	9 mm	10 mm	61 03 000 0053	
	9.5 mm	10.5 mm	61 03 000 0054	
	10 mm	11 mm	61 03 000 0055	
	10.5 mm	11.5 mm	61 03 000 0056	
	11 mm	12 mm	61 03 000 0057	
	11.5 mm	12.5 mm	61 03 000 0058	
	12 mm	13 mm	61 03 000 0142	
	12.5 mm	13.5 mm	61 03 000 0059	
	13 mm	14 mm	61 03 000 0127	
	13.7 mm	15 mm	61 03 000 0060	
	14 mm	15 mm	61 03 000 0061	



Features

- Shielding bus separate from housing potential
- Suitable for the transmission of sensitive signals (e.g. bus signals)
- The four pole Han® Quintax contact is suitable for Ethernet cat. 5e and PROFIBUS when diagonally wiring of the data pairs.

Technical characteristics

Number of contacts	4
Additional contacts	+ shielding
Electrical data acc. to IEC 61984	10 A 50 V 0,8 kV 3
Rated current	10 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Material (insert)	Polycarbonate, Zinc alloy
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Metal

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Modu-
lar

Technical characteristics

Number of contacts	8
Additional contacts	+ shielding
Electrical data acc. to IEC 61984	5 A 50 V 0,8 kV 3
Rated current	5 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500

Technical characteristics


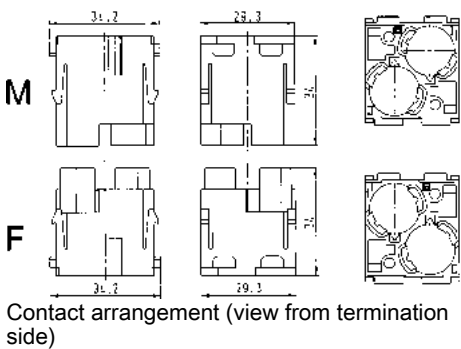
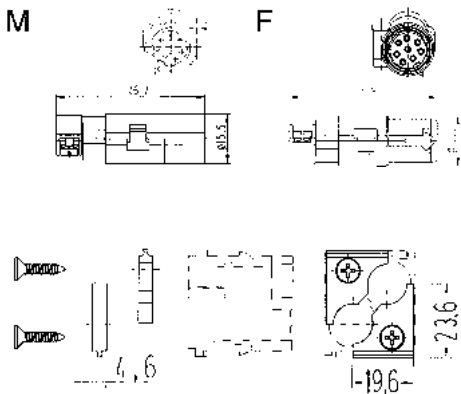
Material (insert)	Polycarbonate, Zinc alloy
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Metal

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Modu-
lar

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)												
		Male	Female													
Han-Modular® , Han-Quintax® module, Crimp termination 		09 14 002 3001	09 14 002 3101	M F 												
Han-Quintax® High Density , for Han® D-Sub crimp contacts  Please order crimp contacts separately. Han-Quintax®, Adapter  Optional D-Sub , Crimp contact, Turned , Pack contents: Single contact 	0,09 ... 0,52 0,09 ... 0,25 0,13 ... 0,33 0,25 ... 0,52	09 15 008 3013 09 14 000 9915 09 67 000 7576 09 67 000 5576 09 67 000 8576	09 15 008 3113 09 14 000 9915 09 67 000 7476 09 67 000 5476 09 67 000 8476	M F  <table><tr><th>Wire gauge</th><th>max. insulation diameter</th><th>Stripping length</th></tr><tr><td>0.09-0.25 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.13-0.33 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.25-0.52 mm²</td><td>1.7</td><td>4 mm</td></tr></table>	Wire gauge	max. insulation diameter	Stripping length	0.09-0.25 mm²	1.7	4 mm	0.13-0.33 mm²	1.7	4 mm	0.25-0.52 mm²	1.7	4 mm
Wire gauge	max. insulation diameter	Stripping length														
0.09-0.25 mm²	1.7	4 mm														
0.13-0.33 mm²	1.7	4 mm														
0.25-0.52 mm²	1.7	4 mm														

Technical characteristics

Number of contacts	1
Additional contacts	+ shielding
Electrical data acc. to IEC 61984	10 A 50 V 0,8 kV 3
Rated current	10 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Impedance	75 Ω
Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate, Zinc alloy
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076

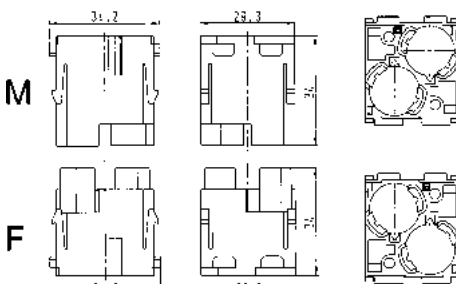
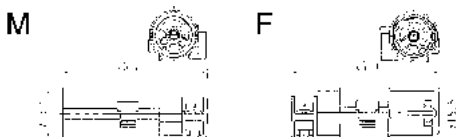
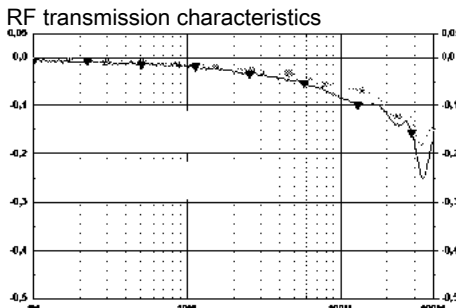
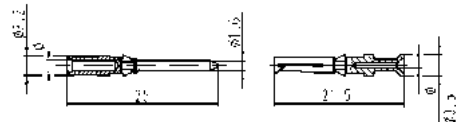


Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han-Modular® , Han-Quintax® module, Crimp termination 		09 14 002 3001	09 14 002 3101	M F  Contact arrangement (view from termination side)																					
Han® D Coax , for Han D® crimp contacts  Please order crimp contacts separately.	0,14 ... 2,5	09 15 001 3013	09 15 001 3113	M F  RF transmission characteristics  ■ 75 Ohm Cable ▼ 75 Ohm Cable with Han D® Coax  <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm	0.5 mm² AWG 20	1.1 mm	8 mm	0.75 mm² AWG 18	1.3 mm	8 mm	1 mm² AWG 18	1.45 mm	8 mm	1.5 mm² AWG 16	1.75 mm	8 mm	2.5 mm² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm																							
0.5 mm² AWG 20	1.1 mm	8 mm																							
0.75 mm² AWG 18	1.3 mm	8 mm																							
1 mm² AWG 18	1.45 mm	8 mm																							
1.5 mm² AWG 16	1.75 mm	8 mm																							
2.5 mm² AWG 14	2.25 mm	6 mm																							
Han D® , Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226																						

Technical characteristics

Number of contacts	1
Additional contacts	+ shielding
Electrical data acc. to IEC 61984	16 A 50 V 0,8 kV 3
Rated current	16 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Impedance	50 Ω
Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate, Zinc alloy
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076




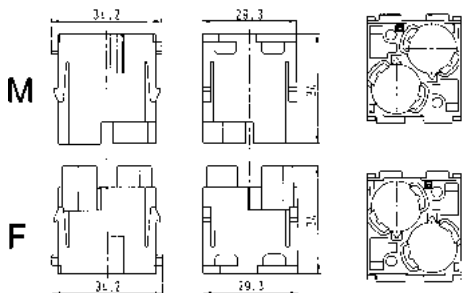


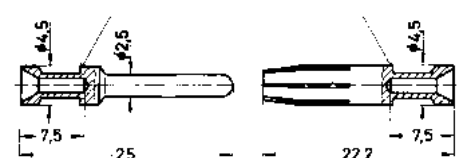
Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Modu-
lar

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																								
		Male	Female																									
Han-Modular® , Han-Quintax® module, Crimp termination 		09 14 002 3001	09 14 002 3101	M F  Contact arrangement (view from termination side)																								
Han® E Coax , for Han E® crimp contacts  Please order crimp contacts separately.	0,14 ... 5,5	09 15 001 3023	09 15 001 3123	M F  <table><tr><td>Han E® Coax with RG 213 cable (2.5 mm²)</td><td>200 MHz</td><td>500 MHz</td><td>1.0 GHz</td><td>1.2 GHz</td><td>1.5 GHz</td><td>2.0 GHz</td><td>2.5 GHz</td></tr><tr><td>Return loss [dB]</td><td>23.8</td><td>21.1</td><td>>16.7</td><td>>17.7</td><td>>16.4</td><td>>14.1</td><td>>12.0</td></tr><tr><td>Attenuation [dB]</td><td>0.07</td><td>0.11</td><td>0.17</td><td>0.2</td><td><0.23</td><td><0.53</td><td><2.0</td></tr></table>	Han E® Coax with RG 213 cable (2.5 mm²)	200 MHz	500 MHz	1.0 GHz	1.2 GHz	1.5 GHz	2.0 GHz	2.5 GHz	Return loss [dB]	23.8	21.1	>16.7	>17.7	>16.4	>14.1	>12.0	Attenuation [dB]	0.07	0.11	0.17	0.2	<0.23	<0.53	<2.0
Han E® Coax with RG 213 cable (2.5 mm²)	200 MHz	500 MHz	1.0 GHz	1.2 GHz	1.5 GHz	2.0 GHz	2.5 GHz																					
Return loss [dB]	23.8	21.1	>16.7	>17.7	>16.4	>14.1	>12.0																					
Attenuation [dB]	0.07	0.11	0.17	0.2	<0.23	<0.53	<2.0																					
Han E® , Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5 4	09 33 000 6117 09 33 000 6122 09 33 000 6115 09 33 000 6118 09 33 000 6116 09 33 000 6123 09 33 000 6119	09 33 000 6217 09 33 000 6222 09 33 000 6215 09 33 000 6218 09 33 000 6216 09 33 000 6223 09 33 000 6221	 <table><tr><th>Conductor cross-section</th><th>Identification</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22 no groove</td></tr><tr><td>0.5 mm²</td><td>AWG 20 no groove</td></tr><tr><td>0.75 mm²</td><td>AWG 18 1 groove*</td></tr><tr><td>1 mm²</td><td>AWG 18 1 groove</td></tr><tr><td>1.5 mm²</td><td>AWG 16 2 grooves</td></tr><tr><td>2.5 mm²</td><td>AWG 14 3 grooves</td></tr><tr><td>3 mm²</td><td>AWG 12 wide groove</td></tr><tr><td>4 mm²</td><td>AWG 12 no groove</td></tr></table> * on the back crimp collar Stripping length 7.5 mm	Conductor cross-section	Identification	0.14-0.37 mm²	AWG 26-22 no groove	0.5 mm²	AWG 20 no groove	0.75 mm²	AWG 18 1 groove*	1 mm²	AWG 18 1 groove	1.5 mm²	AWG 16 2 grooves	2.5 mm²	AWG 14 3 grooves	3 mm²	AWG 12 wide groove	4 mm²	AWG 12 no groove						
Conductor cross-section	Identification																											
0.14-0.37 mm²	AWG 26-22 no groove																											
0.5 mm²	AWG 20 no groove																											
0.75 mm²	AWG 18 1 groove*																											
1 mm²	AWG 18 1 groove																											
1.5 mm²	AWG 16 2 grooves																											
2.5 mm²	AWG 14 3 grooves																											
3 mm²	AWG 12 wide groove																											
4 mm²	AWG 12 no groove																											

Number of contacts

4

1,5 A 50 V

Features

- Suitable for FOC and coaxial contacts acc. to EN 41626 / D-Sub

Technical characteristics

Number of contacts	4
Electrical data acc. to IEC 61984	1,5 A 50 V
Rated current	1.5 A
Rated voltage	50 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Impedance	50 Ω , 75 Ω
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984

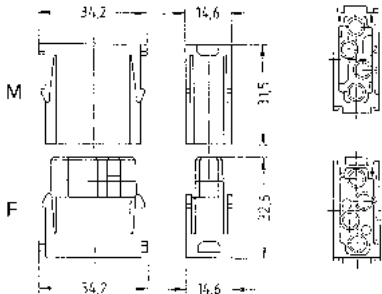
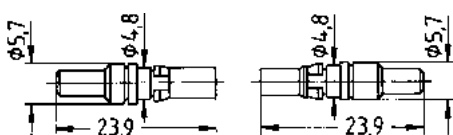


Details

ATTENTION when using coaxial contacts:

Male module 09 14 004 4501 with male contacts 09 14 000 62xx

Female module 09 14 004 4512 with female contacts 09 14 000 61xx

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular®, Han® Multi module  Please order contacts separately. When removing the contacts, the two-piece module can be opened using a 7mm screwdriver. This destroys the module.	09 14 004 4501	09 14 004 4512	 Contact arrangement (view from termination side) 
DIN 41626, Coaxial contact, Solder/crimp termination, 50 Ohm, Contact resistance $\leq 10 \text{ m}\Omega$ Contact surface: Gold plated 	09 14 000 6211	09 14 000 6111	

Modu-
lar

Number of contacts

4

1,5 A 50 V

Features

- Suitable for FOC and coaxial contacts acc. to EN 41626 / D-Sub

Technical characteristics

Number of contacts	4
Electrical data acc. to IEC 61984	1,5 A 50 V
Rated current	1.5 A
Rated voltage	50 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 6 \text{ m}\Omega, \leq 10 \text{ m}\Omega$
Impedance	50 Ω , 75 Ω
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Nominal frequency	50 Hz
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (locking)	Copper alloy
Material (contacts)	Copper alloy, PBFE / PBTP / PI

Specifications and approvals

EN 60664-1
IEC 61984


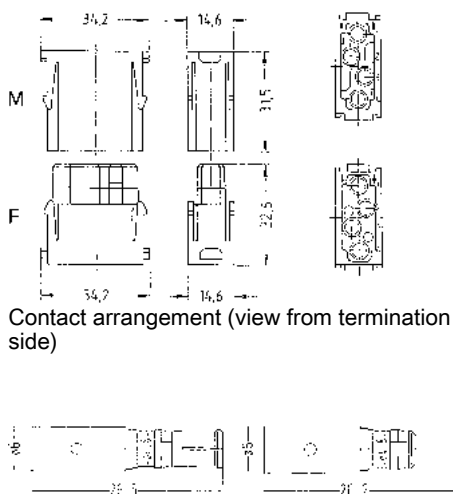



Details

ATTENTION when using coaxial contacts:

Male module 09 14 004 4501 with male contacts 09 14 000 62xx or 09 69 28x 5xxx

Female module 09 14 004 4513 with female contacts 09 14 000 61xx or 09 69 18x 5xxx

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular®, Han® Multi module  Please order contacts separately. When removing the contacts, the two-piece module can be opened using a 7mm screwdriver. This destroys the module.	09 14 004 4501	09 14 004 4513	 Contact arrangement (view from termination side)
D-Sub , Coaxial contact, Solder / solder termination, 50 Ohm, Contact resistance $\leq 6 \text{ m}\Omega$ Contact surface: Gold plated 	09 14 000 6215	09 14 000 6115	

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
D-Sub , Coaxial contact, Crimp/crimp termination, Straight Turned for cables RG 174 U, 188 AU, 316 U , 50 Ohm, Contact resistance ≤ 10 mOhm Contact surface: Gold plated 	09 69 282 5140	09 69 182 5140	
D-Sub , Coaxial contact, Crimp/crimp termination, Straight Turned for cables RG 179 BU, 187 AU , 75 Ohm, Contact resistance ≤ 10 mOhm Contact surface: Gold plated 	09 69 282 5230	09 69 182 5230	
D-Sub , Coaxial contact, Solder/crimp termination, Straight Turned for cables RG 174 U, 188 AU, 316 U , 50 Ohm, Contact resistance ≤ 10 mOhm Contact surface: Gold plated 	09 69 281 5140	09 69 181 5140	
D-Sub , Coaxial contact, Solder/crimp termination, Straight Turned for cables RG 178 BU, 196 AU, 404 U , 75 Ohm, Contact resistance ≤ 10 mOhm Contact surface: Gold plated 	09 69 281 5141	09 69 181 5141	
D-Sub , Coaxial contact, Solder/crimp termination, Straight Turned for cables RG 58 CU, 141 AU , 50 Ohm, Contact resistance ≤ 10 mOhm Contact surface: Gold plated 	09 69 281 5143	09 69 181 5143	

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
D-Sub , Coaxial contact, Solder/crimp termination, Straight Turned for cables RG 179 BU, 187 AU , 75 Ohm, Contact resistance ≤ 10 mOhm Contact surface: Gold plated	09 69 281 5230	09 69 181 5230	



Modu-
lar

Number of contacts

12

1,5 A 50 V

Technical characteristics

Number of contacts	12
Electrical data acc. to IEC 61984	1,5 A 50 V
Rated current	1.5 A
Rated voltage	50 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Impedance	50 Ω , 75 Ω
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984



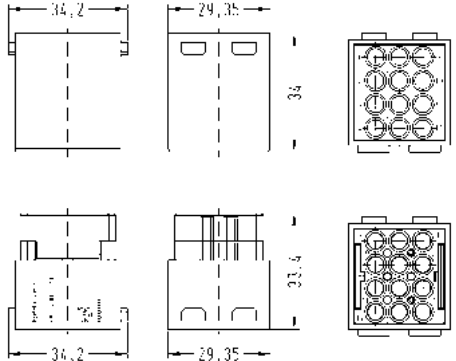
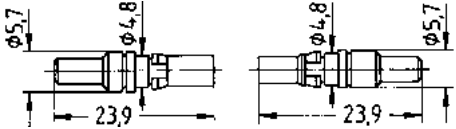
Details

ATTENTION! Guide pins and bushes are prescribed (see chapter 80).

ATTENTION when using coaxial contacts:

Male module 09 14 012 4501 with male contacts 09 14 000 62xx

Female module 09 14 012 4512 with female contacts 09 14 000 61xx

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular®, Han® Multi module, acc. to DIN 41626  Please order contacts separately. Due to the closed entry design of female insert the upper part has to be removed by screw driver before extracting the contacts.	09 14 012 4501	09 14 012 4512	 Contact arrangement (view from termination side)
DIN 41626 , Coaxial contact, Solder/crimp termination, 50 Ohm, Contact resistance $\leq 10 \text{ m}\Omega$ Contact surface: Gold plated 	09 14 000 6211	09 14 000 6111	

Modu-
lar

Features

- for the transmission of clean and dry compressed air
- Operating pressure up to 8 bar (116 psi)
- Female contacts with / without shut-off
- Removal of tubes from pre-assembled pneumatic contacts is possible

Technical characteristics

Number of contacts	2, 3
Limiting temperature	-40 ... +80 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Tube inner diameter	6 mm, 1.6 mm, 3 mm, 4 mm
Material (insert)	Polycarbonate
Colour (insert)	Blue
Material (seal)	Buna-N
Material (contacts)	Delrin acetal

Specifications and approvals



Details

Shut-off principle:


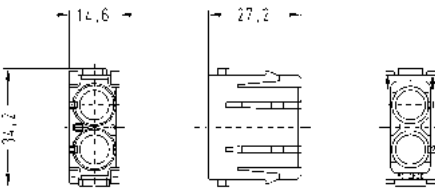


In the disconnected position the spring integrated in the female contact is active, thus the O-ring of the valve seals the opening of the air-way. During the mating process, when the defined depth of insertion is reached the male contact presses on the valve head and moves it backwards against the spring tension, so that the air-way opens.

Using of guiding pins in connection with pneumatic modules is imperative.

In addition to this guiding pins guarantee a coding, if pneumatic modules are used exclusively.

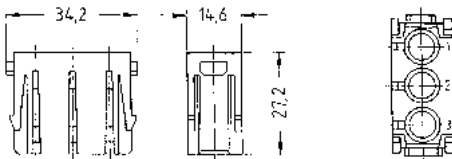
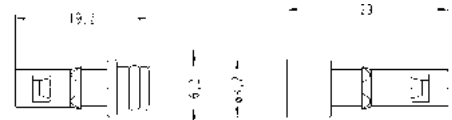



Number of contacts

2

Identification		Part number		Drawing (dimensions in mm)
		Male	Female	
Modu- lar	Han-Modular®, Han® Pneumatic module  Please order contacts separately. Using of guiding pins is imperative!	09 14 002 4501	09 14 002 4501	 Contact arrangement (view from termination side)
	Pneumatic contact, Without shut-off , 6 mm / 1/4"	09 14 000 6174	09 14 000 6274	 Male contact Female contact
	Pneumatic contact, With shut-off Polypropylen, 6 mm / 1/4" 		09 14 000 6279	 Female contact with shut-off in closed position

Number of contacts

3

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular®, Han® Pneumatic module  Please order contacts separately. Using of guiding pins is imperative!	09 14 003 4501	09 14 003 4501	 Contact arrangement (view from termination side)
Pneumatic contact, Without shut-off , 1,6 mm / 1/16"	09 14 000 6151	09 14 000 6251	 Male contact Female contact
Pneumatic contact, Without shut-off , 3 mm	09 14 000 6152	09 14 000 6252	
Pneumatic contact, Without shut-off , 4 mm / 1/8"	09 14 000 6153	09 14 000 6253	
Pneumatic contact, With shut-off Polypropylen, 1,6 mm / 1/16"		09 14 000 6256	 Female contact with shut-off in closed position
Pneumatic contact, With shut-off Polypropylen, 3 mm		09 14 000 6257	
Pneumatic contact, With shut-off Polypropylen, 4 mm / 1/8"		09 14 000 6258	

Modu-
lar

Features

- Suitable for HARTING SC contacts
- for GI-Fibre 50 - 62,5 / 125µm
- Insertion loss < 0.5 dB

Technical characteristics

Number of contacts	4
Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

Specifications and approvals

UL 1977 ECBT2.E235076



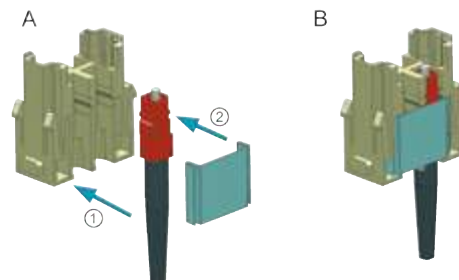
Details

Guide pins and bushes are recommended (see chapter 80).

Details

Assembly instructions

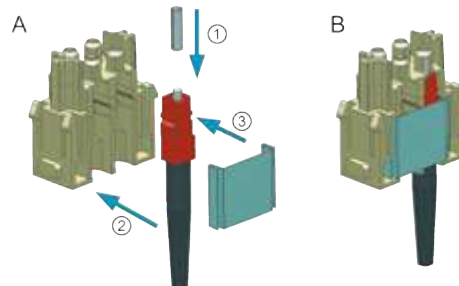
Male module



- A) Assemble the SC contact
Push the SC contact from the side into the relevant insert ①
Push the fixing plate from the side over the contacts ②
B) SC contact fixed in the module

Assembly instructions

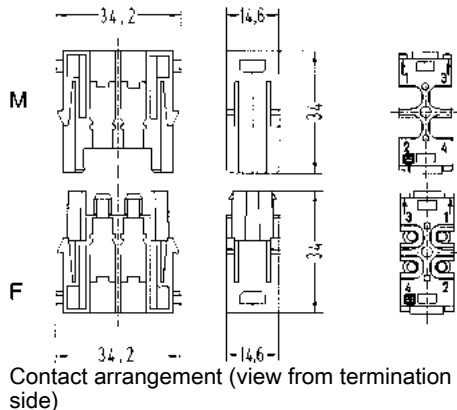
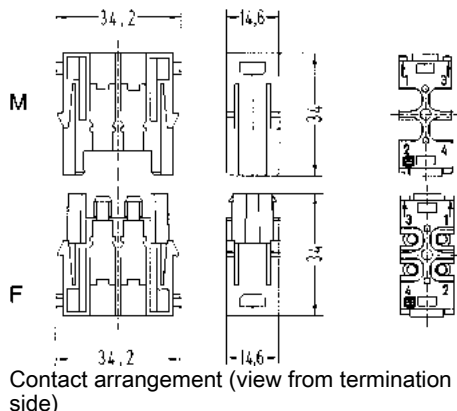
Female module



- A) Assemble the SC contact
Push the centering ferrule (included in delivery) on the SC contact ①
Push the SC contact from the side into the relevant insert ②
Push the fixing plate from the side over the contacts ③
B) SC contact fixed in the module

Number of contacts

4

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular®, Han® SC module  Please order contacts separately.	09 14 004 4701	09 14 004 4712	 Contact arrangement (view from termination side)
Han-Modular®, Han® SC module, with ceramic ferrule 62.5/125 µm  Please order contacts separately.		09 14 004 4711	 Contact arrangement (view from termination side)
Han-Modular®, Han® SC module, with metal ferrule  Please order contacts separately.		09 14 004 4713	
SC contact, for 1 mm plastic fibre Crimp termination 	20 10 001 5211	20 10 001 5211	

Modu-
lar

Modu-
lar

Features

- Suitable for HARTING LC contacts
- for GI-Fibre 50 - 62.5 / 125 µm and for singlemode fibre

Technical characteristics

Number of contacts	6
Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

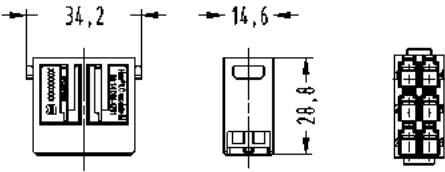
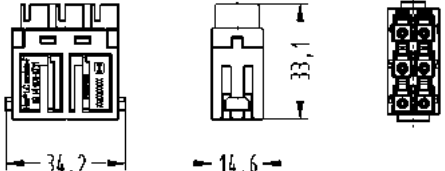

Details

ATTENTION! Guide pins and bushes are prescribed (see chapter 80).

Number of contacts

6

Modu-
lar

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular®, Han® LC module  Please order contacts separately.	09 14 006 4701	09 14 006 4711	 
LC contact, Singlemode for wire gauge up to 2 mm	20 10 125 8221	20 10 125 8221	
LC contact, Singlemode for wire gauge up to 3 mm	20 10 125 8220	20 10 125 8220	
LC contact, Multimode for wire gauge up to 2 mm	20 10 125 8212	20 10 125 8212	
LC contact, Multimode for wire gauge up to 3 mm  	20 10 125 8211	20 10 125 8211	

Number of contacts

7

Technical characteristics		Specifications and approvals
Number of contacts	7	DIN EN 60721-3-3 DIN EN 50102 EN 61000-4-2 Electrostatic discharge (ESD) EN 61000-4-3 Electromagnetic field EN 61000-4-4 Rapid transients (burst) EN 61000-4-5 Surge voltages EN 61000-4-6 conducted disturbances 
Operating temperature	-40 ... +70 °C	
Storage temperature	-40 ... +70°C	
Mating cycles	≥500	
Degree of protection acc. to IEC 60529	IP30	
Power consumption	<5 W	
Material (insert)	Polycarbonate	
Colour (insert)	RAL 7032 (pebble grey)	
Material (contacts)	Copper alloy	

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular® , ID CAN, Contact surface: Gold plated 	09 80 015 0100		
Han-Modular® , ID CAN, Cage-clamp termination, Contact surface: Gold plated 		09 80 115 0200	

Modu-
lar

Modu-
lar

Technical characteristics

Storage temperature	-40 ... +85°C
Degree of protection acc. to IEC 60529	IP30, When mated
Supply voltage	24 V DC
Transmission characteristics	Category, 5
Data rate	1000 Gbit/s
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

Specifications and approvals

EN 55022
Radio disturbance characteristics
EN 61000-4-2
Electrostatic discharge (ESD)
EN 61000-4-3
Electromagnetic field
EN 61000-4-4
Rapid transients (burst)
EN 61000-4-5
Surge voltages
EN 61000-4-6
conducted disturbances
EN 61000-6-4
emission standard
IEC 60068-2-6
Vibration (sinusoidal)
IEC 60068-2-27
Shock
IEEE 802.3



Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular® , Switch US4 	09 80 113 0400	09 80 113 0400	

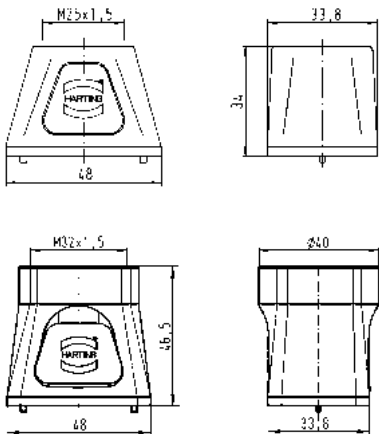
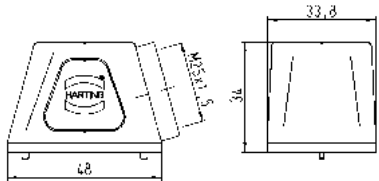
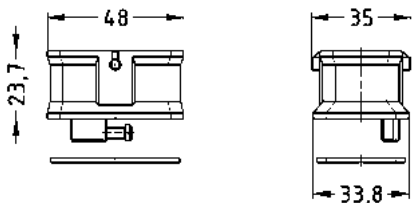
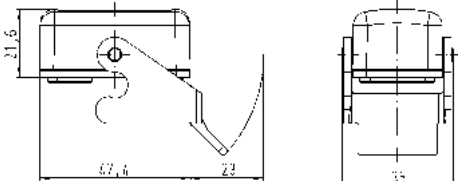
- Robust housing
- Compact design saves space
- Modular structure increases flexibility
- Simple and quick assembly
- Two-part hood

Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65, In locked position
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Nickel plated
Material (seal)	NBR
Material (locking)	Stainless steel
Material (accessories)	Metal


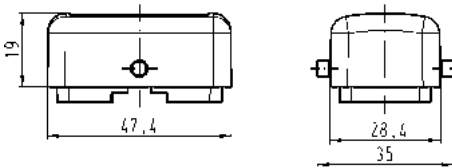

- ① Hood with side entry
- ② Cable entry M25
- ③ Bulkhead mounted housing with locking lever
- ④ Carrier hood

Double locking lever

Modu-
lar

Identification	Cable entry	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
Han-Modular® Compact , Hoods, Top entry, Pack contents: 4 screws are included within the delivery 	1x M25 1x M32		19 14 001 0401 19 14 001 0402	
Han-Modular® Compact , Hoods, Side entry, Pack contents: 4 screws are included within the delivery 	1x M25		19 14 001 0501	
Han-Modular® Compact , Carrier hood 		0,5 ... 10 PE	09 14 001 0311	
Han-Modular® Compact , Protection covers for carrier hoods, Thermoplastic 			09 14 001 5402	

Double locking lever

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
Han-Modular® Compact , Bulkhead mounted housings 	0,5 ... 10 PE	09 14 001 0301	
Han-Modular® Compact , Protection cover for bulkhead mounted housings, Thermoplastic 		09 14 001 5401	
Fixing bracket 		09 14 000 9947	 Panel cut out

Modu-
lar

Technical characteristics

Material (accessories) Thermoplastic

Technical characteristics

Colour (accessories) Red, Blue, Black, Yellow

Identification

Part number

Drawing
(dimensions in mm)

Coding element,
Red

09 14 000 9971



Coding element,
Blue

09 14 000 9972



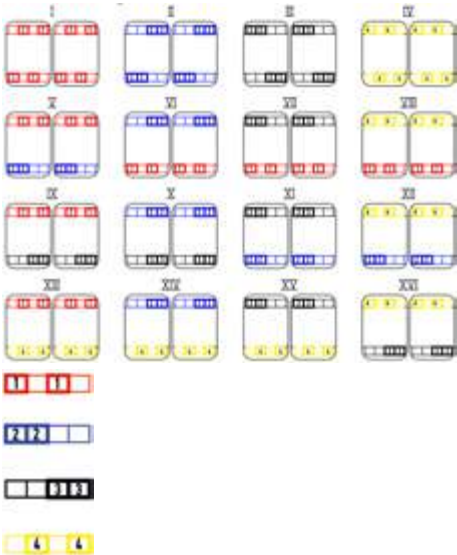
Coding element,
Black

09 14 000 9973



Coding element,
Yellow

09 14 000 9974



Features

- Robust housing
- Compact design saves space
- Modular structure increases flexibility
- Simple and quick assembly
- Two-part hood

Technical characteristics

Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94 (locking levers)	V-0
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Aluminium die-cast, Zinc die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)
Material (accessories)	Zinc die-cast

Details

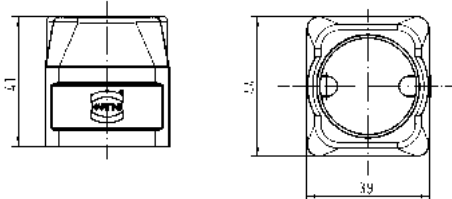
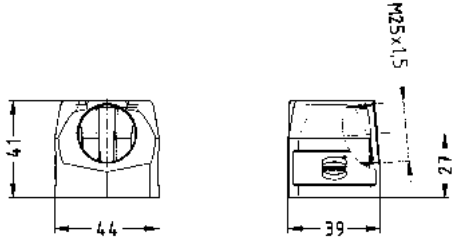
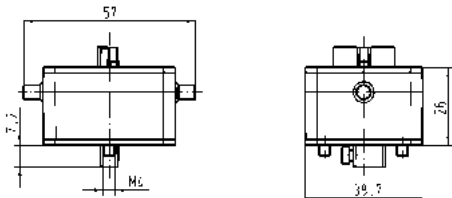



- ① Hood with top entry
- ② Carrier hood
- ③ Bulkhead mounted housing with locking lever
- ④ Switch board panel
- ⑤ Panel feed through housings
- ⑥ Cable entry

Screw locking

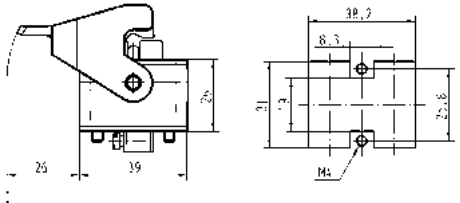
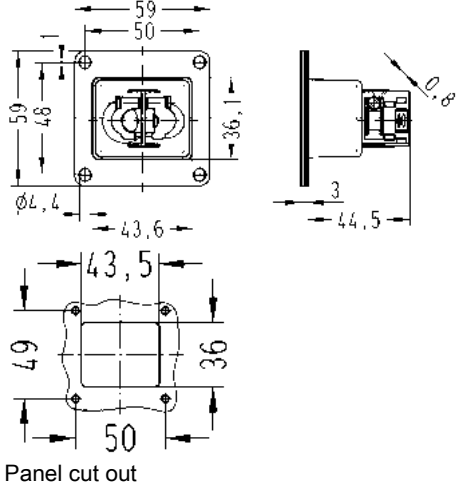
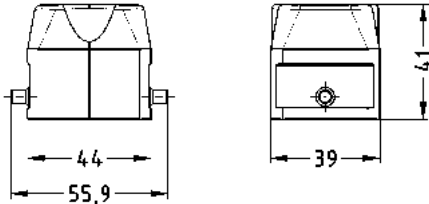


Modular

Identification	Cable entry	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
Han-Modular® Twin , Hoods, Top entry 	1x M20 1x M25 1x M32		19 14 002 0400 19 14 002 0401 19 14 002 0402	
Han-Modular® Twin , Hoods, Side entry 	1x M25		19 14 002 0501	
Han-Modular® Twin , Carrier hood 		0,5 ... 10 PE	09 14 002 0311	
Han-Modular® Twin , Angled housing, Zinc die-cast 	1x M32		09 14 002 0950 19 14 002 0952	
Shielded frame 			09 14 000 9924	

Single locking lever



Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
Han-Modular® Twin , Bulkhead mounted housings, Han-Easy Lock® 	0,5 ... 10 PE	09 14 002 0301	
Han-Modular® Twin , Panel feed through housing, Zinc die-cast 		09 14 000 9928	 Panel cut out
Han-Modular® Twin , Protection cover for bulkhead mounted housings, Metal, Closed 		09 14 002 5401	

Modular

Features

- Suitable for all Han-Modular® single modules
- The variant with PE connection uses pin 1 of the module as PE
- Slim, space saving construction type
- Low cost plastic hoods and housings

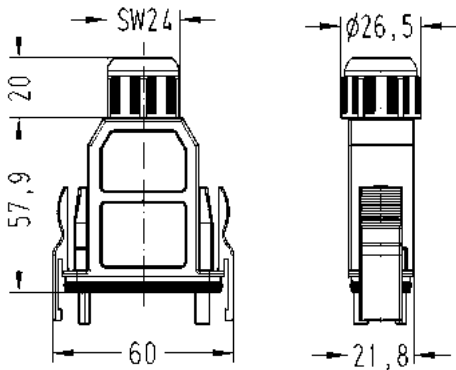
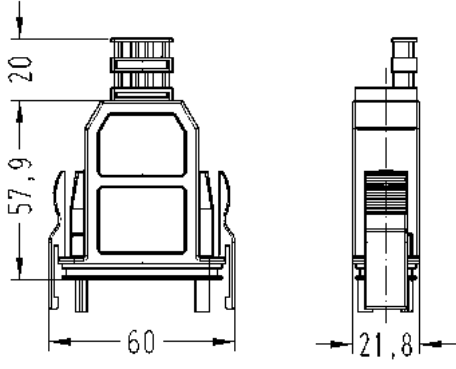
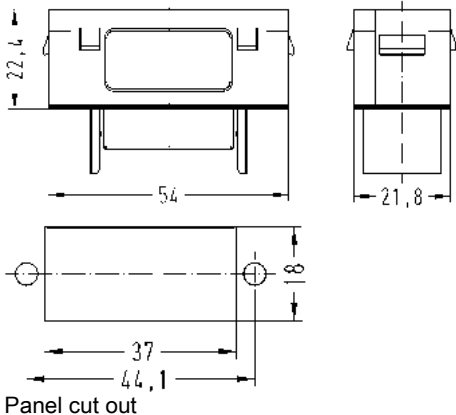
Technical characteristics

Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65, IP20
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 7032 (pebble grey)
Material (seal)	NBR
Material (accessories)	Thermoplastic

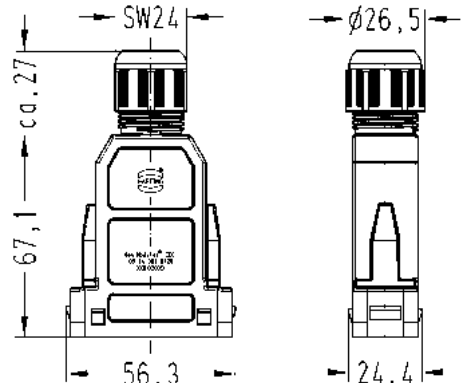
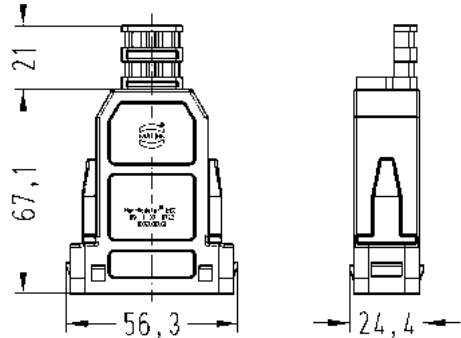
Specifications and approvals

EN 60664-1
IEC 61984

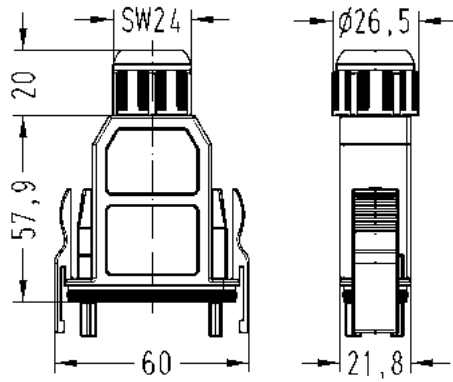
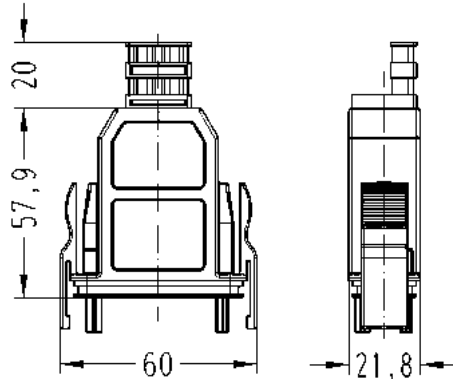
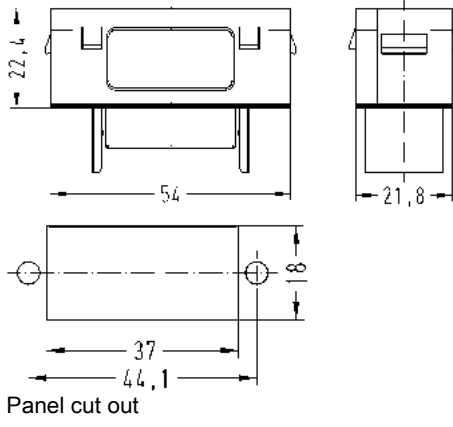
Snap-in latches

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han-Modular® ECO , Hoods, Top entry, IP65 	1x Integrated	6 ... 13	09 14 001 0420	
Han-Modular® ECO , Hoods, Top entry, IP20 		14,65	09 14 001 0422	
Han-Modular® ECO , Bulkhead mounted housings 			09 14 001 0320	

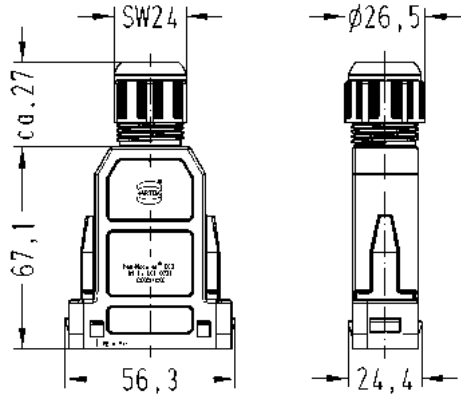
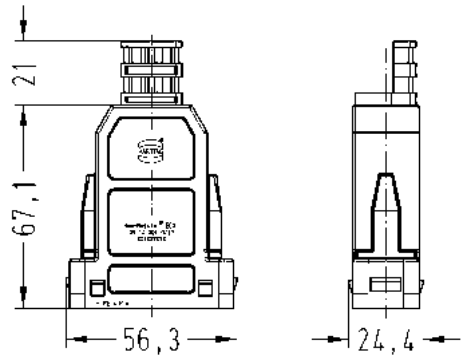
Modu-
lar

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han-Modular® ECO , Cable to cable housing, Top entry, IP65 	1x Integrated	6 ... 13	09 14 001 0720	
Han-Modular® ECO , Cable to cable housing, Top entry, IP20 		14,65	09 14 001 0722	
Han-Modular® , Coding element, Pack contents: 8 pieces per frame 			09 14 000 9929	

Snap-in latches

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han-Modular® ECO , Hoods, With PE identification (pin 1 = PE), Top entry, IP65 	1x Integrated	6 ... 13	09 14 001 0421	
Han-Modular® ECO , Hoods, With PE identification (pin 1 = PE), Top entry, IP20 		14,65	09 14 001 0423	
Han-Modular® ECO , Bulkhead mounted housings, With PE identification (pin 1 = PE) 			09 14 001 0321	

Modu-
lar

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han-Modular® ECO , Cable to cable housing, With PE identification (pin 1 = PE), Top entry, IP65 	1x Integrated	6 ... 13	09 14 001 0721	
Han-Modular® ECO , Cable to cable housing, With PE identification (pin 1 = PE), Top entry, IP20 		14,65	09 14 001 0723	
Han-Modular® , Coding element, Pack contents: 8 pieces per frame 			09 14 000 9929	

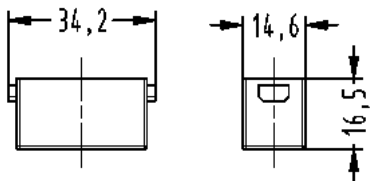
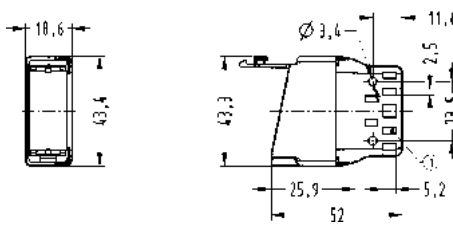
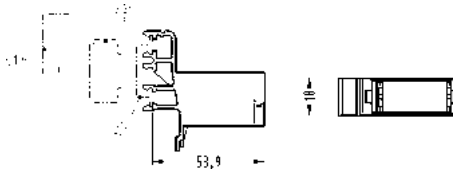

Technical characteristics

Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500

Technical characteristics

Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (locking)	Polycarbonate
Material (accessories)	Thermoplastic

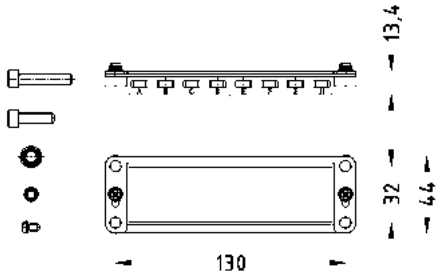
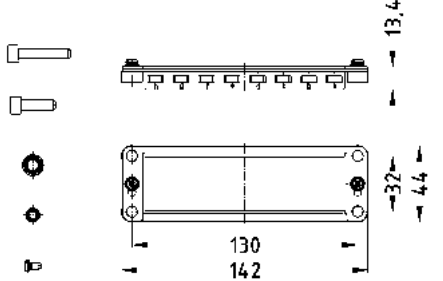
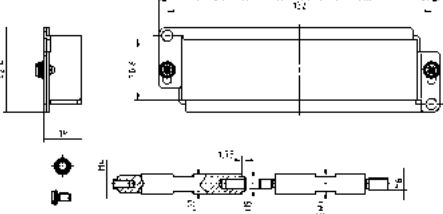
Modu-
lar

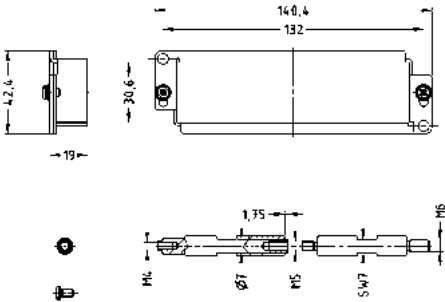
Identification		Part number	Drawing (dimensions in mm)
Han-Modular®, Han® Dummy module		09 14 000 9950	
Han-Modular®, Module locking system, With strain relief, Pack contents: 1 module locking system		09 14 000 0312	 ① For cable ties with max. 5 mm width
Han-Modular®, Module locking system, for rail, Pack contents: 1 module locking system		09 14 000 0313	 ① G-rail IEC 60715-G32 ② Rail IEC 60715-35 x 7.5 with 1 mm thickness or -35 x 15 with 1.5 mm thickness ③ C-rail IEC 60715-C30
Han-Modular®, Fixing, for Han-Modular® hinged frames, Pack contents: 20 pieces per frame		09 14 000 9960	 to fix the pre-assembled hinged frames

Technical characteristics

Material (accessories) Stainless steel

Modu-
lar

Identification	Part number	Drawing (dimensions in mm)
Han-Modular®, Frame, for up to 8 single modules, Marking A ... H, Pack contents: 2 x M4 screw, 2 x washer SK S4, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25, 4 x washer SK S6 	09 11 000 9935	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm
Han-Modular®, Frame, for up to 8 single modules, Marking a ... h, Pack contents: 2 x M4 screw, 2 x washer SK S4, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25, 4 x washer SK S6 	09 11 000 9936	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm
Han-Modular®, Frame, for up to 8 single modules, Marking A ... H, Pack contents: 2 x M4/M5 distance bolts (A/F 7), 2 x M5/M6 distance bolts (A/F 7), 4 x M4 screw, 4 x washer SK S4 	09 40 024 9931	 Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm Tightening torque M4: 1.5 Nm

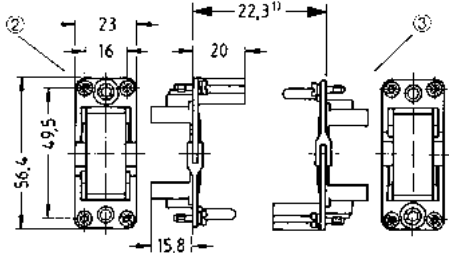
Identification	Part number	Drawing (dimensions in mm)
Han-Modular® , Frame, for up to 8 single modules, Marking a ... h, Pack contents: 2 x M4/M5 distance bolts (A/F 7), 2 x M5/M6 distance bolts (A/F 7), 4 x M4 screw, 4 x washer SK S4 	09 40 024 9932	 Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm Tightening torque M4: 1.5 Nm

Modu-
lar

Technical characteristics

Material (accessories) Zinc die-cast


Modu-
lar

Identification	Conductor cross-section (mm²)	Part number	Drawing (dimensions in mm)
Han-Modular®, Frame, for 1 module, In housing Han® 10 A 	0,75 ... 2,5 PE	09 14 000 0304	 ① Distance max. 23.5 mm ② Hood ③ Housing

Technical characteristics

Material (contacts) Copper alloy

Modu-
lar

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
Han-Modular®, Cable shoe, for PE extension  for hoods/housings high construction only	16	09 14 000 9912	 Please use pressing tools for non-insulated cable shoes

Contents	Page
Han® HsB.....	07.2

Features

- Screw termination with wire protection
- Suitable for power supply applications
- Termination with standard screw driver

Technical characteristics

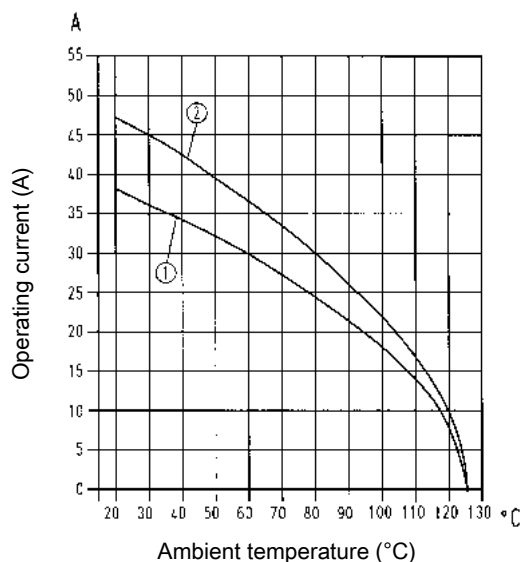
Number of contacts	6, 12
Electrical data acc. to IEC 61984	35 A 400/690 V 6 kV 3
Rated current	35 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Alternative electrical data	35 A 500 V 6 kV 3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 4 mm²
② Conductor cross-section 6 mm²

Specifications and approvals

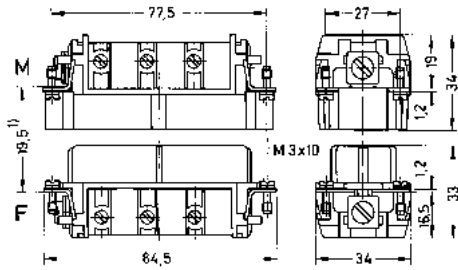


EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
UL 2237 PVVA2.E318390



Number of contacts

6+ 


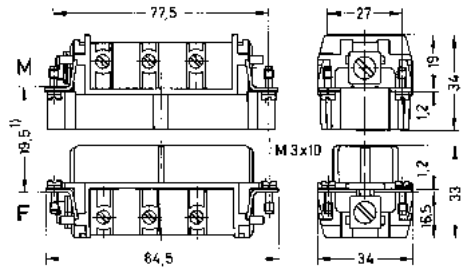
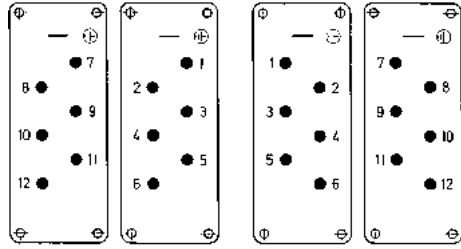

35 A 400/690 V 6 kV 3
35 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® HsB , Screw termination, With wire protection, Contact surface: Silver plated 	1,5 ... 6	09 31 006 2601	09 31 006 2701	  M F Contact arrangement (view from termination side)  Panel cut out for use without hood

Han
HsB

Number of contacts

12+ 35 A 400/690 V 6 kV 3
35 A 500 V 6 kV 3Han
HsB

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® HsB , Screw termination, With wire protection, 1 ... 6 Contact surface: Silver plated  You need two inserts for a complete assembly!	1,5 ... 6	09 31 006 2601	09 31 006 2701	 1) distance for contact max. 21 mm Tightening torque Clamping screw 1.2 Nm
Han® HsB , Continuing marking, Screw termination, With wire protection, 7 ... 12 Contact surface: Silver plated  You need two inserts for a complete assembly!	1,5 ... 6	09 31 006 2611	09 31 006 2711	 Contact arrangement (view from termination side)  Panel cut out for use without hood

Contents	Page
Han D® AV	08.4
Han D® AV distributor.....	08.9
Han E® AV	08.11
Han® ES AV	08.20
Accessories	08.25

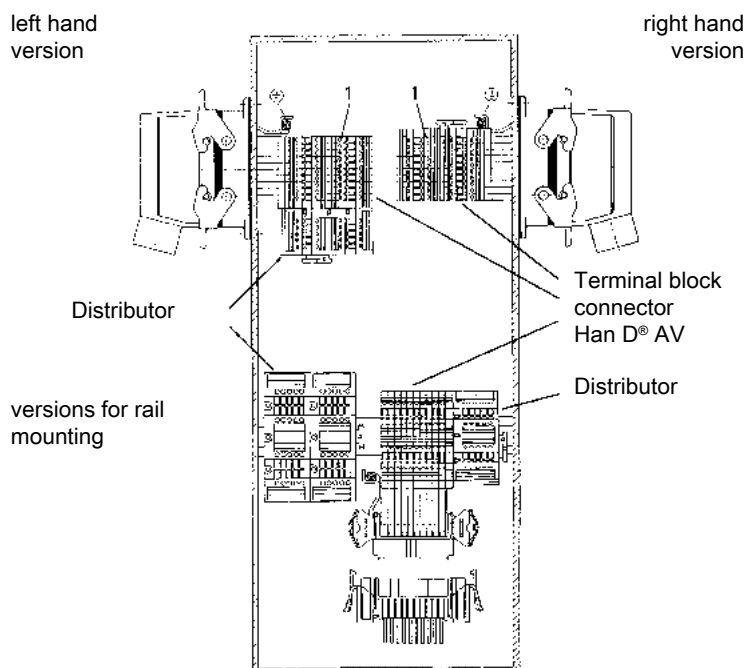
Possibilities in switch cabinet

Left or right hand mounting in the switch cabinet, therefore allows use of the same pre-prepared interface cable

Internal use on standard rails in the switch cabinet in conjunction with Han-Snap®

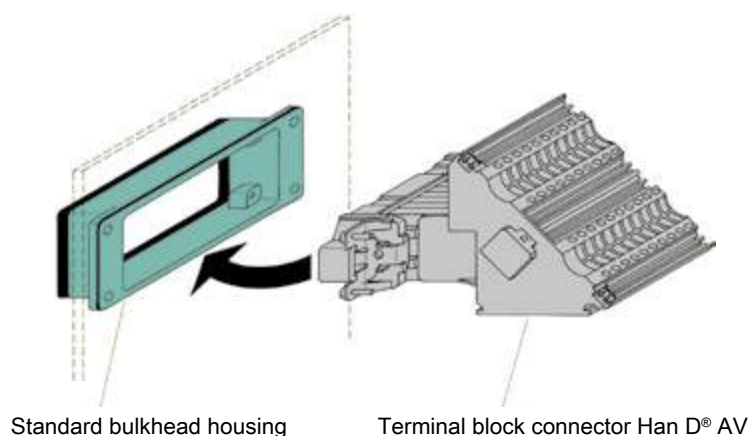
Distributor lockable on standard rails or mountable at terminal block connector Han D® AV

The terminal block connectors can be supplied for left hand or right hand applications. Hence the ground and connecting terminal for contact no. 1 will always be accessible from above in both types of installation.



Assembly of terminal block connectors

Terminal block connectors can be mounted from the inside of the switch cabinet into standard bulkhead housings. Therefore pre-assembly is possible.



Identification

The individual terminals have the same identification as on the mating face. In addition each circuit may be separately labelled with identification strips fitted in the adjacent slots.

Counterparts

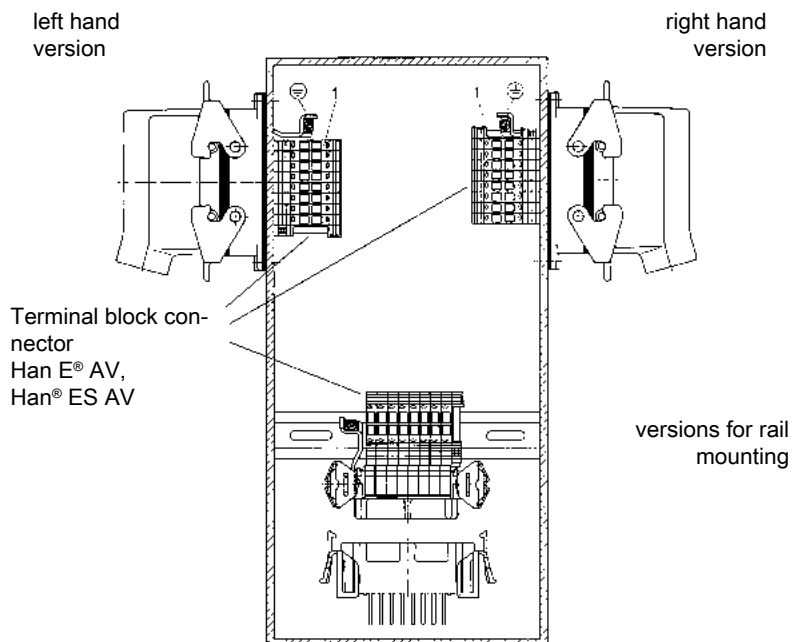
For suitable mating inserts of serie Han D® with crimp terminal please refer to the chapter 02.

Possibilities in switch cabinet

Left or right hand mounting in the switch cabinet, therefore allows use of the same pre-prepared interface cable

Internal use on standard rails in the switch cabinet in conjunction with Han-Snap®

The terminal block connectors can be supplied for left hand or right hand applications. Hence the ground and connecting terminal for contact no. 1 will always be accessible from above in both types of installation.

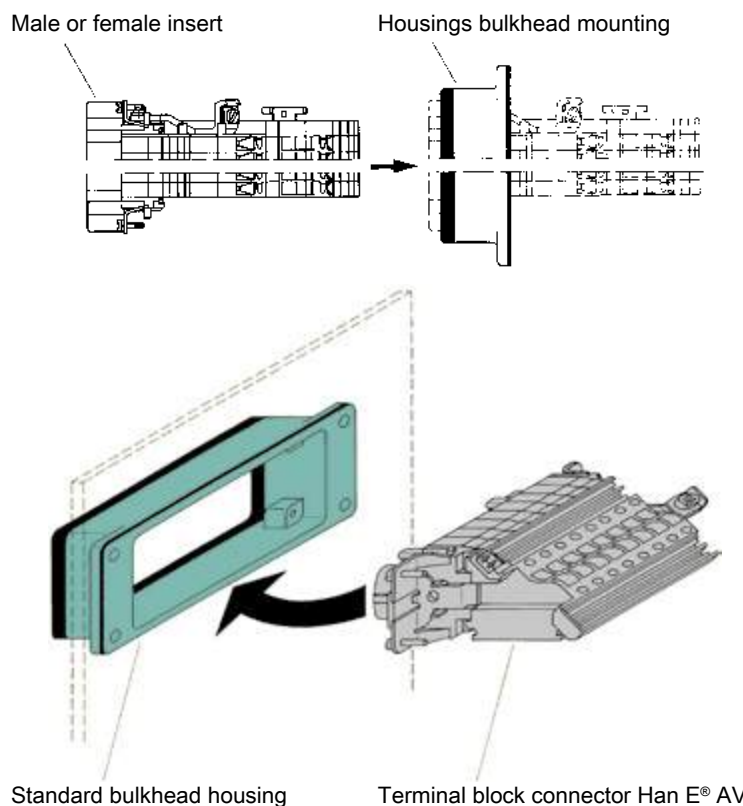


Han
AV

Assembly of terminal block connectors

The terminal block connector is fixed in the standard bulkhead housing in the normal way.

Han E® AV and Han® ES AV with 16 and 24 pins can be mounted from the inside of the switch cabinet into standard bulkhead housings. Therefore pre-assembly is possible.



Identification

The individual terminals have the same identification as on the mating face. In addition each circuit may be separately labelled with identification strips fitted in the adjacent slots.

Counterparts

For suitable mating inserts of series Han E® and Han® ES with screw, cage-clamp or crimp terminals please refer to the chapter 03.

Features

- for left or right hand applications available
- PE and connecting terminal for contact no.1 are at the top in both types of installation
- Mountable in standard bulkhead mounted housings and on standard rails by using of fixing elements
- Screw termination with wire protection

Technical characteristics

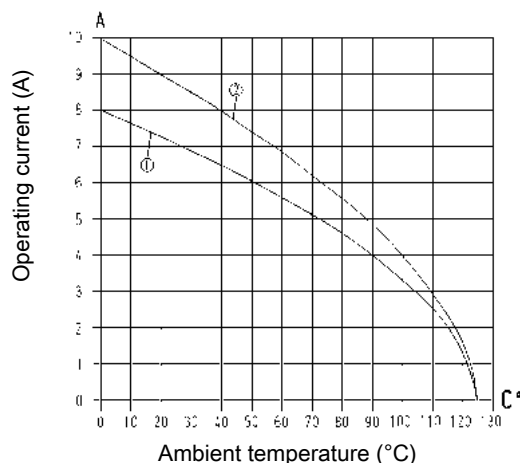
Number of contacts	40, 64
Electrical data acc. to IEC 61984	10 A 250 V 4 kV 3
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 4 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

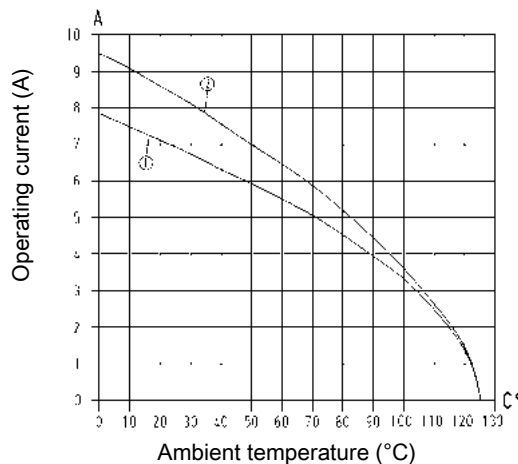
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 40 D AV Conductor cross-section 0.75 mm²
 ② Han® 40 D AV Conductor cross-section 1.5 mm²

Derating



- ① Han® 64 D AV Conductor cross-section 0.75 mm²
 ② Han® 64 D AV Conductor cross-section 1.5 mm²

Specifications and approvals

EN 60664-1
 IEC 61984



Details

Stripping length 8 ... 11 mm

Tightening torque 0.5 Nm

Hoods/Housings see chapter 31

Identification strips

Multi contour (MK) the following identification strips may be used

- ♦ HARTING – 09 21 000 9971
- ♦ Murrplastik – KPX 5/10-5
- ♦ Weidmüller – DEK 5
- ♦ Phoenix – 4 K – DST 5
- ♦ Phoenix – DS 5
- ♦ Phoenix – ZB 5
- ♦ WAGO – WSB 5

Single contour (SK) the following identification strips may be used

- ♦ Murrplastik – KWI 5/10
- ♦ Murrplastik – KWI 5/10-5
- ♦ Murrplastik – KWI 8.6-5
- ♦ Wieland – 9705 A 5/10
- ♦ WAGO – Mini - WSB

Identification

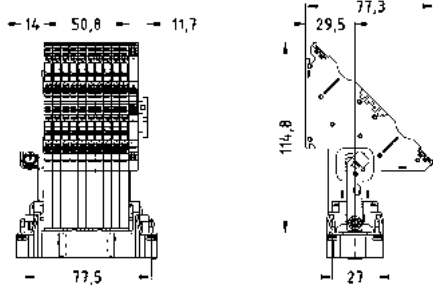
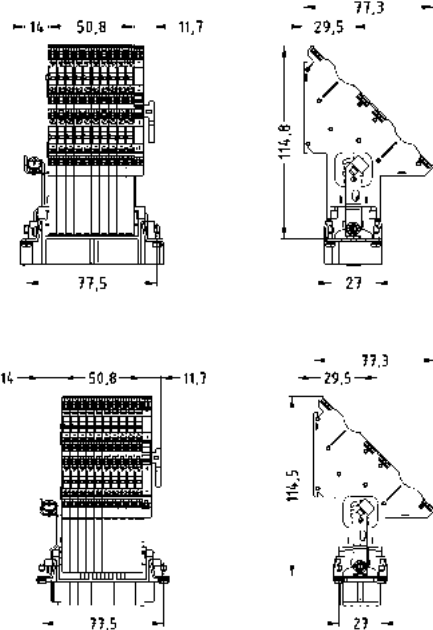
The individual terminals have the same identification as on the mating face. In addition each circuit may be separately labelled with identification strips fitted in the adjacent slots.



Number of contacts

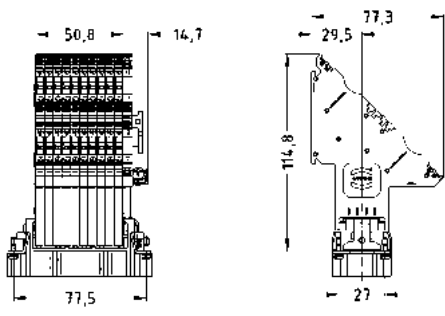
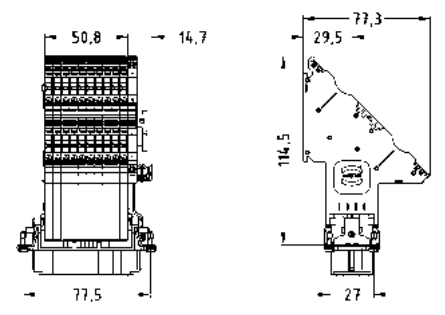
40+

10 A 250 V 4 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
Han D® AV , Terminal block connector, Left hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 21 040 4601	09 21 040 4701		
Han D® AV , Terminal block connector, Left hand version, Single contour (SK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 21 040 4602	09 21 040 4702		

Han
AV



Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D® AV , Terminal block connector, Right hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 21 040 4611	09 21 040 4711	
Han D® AV , Terminal block connector, Right hand version, Single contour (SK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 21 040 4612	09 21 040 4712	

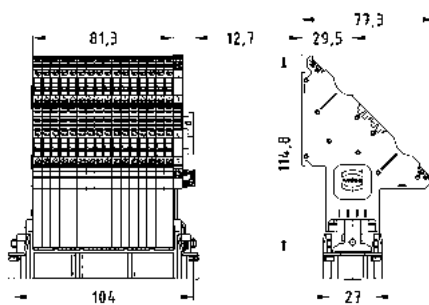
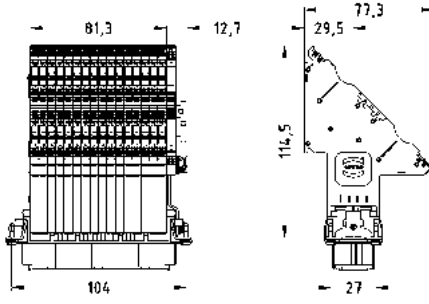
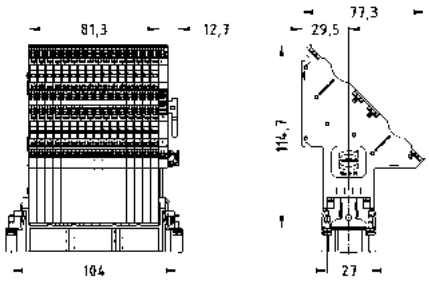
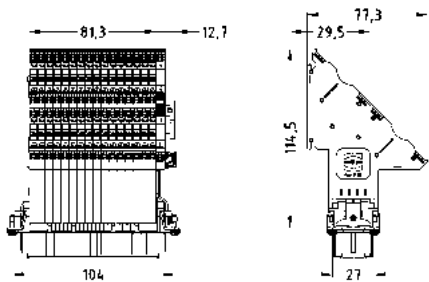
Number of contacts

64+

10 A 250 V 4 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D [®] AV , Terminal block connector, Left hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated	0,2 ... 2,5	09 21 064 4601	09 21 064 4701	
Han D [®] AV , Terminal block connector, Left hand version, Single contour (SK), Screw termination, Contact surface: Silver plated	0,2 ... 2,5	09 21 064 4602	09 21 064 4702	

Han
AV

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D® AV , Terminal block connector, Right hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 21 064 4611	09 21 064 4711	
Han D® AV , Terminal block connector, Right hand version, Single contour (SK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 21 064 4612	09 21 064 4712	
				
				

Features

- Easy mounting direct adjacent to terminal block connector Han D® AV
- By using of fixing elements mountable on standard rails
- Screw termination with wire protection

Technical characteristics

Electrical data acc. to IEC 61984	16 A 400/690 V 6 kV 3
Rated current	16 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984



Details

Stripping length 8 ... 11 mm

Tightening torque 0.5 Nm

Identification strips

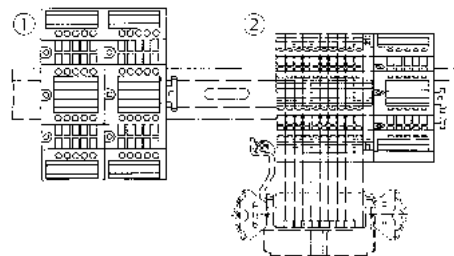
the following identification strips may be used

- ♦ HARTING – 09 21 000 9971
- ♦ Murrplastik – KPX 5/10-5
- ♦ Phoenix – 4 K – DST 5
- ♦ Phoenix – ZB 5
- ♦ Phoenix – DS 5

Identification

The individual terminals have the same identification as on the mating face. In addition each circuit may be separately labelled with identification strips fitted in the adjacent slots.

Mounting example



- ① Distributor On standard rail
- ② Distributor With terminal block connector Han D® AV

16 A 400/690 V 6 kV 3



Han
AV

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
Han D® AV , Distributor, 20 termination points, Screw termination, Contact surface: Tin plated Optionally mountable to terminal block connectors	0,2 ... 2,5	09 42 020 0111	
Han D® AV , Distributor, 2 x10 termination points, Screw termination, Contact surface: Tin plated Optionally mountable to terminal block connectors	0,2 ... 2,5	09 42 020 0121	
Han D® AV , Distributor, 4x 4 termination points, Screw termination, Contact surface: Tin plated Optionally mountable to terminal block connectors	0,2 ... 2,5	09 42 020 0131	

Features

- for left or right hand applications available
- PE and connecting terminal for contact no.1 are at the top in both types of installation
- Mountable in standard bulkhead mounted housings and on standard rails by using of fixing elements
- Screw termination with wire protection

Technical characteristics

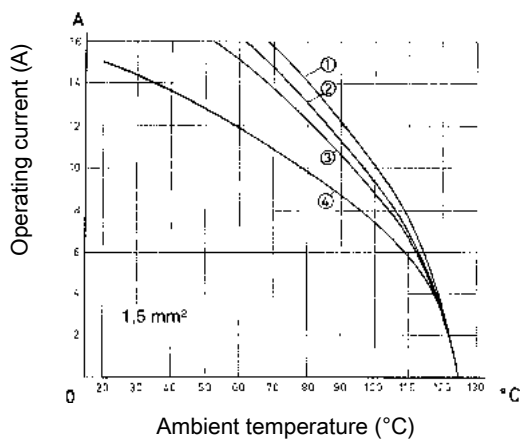
Number of contacts	6, 10, 16, 24
Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 4 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

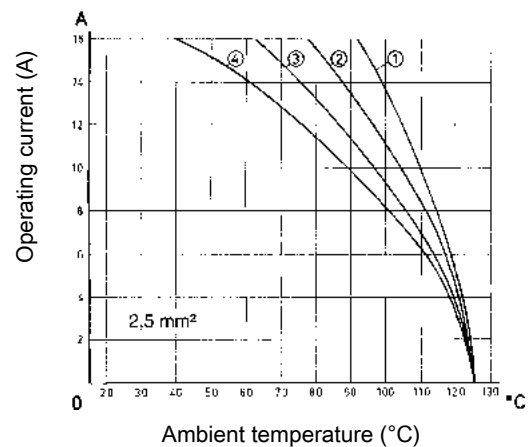
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 6 E AV
- ② Han® 10 E AV
- ③ Han® 16 E AV
- ④ Han® 24 E AV

Derating



- ① Han® 6 E AV
- ② Han® 10 E AV
- ③ Han® 16 E AV
- ④ Han® 24 E AV

Specifications and approvals

EN 60664-1
IEC 61984



Details

Stripping length 8 ... 11 mm

Tightening torque 0.5 Nm

Identification strips

Multi contour (MK) the following identification strips may be used

- HARTING 6 x 10 – 09 33 000 9971
- Murrplastik – KPX 6 / 10
- Weidmüller – DEK 6.5
- Phoenix – 4 K – DST 6

Single contour (SK) the following identification strips may be used

- Murrplastik – KWI 6/10
- Wieland – 9705 A/6.7

Identification

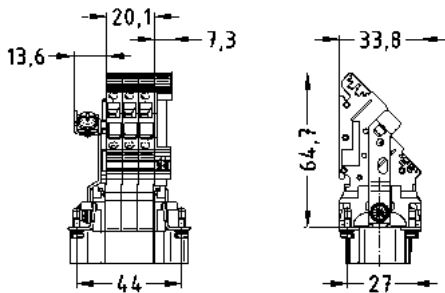
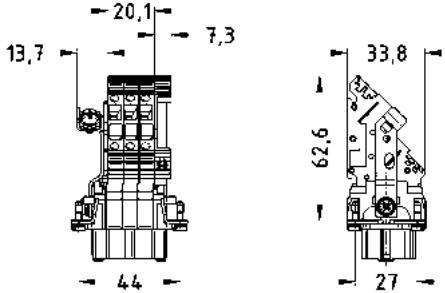
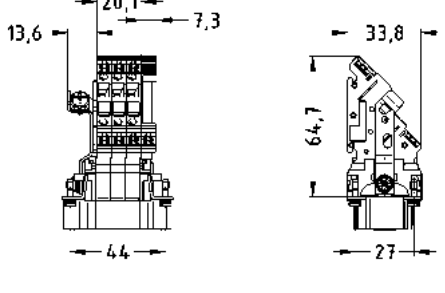
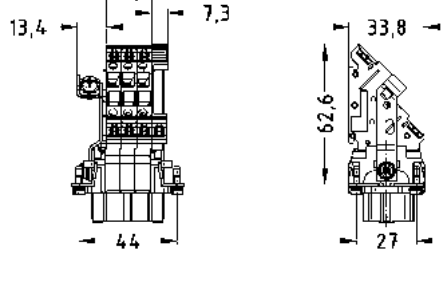
The individual terminals have the same identification as on the mating face. In addition each circuit may be separately labelled with identification strips fitted in the adjacent slots.

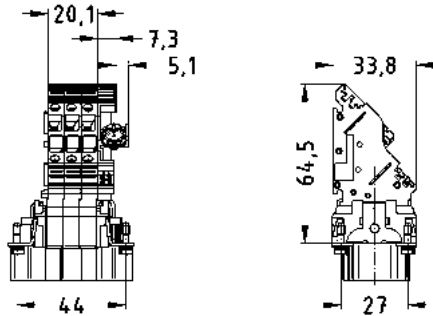
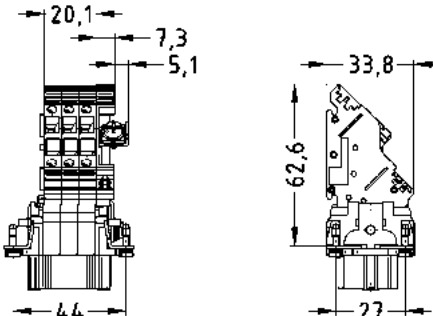
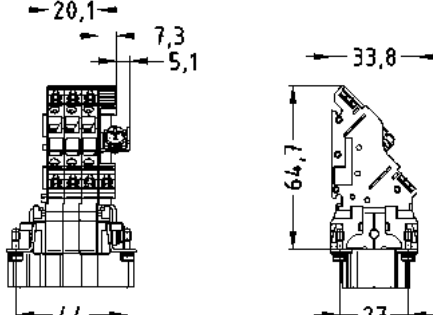
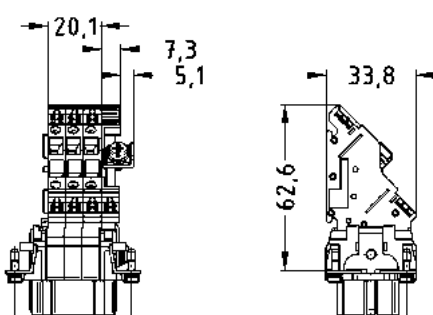
Number of contacts

6+

16 A 500 V 6 kV 3

Han
AV

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E® AV , Terminal block connector, Left hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 33 006 4625	09 33 006 4725	
Han E® AV , Terminal block connector, Left hand version, Single contour (SK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 33 006 4626	09 33 006 4726	
				
				

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E® AV , Terminal block connector, Right hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 33 006 4635	09 33 006 4735	
Han E® AV , Terminal block connector, Right hand version, Single contour (SK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 33 006 4636	09 33 006 4736	
				
				

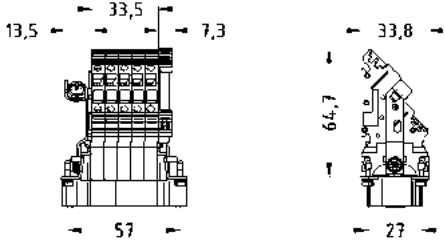
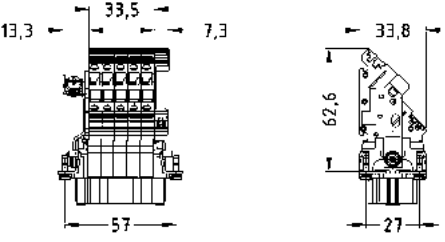
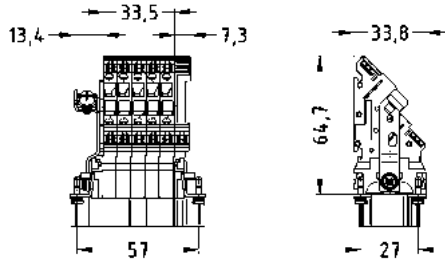
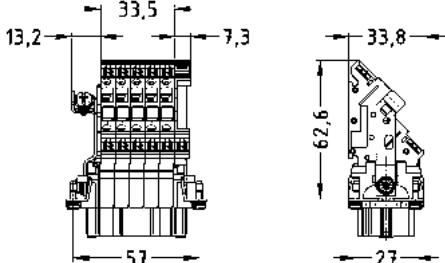


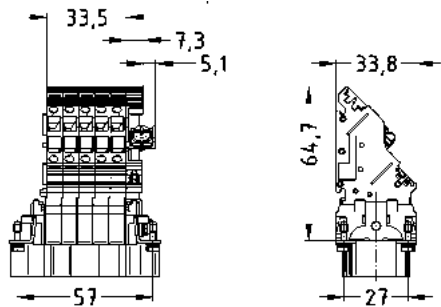
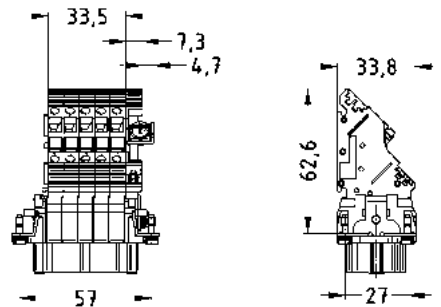
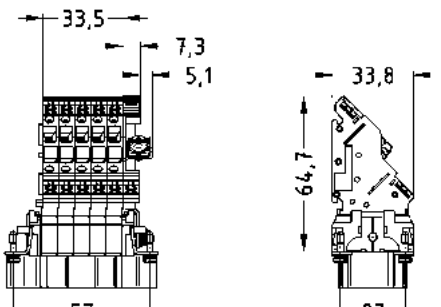
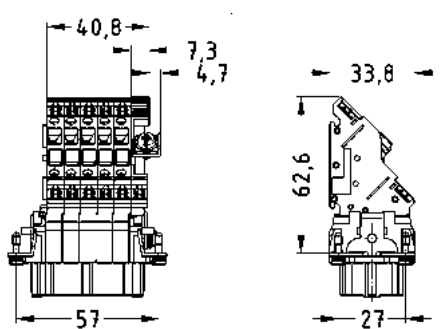
Number of contacts

10+

16 A 500 V 6 kV 3

Han
AV

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
Han E® AV , Terminal block connector, Left hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 33 010 4625	09 33 010 4725		
Han E® AV , Terminal block connector, Left hand version, Single contour (SK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 33 010 4626	09 33 010 4726		
					
					

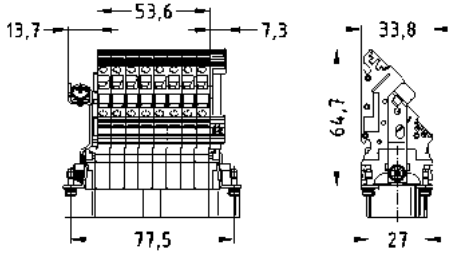
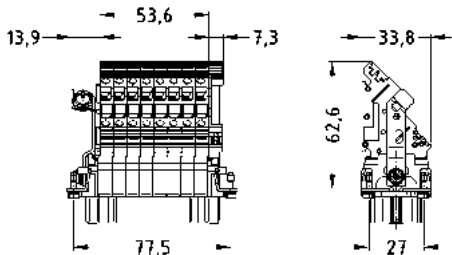
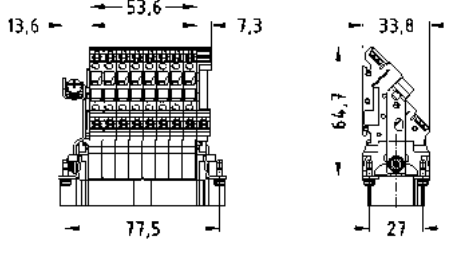
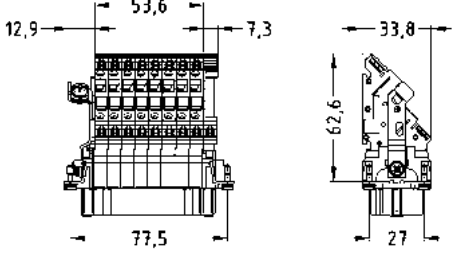
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E® AV , Terminal block connector, Right hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 33 010 4635	09 33 010 4735	
Han E® AV , Terminal block connector, Right hand version, Single contour (SK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 33 010 4636	09 33 010 4736	
				
				

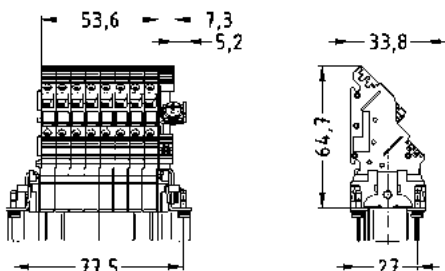
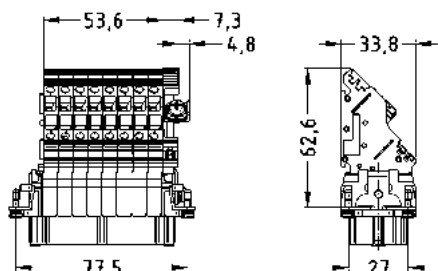
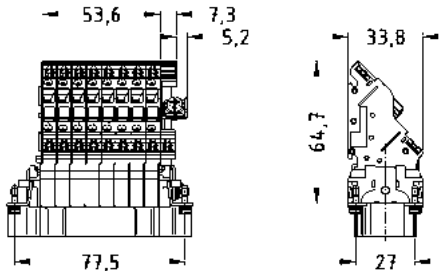
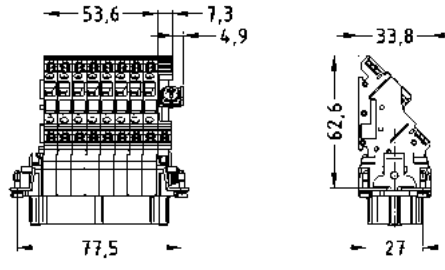
Number of contacts

16+

16 A 500 V 6 kV 3

Han
AV

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E® AV , Terminal block connector, Left hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 33 016 4625	09 33 016 4725	
Han E® AV , Terminal block connector, Left hand version, Single contour (SK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 33 016 4626	09 33 016 4726	
				
				

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E® AV , Terminal block connector, Right hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated	0,2 ... 2,5	09 33 016 4635	09 33 016 4735	
				
Han E® AV , Terminal block connector, Right hand version, Single contour (SK), Screw termination, Contact surface: Silver plated	0,2 ... 2,5	09 33 016 4636	09 33 016 4736	
				

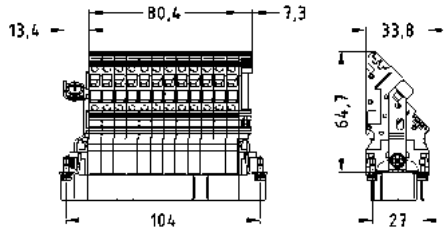
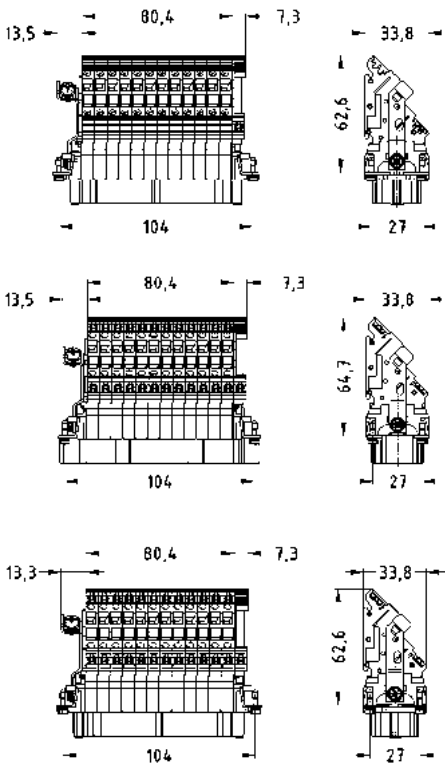


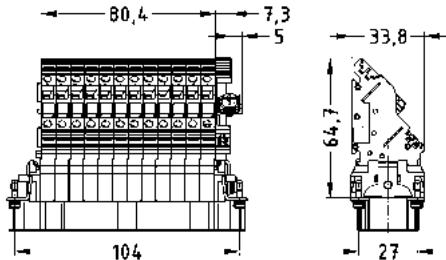
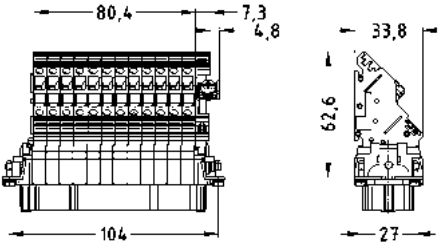
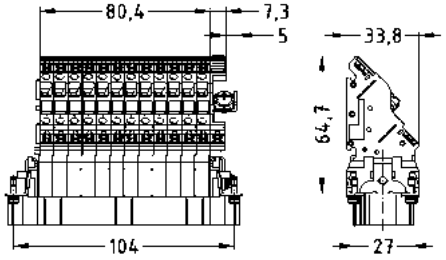
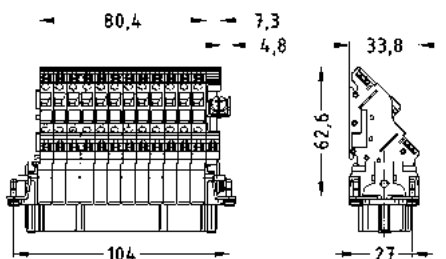
Number of contacts

24+

16 A 500 V 6 kV 3

Han
AV

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E® AV , Terminal block connector, Left hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 33 024 4625	09 33 024 4725	
Han E® AV , Terminal block connector, Left hand version, Single contour (SK), Screw termination, Contact surface: Silver plated 	0,2 ... 2,5	09 33 024 4626	09 33 024 4726	

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E® AV , Terminal block connector, Right hand version, Multi contour (MK), Screw termination, Contact surface: Silver plated	0,2 ... 2,5	09 33 024 4635	09 33 024 4735	
Han E® AV , Terminal block connector, Right hand version, Single contour (SK), Screw termination, Contact surface: Silver plated	0,2 ... 2,5	09 33 024 4636	09 33 024 4736	
Han E® AV , Terminal block connector, Right hand version, Single contour (SK), Screw termination, Contact surface: Silver plated	0,2 ... 2,5	09 33 024 4636	09 33 024 4736	
				

Features

- for left or right hand applications available
- PE and connecting terminal for contact no.1 are at the top in both types of installation
- Mountable in standard bulkhead mounted housings and on standard rails by using of fixing elements
- Reliable cage clamp termination

Technical characteristics

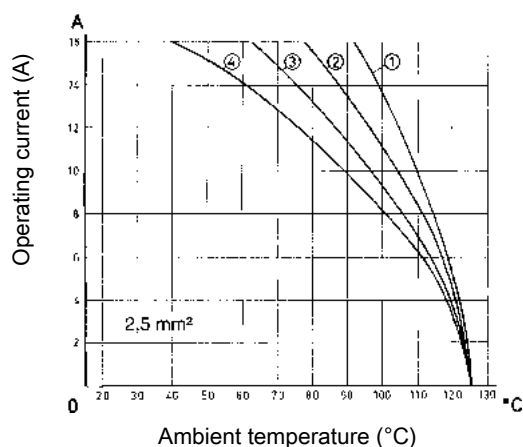
Number of contacts	6, 10, 16, 24
Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated current acc. to UL	12 A
Rated current acc. to CSA	12 A
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 4 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

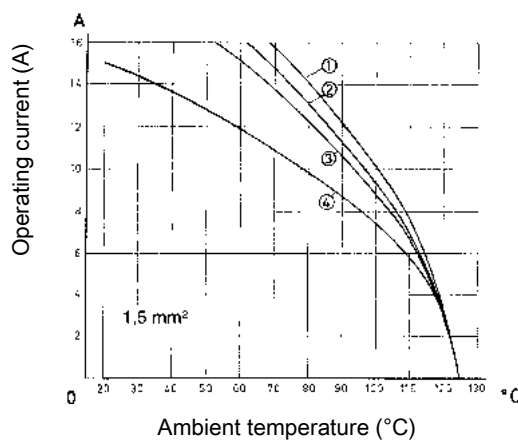
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 6 ES AV
- ② Han® 10 ES AV
- ③ Han® 16 ES AV
- ④ Han® 24 ES AV

Derating



- ① Han® 6 ES AV
- ② Han® 10 ES AV
- ③ Han® 16 ES AV
- ④ Han® 24 ES AV

Specifications and approvals

EN 60664-1
IEC 61984



Details

Stripping length 8 ... 11 mm

Identification strips

Single contour (SK) the following identification strips may be used

- ♦ HARTING – 09 33 000 9973 (6 x 15)
- ♦ Murrplastik – KWI 6/15
- ♦ Wieland – 9705 A/6.7

Identification

The individual terminals have the same identification as on the mating face. In addition each circuit may be separately labelled with identification strips fitted in the adjacent slots.

Number of contacts

6+

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)	
		Male	Female		
Han® ES AV , Terminal block connector, Left hand version, Single contour (SK), Cage-clamp termination, Contact surface: Silver plated	0,14 ... 2,5	09 33 006 4629	09 33 006 4729		
Han® ES AV , Terminal block connector, Right hand version, Single contour (SK), Cage-clamp termination, Contact surface: Silver plated	0,14 ... 2,5	09 33 006 4639	09 33 006 4739		

Han
AV

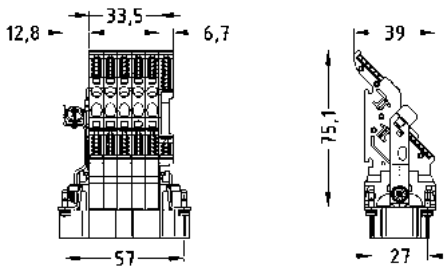

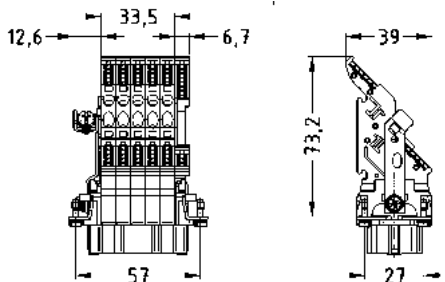
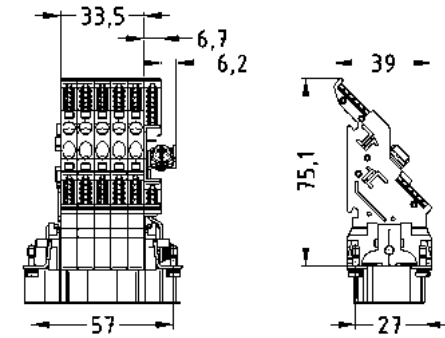
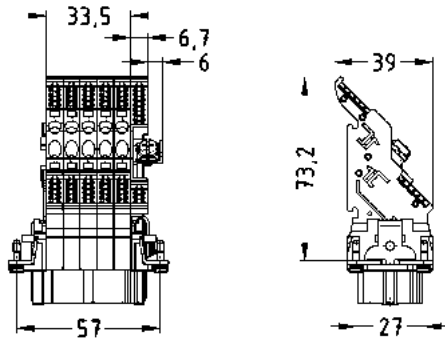


Number of contacts

10+

16 A 500 V 6 kV 3

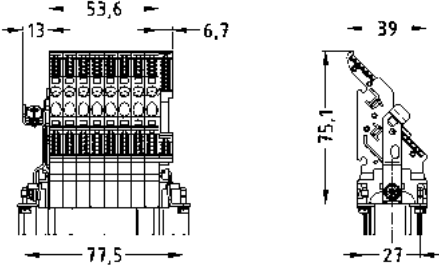
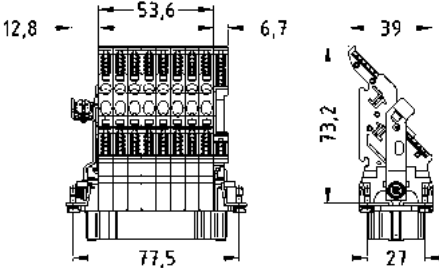
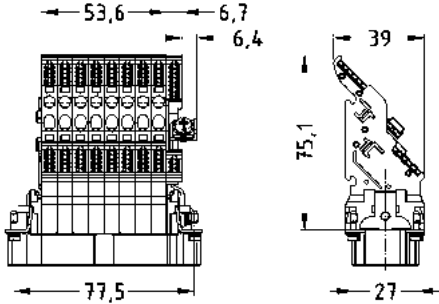
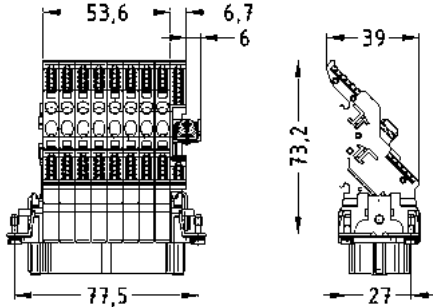
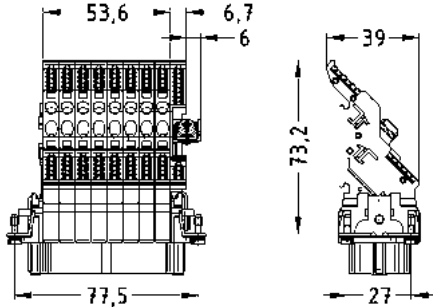
Han
AV

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® ES AV , Terminal block connector, Left hand version, Single contour (SK), Cage-clamp termination, Contact surface: Silver plated 	0,14 ... 2,5	09 33 010 4629	09 33 010 4729	
Han® ES AV , Terminal block connector, Right hand version, Single contour (SK), Cage-clamp termination, Contact surface: Silver plated 	0,14 ... 2,5	09 33 010 4639	09 33 010 4739	
				
				

Number of contacts

16+ 

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® ES AV , Terminal block connector, Left hand version, Single contour (SK), Cage-clamp termination, Contact surface: Silver plated 	0,14 ... 2,5	09 33 016 4629	09 33 016 4729	   
Han® ES AV , Terminal block connector, Right hand version, Single contour (SK), Cage-clamp termination, Contact surface: Silver plated 	0,14 ... 2,5	09 33 016 4639	09 33 016 4739	

Han
AV

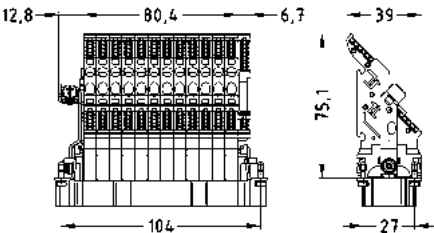
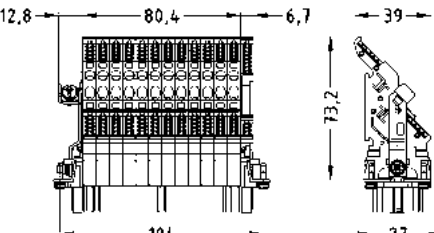
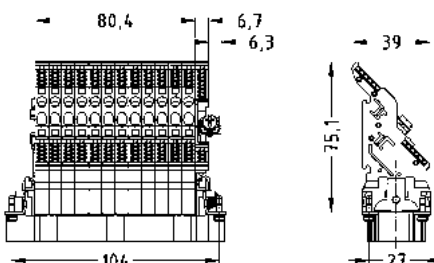
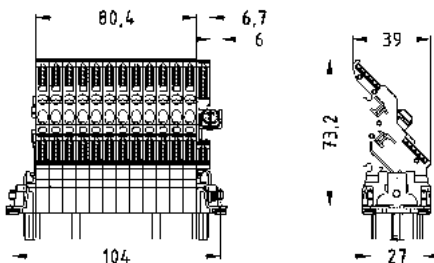


Number of contacts

24+

16 A 500 V 6 kV 3

Han
AV

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® ES AV , Terminal block connector, Left hand version, Single contour (SK), Cage-clamp termination, Contact surface: Silver plated 	0,14 ... 2,5	09 33 024 4629	09 33 024 4729	
Han® ES AV , Terminal block connector, Right hand version, Single contour (SK), Cage-clamp termination, Contact surface: Silver plated 	0,14 ... 2,5	09 33 024 4639	09 33 024 4739	
				
				



Details

There are moulded slots at the rear of the terminal block connectors and distributors to accept the fixing elements. When used these elements, for example, can be used to secure the connectors inside the switch cabinets on standard rails.






Details

For mounting
Terminal block connector Han E® AV / Han® ES AV
Han® 6 E AV, Han® 6 ES AV = 1 fixing element
Han® 10/16/24 E AV, Han® 10/16/24 ES AV = 2 fixing elements
Terminal block connector Han D® AV
Han® 40/64 D AV = 2 fixing elements
Distributor = 1 fixing element

Han
AV

Identification		Part number	Drawing (dimensions in mm)
Han D® AV Distributor, Fixing element		09 33 000 9928	 ① Terminal block connector Han D® AV ② Fixing element ③ C-rail IEC 60715-C30 ④ G-rail IEC 60715-G32 ⑤ Rail IEC 60715-35 x 7.5 or -35 x 15
Han E® AV / Han® ES AV , Fixing element		09 33 000 9929	 ① Terminal block connector Han E® AV ② Fixing element ③ C-rail IEC 60715-C30 ④ G-rail IEC 60715-G32 ⑤ Rail IEC 60715-35 x 7.5 or -35 x 15

Han
AV

Identification	Part number	Drawing (dimensions in mm)
Han D® AV , Identification strip, Multi contour (MK), Pack contents: 88 pieces in one block 	09 21 000 9971	
Han E® AV , Identification strip, Multi contour (MK), Pack contents: 64 pieces in one block 	09 33 000 9971	
Han® ES AV , Identification strip, Single contour (SK), Pack contents: 64 pieces in one block 	09 33 000 9973	
Adapter, To fit identification strips, Multi contour (MK) 	09 33 000 9964 09 33 000 9965 09 33 000 9966 09 33 000 9967	 09 33 000 9964 Han® 6 E AV a = 26.8 mm 09 33 000 9965 Han® 10 E AV a = 40.2 mm 09 33 000 9966 Han® 16 E AV a = 60.3 mm 09 33 000 9967 Han® 24 E AV a = 87.4 mm

Contents

Page

Staf®

09.2

Features

- male insert with female contacts
- female insert with male contacts

Technical characteristics

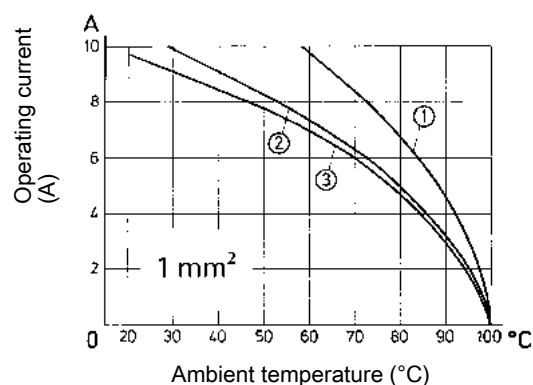
Number of contacts	6, 14, 20, 40
Electrical data acc. to IEC 61984	10 A 25 V 0,8 kV 3
Rated current	10 A
Rated voltage	25 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage	25 V AC, 60 V DC
Rated voltage acc. to UL	50 V
Rated voltage acc. to CSA	50 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 2 \text{ m}\Omega$
Limiting temperature	-40 ... +100 °C
Flammability acc. to UL 94	HB
Mating cycles	≥ 500
Material (insert)	Polyamide
Colour (insert)	Black
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Staf® 6
- ② Staf® 14
- ③ Staf® 20

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076






Details

In accordance with the appropriate regulations a wire-end sleeve has to be used at clamps without wire protection (see "screw terminal", chapter 00).

Number of contacts

6+

10 A 25 V 0,8 kV 3

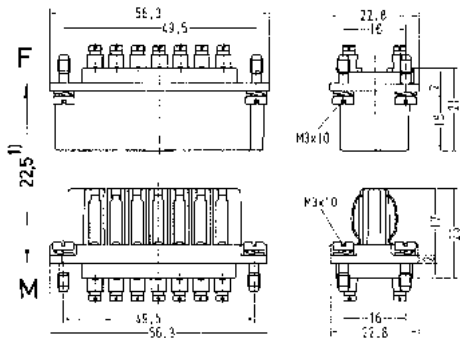
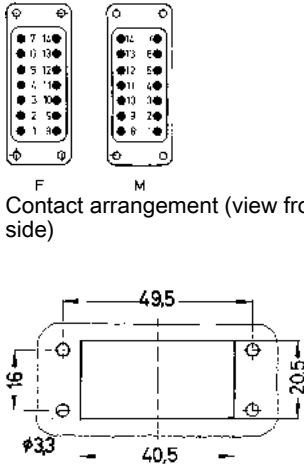
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Staf® , Screw termination, Contact surface: Silver plated 	1,5	09 70 006 2813	09 70 006 2616	 Contact arrangement (view from termination side)
Staf® , Solder termination, Contact surface: Silver plated 	2,5	09 70 006 2812	09 70 006 2615	 Contact arrangement (view from termination side)  Mounting example

Staf

Number of contacts

14+ 

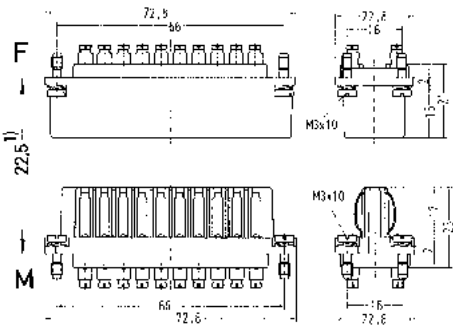
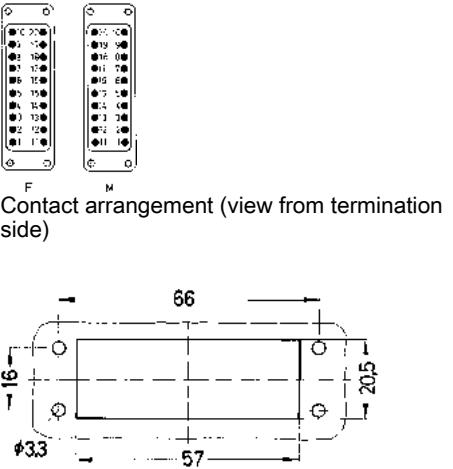
10 A 25 V 0,8 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Staf® , Screw termination, Contact surface: Silver plated 	1,5	09 70 014 2811	09 70 014 2614	 1) distance for contact max. 24 mm
Staf®, Solder termination, Contact surface: Silver plated 	2,5	09 70 014 2810	09 70 014 2613	 Contact arrangement (view from termination side) Panel cut out for use without hood

Number of contacts

20+ 

10 A 25 V 0,8 kV 3


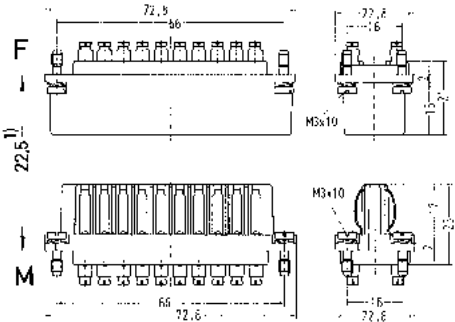
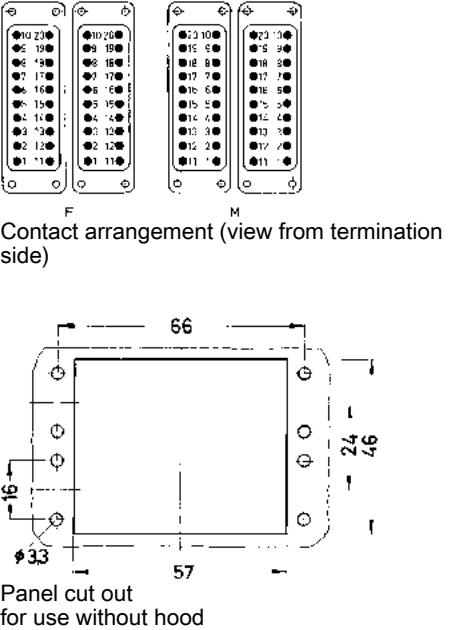
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Staf®, Screw termination, Contact surface: Silver plated 	1,5	09 70 020 2817	09 70 020 2622	 1) distance for contact max. 24 mm
Staf®, Solder termination, Contact surface: Silver plated 	2,5	09 70 020 2816	09 70 020 2621	 Panel cut out for use without hood



Number of contacts

40+

10 A 25 V 0,8 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Staf®, Screw termination, Contact surface: Silver plated  You need two inserts for a complete assembly!	1,5	09 70 020 2817	09 70 020 2622	 1) distance for contact max. 24 mm
Staf®, Solder termination, Contact surface: Silver plated  You need two inserts for a complete assembly!	2,5	09 70 020 2816	09 70 020 2621	 Panel cut out for use without hood

Contents	Page
Coupling	11.3
Plastic panel mounting	11.5
Metal panel mounting	11.6
Insert mounting.....	11.7
Insert mounting with carrier element	11.8
Plastic housings.....	11.10
Accessories	11.15

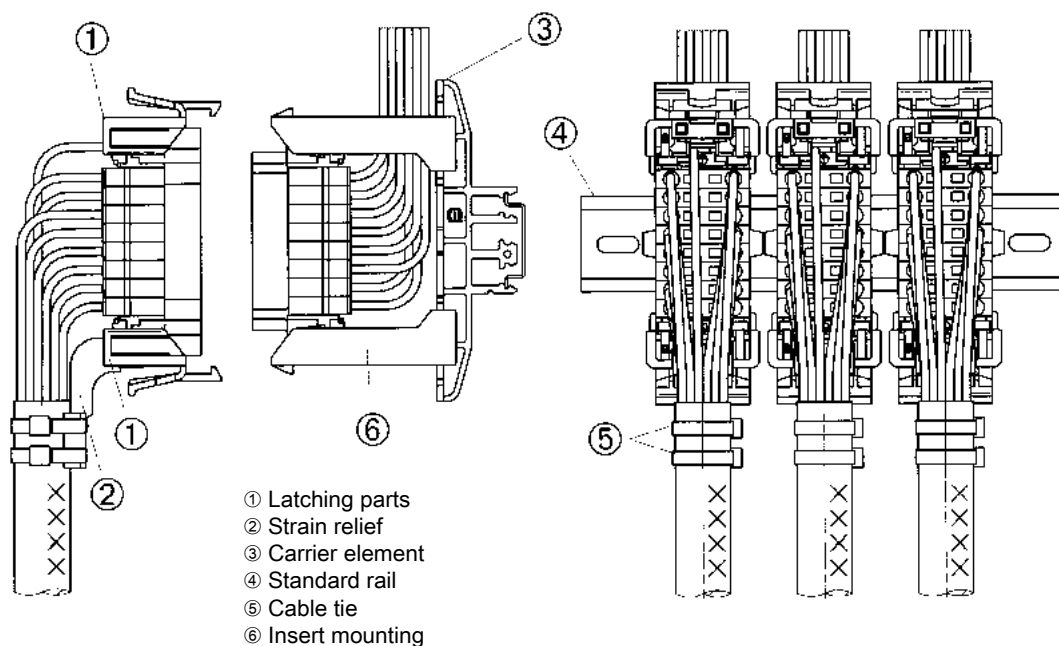
Note:

A connector mounted with Han-Snap® elements does not offer finger safe protection to the relevant standards. In this case protection against electric shock must be provided by the installation methods of the user. The fixing of the PE terminal must be conducted on equal side of the connector insert to avoid ground interruptions.

- The Han-Snap® system is ideal for connectors within closed electrical operating environments. These can be rooms, cabinets or termination boxes.
- The Han-Snap® components are an innovative design which offer the following advantages and characteristics:
 - reduction of material and assembly costs;
 - fast and easy installation;
 - preassembly of Han connectors;
 - secure and rigid mounting of Han connectors;
 - frequent use of latching systems is possible (up to several thousand cycles).
- The Han-Snap® elements are compatible with the standard inserts and terminal block connectors of the following series (named series Han B as follows)
 - Han D®, 40 and 64 pins
 - Han DD®
 - Han E®
 - Han® EE
 - Han® EEE
 - Han® ES
 - Han Hv E®
 - Han® Hv ES
 - Han® HsB
 - Han-Com®
 - Han-Modular®

- With the Han-Snap® adapter the following standard inserts are compatible (named series Han A as follows):
 - Han D®, 15 and 25 pins
 - Han A®, 10 and 16 pins
- The Han-Snap® elements are a mechanical system for the mounting assembly and security of Han connectors. Normally the elements are assembled to the connector insert using the standard insert fixing screws. If coding is required the standard fixing screws may be replaced by either code pins or guide pins and bushes.
- On free connectors the wires or cables can be secured to the strain relief element with standard cable ties of 5 mm width maximum.

Han-Snap® on standard rail





Features

- Compact design saves space
- Practical and easy handling
- Reduction of material and assembly costs

Technical characteristics

Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Degree of protection acc. to IEC 60529	IP20
Retention force	200 N Without guiding, 300 N With guiding
Material (accessories)	Polycarbonate
Colour (accessories)	RAL 7032 (pebble grey)

Specifications and approvals

IEC 60068-2-6
Vibration (sinusoidal)
IEC 60068-2-27
Shock

Details

Inserts can be mounted on the panel mounting part and the latching part with the standard insert mounting screws.

High mechanical security of the fixings.

No functional impairment is caused by slight over tightening of the fixing screws.

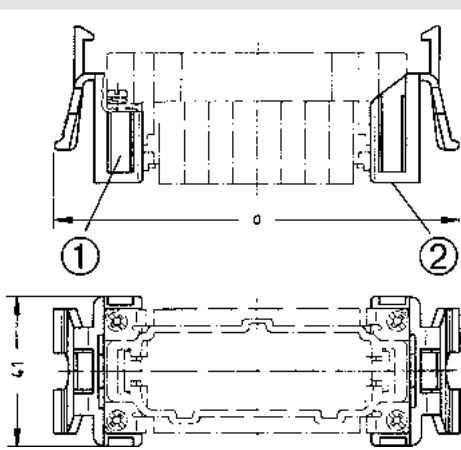
Alternatively, Han® coding elements (code pins or guide pins and bushes) may be used.

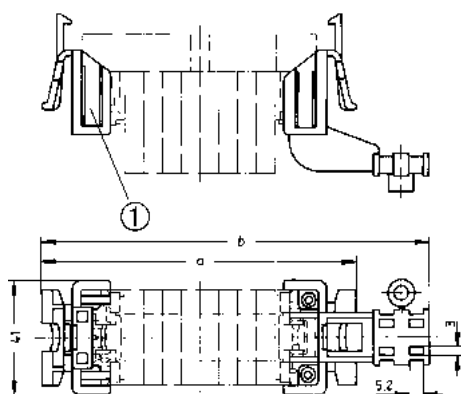
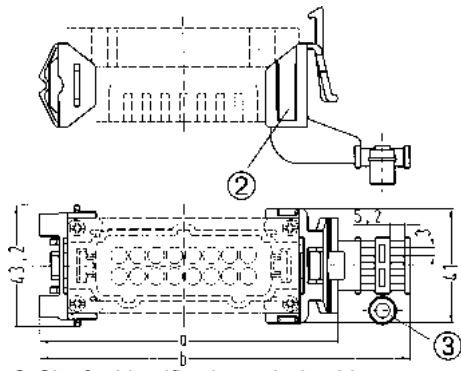
Label 9 x 20 mm may be fitted in both sides of each latching element. Label 7 x 20 mm may be fitted to the top of the latching part without the strain relief element.

Up to 2 cable ties with max. 5 mm width can be used on the strain relief.

Please note: The strain relief element should be assembled to the latching part at the end of the insert opposite to the ground screw.

Han-Snap

Identification	Part number	Drawing (dimensions in mm)
Han-Snap®, Coupling, Pack contents: 2 latching parts 	09 33 000 9987	 ① Slot for identification strip 9 x 20 ② Slot for identification strip 7 x 20 6 B: a= 78.5 10 B: a= 91.5 16 B: a= 112.5 24 B: a= 138.5

Identification	Part number	Drawing (dimensions in mm)
Han-Snap® , Coupling, With strain relief, Pack contents: 1 latching part with strain relief, 1 panel mounting part 	09 33 000 9991	 ① Slot for identification strip 9 x 20 6 B: a=78,5; b=105 10 B: a=91,5; b=118 16 B: a=112,5; b=138,5 24 B: a=138,5; b=165
Han-Snap® , Coupling, With strain relief, and panel mounting parts, Pack contents: 1 latching part with strain relief, 1 panel mounting part 	09 33 000 9990	 ② Slot for identification strip 9 x 20 ③ Distance bush 6 B: a=75; b=101 10 B: a=88; b=114 16 B: a=108,5; b=134,5 24 B: a=135; b=161



Features

- Snap element for sheet-metal cut out
- Compact design saves space
- Practical and easy handling
- Reduction of material and assembly costs

Technical characteristics

Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Retention force	≥250 N in the sheet-metal cut out
Material (accessories)	Polycarbonate
Colour (accessories)	RAL 7032 (pebble grey)

Specifications and approvals

IEC 60068-2-6
Vibration (sinusoidal)
IEC 60068-2-27
Shock

Details

Connector inserts and terminal block connectors can be fixed on elements for panel mounting with standard insert mounting screws.

High mechanical security of the fixings. No functional impairment is caused by slight over tightening of the fixing screws.

Alternatively, Han® coding elements (code pins or guide pins and bushes) may be used.

Connector assembly into the panel (sheet-metal) cut out or two parallel mounted rails is possible from mating or termination side.

Han-Snap

Identification

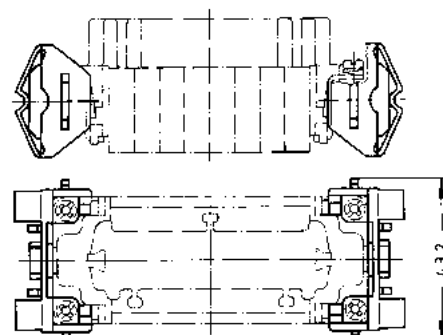
Han-Snap®,
Panel mounting parts,
Pack contents:
2 plastic panel mounting parts sufficient for one insert or terminal block connector




Part number

09 33 000 9985

Drawing (dimensions in mm)



Panel cut out
Sheet-metal thickness: 1.3 ... 3 mm



6 B: $a^{+0.5} = 65$
10 B: $a^{+0.5} = 78$
16 B: $a^{+0.5} = 98$
24 B: $a^{+0.5} = 125$
10 A: $a^{+0.5} = 81,5$
16 A: $a^{+0.5} = 98$



Features

- Snap element for sheet-metal cut out
- Compact design saves space
- Practical and easy handling
- Reduction of material and assembly costs

Technical characteristics

Limiting temperature -40 ... +125 °C
Material (accessories) Zinc die-cast

Specifications and approvals

IEC 60068-2-6
Vibration (sinusoidal)
IEC 60068-2-27
Shock

Details

Connector inserts and terminal block connectors can be fixed on elements for panel mounting with standard insert mounting screws.
High mechanical security of the fixings.
Alternatively, Han® coding elements (code pins or guide pins and bushes) may be used.
Connector assembly into the panel (sheet-metal) cut out or two parallel mounted rails is possible from mating or termination side.

Identification

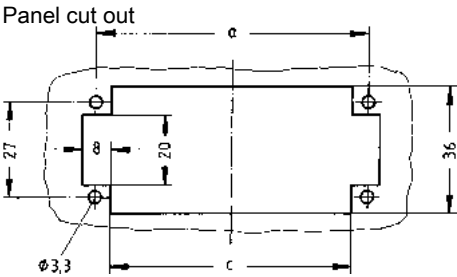
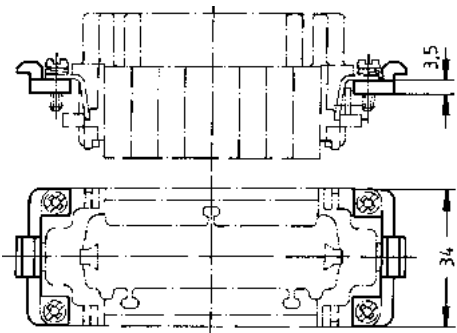
Han-Snap®,
Panel mounting parts,
Pack contents:
2 metallic panel mounting parts sufficient for one insert or terminal block connector



Part number

09 33 000 9984

Drawing
(dimensions in mm)



6 B: a=44; c=36
10 B: a=57; c=49
16 B: a=77.5; c=69.5
24 B: a=104; c=96



Features

- Insert is mounted with carrier element
- A practical solution to fix the insert directly on a standard rail
- Insert can be assembled to Han-Snap® element with screw-driver
- Compact design saves space

Technical characteristics

Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Retention force	≥300 N On rail (tension), ≥1.000 N On rail (pressure)
Material (accessories)	Polycarbonate
Colour (accessories)	RAL 7032 (pebble grey)

Specifications and approvals

IEC 60068-2-6
Vibration (sinusoidal)
IEC 60068-2-27
Shock

Details

The insert mounting locks directly on standard rail 35 x 15 or 35 x 7.5 mm.

Inserts can be assembled on the insert mounting with the standard insert fixing screws.

High mechanical security of the fixings.

No functional impairment is caused by slight over tightening of the fixing screws.

Alternatively, Han® coding elements (code pins or guide pins and bushes) may be used.

The following labels may be fitted alternatively to the insert mounting parts for circuit identification purposes:

Label 7 x 20 mm or 9 x 20 mm

Han-Snap

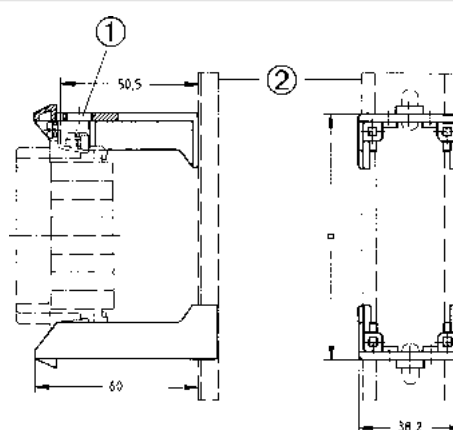
Identification

Han-Snap®,
Insert mounting,
Pack contents:
2 insert mounting parts

Part number

09 33 000 9980

Drawing (dimensions in mm)



- ① Slot for identification strip
② Rail IEC 60715-35 x 7.5 or -35 x 15
6 B: a= 57
10 B: a= 70
16 A / 16 B: a= 90.5
24 B: a= 117





Features

- Insert is mounted with carrier element
- A practical solution to fix the insert directly on a standard rail
- Insert can be assembled to Han-Snap® element with screw-driver
- Compact design saves space

Technical characteristics

Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Retention force	≥450 N On rail
Material (accessories)	Polycarbonate
Colour (accessories)	RAL 7032 (pebble grey)

Specifications and approvals

IEC 60068-2-6
Vibration (sinusoidal)
IEC 60068-2-27
Shock

Details

The carrier element is the basic element to mount the inserts in the cross direction on standard rails, for example:

- Caprail, 35 x 7.5 or 35 x 15 acc. to DIN EN 60 715
- C-rail, C 30 acc. to DIN EN 60 715
- G-rail, G 32 acc. to DIN EN 60 715

Where vibration is likely to be encountered, use the 35 x 15 mounting rails. When using the large carrier element, the 35 x 15 mounting rails are recommended to give greater stability.

Insert mounting type 6/10 is suitable for inserts of sizes Han 6 B and Han 10 B.

Insert mounting type 6/24 is suitable for all insert sizes: Han 6 B / 10 B / 16 B / 24 B, Han 16 A with the corresponding adapter.

Inserts can be assembled to the insert mountings with the standard insert mounting screws.

High mechanical security of the fixings. No functional impairment is caused by slight over tightening of the fixing screws.

Alternatively, Han® coding elements (code pins or guide pins and bushes) may be used.

The following labels may be fitted to the insert mounting parts for circuit identification purposes:

Label 7 x 20 mm or 9 x 20 mm

Identification

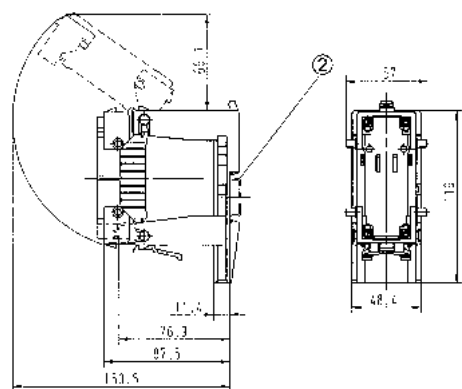
Han-Snap®,
Insert mounting,
Swinging,
for standard inserts



Part number

09 33 000 9801

Drawing (dimensions in mm)



② Rail IEC 60715-35 x 7.5 or -35 x 15

Han-Snap®,
Insert mounting,
Swinging,
for Han-Modular® hinged frames



09 33 000 9803

Han-Snap

Features

- Ideal for use within closed electrical operation environments
- Allows use of preassembled cables
- Optimised cost of material and assembly
- Insert can be assembled to Han-Snap® element with screw-driver

Technical characteristics

Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Retention force	≥300 N In locked position
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 7032 (pebble grey)

Specifications and approvals

IEC 60068-2-6
Vibration (sinusoidal)
IEC 60068-2-27
Shock

Details

2 identical half shells form a shell housing.

Each housing has 3 cable entries, one on top and one at each end. 2 x cable entries can be closed by enclosed blind plugs.

In the area of cable entries there are rectangular openings for mounting of cable ties up to max. 5 mm width.

In the mating area both housing shells are fixed by the standard insert fixing screws.

To release the half shells use screw driver (3.5 x 0.5).

Alternatively, Han® coding elements (code pins or guide pins and bushings) may be used.

High mechanical security of the fixings.

No functional impairment is caused by slight over tightening of the fixing screws. The blind plugs have slots for identification strips.

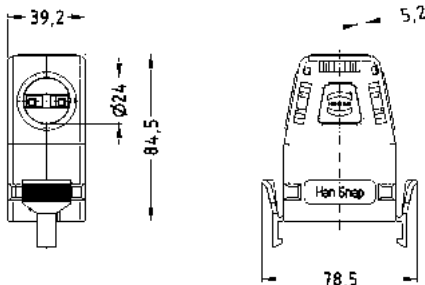
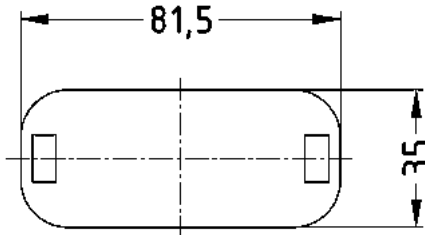
The following labels can be fitted: label 7 x 20 mm or 9 x 20 mm

Size 16 A by using the corresponding adapter

Inserts can be assembled to the adapters with the standard insert fixing screws.

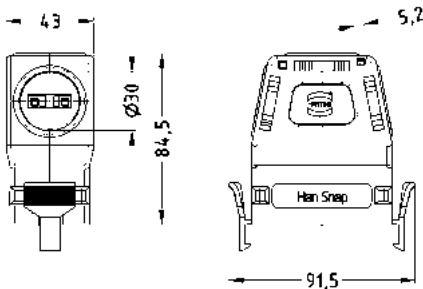
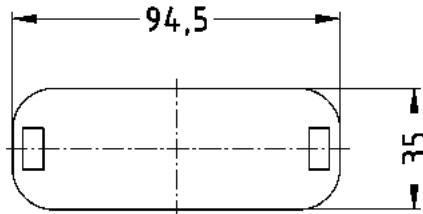
With the included screws the adapter can be fixed to the selected Han-Snap® element.

Snap-in latches

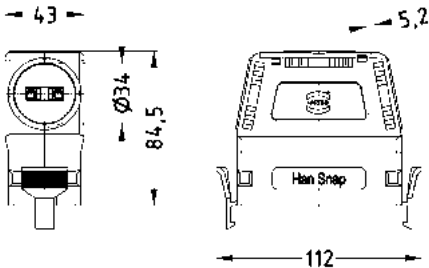
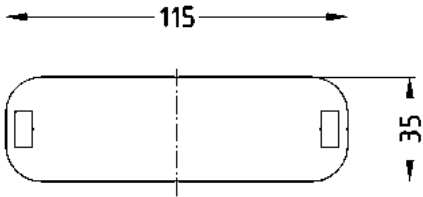
Identification	Part number	Drawing (dimensions in mm)
Han-Snap® , Plastic housings, Top/side entry, Pack contents: 2 half shells with blind plugs 	09 33 006 0401	
Han-Snap® , Protection cover, Thermoplastic 	09 33 006 5401	

Han-Snap

Snap-in latches

Identification	Part number	Drawing (dimensions in mm)
Han-Snap® , Plastic housings, Top/side entry, Pack contents: 2 half shells with blind plugs 	09 33 010 0401	
Han-Snap® , Protection cover, Thermoplastic 	09 33 010 5401	

Snap-in latches

Identification	Part number	Drawing (dimensions in mm)
Han-Snap® , Plastic housings, Top/side entry, Pack contents: 2 half shells with blind plugs  Size 16 A by using the corresponding adapter!	09 33 016 0401	
Han-Snap® , Protection cover, Thermoplastic 	09 33 016 5401	

Han-Snap



Snap-in latches

Identification

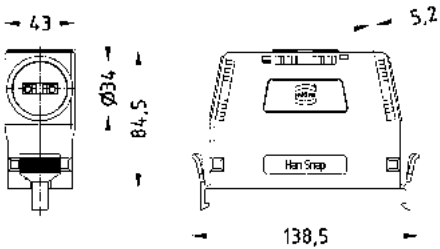
Part number

Drawing
(dimensions in mm)

Han-Snap® ,
Plastic housings,
Top/side entry,
Pack contents:
2 half shells with blind plugs



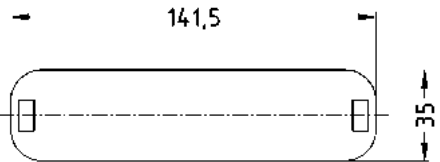
09 33 024 0401

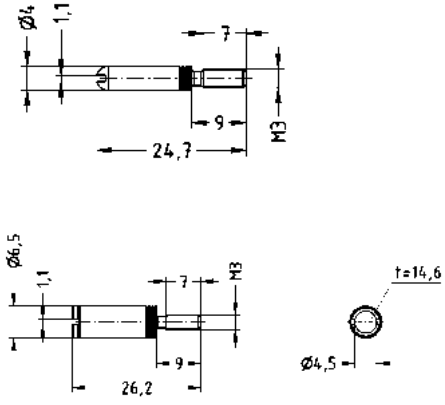
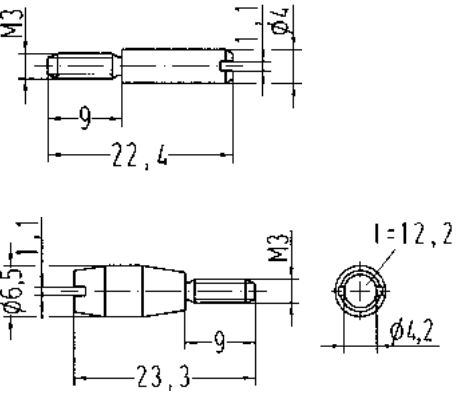


Han-Snap® ,
Protection cover,
Thermoplastic



09 33 024 5401



Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Coding, With guide pins/bushes, for application "insert with screw adapter" with/ without grip frame  Please order 4 pieces for one connector.	09 33 000 9808	09 33 000 9809	
Han-Snap® , Coding, Only for swinging insert mountings 	09 33 000 9956	09 33 000 9957	

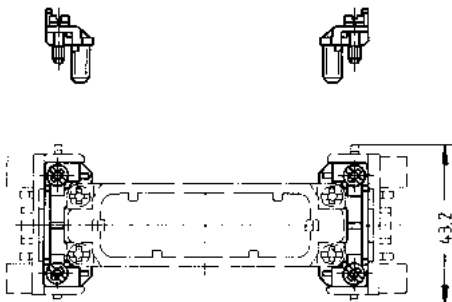

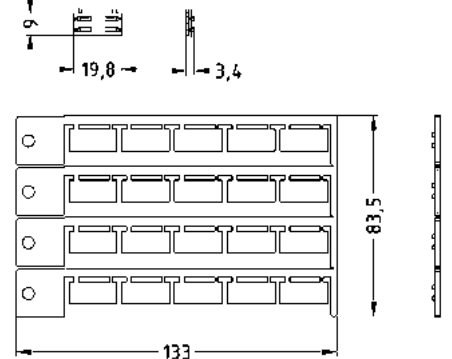
Han-Snap

Technical characteristics

Material (accessories) Polycarbonate

Technical characteristics

Colour (accessories) RAL 7032 (pebble grey)

Identification	Part number	Drawing (dimensions in mm)
Han A®, Adapter, Pack contents: 2 adapters, 4 fixing screws 	09 20 000 9933	
Identification strip, Pack contents: Single 	09 33 000 9981	
Identification strip, Pack contents: 20 pieces in one block	09 33 000 9982	

Contents	Page
Sockets.....	12.2
Frames	12.6
Data connectors	12.10
Wires	12.15
Gender changer.....	12.18
Accessories	12.19

Features

- Sockets for the European and international market
- Modular assembly
- Sockets to mount or snap into mounting plates

Technical characteristics

Mounting depth	62 mm, 30 mm, 20 mm, 43 mm
Supply voltage	250 V AC, 125 V AC, 240 V AC
Nominal frequency	50 Hz, 60 Hz
Nominal current	16 A, 15 A, 13 A, 6 A, 10 A
Material (hood/housing)	Thermoplastic

Details

for detailed technical characteristics see following pages

Identification	Conductor cross-section (mm ²)	Part number	
Han-Port® , Socket, With LED display, Connection at the rear, Screw termination, Germany (VDE) , 62 mm / 250 V AC / 50 Hz / 16 A	6	39 50 001 0001	
Han-Port® , Socket, for assembly in front of main switch, Connection at the rear, Screw termination, Germany (VDE) , 62 mm / 250 V AC / 50 Hz / 16 A	6	39 50 001 0002	
Han-Port® , Socket, Finger safe, Screw termination, USA Japan , 30 mm / 125 V AC / 60 Hz / 15 A	2,5	39 50 001 0004	
Han-Port® , Socket, With LED display, Connection at the rear, Screw termination, France (UTE) , 62 mm / 250 V AC / 50 Hz / 16 A	6	39 50 001 0005	
Han-Port® , Socket, Finger safe, Screw termination, Great Britain (BS) , 30 mm / 250 V AC / 60 Hz, 50 Hz / 13 A	4	39 50 001 0006	
Han-Port® , Socket, Double, Finger safe, Screw termination, Italy (CEI 23-16) , 20 mm / 250 V AC / 50 Hz / 16 A	2,5	39 50 001 0007	

Identification	Conductor cross-section (mm ²)	Part number	
Han-Port® , Socket, Screw termination, Australia China , 20 mm / 240 V AC / 60 Hz, 50 Hz / 15 A	4	39 50 001 0009	
Han-Port® , Socket, Spring clamp termination, Switzerland , 30 mm / 250 V AC / 50 Hz / 10 A	1,5	39 50 001 0012	
Han-Port® , Socket, Spring clamp termination, Denmark , 20 mm / 250 V AC / 50 Hz / 13 A	2,5	39 50 001 0017	
Han-Port® , Socket, Screw termination, India (IS) , 20 mm / 240 V AC / 50 Hz / 6 A	4	39 50 001 0321	
Han-Port® , Socket, Screw termination, Brazil , 30 mm / 250 V AC / 60 Hz / 10 A	2,5	39 50 001 0331	
Han-Port® , Socket, Screw termination, Israel , 30 mm / 250 V AC / 50 Hz / 16 A	2,5	39 50 001 0333	

Han-Port

Identification	Conductor cross-section (mm²)	Part number	
Han-Port® , Socket, Spring clamp terminal, Spring clamp termination, Germany (VDE) , 43 mm / 250 V AC / 50 Hz / 16 A	2,5	39 50 001 0450	
Han-Port® , Socket, Spring clamp terminal, Screw termination, China , 43 mm / 250 V AC / 50 Hz / 10 A	4	39 50 001 0458	
Han-Port® , Socket, Spring clamp termination, Germany (VDE) , 43 mm / 250 V AC / 50 Hz / 16 A 1 x RJ45 Cat.6 / 1 x USB-A 3.0, enclosed separatly	2,5	39 50 012 0450	
Han-Port® , Socket, Screw termination, China , 43 mm / 250 V AC / 50 Hz / 10 A 1 x RJ45 Cat.6 / 1 x USB-A 3.0, enclosed separatly	4	39 50 012 0458	

Features

- Suitable for rough industrial environments (degree of protection IP65 with closed cover)
- Modular assembly
- Various mounting plates with sockets and data interfaces available

Technical characteristics

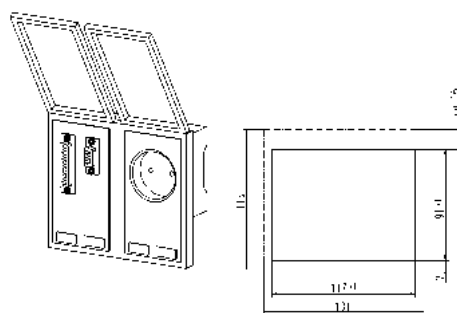
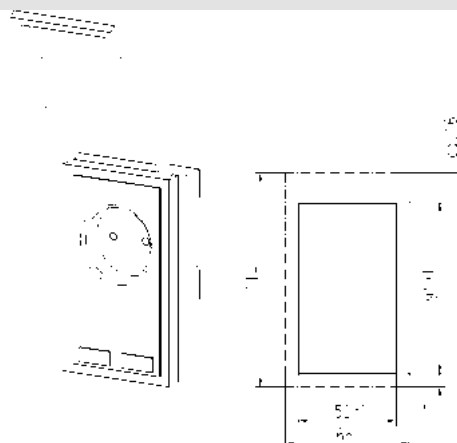
Operating temperature	-10 ... +60 °C
Storage temperature	-25 ... +60°C
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Thermoplastic, Zinc die-cast
Surface (hood/housing)	Smoothed surface

Specifications and approvals



Han-
Port

Details



Identification

Part number

Han-Port® ,
Frames,
Single,
Plastic version, PBT black,
Plastic cover, PC transparent

39 50 000 0300



Han-Port® ,
Frames,
Double,
Plastic version, PBT black,
Plastic cover, PC transparent

39 50 000 0400



Han-Port® ,
Frames,
Single,
Plastic version, PBT black,
Plastic cover, ABS metallic silver

39 50 000 0320



Han-Port® ,
Frames,
Double,
Plastic version, PBT black,
Plastic cover, ABS metallic silver

39 50 000 0420



Han-
Port

Identification		Part number	
Han-Port® , Frames, Single, Metal version, nickel plated (electrically conductive), Transparent plastic cover		39 50 000 0100	
		39 50 000 0200	
Han-Port® , Frames, Double, Metal version, nickel plated (electrically conductive), Transparent plastic cover			

Identification

Part number

Han-Port® ,
Frames,
Single,
Metal version, nickel plated (electrically conductive),
Metal cover, nickel plated

39 50 000 0110



Han-Port® ,
Frames,
Double,
Metal version, nickel plated (electrically conductive),
Metal cover, nickel plated

39 50 000 0210



Han-Port® ,
Frames,
Single,
Metal version, CPD black,
Metal cover, CPD black

39 50 000 0120





Features

- Standard interfaces for easy connection of devices
- Modular assembly
- Assembled data connectors to snap into the frame
- Frames with or without shielding plate

Specifications and approvals



Details

D-Sub: < 125 V AC / 150 V DC / 3 A
Mounting depth 32 mm
RJ45: < 50 V AC/DC / 1 A
Mounting depth 32 mm
USB: < 30 V AC/DC / 1 A
Mounting depth 80 mm

Identification

Part number

Han-Port® ,
Data connectors,
Without shielding plate,
D-Sub 9 female/male gender changer,
D-Sub 9 female/male gender changer

39 50 003 0020



Han-Port® ,
Data connectors,
Without shielding plate,
D-Sub 9 female/female gender changer

39 50 003 0024



Han-Port® ,
Data connectors,
Without shielding plate,
D-Sub 9 female/male gender changer,
D-Sub 25 female/male gender changer

39 50 003 0040



Han-Port® ,
Data connectors,
Without shielding plate,
D-Sub 25 female/male gender changer

39 50 003 0074



Han-Port® ,
Data connectors,
Without shielding plate,
RJ45 female/female gender changer, 8-pin, metal, Cat. 5e,
D-Sub 9 female/female gender changer,
D-Sub 9 male/male gender changer

39 50 003 0111



Han-Port® ,
Data connectors,
Without shielding plate,
RJ45 female/female gender changer, 8-pin, metal, Cat. 5e,
D-Sub 9 male/male gender changer,
D-Sub 9 male/male gender changer,
D-Sub 9 male/male gender changer

39 50 003 0129



Identification

Part number

Han-Port® ,
Data connectors,
Without shielding plate,
RJ45 female/female gender changer, 8-pin, metal, Cat. 5e,
D-Sub 9 female/male gender changer,
D-Sub 25 female/male gender changer

39 50 003 0170



Han-
Port

Identification	Part number	
Han-Port® , Data connectors, With shielding plate, USB female/female gender changer, size A according to specification 3.0, USB female/female gender changer, size A according to specification 3.0	39 50 002 0093	
Han-Port® , Data connectors, With shielding plate, USB female/female gender changer, size A according to specification 3.0, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, D-Sub 9 male/male gender changer	39 50 002 0117	
Han-Port® , Data connectors, With shielding plate, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e	39 50 002 0120	
Han-Port® , Data connectors, With shielding plate, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e	39 50 002 0122	
Han-Port® , Data connectors, With shielding plate, USB female/female gender changer, size A according to specification 3.0, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e	39 50 002 0133	
Han-Port® , Data connectors, With shielding plate, USB female/female gender changer, size A according to specification 3.0, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, D-Sub 9 female/male gender changer	39 50 002 0143	

Identification	Part number	
Han-Port® , Data connectors, With shielding plate, USB female/female gender changer, size A according to specification 3.0, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, D-Sub 25 female/male gender changer	39 50 002 0145	
Han-Port® , Data connectors, With shielding plate, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, RJ45 female/female gender changer, 8-pin, metal, Cat. 5e, D-Sub 9 female/female gender changer	39 50 002 0163	

Han-Port

Technical characteristics		Technical characteristics	
Core structure	9 wires	Connector 2	Male connector, With plastic hood, Female connector
Connector 1	Male connector, With plastic hood		

Identification	Cable length	Part number	Drawing (dimensions in mm)
D-Sub , Copper cable (round), Pre-assembled on both sides, Male/male	2 m 5 m	39 50 903 0010 39 50 903 0011	
			
D-Sub , Copper cable (round), Pre-assembled on both sides, Female/male	2 m 5 m	39 50 903 0020 39 50 903 0021	
			



Technical characteristics

Core structure 8 wires
Connector 1 RJ45, Thermoplastic

Technical characteristics

Connector 2 RJ45, Thermoplastic
Transmission characteristics Category, 6

Identification	Cable length	Part number	Drawing (dimensions in mm)

RJ45 ,
Copper cable (round),
Pre-assembled on both sides




2 m
5 m

39 50 903 0060
39 50 903 0061

Technical characteristics		Technical characteristics	
Connector 1	USB 2.0, Type A, Male	Connector 2	USB 2.0, Type A, Male

Identification	Cable length	Part number	Drawing (dimensions in mm)
USB , Copper cable (round), Pre-assembled on both sides 	2 m 5 m	39 50 903 0050 39 50 903 0051	



Han-
Port

Identification

Part number

Han-Port® ,
Gender changer,
D-Sub 9,
Female/female

39 50 904 0030



Han-Port® ,
Gender changer,
D-Sub 9,
Female/male

39 50 904 0031



Han-Port® ,
Gender changer,
D-Sub 9,
Male/male

39 50 904 0032



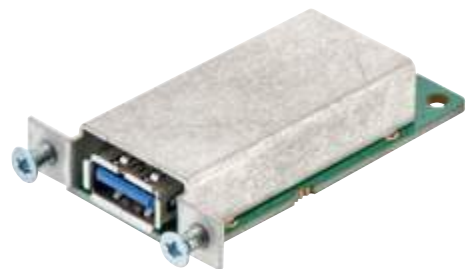
Han-Port® ,
Gender changer,
D-Sub 25,
Female/female

39 50 904 0050



Han-Port® ,
Gender changer,
USB female/female gender changer, size A according to specification 3.0

39 50 904 0020



Han-Port® ,
Gender changer,
RJ45 female/female gender changer, 8-pin, metal, Cat. 5e

39 50 904 0010



Identification

Part number

Han-Port® ,
Identification strip,
Pack contents:
20 pieces per frame

39 50 000 0900



Han-Port® ,
Blind plate,
With perforated cut-outs for gender changer RJ45, USB and
D-Sub 25

39 50 000 0851



Han-Port® ,
Blind plate,
Free space for self assembly of connectors or switches: 45 x 75
mm

39 50 000 0890



Han-
Port

Contents	Page
Han® Q 2/0 Crimp	13.2
Han® Q 2/0 Crimp High Voltage.....	13.4
Han® Q 2/0 Axial screw.....	13.6
Han® Q 2/0 Axial screw High Voltage	13.8
Han® Q 3/0 Crimp	13.10
Han® Q 4/0 Crimp	13.12
Han® Q 4/2 Crimp	13.14
Han® Q 4/2 Axial screw.....	13.17
Han® Q 5/0 Quick Lock.....	13.19
Han® Q 5/0 Crimp	13.21
Han® Q 7/0 Crimp	13.24
Han® Q 8/0 Quick Lock.....	13.26
Han® Q 8/0 Crimp	13.28
Han® Q 12/0 Crimp/Quick Lock	13.31
Han® Q 17/0 Crimp	13.34
Han® Q High Density Crimp.....	13.36
Han® Q Data RJ45.....	13.38
Plastic hoods/housings.....	13.40
Metal hoods / housings.....	13.44
EMC hoods/housings	13.48
Accessories	13.51

Features

- High current rated compact designed connector
- Mating compatible to the axial screw version
- Suitable for Han® C crimp contacts
- Allows a cost optimised production of high quantities
- Finger safe male and female contacts
- 16 coding options

Technical characteristics

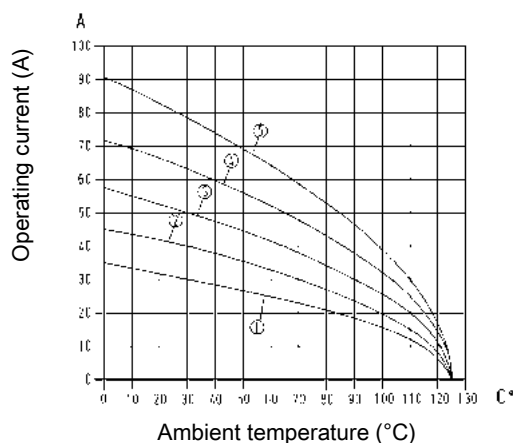
Number of contacts	2
Electrical data acc. to IEC 61984	40 A 400 V 6 kV 3
Rated current	40 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 1.5 mm²
- ② Conductor cross-section 2.5 mm²
- ③ Conductor cross-section 4 mm²
- ④ Conductor cross-section 6 mm²
- ⑤ Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
UL 2237 PVVA2.E318390



Details

Crimping tools see chapter 90

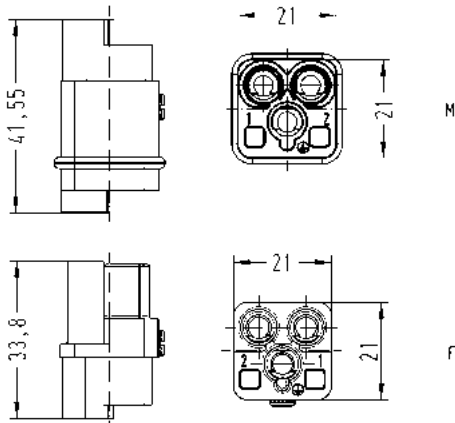
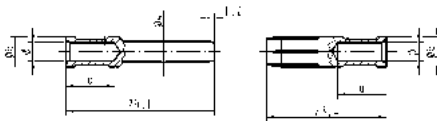

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

 $2+ \text{ (ground symbol)}$

40 A 400 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han® Q , Crimp termination  Please order crimp contacts separately.	1,5 ... 10	09 12 002 3051	09 12 002 3151	 Contact arrangement (view from termination side)																		
Han® C , Crimp contact, Contact surface: Silver plated 	1,5 2,5 4 6 10	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108 09 32 000 6109	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208 09 32 000 6209	 <table><tr><th>Conductor cross-section</th><th>Ø</th><th>Stripping length</th></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>9.5 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>9.5 mm</td></tr><tr><td>4 mm² AWG 12</td><td>2.85 mm</td><td>9.5 mm</td></tr><tr><td>6 mm² AWG 10</td><td>3.5 mm</td><td>9.5 mm</td></tr><tr><td>10 mm² AWG 8</td><td>4.3 mm</td><td>12 mm</td></tr></table>	Conductor cross-section	Ø	Stripping length	1.5 mm² AWG 16	1.75 mm	9.5 mm	2.5 mm² AWG 14	2.25 mm	9.5 mm	4 mm² AWG 12	2.85 mm	9.5 mm	6 mm² AWG 10	3.5 mm	9.5 mm	10 mm² AWG 8	4.3 mm	12 mm
Conductor cross-section	Ø	Stripping length																				
1.5 mm² AWG 16	1.75 mm	9.5 mm																				
2.5 mm² AWG 14	2.25 mm	9.5 mm																				
4 mm² AWG 12	2.85 mm	9.5 mm																				
6 mm² AWG 10	3.5 mm	9.5 mm																				
10 mm² AWG 8	4.3 mm	12 mm																				
Coding element 		09 12 000 9922	09 12 000 9922																			

Features

- High current rated compact designed connector
- Mating compatible to the axial screw version
- Suitable for Han® C crimp contacts
- Allows a cost optimised production of high quantities
- Finger safe male and female contacts
- 16 coding options
- for high voltages, please use heat shrink tube (included in delivery range)

Technical characteristics

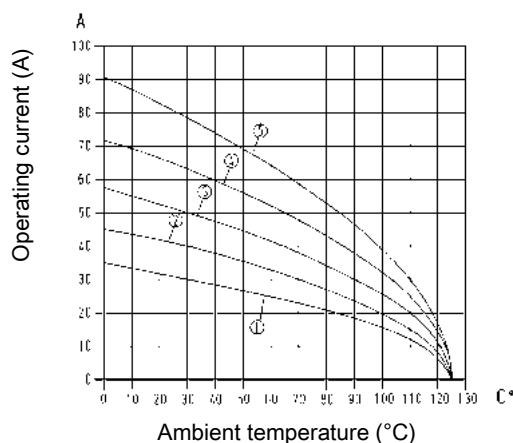
Number of contacts	2
Electrical data acc. to IEC 61984	40 A 830 V 6 kV 3
Rated current	40 A
Rated voltage	830 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 1.5 mm²
- ② Conductor cross-section 2.5 mm²
- ③ Conductor cross-section 4 mm²
- ④ Conductor cross-section 6 mm²
- ⑤ Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

Crimping tools see chapter 90

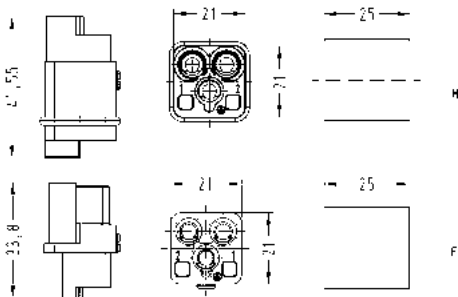
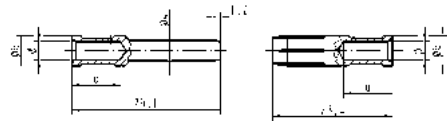

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

 $2+ \text{ (ground symbol)}$

40 A 830 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han® Q , Crimp termination, Pack contents: With heat shrink tube  Please order crimp contacts separately.	1,5 ... 10	09 12 002 3052	09 12 002 3152	 Contact arrangement (view from termination side)																		
Han® C , Crimp contact, Contact surface: Silver plated  Coding element 	1,5 2,5 4 6 10	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108 09 32 000 6109	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208 09 32 000 6209	 <table><tr><th>Conductor cross-section</th><th>Ø</th><th>Stripping length</th></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>9.5 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>9.5 mm</td></tr><tr><td>4 mm² AWG 12</td><td>2.85 mm</td><td>9.5 mm</td></tr><tr><td>6 mm² AWG 10</td><td>3.5 mm</td><td>9.5 mm</td></tr><tr><td>10 mm² AWG 8</td><td>4.3 mm</td><td>12 mm</td></tr></table> 	Conductor cross-section	Ø	Stripping length	1.5 mm² AWG 16	1.75 mm	9.5 mm	2.5 mm² AWG 14	2.25 mm	9.5 mm	4 mm² AWG 12	2.85 mm	9.5 mm	6 mm² AWG 10	3.5 mm	9.5 mm	10 mm² AWG 8	4.3 mm	12 mm
Conductor cross-section	Ø	Stripping length																				
1.5 mm² AWG 16	1.75 mm	9.5 mm																				
2.5 mm² AWG 14	2.25 mm	9.5 mm																				
4 mm² AWG 12	2.85 mm	9.5 mm																				
6 mm² AWG 10	3.5 mm	9.5 mm																				
10 mm² AWG 8	4.3 mm	12 mm																				

Features

- High current rated compact designed connector
- Mating compatible to the crimp version
- Finger safe male and female contacts
- 16 coding options
- No special tools required for axial-screw termination

Technical characteristics

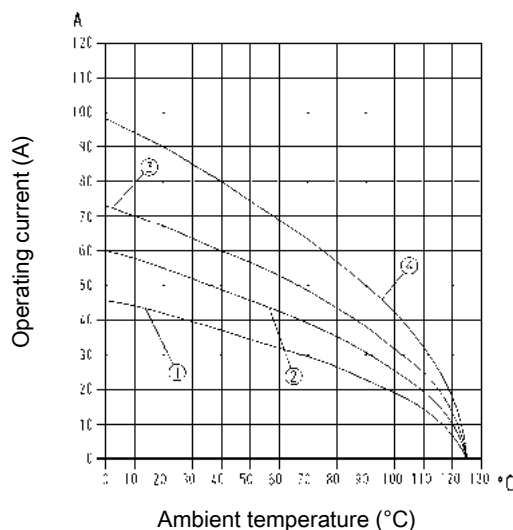
Number of contacts	2
Electrical data acc. to IEC 61984	40 A 400 V 6 kV 3
Rated current	40 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	400 V
Rated voltage acc. to CSA	400 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



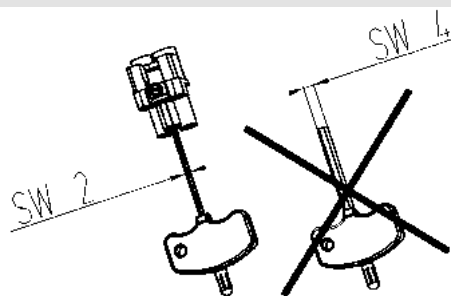
- ① Conductor cross-section 2.5 mm²
- ② Conductor cross-section 4 mm²
- ③ Conductor cross-section 6 mm²
- ④ Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details



for termination please use only hexagonal screw driver with A/F 2

If PE contact is not used: Please screw the PE contact maximal on both sides clockwise with a hexagonal screwdriver A/F 2.

Number of contacts

2+

40 A 400 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Q , Axial screw termination, Contact surface: Silver plated	1,5 ... 2,5 2,5 ... 6 4 ... 10	09 12 002 2655 09 12 002 2653 09 12 002 2651	09 12 002 2755 09 12 002 2753 09 12 002 2751	Stripping length 8 ... 9 mm Tightening torque 1.8 Nm
Coding element		09 12 000 9922	09 12 000 9922	

Han Q

Features

- High current rated compact designed connector
- Mating compatible to the crimp version
- Finger safe male and female contacts
- 16 coding options
- No special tools required for axial-screw termination
- for high voltages, please use heat shrink tube (included in delivery range)

Technical characteristics

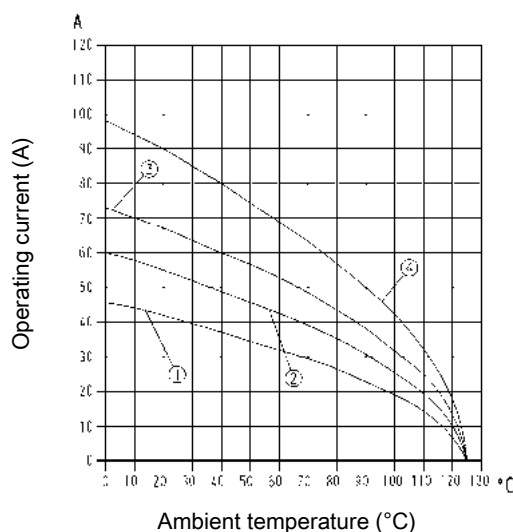
Number of contacts	2
Electrical data acc. to IEC 61984	40 A 830 V 6 kV 3
Rated current	40 A
Rated voltage	830 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



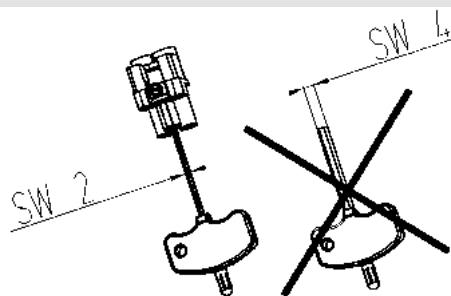
- ① Conductor cross-section 2.5 mm²
- ② Conductor cross-section 4 mm²
- ③ Conductor cross-section 6 mm²
- ④ Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details



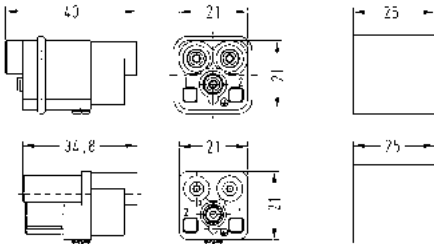

for termination please use only hexagonal screw driver with A/F 2

If PE contact is not used: Please screw the PE contact maximal on both sides clockwise with a hexagonal screwdriver A/F 2.

Number of contacts

2+ 

40 A 830 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Q , Axial screw termination, Pack contents: With heat shrink tube Contact surface: Silver plated 	1,5 ... 2,5 2,5 ... 6 4 ... 10	09 12 002 2656 09 12 002 2654 09 12 002 2652	09 12 002 2756 09 12 002 2754 09 12 002 2752	 Stripping length 8 ... 9 mm Tightening torque 1.8 Nm
Coding element 		09 12 000 9922	09 12 000 9922	

Han Q

Features

- High current rated compact designed connector
- 4 coding options
- Suitable for Han® C crimp contacts
- Finger safe male and female contacts
- Leading PE crimp contact

Technical characteristics

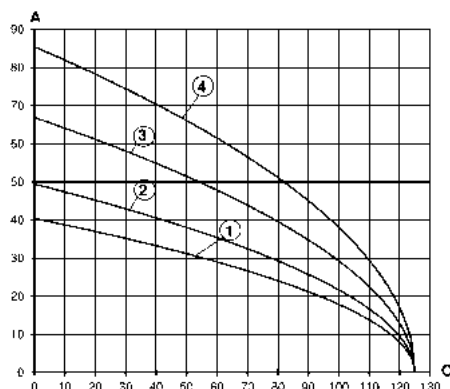
Number of contacts	3
Electrical data acc. to IEC 61984	40 A 400 V 6 kV 3
Rated current	40 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 2.5 mm²
- ② Conductor cross-section 4 mm²
- ③ Conductor cross-section 6 mm²
- ④ Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
UL 2237 PVVA2.E318390



Details

Crimping tools see chapter 90

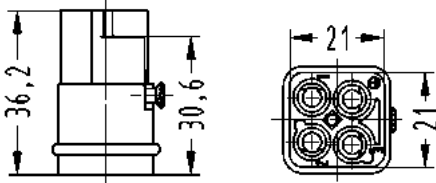
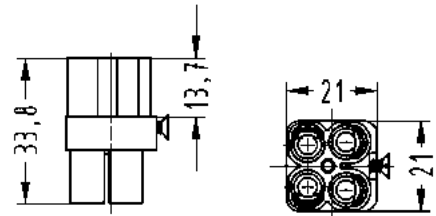
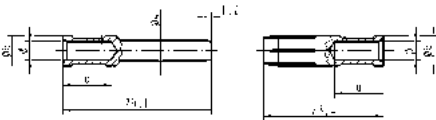

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

3+ 

40 A 400 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han® Q , Crimp termination  Please order crimp contacts separately.	1,5 ... 10	09 12 003 3051	09 12 003 3151	 																		
Han® C , Crimp contact, Contact surface: Silver plated  Coding element, Pack contents: 20 pieces per frame 	1,5 2,5 4 6 10	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108 09 32 000 6109	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208 09 32 000 6209	 <table><tr><th>Conductor cross-section</th><th>Ø</th><th>Stripping length</th></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>9.5 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>9.5 mm</td></tr><tr><td>4 mm² AWG 12</td><td>2.85 mm</td><td>9.5 mm</td></tr><tr><td>6 mm² AWG 10</td><td>3.5 mm</td><td>9.5 mm</td></tr><tr><td>10 mm² AWG 8</td><td>4.3 mm</td><td>12 mm</td></tr></table> 	Conductor cross-section	Ø	Stripping length	1.5 mm² AWG 16	1.75 mm	9.5 mm	2.5 mm² AWG 14	2.25 mm	9.5 mm	4 mm² AWG 12	2.85 mm	9.5 mm	6 mm² AWG 10	3.5 mm	9.5 mm	10 mm² AWG 8	4.3 mm	12 mm
Conductor cross-section	Ø	Stripping length																				
1.5 mm² AWG 16	1.75 mm	9.5 mm																				
2.5 mm² AWG 14	2.25 mm	9.5 mm																				
4 mm² AWG 12	2.85 mm	9.5 mm																				
6 mm² AWG 10	3.5 mm	9.5 mm																				
10 mm² AWG 8	4.3 mm	12 mm																				

Features

- High current rated compact designed connector
- 4 coding options
- Suitable for Han® C crimp contacts
- Finger safe male and female contacts

Technical characteristics

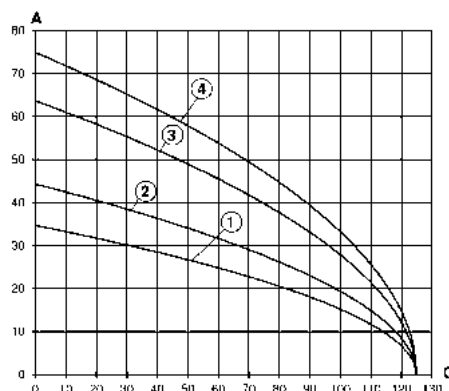
Number of contacts	4
Electrical data acc. to IEC 61984	40 A 830 V 8 kV 3
Rated current	40 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 2.5 mm²
- ② Conductor cross-section 4 mm²
- ③ Conductor cross-section 6 mm²
- ④ Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
UL 2237 PVVA2.E318390



Details

Attention! Only for thermoplastic hoods/housings!

Crimping tools see chapter 90

Remarks on the crimp technique

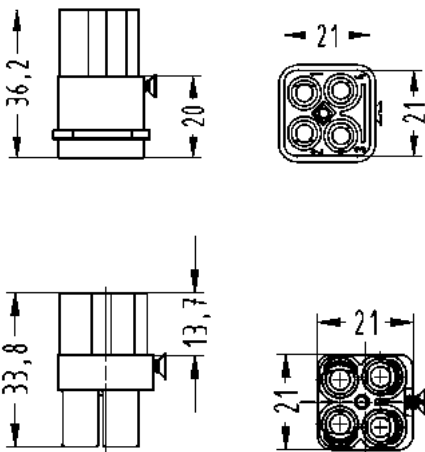


The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.



Number of contacts

4

40 A 830 V 8 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han® Q , Crimp termination  Please order crimp contacts separately.	1,5 ... 10	09 12 004 3051	09 12 004 3151																			
Han® C , Crimp contact, Contact surface: Silver plated  Coding element, Pack contents: 20 pieces per frame 	1,5 2,5 4 6 10	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108 09 32 000 6109	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208 09 32 000 6209	 <table><tr><th>Conductor cross-section</th><th>Ø</th><th>Stripping length</th></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>9.5 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>9.5 mm</td></tr><tr><td>4 mm² AWG 12</td><td>2.85 mm</td><td>9.5 mm</td></tr><tr><td>6 mm² AWG 10</td><td>3.5 mm</td><td>9.5 mm</td></tr><tr><td>10 mm² AWG 8</td><td>4.3 mm</td><td>12 mm</td></tr></table> 	Conductor cross-section	Ø	Stripping length	1.5 mm² AWG 16	1.75 mm	9.5 mm	2.5 mm² AWG 14	2.25 mm	9.5 mm	4 mm² AWG 12	2.85 mm	9.5 mm	6 mm² AWG 10	3.5 mm	9.5 mm	10 mm² AWG 8	4.3 mm	12 mm
Conductor cross-section	Ø	Stripping length																				
1.5 mm² AWG 16	1.75 mm	9.5 mm																				
2.5 mm² AWG 14	2.25 mm	9.5 mm																				
4 mm² AWG 12	2.85 mm	9.5 mm																				
6 mm² AWG 10	3.5 mm	9.5 mm																				
10 mm² AWG 8	4.3 mm	12 mm																				

Features

- Han® C power contacts
- Han D® signal contacts
- Finger safe male and female contacts
- Leading PE crimp contact
- Suitable for standard plastic hoods/housings or metal hoods/housings with additional PE terminating contact on the hoods/housings from the Han-Compact® series
- Mating compatible to the axial screw version

Technical characteristics

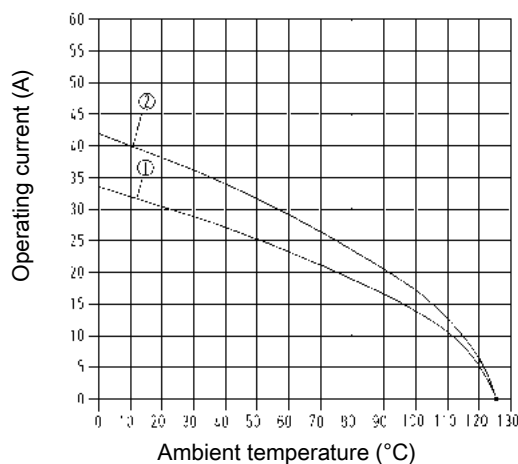
Number of contacts	4
Additional contacts	+ 2 additional signal contacts
Electrical data acc. to IEC 61984	40 A 400/690 V 6 kV 3
Rated current	40 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Electrical data, signal	10 A 250 V 4 kV 3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	250 V
Rated voltage acc. to CSA	600 V
Rated voltage acc. to CSA (signal)	250 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega, \leq 3 \text{ m}\Omega$
Contact resistance, signal area	$< 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 2.5 mm²
 ② Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 UL 2237 PVVA2.E318390



Details

Contact resistance Han D® crimp contact: $\leq 3 \text{ m}\Omega$

Contact resistance Han® C crimp contact: $\leq 0.3 \text{ m}\Omega$

Crimping tools see chapter 90

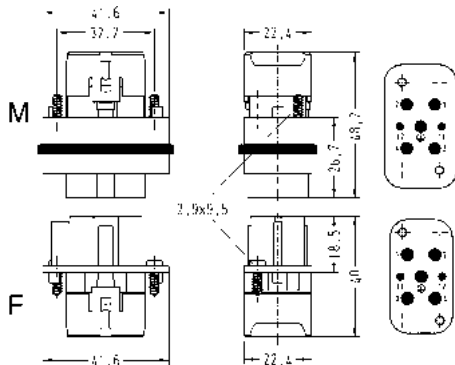

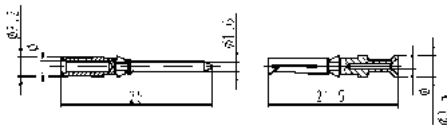
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

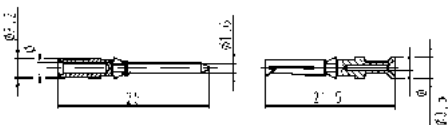
4+ 

40 A 400/690 V 6 kV 3
+ 2 additional signal contacts
10 A 250 V 4 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han® Q , Crimp termination  Please order crimp contacts separately.	0,14 ... 6	09 12 006 3041	09 12 006 3141	 Contact arrangement (view from termination side)																					
Han® C , Crimp contact, Contact surface: Silver plated 	1,5 2,5 4 6	09 32 000 6104 09 32 000 6105 09 32 000 6107 09 32 000 6108	09 32 000 6204 09 32 000 6205 09 32 000 6207 09 32 000 6208	 <table><tr><th>Conductor cross-section</th><th>Ø</th><th>Stripping length</th></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>9.5 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>9.5 mm</td></tr><tr><td>4 mm² AWG 12</td><td>2.85 mm</td><td>9.5 mm</td></tr><tr><td>6 mm² AWG 10</td><td>3.5 mm</td><td>9.5 mm</td></tr><tr><td>10 mm² AWG 8</td><td>4.3 mm</td><td>12 mm</td></tr></table>	Conductor cross-section	Ø	Stripping length	1.5 mm² AWG 16	1.75 mm	9.5 mm	2.5 mm² AWG 14	2.25 mm	9.5 mm	4 mm² AWG 12	2.85 mm	9.5 mm	6 mm² AWG 10	3.5 mm	9.5 mm	10 mm² AWG 8	4.3 mm	12 mm			
Conductor cross-section	Ø	Stripping length																							
1.5 mm² AWG 16	1.75 mm	9.5 mm																							
2.5 mm² AWG 14	2.25 mm	9.5 mm																							
4 mm² AWG 12	2.85 mm	9.5 mm																							
6 mm² AWG 10	3.5 mm	9.5 mm																							
10 mm² AWG 8	4.3 mm	12 mm																							
Han D® , Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm	0.5 mm² AWG 20	1.1 mm	8 mm	0.75 mm² AWG 18	1.3 mm	8 mm	1 mm² AWG 18	1.45 mm	8 mm	1.5 mm² AWG 16	1.75 mm	8 mm	2.5 mm² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm																							
0.5 mm² AWG 20	1.1 mm	8 mm																							
0.75 mm² AWG 18	1.3 mm	8 mm																							
1 mm² AWG 18	1.45 mm	8 mm																							
1.5 mm² AWG 16	1.75 mm	8 mm																							
2.5 mm² AWG 14	2.25 mm	6 mm																							

Han Q



Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																												
		Male	Female																													
Han D®, Crimp contact, Contact surface: Gold plated	0,14 ... 0,37	09 15 000 6124	09 15 000 6224																													
	0,5	09 15 000 6123	09 15 000 6223																													
	0,75	09 15 000 6125	09 15 000 6225																													
	1	09 15 000 6122	09 15 000 6222																													
	1,5	09 15 000 6121	09 15 000 6221																													
	2,5	09 15 000 6126	09 15 000 6226																													
				<table><tr><th colspan="2">Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm²</td><td>AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm²</td><td>AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm²</td><td>AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm²</td><td>AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm²</td><td>AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></table>	Wire gauge		Ø	Stripping length	0.14-0.37 mm²	AWG 26-22	0.9 mm	8 mm	0.5 mm²	AWG 20	1.1 mm	8 mm	0.75 mm²	AWG 18	1.3 mm	8 mm	1 mm²	AWG 18	1.45 mm	8 mm	1.5 mm²	AWG 16	1.75 mm	8 mm	2.5 mm²	AWG 14	2.25 mm	6 mm
Wire gauge		Ø	Stripping length																													
0.14-0.37 mm²	AWG 26-22	0.9 mm	8 mm																													
0.5 mm²	AWG 20	1.1 mm	8 mm																													
0.75 mm²	AWG 18	1.3 mm	8 mm																													
1 mm²	AWG 18	1.45 mm	8 mm																													
1.5 mm²	AWG 16	1.75 mm	8 mm																													
2.5 mm²	AWG 14	2.25 mm	6 mm																													

Features

- Compact design saves space
- No special tools required
- Mating compatible to the crimp version
- Suitable for standard plastic hoods/housings or metal hoods/housings with additional PE terminating contact on the hoods/housings from the Han-Compact® series
- With or without Han-Quick Lock® signal contacts

Technical characteristics

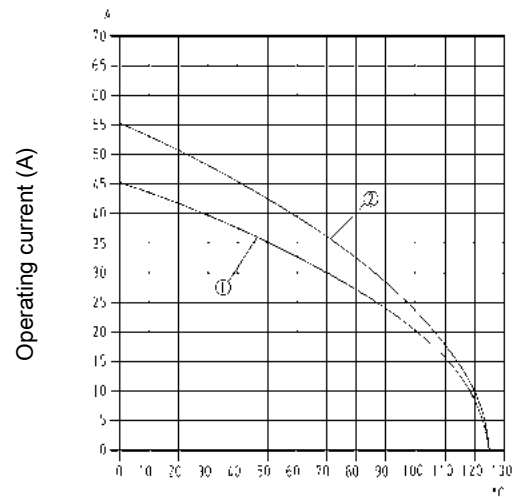
Number of contacts	4
Additional contacts	+ 2 additional signal contacts
Electrical data acc. to IEC 61984	40 A 400/690 V 6 kV 3
Rated current	40 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Electrical data, signal	10 A 250 V 4 kV 3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega$
Contact resistance, signal area	$< 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



① Conductor cross-section 4 mm²

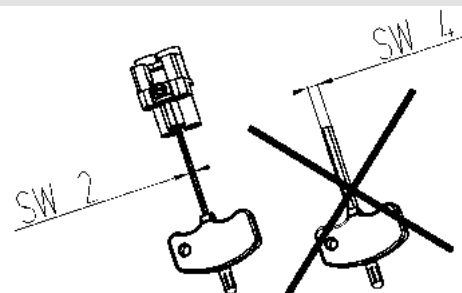
② Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details



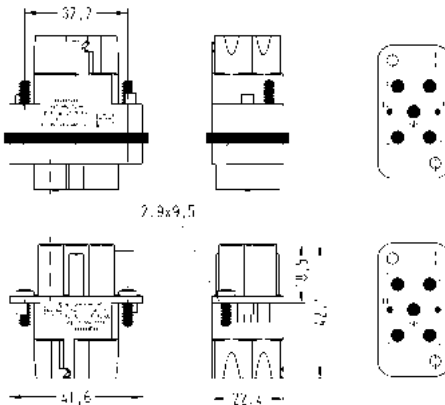
for termination please use only hexagonal screw driver with A/F 2

If PE contact is not used: Please screw the PE contact maximal on both sides clockwise with a hexagonal screwdriver A/F 2.

Number of contacts

4+ 

 40 A 400/690 V 6 kV 3
 + 2 additional signal contacts
 10 A 250 V 4 kV 3


Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Q , Axial screw termination, Contact surface: Silver plated  With Han-Quick Lock® signal contacts	2,5 ... 6 4 ... 10	09 12 006 2662 09 12 006 2663	09 12 006 2762 09 12 006 2763	 Stripping length Power contacts 8 mm Stripping length Signal contacts 10 mm Tightening torque 1.8 Nm
Han® Q , Axial screw termination, Contact surface: Silver plated Without signal contacts	2,5 ... 6 4 ... 10	09 12 006 2665 09 12 006 2666	09 12 006 2765 09 12 006 2766	

Han Q

Features

- Innovative Han-Quick Lock® termination with reduced wiring times
- No special tools required
- Mating compatible to the crimp version
- Vibration and shock resistant

Technical characteristics

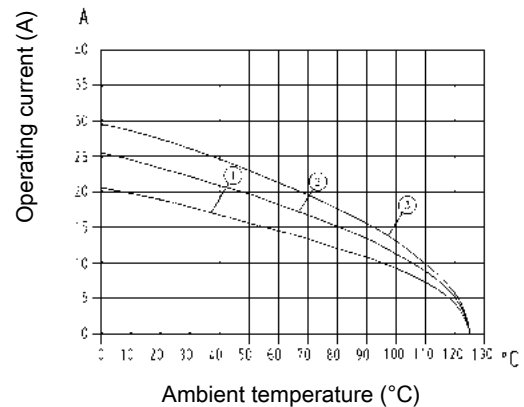
Number of contacts	5
Electrical data acc. to IEC 61984	16 A 230/400 V 4 kV 3
Rated current	16 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 1 mm²
- ② Conductor cross-section 1.5 mm²
- ③ Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076









Number of contacts

5+

16 A 230/400 V 4 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Q , Han-Quick Lock® termination, Contact surface: Silver plated  Blue slide	0,5 ... 2,5	09 12 005 2633	09 12 005 2733	M  F     
Han® Q , Han-Quick Lock® termination, Contact surface: Silver plated  Black slide	0,25 ... 1,5	09 12 005 2634	09 12 005 2734	

Features

- Compact design saves space
- Suitable for Han E® crimp contacts
- Leading PE contact with screw termination

Technical characteristics

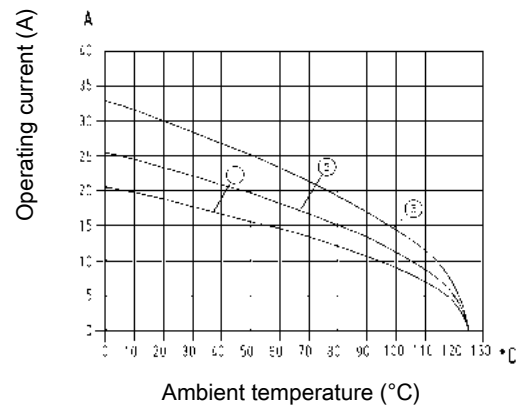
Number of contacts	5
Electrical data acc. to IEC 61984	16 A 230/400 V 4 kV 3
Rated current	16 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 1 mm²
- ② Conductor cross-section 1.5 mm²
- ③ Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076
UL 2237 PVVA2.E318390



Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.


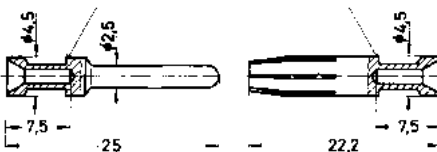
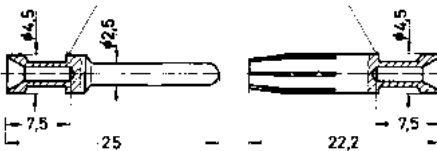

Coding pin

Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.

Number of contacts

5+

16 A 230/400 V 4 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han® Q , Crimp termination  Please order crimp contacts separately.	0,14 ... 2,5	09 12 005 3001	09 12 005 3101	 Contact arrangement (view from termination side)																		
Han E® , Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 33 000 6127 09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102	09 33 000 6227 09 33 000 6220 09 33 000 6214 09 33 000 6205 09 33 000 6204 09 33 000 6202	 <table><tr><th>Conductor cross-section</th><th>Identification</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22 no groove</td></tr><tr><td>0.5 mm²</td><td>AWG 20 no groove</td></tr><tr><td>0.75 mm²</td><td>AWG 18 1 groove*</td></tr><tr><td>1 mm²</td><td>AWG 18 1 groove</td></tr><tr><td>1.5 mm²</td><td>AWG 16 2 grooves</td></tr><tr><td>2.5 mm²</td><td>AWG 14 3 grooves</td></tr><tr><td>3 mm²</td><td>AWG 12 wide groove</td></tr><tr><td>4 mm²</td><td>AWG 12 no groove</td></tr></table> * on the back crimp collar Stripping length 7.5 mm	Conductor cross-section	Identification	0.14-0.37 mm²	AWG 26-22 no groove	0.5 mm²	AWG 20 no groove	0.75 mm²	AWG 18 1 groove*	1 mm²	AWG 18 1 groove	1.5 mm²	AWG 16 2 grooves	2.5 mm²	AWG 14 3 grooves	3 mm²	AWG 12 wide groove	4 mm²	AWG 12 no groove
Conductor cross-section	Identification																					
0.14-0.37 mm²	AWG 26-22 no groove																					
0.5 mm²	AWG 20 no groove																					
0.75 mm²	AWG 18 1 groove*																					
1 mm²	AWG 18 1 groove																					
1.5 mm²	AWG 16 2 grooves																					
2.5 mm²	AWG 14 3 grooves																					
3 mm²	AWG 12 wide groove																					
4 mm²	AWG 12 no groove																					
Han E® , Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 33 000 6117 09 33 000 6122 09 33 000 6115 09 33 000 6118 09 33 000 6116 09 33 000 6123	09 33 000 6217 09 33 000 6222 09 33 000 6215 09 33 000 6218 09 33 000 6216 09 33 000 6223																			
Han E® , Crimp contact, Relay contact , Contact surface: Silver plated 	0,75 ... 1 1,5 2,5	09 33 000 6109 09 33 000 6110 09 33 000 6111																				

Han Q

Features

- Compact design saves space
- Suitable for Han D® crimp contacts
- Leading PE contact with screw termination
- 6 coding options

Technical characteristics

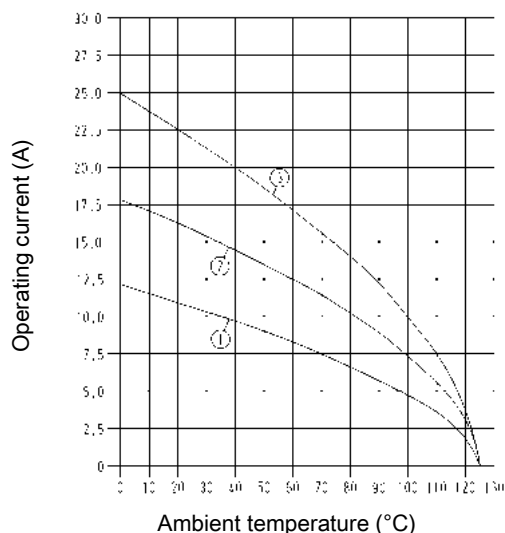
Number of contacts	7
Electrical data acc. to IEC 61984	10 A 400 V 6 kV 3
Rated current	10 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 0.75 mm²
- ② Conductor cross-section 1.5 mm²
- ③ Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

Crimping tools see chapter 90

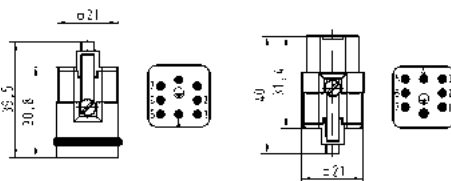
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

7+ 

10 A 400 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Q , Crimp termination	0,14 ... 2,5	09 12 007 3001	09 12 007 3101	 Contact arrangement (view from termination side)
Please order crimp contacts separately.				
Han D® , Crimp contact, Contact surface: Silver plated	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	

Features

- Innovative Han-Quick Lock® termination with reduced wiring times
- No special tools required
- Mating compatible to the crimp version
- Suitable for standard plastic hoods/housings or metal hoods/housings with additional PE terminating contact on the hoods/housings from the Han-Compact® series
- Leading PE crimp contact

Technical characteristics

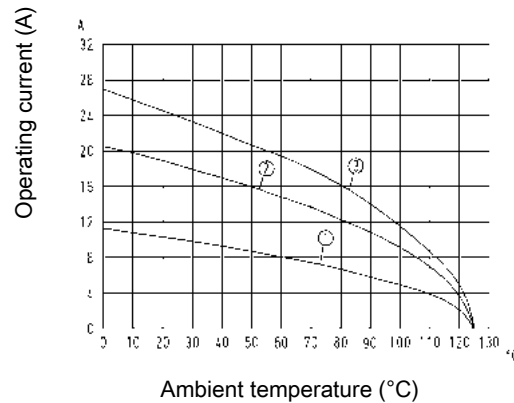
Number of contacts	8
Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 0.5 mm²
- ② Conductor cross-section 1.5 mm²
- ③ Conductor cross-section 2.5 mm²

Specifications and approvals

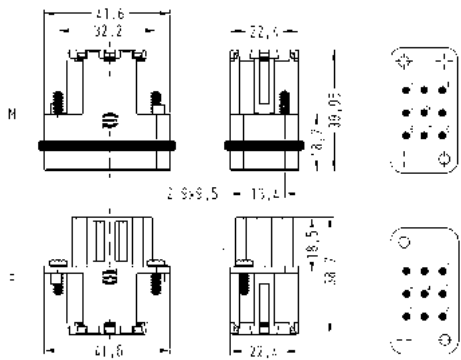
EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Number of contacts

8+ 

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Q , Han-Quick Lock® termination, Contact surface: Silver plated  Blue slide	0,5 ... 2,5	09 12 008 2633	09 12 008 2733	
Han® Q , Han-Quick Lock® termination, Contact surface: Silver plated Black slide	0,25 ... 1,5	09 12 008 2634	09 12 008 2734	

Han Q

Features

- Compact design saves space
- Suitable for Han E® crimp contacts
- Leading PE crimp contact
- ISO 23570 / DESINA conform product

Technical characteristics

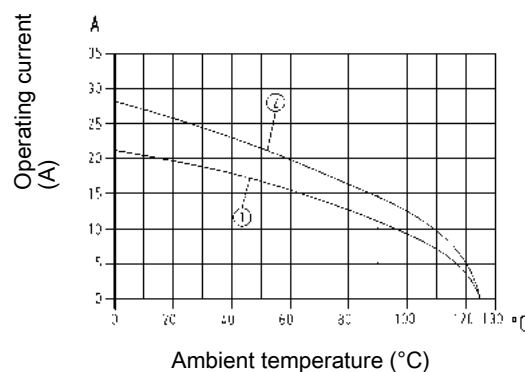
Number of contacts	8
Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 1.5 mm²
 ② Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076
 UL 2237 PVVA2.E318390



Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

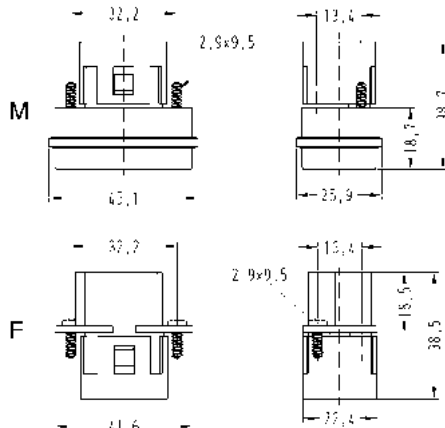

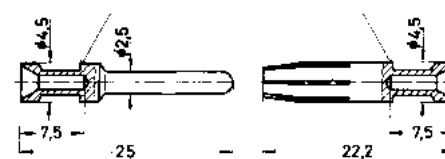
Coding pin

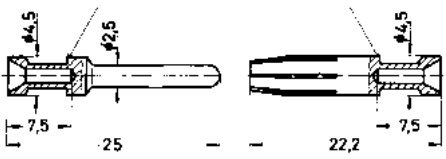
Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.

Number of contacts

8+

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
Han® Q , Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 12 008 3001	09 12 008 3101	  Contact arrangement (view from termination side)																											
Han E® , Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5 3 4	09 33 000 6127 09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102 09 33 000 6106 09 33 000 6107	09 33 000 6227 09 33 000 6220 09 33 000 6214 09 33 000 6205 09 33 000 6204 09 33 000 6202 09 33 000 6206 09 33 000 6207	 <table><tr><th colspan="2">Conductor cross-section</th><th>Identification</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22</td><td>no groove</td></tr><tr><td>0.5 mm²</td><td>AWG 20</td><td>no groove</td></tr><tr><td>0.75 mm²</td><td>AWG 18</td><td>1 groove*</td></tr><tr><td>1 mm²</td><td>AWG 18</td><td>1 groove</td></tr><tr><td>1.5 mm²</td><td>AWG 16</td><td>2 grooves</td></tr><tr><td>2.5 mm²</td><td>AWG 14</td><td>3 grooves</td></tr><tr><td>3 mm²</td><td>AWG 12</td><td>wide groove</td></tr><tr><td>4 mm²</td><td>AWG 12</td><td>no groove</td></tr></table> * on the back crimp collar Stripping length 7.5 mm	Conductor cross-section		Identification	0.14-0.37 mm²	AWG 26-22	no groove	0.5 mm²	AWG 20	no groove	0.75 mm²	AWG 18	1 groove*	1 mm²	AWG 18	1 groove	1.5 mm²	AWG 16	2 grooves	2.5 mm²	AWG 14	3 grooves	3 mm²	AWG 12	wide groove	4 mm²	AWG 12	no groove
Conductor cross-section		Identification																													
0.14-0.37 mm²	AWG 26-22	no groove																													
0.5 mm²	AWG 20	no groove																													
0.75 mm²	AWG 18	1 groove*																													
1 mm²	AWG 18	1 groove																													
1.5 mm²	AWG 16	2 grooves																													
2.5 mm²	AWG 14	3 grooves																													
3 mm²	AWG 12	wide groove																													
4 mm²	AWG 12	no groove																													

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E®, Crimp contact, Contact surface: Gold plated	0,14 ... 0,37	09 33 000 6117	09 33 000 6217	
	0,5	09 33 000 6122	09 33 000 6222	
	0,75	09 33 000 6115	09 33 000 6215	
	1	09 33 000 6118	09 33 000 6218	
	1,5	09 33 000 6116	09 33 000 6216	
	2,5	09 33 000 6123	09 33 000 6223	
	4	09 33 000 6119	09 33 000 6221	




Conductor cross-section	Identification
0.14-0.37 mm²	AWG 26-22 no groove
0.5 mm²	AWG 20 no groove
0.75 mm²	AWG 18 1 groove*
1 mm²	AWG 18 1 groove
1.5 mm²	AWG 16 2 grooves
2.5 mm²	AWG 14 3 grooves
3 mm²	AWG 12 wide groove
4 mm²	AWG 12 no groove

* on the back crimp collar

Stripping length 7.5 mm

Han E®, Crimp contact, Relay contact, Contact surface: Silver plated	0,75 ... 1	09 33 000 6109
	1,5	09 33 000 6110
	2,5	09 33 000 6111




FO contact, for 1 mm plastic fibre	20 10 001 3311	20 10 001 3321



Crimp zone

Han E® Han® EE Han® EEE , Coding pin	09 33 000 9954
for crimp inserts only	



Features

- Suitable for Han D® crimp contacts
- PE contact with Han-Quick Lock® termination
- 16 coding options without loss of contacts

Technical characteristics

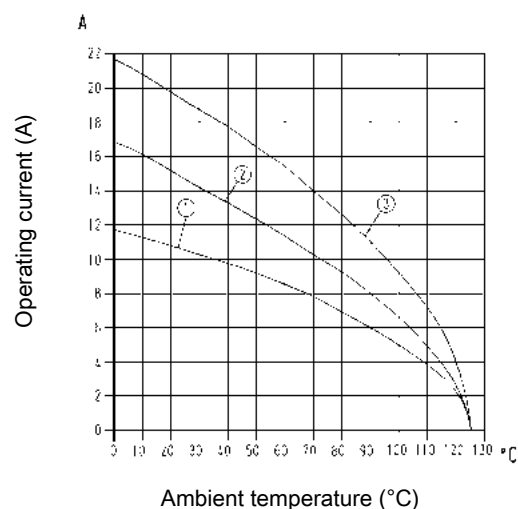
Number of contacts	12
Electrical data acc. to IEC 61984	10 A 400 V 6 kV 3
Rated current	10 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



Specifications and approvals

EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076



Details

Crimping tools see chapter 90

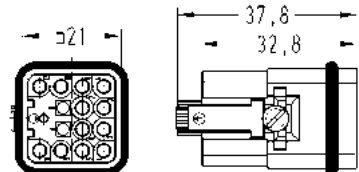
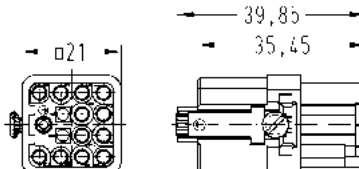

Remarks on the crimp technique

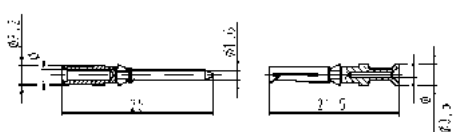


The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

12+

10 A 400 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han® Q , With Han-Quick Lock® PE contact, Crimp termination  Blue slide Please order crimp contacts separately.	0,14 ... 2,5	09 12 012 3001	09 12 012 3101	M  F  With Han-Quick Lock® PE contact : Conductor cross-section Blue slide 0.5 ... 2.5 Conductor cross-section Black slide 0.25 ... 1.5																					
Han® Q , With Han-Quick Lock® PE contact, Crimp termination  Black slide Please order crimp contacts separately.	0,14 ... 2,5	09 12 012 3004	09 12 012 3104																						
Han D® , Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm	0.5 mm² AWG 20	1.1 mm	8 mm	0.75 mm² AWG 18	1.3 mm	8 mm	1 mm² AWG 18	1.45 mm	8 mm	1.5 mm² AWG 16	1.75 mm	8 mm	2.5 mm² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm																							
0.5 mm² AWG 20	1.1 mm	8 mm																							
0.75 mm² AWG 18	1.3 mm	8 mm																							
1 mm² AWG 18	1.45 mm	8 mm																							
1.5 mm² AWG 16	1.75 mm	8 mm																							
2.5 mm² AWG 14	2.25 mm	6 mm																							

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han D® , Crimp contact, Contact surface: Gold plated	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm	0.5 mm² AWG 20	1.1 mm	8 mm	0.75 mm² AWG 18	1.3 mm	8 mm	1 mm² AWG 18	1.45 mm	8 mm	1.5 mm² AWG 16	1.75 mm	8 mm	2.5 mm² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm																							
0.5 mm² AWG 20	1.1 mm	8 mm																							
0.75 mm² AWG 18	1.3 mm	8 mm																							
1 mm² AWG 18	1.45 mm	8 mm																							
1.5 mm² AWG 16	1.75 mm	8 mm																							
2.5 mm² AWG 14	2.25 mm	6 mm																							
FO contact, for 1 mm plastic fibre		20 10 001 3211	20 10 001 3221	 20 10 001 3211 + 20 10 001 3221																					
Coding element, Pack contents: 20 pieces per frame		09 12 000 9924	09 12 000 9924																						

Features

- Compact design saves space
- Suitable for Han D® crimp contacts
- Leading PE crimp contact

Technical characteristics

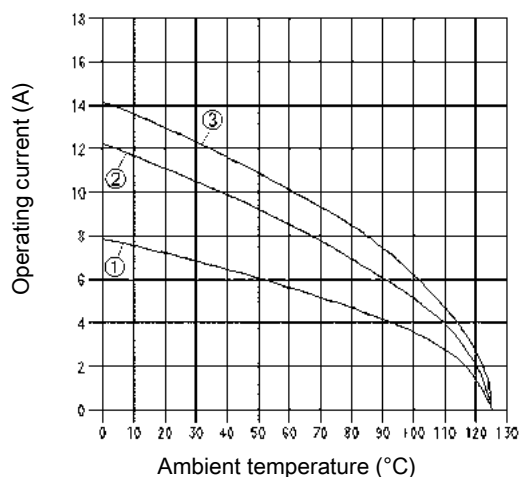
Number of contacts	17
Electrical data acc. to IEC 61984	10 A 160 V 2,5 kV 3
Rated current	10 A
Rated voltage	160 V
Rated impulse voltage	2.5 kV
Pollution degree	3
Rated voltage acc. to UL	250 V
Rated voltage acc. to CSA	250 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 0.5 mm²
- ② Conductor cross-section 1 mm²
- ③ Conductor cross-section 1.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

Crimping tools see chapter 90

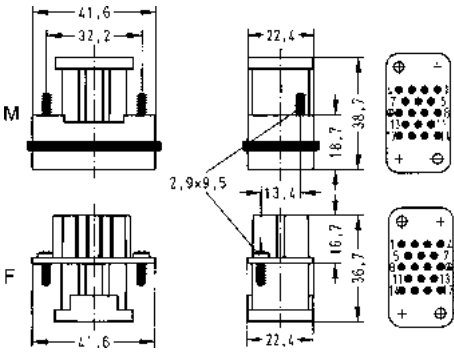
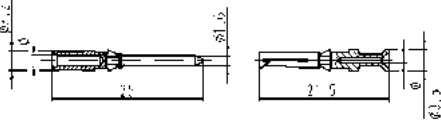
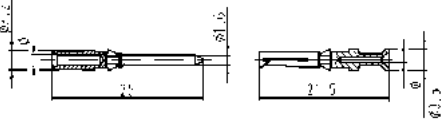

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

17+ 

10 A 160 V 2.5 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han® Q , Crimp termination  Please order crimp contacts separately.	0,14 ... 2,5	09 12 017 3001	09 12 017 3101	 Contact arrangement (view from termination side)																					
Han D® , Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6104 09 15 000 6103 09 15 000 6105 09 15 000 6102 09 15 000 6101 09 15 000 6106	09 15 000 6204 09 15 000 6203 09 15 000 6205 09 15 000 6202 09 15 000 6201 09 15 000 6206	 <table><thead><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr></thead><tbody><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></tbody></table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm	0.5 mm² AWG 20	1.1 mm	8 mm	0.75 mm² AWG 18	1.3 mm	8 mm	1 mm² AWG 18	1.45 mm	8 mm	1.5 mm² AWG 16	1.75 mm	8 mm	2.5 mm² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm																							
0.5 mm² AWG 20	1.1 mm	8 mm																							
0.75 mm² AWG 18	1.3 mm	8 mm																							
1 mm² AWG 18	1.45 mm	8 mm																							
1.5 mm² AWG 16	1.75 mm	8 mm																							
2.5 mm² AWG 14	2.25 mm	6 mm																							
Han D® , Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	 <table><thead><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr></thead><tbody><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></tbody></table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm	0.5 mm² AWG 20	1.1 mm	8 mm	0.75 mm² AWG 18	1.3 mm	8 mm	1 mm² AWG 18	1.45 mm	8 mm	1.5 mm² AWG 16	1.75 mm	8 mm	2.5 mm² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm																							
0.5 mm² AWG 20	1.1 mm	8 mm																							
0.75 mm² AWG 18	1.3 mm	8 mm																							
1 mm² AWG 18	1.45 mm	8 mm																							
1.5 mm² AWG 16	1.75 mm	8 mm																							
2.5 mm² AWG 14	2.25 mm	6 mm																							
FO contact, for 1 mm plastic fibre 		20 10 001 3211	20 10 001 3221	 20 10 001 3211 + 20 10 001 3221																					

Features

- Easy handling of signal connectors in industrial environment
- High density of contacts
- Suitable for D-Sub crimp contacts
- One preleading contact

Technical characteristics

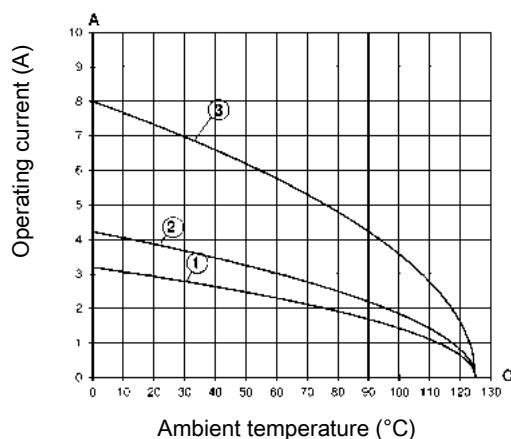
Number of contacts	21
Electrical data acc. to IEC 61984	6,5 A 50 V 0,8 kV 3
Rated current	6.5 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Rated voltage	50 V AC, 120 V DC
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Stamped contacts: Conductor cross-section 0.14 mm²
- ② Stamped contacts: Conductor cross-section 0.25 mm²
- ③ Turned contacts: Conductor cross-section 0.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

Crimping tools see chapter 90

Remarks on the crimp technique





The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.



Number of contacts

21

6,5 A 50 V 0,8 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)												
		Male	Female													
Han® Q , Crimp termination  Please order crimp contacts separately.	0,09 ... 0,56	09 12 021 3001	09 12 021 3101	M   F  												
D-Sub , Crimp contact, Turned , Pack contents: Single contact 	0,09 ... 0,25 0,13 ... 0,33 0,25 ... 0,52	09 67 000 7576 09 67 000 5576 09 67 000 8576	09 67 000 7476 09 67 000 5476 09 67 000 8476	<table><tr><th>Wire gauge</th><th>max. insulation diameter</th><th>Stripping length</th></tr><tr><td>0.09-0.25 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.13-0.33 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.25-0.52 mm²</td><td>1.7</td><td>4 mm</td></tr></table>	Wire gauge	max. insulation diameter	Stripping length	0.09-0.25 mm²	1.7	4 mm	0.13-0.33 mm²	1.7	4 mm	0.25-0.52 mm²	1.7	4 mm
Wire gauge	max. insulation diameter	Stripping length														
0.09-0.25 mm²	1.7	4 mm														
0.13-0.33 mm²	1.7	4 mm														
0.25-0.52 mm²	1.7	4 mm														
D-Sub , Crimp contact, Stamped , Pack contents: Single contact 	0,09 ... 0,25 0,25 ... 0,52	09 67 000 7176 09 67 000 8176	09 67 000 7276 09 67 000 8276	<table><tr><th>Wire gauge</th><th>max. insulation diameter</th><th>Stripping length</th></tr><tr><td>0.09-0.25 mm²</td><td>1.02</td><td>2.5 mm + 0.5</td></tr><tr><td>0.25-0.52 mm²</td><td>1.52</td><td>2.5 mm + 0.5</td></tr></table>	Wire gauge	max. insulation diameter	Stripping length	0.09-0.25 mm²	1.02	2.5 mm + 0.5	0.25-0.52 mm²	1.52	2.5 mm + 0.5			
Wire gauge	max. insulation diameter	Stripping length														
0.09-0.25 mm²	1.02	2.5 mm + 0.5														
0.25-0.52 mm²	1.52	2.5 mm + 0.5														

Han Q



Features

- Combination connector: Ethernet connector based on RJ45 with up to 10 signal D-Sub contacts, crimp termination
- Turned D-Sub contacts of performance level 1
- Compact design saves space
- High density of contacts

Technical characteristics

Number of contacts	8
Electrical data acc. to IEC 61984	5 A 50 V 0,8 kV 3
Rated current	5 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

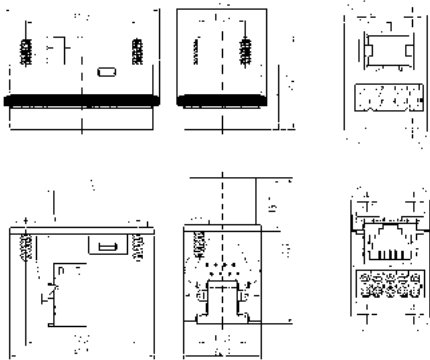
Specifications and approvals

EN 60664-1
IEC 61984

Number of contacts

8

5 A 50 V 0,8 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)												
		Male	Female													
Han® Q , Crimp termination  Please order crimp contacts separately.	0,13 ... 0,52	09 12 011 3001	09 12 011 3111													
D-Sub , Crimp contact, Turned , Pack contents: Single contact 	0,13 ... 0,33 0,25 ... 0,52	09 67 000 5576 09 67 000 8576	09 67 000 5476 09 67 000 8476	<table><tr><th>Wire gauge</th><th>max. insulation diameter</th><th>Stripping length</th></tr><tr><td>0.09-0.25 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.13-0.33 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.25-0.52 mm²</td><td>1.7</td><td>4 mm</td></tr></table>	Wire gauge	max. insulation diameter	Stripping length	0.09-0.25 mm²	1.7	4 mm	0.13-0.33 mm²	1.7	4 mm	0.25-0.52 mm²	1.7	4 mm
Wire gauge	max. insulation diameter	Stripping length														
0.09-0.25 mm²	1.7	4 mm														
0.13-0.33 mm²	1.7	4 mm														
0.25-0.52 mm²	1.7	4 mm														

Han Q

Features

- Hoods/housings for industrial applications
- Compact design saves space

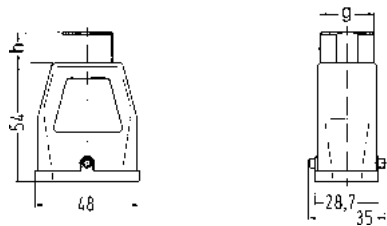

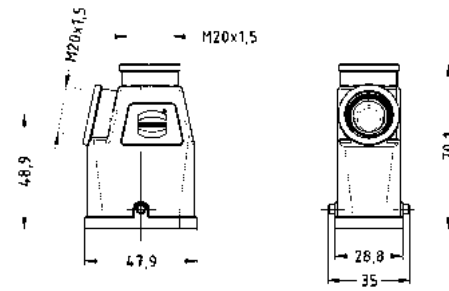
Technical characteristics

Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Flammability acc. to UL 94 (locking levers)	V-0
Degree of protection acc. to IEC 60529	IP65
Degree of protection acc. to UL 50	4, 12
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide
Colour (locking)	RAL 9005 (jet black)

Specifications and approvals


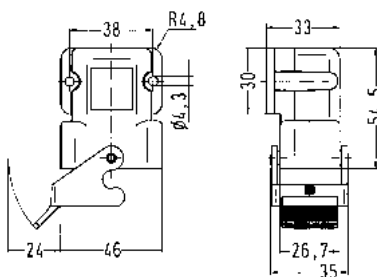
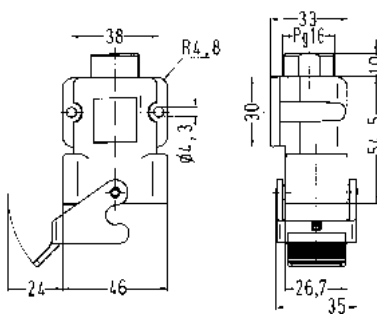

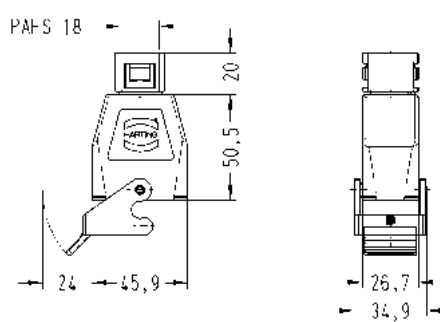



Hoods/housings for industrial applications
Double locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)	
Han-Compact® , Hoods, for Han-Compact® half cable gland, Top entry 	1x M25 1x Pg 16 1x Pg 21	19 12 008 0429 09 12 008 0427 09 12 008 0429		
Han-Compact® , Hoods, for flexible conduits Adaptaflex PAFS18, Top entry 	1x PAFS 18	09 12 008 0428		
Han-Compact® , Hoods, for Han-Compact® half cable gland, Side entry 	1x Pg 16	09 12 008 0527		
Han-Compact® , Hoods, for Han-Compact® half cable gland, Top/side entry 	2x M20	19 12 008 0425		

Han Q

Han Q

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Compact®, Bulkhead mounted housings, Straight 		09 12 008 0327	
Han-Compact®, Bulkhead mounted housings, Angled 		09 12 008 0902	
Han-Compact®, Surface mounted housing, for Han-Compact® half cable gland, Angled entry 	1x Pg 16	09 12 008 0901	
Han-Compact®, Cable to cable housing, for Han-Compact® half cable gland, Top entry 	1x M25 1x Pg 16	19 12 008 0729 09 12 008 0727	
Han-Compact®, Cable to cable housing, for flexible conduits Adaptaflex PAFS18, Top entry 	1x PAFS 18	09 12 008 0728	PAFS 18 

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Compact®, Protection cover for bulkhead mounted housings, Thermoplastic, for mounted male insert 		09 12 008 5407	
Han-Compact®, Protection cover for bulkhead mounted housings, Thermoplastic, for mounted female insert 		09 12 008 5408	

Features

- Hoods/housings for industrial applications
- Large space for cables
- Visible cabling
- Separate PE connection option

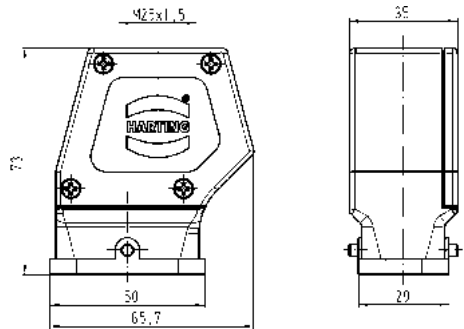
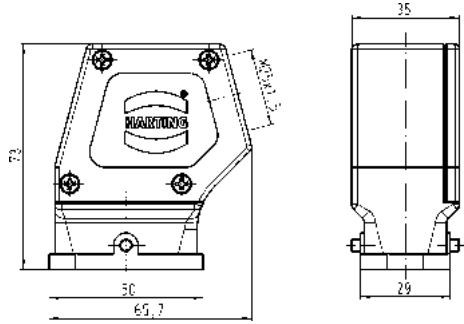
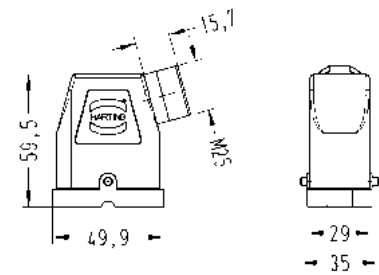
Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Degree of protection acc. to UL 50	4, 12
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated, Chromated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel

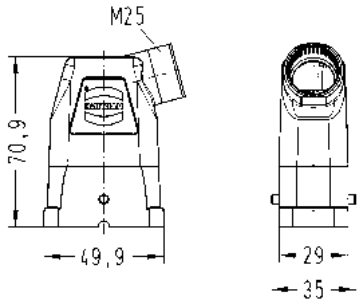
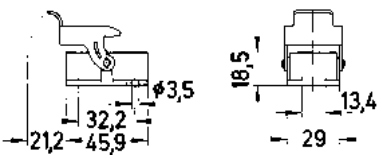
Specifications and approvals



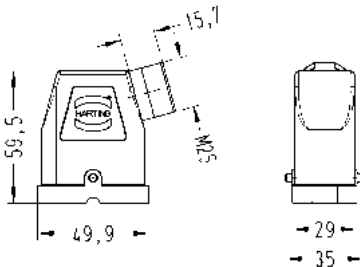
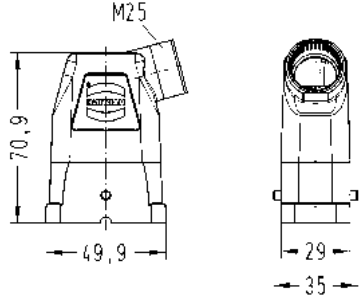
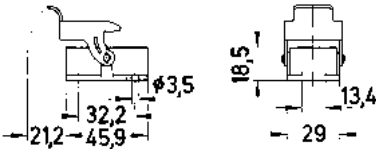
Hoods/housings for industrial applications
Double locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Compact®, Hoods, for standard cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Top entry 	1x M25	19 12 008 0426	
Han-Compact®, Hoods, for Han-Compact® half cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Top entry 	1x M25	19 12 708 0411	
Han-Compact®, Hoods, for standard cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Side entry 	1x M25	19 12 008 0526	
Han-Compact®, Hoods, for Han-Compact® half cable gland, for Han® Q 8/0 Crimp, Han® Q17/0 and Han® Q Data RJ45, Side entry 	1x M25	19 12 708 0501	

Han Q

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Compact®, Hoods, for Han-Compact® half cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Side entry 	1x M25	19 12 708 0511	
Han-Compact®, Bulkhead mounted housings 		09 12 708 0301	

Hoods/housings for industrial applications
Double locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Compact® , Hoods, for Han-Compact® half cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Top entry 	1x M25	19 12 008 0411	
Han-Compact® , Hoods, for Han-Compact® half cable gland, for Han® Q 8/0 Crimp, Han® Q17/0 and Han® Q Data RJ45, Side entry 	1x M25	19 12 008 0501	
Han-Compact® , Hoods, for Han-Compact® half cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Side entry 	1x M25	19 12 008 0511	
Han-Compact® , Bulkhead mounted housings 		09 12 008 0301	

Han Q

Features

- Hoods/Housings for higher EMC requirements
- Separate PE connection option
- High degree of flexibility due to two-part assembly

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Degree of protection acc. to UL 50	4, 12
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Nickel plated
Material (seal)	NBR
Material (locking)	Stainless steel

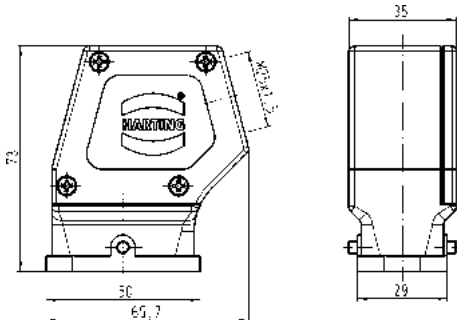
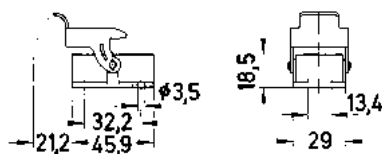
Specifications and approvals



Hoods/Housings for higher EMC requirements
Double locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Compact® , Hoods, for Han-Compact® half cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Top entry	1x M25	19 12 008 0412	
Han-Compact® , Hoods, for standard cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Top entry	1x M25	19 12 008 0428	
Han-Compact® , Hoods, for Han-Compact® half cable gland, for Han® Q 8/0 Crimp, Han® Q17/0 and Han® Q Data RJ45, Side entry	1x M25	19 12 008 0502	
Han-Compact® , Hoods, for Han-Compact® half cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Side entry	1x M25	19 12 008 0512	

Han Q

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Compact®, Hoods, for standard cable gland, With separate PE terminating point, for all inserts of size Han-Compact®, Side entry 	1x M25	19 12 008 0528	
Han-Compact®, Bulkhead mounted housings 		09 12 008 0303	

Technical characteristics

Material (cable glands) Thermoplastic

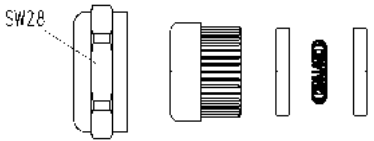

Technical characteristics

Colour (accessories) Black

Identification	Size	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Compact®, Cable gland, for hoods, for cable to cable housing, Pg 16	Pg 16 Pg 16 Pg 16	6,5 ... 9,5 9 ... 13 11,5 ... 15,5	09 00 000 5047 09 00 000 5156 09 00 000 5059	
Han-Compact®, Cable gland, for surface mounted housings, Pg 16	Pg 16 Pg 16	6,5 ... 9,5 11,5 ... 15,5	09 00 000 5057 09 00 000 5058	
Han-Compact®, Cable gland, for hoods, for cable to cable housing, Pg 21	Pg 21 Pg 21	14 ... 18 17 ... 20,5	09 00 000 5157 09 00 000 5158	
Han-Compact®, Cable gland, for hoods, for cable to cable housing, M25	M25 M25 M25	6,5 ... 9,5 10,5 ... 14 14 ... 17	19 12 000 5156 19 12 000 5157 19 12 000 5158	

Technical characteristics

Material (cable glands) Metal

Identification	Size	Clamping range (mm)	Part number	Drawing (dimensions in mm)																
Han-Compact® , Cable gland, EMC version, for hoods 	M25 M25 M25	10,5 ... 14 10,5 ... 14 14 ... 17	19 62 000 5056 19 62 000 5057 19 62 000 5058	 <table><tr><th></th><th>cable-Ø</th><th>shield-Ø</th><th>SW</th></tr><tr><td>19 62 000 5056</td><td>10.5 ... 14mm</td><td>9 ... 13 mm</td><td>28</td></tr><tr><td>19 62 000 5057</td><td>10.5 ... 14mm</td><td>6 ... 11 mm</td><td>28</td></tr><tr><td>19 62 000 5058</td><td>14 ... 17 mm</td><td>9 ... 13 mm</td><td>28</td></tr></table>		cable-Ø	shield-Ø	SW	19 62 000 5056	10.5 ... 14mm	9 ... 13 mm	28	19 62 000 5057	10.5 ... 14mm	6 ... 11 mm	28	19 62 000 5058	14 ... 17 mm	9 ... 13 mm	28
	cable-Ø	shield-Ø	SW																	
19 62 000 5056	10.5 ... 14mm	9 ... 13 mm	28																	
19 62 000 5057	10.5 ... 14mm	6 ... 11 mm	28																	
19 62 000 5058	14 ... 17 mm	9 ... 13 mm	28																	
Han-Compact® , Cable gland, for hoods 	M25 M25	10,5 ... 14 14 ... 17	19 12 000 5057 19 12 000 5058																	

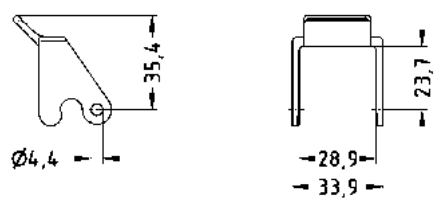
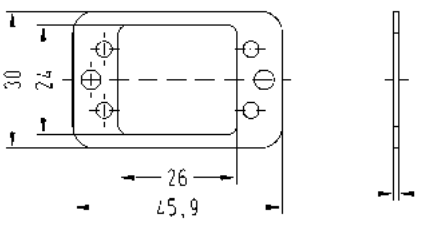

Double locking lever

Technical characteristics

Material (seal) NBR
Colour (seal) Black

Technical characteristics

Material (accessories) Thermoplastic
Colour (accessories) Black

Identification	Size	Part number	Drawing (dimensions in mm)
Locking levers, Han® Q 8/0, Black 	Modular Compact	09 00 000 5244	
Flange gasket, for bulkhead mounted plastic housings, angled, for surface mounted housings 	Han-Compact®	09 12 000 9911	
Flange gasket, for bulkhead mounted plastic housings, straight 	Han-Compact®	09 12 000 9912	

Han Q



Han Q

Contents	Page
Han® K 3/0	14.4
Han® K 3/2	14.6
Hoods/Housings for Han® K 3/0, Han® K 3/2	14.8
Han® HC Modular 250	14.11
Hoods/Housings for Han® HC Modular 250	14.13
Han® HC Modular 350	14.23
Hoods/Housings for Han® HC Modular 350	14.28
Han® M hoods/housings for Han® HC Modular 350	14.45
Han® HC Modular 650	14.48
Hoods/Housings for Han® HC Modular 650	14.51
Han® 24 HPR EasyCon	14.58
Han® 24 HPR EasyCon - Accessories	14.67
Han® 48 HPR	14.68

Assembly instructions

Remarks on the axial screw termination see chapter 00

Step 1: The outer diameter of the cable must not exceed 19.5 mm.

Strip the cable by 19 mm.

Insert the cable through hood.


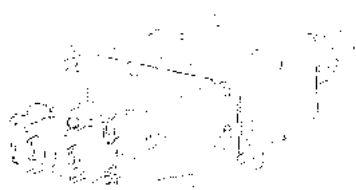
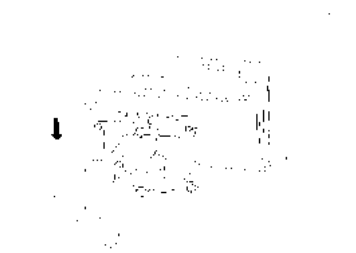
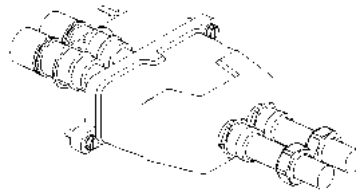
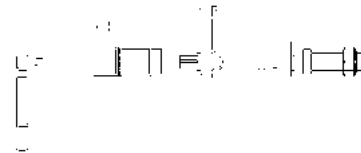

Step 2: Press the Han HC contact on the cable strand and apply tightening torque according table 1 by using a tightening torques tool. Take care that all cable strands fit completely inside the contact termination cavity. During assembling adhere the cable and the contact to minimise axial movement or twisting.

Step 3: Move the perforated plate across the HC contacts.

Step 4: Fit frame onto the hexagon shape of the HC contact. Coding can be arranged by turning the contact within 60° steps. Bolt the frame together with perforated plate.

Step 5: Push back the packet inside the good.

Step 6: Tighten the four M3 (tightening torque 0.5 Nm) screws and the cable gland according manufacturer recommendation.



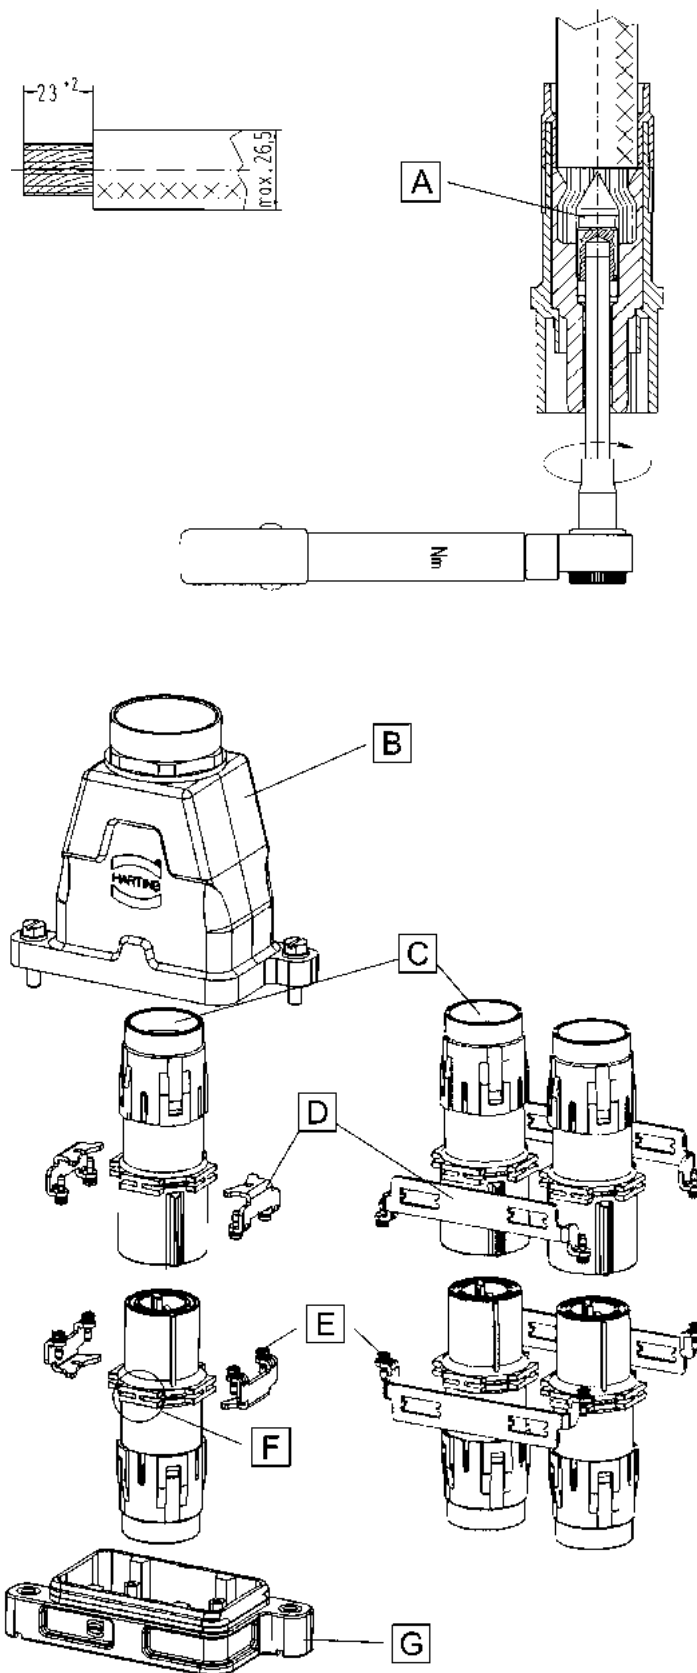
During the assembly of the frame for 4 poles the following tightening torques have to be taken into consideration:

A = 0.5 Nm

B = 1.5 Nm

C = 0.25 Nm

Assembly instructions



1. Strip cable to 23+2 mm.

2. Push conductor through the cable gland and the housing. Push the stripped end of the conductor into the termination entry of the module until the insulation touches the contact.

3. To tighten the axial screw, a hexagonal wrench size 8 is needed. Insert the hexagonal wrench on the mating side of the contact. At the same time, push the conductor over the axial screw. The locking screw has to be tightened with the recommended tightening torque that is determined by the conductor's cross section.

4. Once the modules are terminated, they are mounted into the housing by using two metal frames (tightening torque of the fixing screws = 0.5 Nm). The modules have 4 pegs formed by 2 parallel ribs (each peg shapes like a "H"). Each rib takes 1 pole frame, where the lateral link has to go into the relief of the frame. The 2 pole frames have 2 cutouts on the wall which get fitted to the "H"-shaped pegs (see figure). The heads of the screws have to face the mating direction of the module. Coding can be established by rotating the contact by 90 degrees. Therefore it is important that the corresponding modules are assembled in the correct position otherwise mating is not possible.

5. After assembling the modules in the housing, the tightening torque of the locking screw can be checked and corrected if necessary.

6. After final assembly of the contacts, the user should ensure that the cable is adequately strain relieved to protect the contact from radial stress.

A - Axial screw, B - Hood, C - Termination entry,
D - Frame, E - Fixing screws, F - parallel ribs with
H-shape, G - Housings bulkhead mounting,

Features

- The ideal connector for transmission of high currents requiring little space
- The vertical and angled versions offer solutions for almost all applications
- The angled versions offer a space-saving 90° cable wiring

Technical characteristics

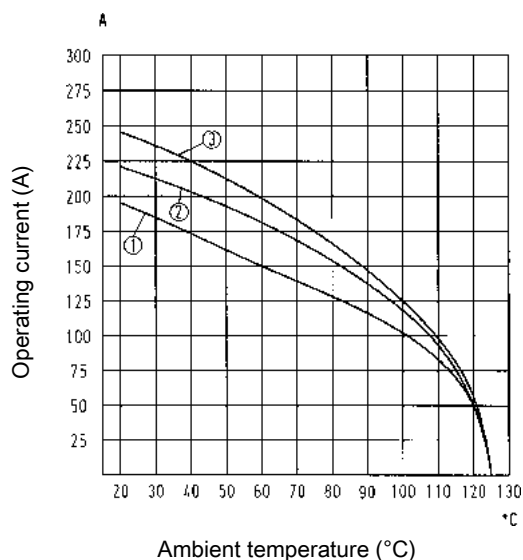
Number of contacts	3
Electrical data acc. to IEC 61984	200 A 1.150/2.000 V 8 kV 3
Rated current	200 A
Rated voltage conductor-earth	1150 V
Rated voltage conductor-conductor	2000 V
Rated impulse voltage	8 kV
Pollution degree	3
Rated current acc. to UL	200 A
Rated current acc. to CSA	160 A
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.2 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 35 mm²
- ② Conductor cross-section 50 mm²
- ③ Conductor cross-section 70 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

ATTENTION! Only to be used with special Han® 24 HPR hoods and housings!

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Hex key (A/F 5) see chapter 90

Number of contacts

3
200 A 1.150/2.000 V 8 kV 3



Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Com [®] , Straight, Axial screw termination, Contact surface: Silver plated	35 ... 70	09 38 005 2621	09 38 005 2721	Distance for contact max. 21 mm Stripping length 22 mm Tightening torque 8 Nm @ 35 mm², 9 Nm @ 50 mm², 10 Nm @ 70 mm²
Han-Com [®] , Angled, Axial screw termination, Contact surface: Silver plated	35 ... 70	09 38 005 2622	09 38 005 2722	Distance for contact max. 21 mm Stripping length 22 mm Tightening torque 8 Nm @ 35 mm², 9 Nm @ 50 mm², 10 Nm @ 70 mm²

Han HC
Modular

Features

- The ideal connector for transmission of high currents requiring little space
- The vertical and angled versions offer solutions for almost all applications
- The angled versions offer a space-saving 90° cable wiring

Technical characteristics

Number of contacts	3
Additional contacts	+ 2 additional signal contacts
Electrical data acc. to IEC 61984	200 A 1.150/2.000 V 8 kV 3
Rated current	200 A
Rated voltage conductor-earth	1150 V
Rated voltage conductor-conductor	2000 V
Rated impulse voltage	8 kV
Pollution degree	3
Electrical data, signal	16 A 400 V 6 kV 3
Rated current (signal)	16 A
Rated voltage (signal)	400 V
Rated impulse voltage (signal)	6 kV
Pollution degree (signal)	3
Rated current acc. to UL	200 A
Rated current acc. to UL (signal)	16 A
Rated current acc. to CSA	160 A
Rated current acc. to CSA (signal)	16 A
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	600 V
Rated voltage acc. to CSA	600 V
Rated voltage acc. to CSA (signal)	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

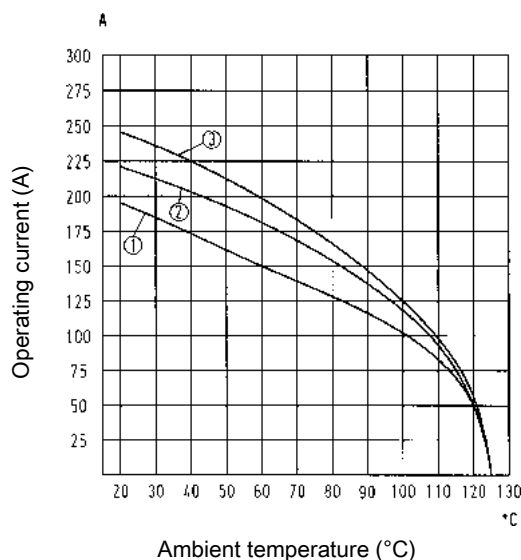
Han HC Modular

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 35 mm²
- ② Conductor cross-section 50 mm²
- ③ Conductor cross-section 70 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

ATTENTION! Only to be used with special Han® 24 HPR hoods and housings!

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Hex key (A/F 5) see chapter 90

Hex key (A/F 4) for PE contact see chapter 90

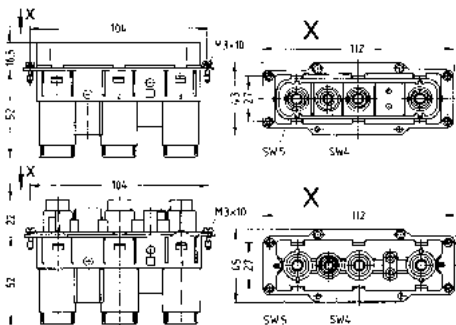
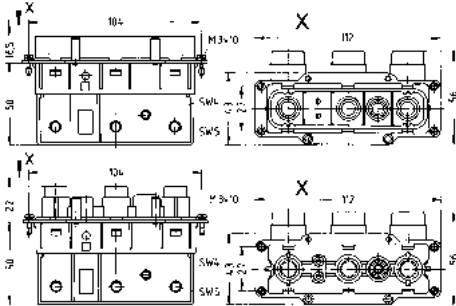
Number of contacts

3+

200 A 1.150/2.000 V 8 kV 3

+ 2 additional signal contacts

16 A 400 V 6 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Com®, Straight, Axial screw termination, Contact surface: Silver plated 	35 ... 70, 2,5 Signal, 16 ... 35 PE	09 38 005 2601	09 38 005 2701	 Distance for contact max. 21 mm Stripping length 22 mm Tightening torque 8 Nm @ 35 mm², 9 Nm @ 50 mm², 10 Nm @ 70 mm² Signal contacts: Stripping length 7 mm, Tightening torque 0.5 Nm PE contact: Stripping length 14 mm, Tightening torque 6 Nm
Han-Com®, Angled, Axial screw termination, Contact surface: Silver plated 	35 ... 70, 2,5 Signal, 16 ... 35 PE	09 38 005 2602	09 38 005 2702	 Distance for contact max. 21 mm Stripping length 22 mm Tightening torque 8 Nm @ 35 mm², 9 Nm @ 50 mm², 10 Nm @ 70 mm² Signal contacts: Stripping length 7 mm, Tightening torque 0.5 Nm PE contact: Stripping length 14 mm, Tightening torque 6 Nm

Han HC
Modular

Features

- Hoods/housings for harsh outdoor environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Excellent EMC characteristics
- Screw locking M6
- Field of application: for external electrical interconnections in vehicles, in highly demanding environments and wet areas, as well as for sensitive interconnections that have to be shielded
- Distinguishing feature: colour-coded black, internal seal

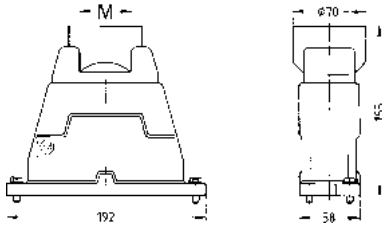
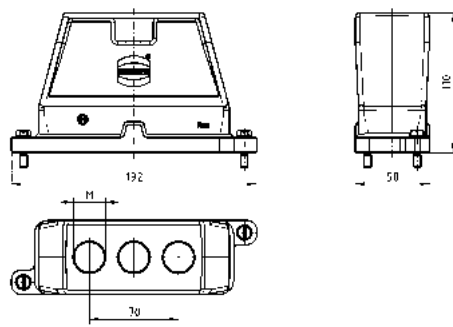
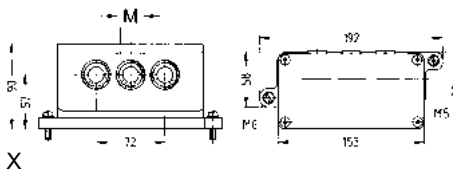
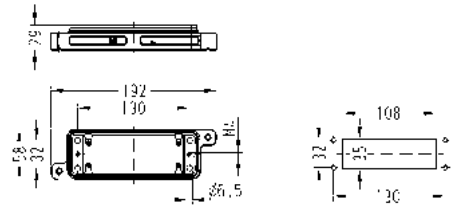
Technical characteristics

Limiting temperature	-40 ... +125 °C
Tightening torque	4 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69K
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Aluminium die-cast, Corrosion resistant
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel

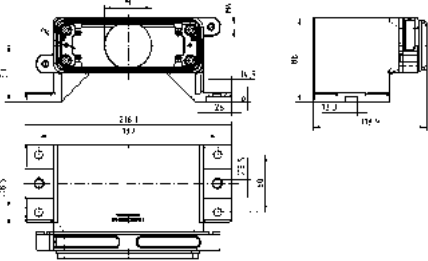
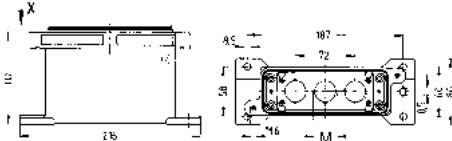
Specifications and approvals



Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Special type, Top entry 	1x M63	19 40 024 0420	
Han® HPR , Hoods, Top entry 	3x M25 3x M25, 1x M20	19 40 024 0461 19 40 024 0471	
Han® HPR , Hoods, Special type, Angled entry 	3x M25	19 40 024 0631	
Han® HPR , Bulkhead mounted housings 		09 40 024 0311	

Han HC
Modular

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Surface mounted housing, Horizontal version, Top entry	1x M50 3x M25 3x M25, 1x M20	19 40 024 0914 19 40 024 0931 19 40 024 0971	
Han® HPR , Surface mounted housing, Top entry	3x M25 3x M25, 1x M20	19 40 024 1231 19 40 024 1271	

Features

- Contacts for fine stranded wire
- Low mating forces
- Suitable for HPR® hoods and housings

Technical characteristics

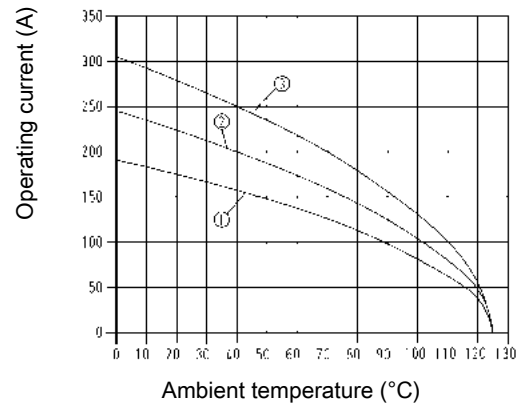
Electrical data acc. to IEC 61984	250 A 2.000 V 12 kV 3
Rated current	250 A
Rated voltage	2000 V
Rated impulse voltage	12 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 35 mm²
 ② Conductor cross-section 50 mm²
 ③ Conductor cross-section 70 mm²
 4 contacts in Han® 24 HPR

Specifications and approvals

EN 60664-1
 IEC 61984
 EN 50124-1



Details

Removal tool 09 99 000 0332 see chapter 90

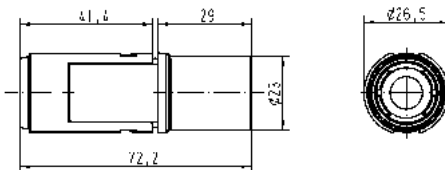
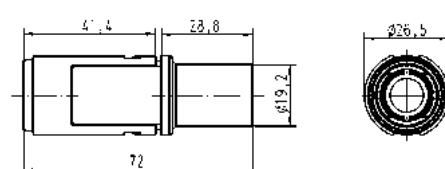
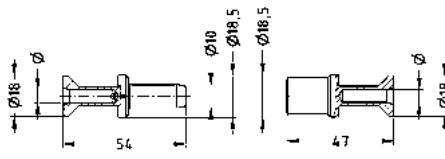
for more technical details (i.e. number of crimping operations or crimping position) see eCatalogue

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

250 A 2.000 V 12 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																												
		Male	Female																													
Han® HC Modular , Crimp termination  Please order crimp contacts separately.	10 ... 70	09 11 001 3021	09 11 001 3121	  max. insulation diameter 18 mm																												
TC 250 , Crimp contact, Contact surface: Silver plated 	10 16 25 35 50 70	09 11 000 6184 09 11 000 6185 09 11 000 6126 09 11 000 6127 09 11 000 6128 09 11 000 6129	09 11 000 6284 09 11 000 6285 09 11 000 6226 09 11 000 6227 09 11 000 6228 09 11 000 6229	 <table><tr><th>Conductor cross-section</th><th>Tool identification</th><th>Stripping length A</th><th>Ø</th></tr><tr><td>10 mm²</td><td>6</td><td>22 mm</td><td>4.3 mm</td></tr><tr><td>16 mm²</td><td>8</td><td>22 mm</td><td>8.5 mm</td></tr><tr><td>25 mm²</td><td>10</td><td>19 mm</td><td>7 mm</td></tr><tr><td>35 mm²</td><td>12</td><td>22 mm</td><td>8.45 mm</td></tr><tr><td>50 mm²</td><td>14</td><td>22 mm</td><td>10.25 mm</td></tr><tr><td>70 mm²</td><td>16</td><td>22 mm</td><td>11.75 mm</td></tr></table> for stranded wire according to IEC 60 228 Class 5 Crimp zone acc. to DIN 46235	Conductor cross-section	Tool identification	Stripping length A	Ø	10 mm²	6	22 mm	4.3 mm	16 mm²	8	22 mm	8.5 mm	25 mm²	10	19 mm	7 mm	35 mm²	12	22 mm	8.45 mm	50 mm²	14	22 mm	10.25 mm	70 mm²	16	22 mm	11.75 mm
Conductor cross-section	Tool identification	Stripping length A	Ø																													
10 mm²	6	22 mm	4.3 mm																													
16 mm²	8	22 mm	8.5 mm																													
25 mm²	10	19 mm	7 mm																													
35 mm²	12	22 mm	8.45 mm																													
50 mm²	14	22 mm	10.25 mm																													
70 mm²	16	22 mm	11.75 mm																													
TC 250 , Crimp contact, PE contact 	16 35	09 11 000 6190 09 11 000 6104	09 11 000 6290 09 11 000 6204																													

Features

- Hoods/housings for harsh outdoor environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Excellent EMC characteristics
- Screw locking M6
- Field of application: for external electrical interconnections in vehicles, in highly demanding environments and wet areas, as well as for sensitive interconnections that have to be shielded

Technical characteristics

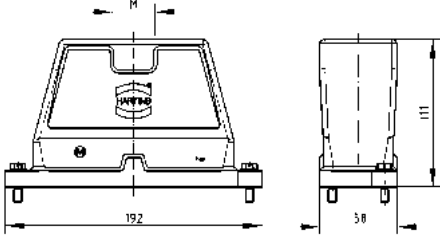


Limiting temperature	-40 ... +125 °C
Tightening torque	4 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69K
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Aluminium die-cast, Corrosion resistant
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel
Material (accessories)	Metal, Stainless steel

Specifications and approvals





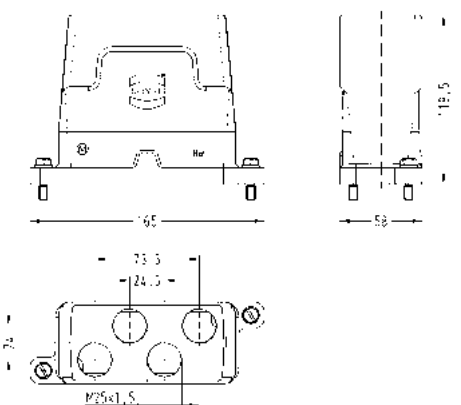
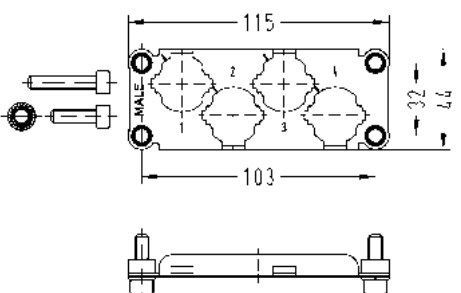
Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry 	4x M20 4x M25	19 40 024 0473 19 40 024 0474	
Frame, for male inserts, 4-pin 		09 11 000 9925	 Tightening torque Fixing screws M3: 0.5 Nm
Frame, for female inserts, 4-pin 		09 11 000 9942	 Tightening torque Fixing screws M3: 0.5 Nm



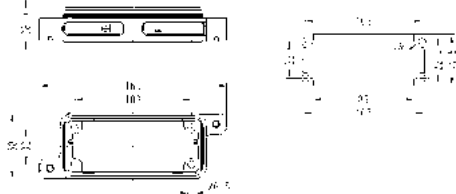
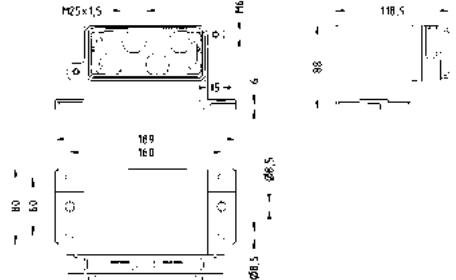
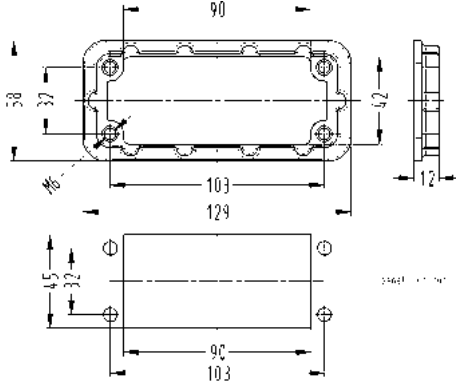
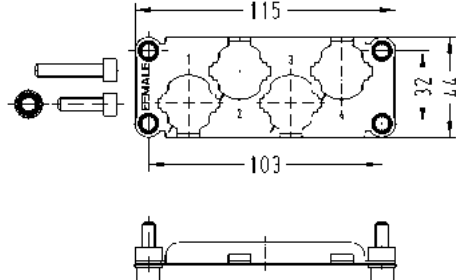
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Mounting frames, Han® HPR, Thread M6		09 40 000 9955	
Frame, for female inserts, 4-pin		09 11 000 9926	Tightening torque Fixing screws M3: 0.5 Nm
Frame, for male inserts, 4-pin		09 11 000 9941	Tightening torque Fixing screws M3: 0.5 Nm

Hoods/housings for harsh outdoor environments
Screw locking

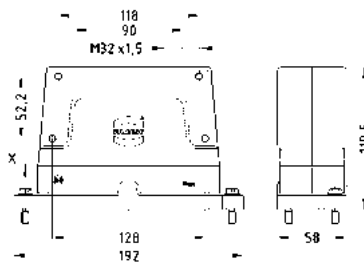
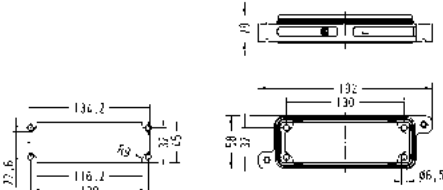
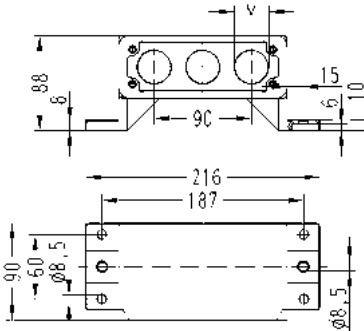
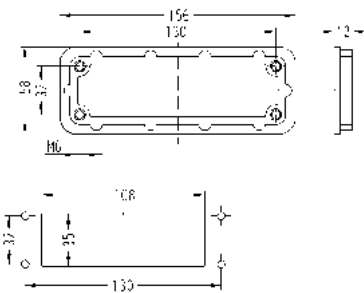
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Enlarged, Top entry 	4x M25	19 40 016 0478	
Frame, for male inserts, 4-pin 		09 11 000 9937	 Tightening torque Fixing screws M6: 10 Nm

Han HC
Modular

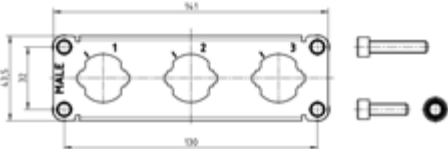
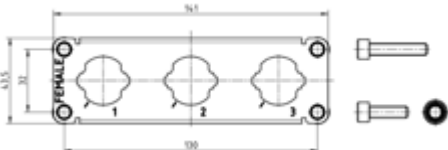
Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Bulkhead mounted housings, Enlarged 		09 40 016 0368	
Han® HPR , Surface mounted housing, Horizontal version, Enlarged, Top entry 	4x M25	19 40 016 0978	
Mounting frames, Han® HPR, Thread M6 		09 40 000 9956	
Frame, for female inserts, 4-pin 		09 11 000 9938	 Tightening torque Fixing screws M6: 10 Nm

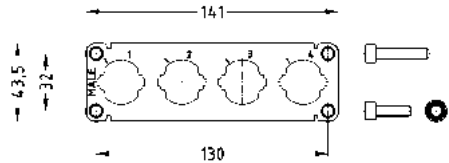
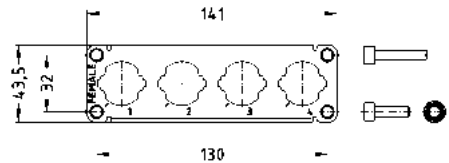
Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Enlarged, Top entry 	3x M32	19 40 024 0468	
Han® HPR , Bulkhead mounted housings, Enlarged 		09 40 024 0368	
Han® HPR , Surface mounted housing, Horizontal version, Enlarged, Top entry  Bulkhead mounted housing 09 40 024 0368 not included, please order separately	3x M32	19 40 024 0968	
Mounting frames, Han® HPR, Thread M6 		09 40 000 9904	 Panel cut out



Identification	Cable entry	Part number	Drawing (dimensions in mm)
Frame, for male inserts, 3x Han® HC Modular 250, Pack contents: 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25, 4 x washer SK S6 		09 11 000 9931	 Tightening torque Fixing screw M6: 10 Nm
Frame, for female inserts, 3x Han® HC Modular 250, Pack contents: 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25, 4 x washer SK S6 		09 11 000 9932	 Tightening torque Fixing screw M6: 10 Nm

Han HC
Modular

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Frame, for male inserts, 4x Han® HC Modular 250, Pack contents: 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25, 4 x washer SK S6 		09 11 000 9927	 Tightening torque Fixing screws M6: 10 Nm
Frame, for female inserts, 4x Han® HC Modular 250, Pack contents: 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25, 4 x washer SK S6 		09 11 000 9928	 Tightening torque Fixing screws M6: 10 Nm

Features

- Contacts for fine stranded wire
- Low mating forces
- Suitable for HPR® hoods and housings
- UL approvals for axial-screw and screw termination

Technical characteristics

Electrical data acc. to IEC 61984	350 A 2.000 V 12 kV 3
Rated current	350 A
Rated voltage	2000 V
Rated impulse voltage	12 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega, \leq 0.2 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate, Polyamide
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

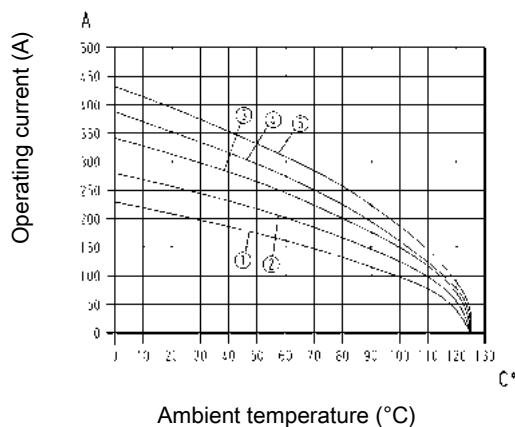
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

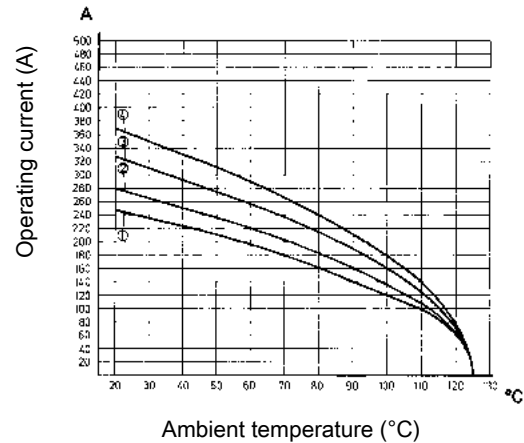
Crimp termination



- ① Conductor cross-section 35 mm²
 - ② Conductor cross-section 50 mm²
 - ③ Conductor cross-section 70 mm²
 - ④ Conductor cross-section 95 mm²
 - ⑤ Conductor cross-section 120 mm²
- Three contacts in Han® 24 HPR

Derating

Axial screw termination
Screw termination



- ① Conductor cross-section 50 mm²
 - ② Conductor cross-section 70 mm²
 - ③ Conductor cross-section 95 mm²
 - ④ Conductor cross-section 120 mm²
- Three contacts in Han® 24 HPR

Specifications and approvals

EN 60664-1
IEC 61984



Details

Electrical data up to 350 A 4000 V 18 kV 3 by using a hexagonal adapter and the HARTING cable gland, in order to realise the clearance and creepage distance.

Contact resistance crimp contact: $\leq 0.3 \text{ m}\Omega$

Contact resistance screw contact: $\leq 0.2 \text{ m}\Omega$

Contact resistance axial screw contact: $\leq 0.2 \text{ m}\Omega$

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Hex key (A/F 5) see chapter 90

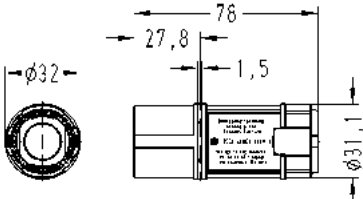
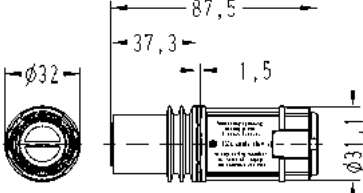
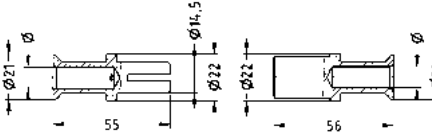
for more technical details (i.e. number of crimping operations or crimping position) see eCatalogue



Crimping tools see chapter 90

Remarks on the crimp technique



The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

350 A 2.000 V 12 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han® HC Modular , Crimp termination  Please order crimp contacts separately.	25 ... 120	09 11 001 3001	09 11 001 3101	M  F  max. insulation diameter 22 mm																					
TC 350 , Crimp contact, Contact surface: Silver plated 	25 35 50 70 95 120	09 11 000 6139 09 11 000 6140 09 11 000 6141 09 11 000 6142 09 11 000 6143 09 11 000 6144	09 11 000 6239 09 11 000 6240 09 11 000 6241 09 11 000 6242 09 11 000 6243 09 11 000 6244	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>25 mm²</td><td>7</td><td>26 mm</td></tr><tr><td>35 mm²</td><td>8.2</td><td>26 mm</td></tr><tr><td>50 mm²</td><td>10</td><td>28 mm</td></tr><tr><td>70 mm²</td><td>11.5</td><td>28 mm</td></tr><tr><td>95 mm²</td><td>13.5</td><td>30 mm</td></tr><tr><td>120 mm²</td><td>15.5</td><td>24 mm</td></tr></table> for stranded wire according to IEC 60 228 Class 5 Crimp zone acc. to DIN 46235	Wire gauge	Ø	Stripping length	25 mm²	7	26 mm	35 mm²	8.2	26 mm	50 mm²	10	28 mm	70 mm²	11.5	28 mm	95 mm²	13.5	30 mm	120 mm²	15.5	24 mm
Wire gauge	Ø	Stripping length																							
25 mm²	7	26 mm																							
35 mm²	8.2	26 mm																							
50 mm²	10	28 mm																							
70 mm²	11.5	28 mm																							
95 mm²	13.5	30 mm																							
120 mm²	15.5	24 mm																							



Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
TC 350 , Crimp contact, PE contact , Contact surface: Silver plated 	35	09 11 000 6172	09 11 000 6272	 

350 A 2.000 V 12 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® HC Modular , Screw termination, Contact surface: Silver plated 	35 ... 120	09 11 001 2655	09 11 001 2755	 Tightening torque 14 Nm Cable shoe ≤ 120 mm² Please ensure to hold up the contact with a wrench size 17 to apply the tightening torque
TC 350 , Screw contact, PE contact , Contact surface: Silver plated 	120	09 11 000 6158	09 11 000 6258	 Tightening torque 14 Nm Cable shoe ≤ 120 mm² Please ensure to hold up the contact with a wrench size 17 to apply the tightening torque

Han HC Modular

350 A 2.000 V 12 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)												
		Male	Female													
Han® HC Modular , Axial screw termination, Contact surface: Silver plated 	35 ... 70 95 ... 120	09 11 001 2651 09 11 001 2652	09 11 001 2751 09 11 001 2752	 Tightening torque <table><tr><td>mm²</td><td>35</td><td>50</td><td>70</td><td>95</td><td>120</td></tr><tr><td>Nm</td><td>8</td><td>10</td><td>12</td><td>14</td><td>16</td></tr></table> max. insulation diameter 19.5 mm Stripping length 19...20 mm	mm²	35	50	70	95	120	Nm	8	10	12	14	16
mm²	35	50	70	95	120											
Nm	8	10	12	14	16											
Axial screw contact, PE contact 	35 ... 70	09 11 000 6156	09 11 000 6256	 Tightening torque <table><tr><td>mm²</td><td>35</td><td>50</td><td>70</td></tr><tr><td>Nm</td><td>8</td><td>10</td><td>12</td></tr></table> Stripping length 19...20 mm	mm²	35	50	70	Nm	8	10	12				
mm²	35	50	70													
Nm	8	10	12													

Han HC Modular

Features

- Hoods/housings for harsh outdoor environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Excellent EMC characteristics
- Screw locking M6
- Field of application: for external electrical interconnections in vehicles, in highly demanding environments and wet areas, as well as for sensitive interconnections that have to be shielded
- Distinguishing feature: colour-coded black, internal seal

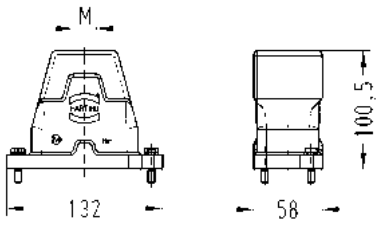
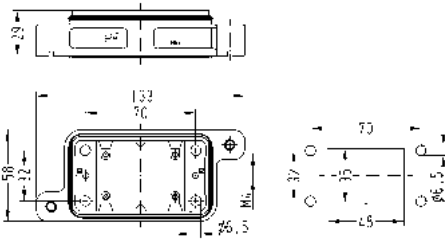
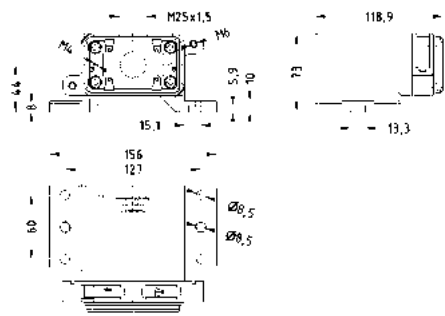
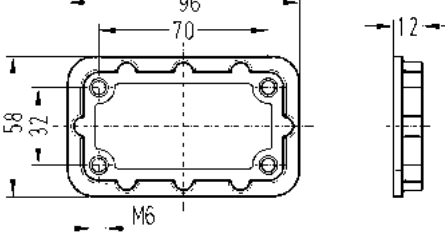
Technical characteristics

Limiting temperature	-40 ... +125 °C
Tightening torque	4 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69K
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Aluminium die-cast, Corrosion resistant
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel
Material (accessories)	Metal


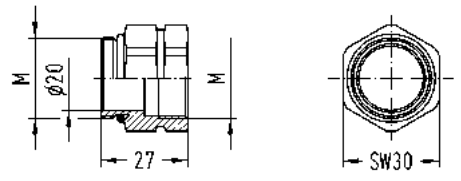
Specifications and approvals



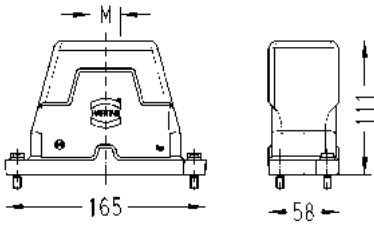
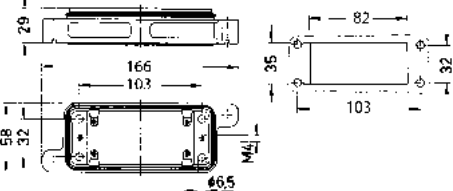


Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry 	1x M25 1x M32		19 40 006 0411 19 40 006 0412	
Han® HPR , Bulkhead mounted housings 			09 40 006 0311	
Han® HPR , Surface mounted housing, Horizontal version, Top entry 	1x M25		19 40 006 0911	
Mounting frames, Han® HPR, Thread M6 			09 40 000 9901	



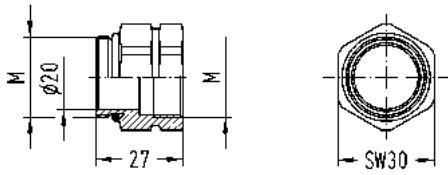
Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Frame, 1-pin 			09 11 000 9951	 Tightening torque Fixing screws M3: 0.5 Nm
Hexagonal adapter, With O-ring  to reach the electrical data up to 4000 V 18 kV 3		M25 M32	19 36 000 5134 19 36 000 5135	

Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry 	2x M25		19 40 016 0431	
Han® HPR , Bulkhead mounted housings 			09 40 016 0311	
Mounting frames, Han® HPR, Thread M6 			09 40 000 9903	 Panel cut out
Frame, 2-pin 			09 11 000 9952	 Tightening torque Fixing screws M3: 0.5 Nm Tightening torque Fixing screws M4: 1.5 Nm

Han HC
Modular

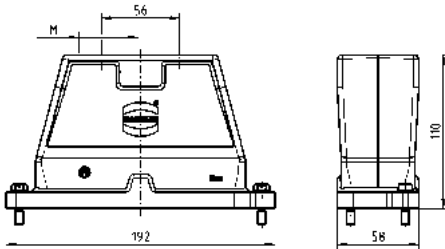
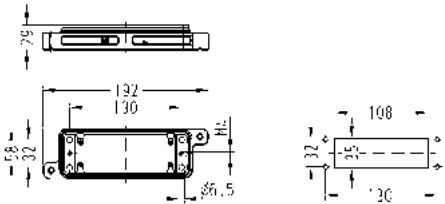
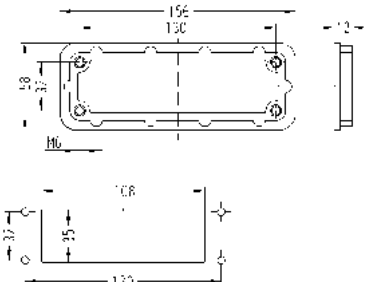

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)

Hexagonal adapter, With O-ring		M25	19 36 000 5134	



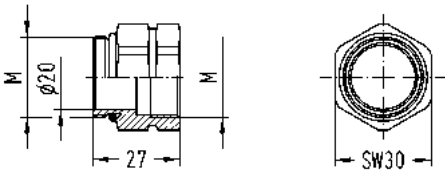
to reach the electrical data up to
4000 V 18 kV 3

Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry 	2x M32		19 40 024 0432	
Han® HPR , Bulkhead mounted housings 			09 40 024 0311	
Mounting frames, Han® HPR, Thread M6 			09 40 000 9904	 Panel cut out
Frame, 2-pin 			09 11 000 9956	 Tightening torque Fixing screws M3: 0.5 Nm Tightening torque Fixing screws M4: 1.5 Nm

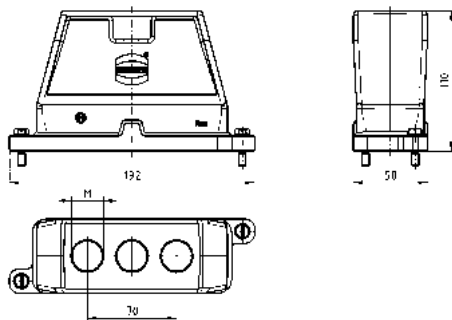
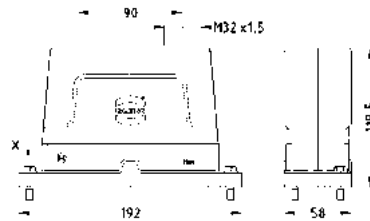
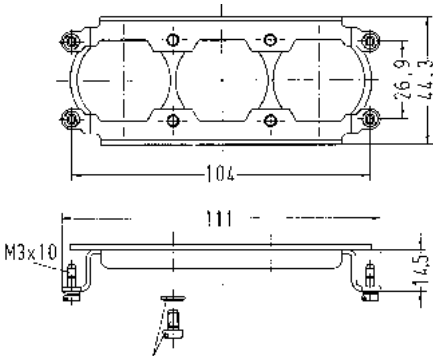
Han HC
Modular



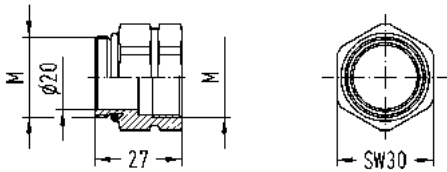
Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Hexagonal adapter, With O-ring  to reach the electrical data up to 4000 V 18 kV 3		M32	19 36 000 5135	

Han HC
Modular

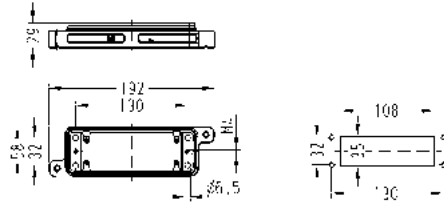
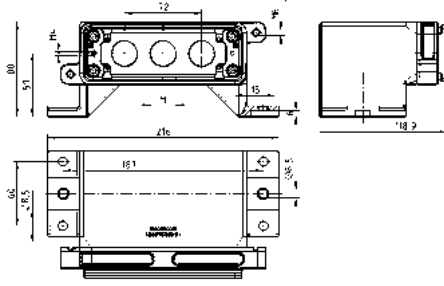
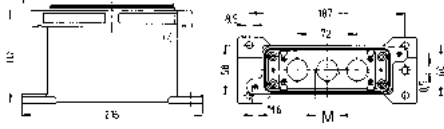
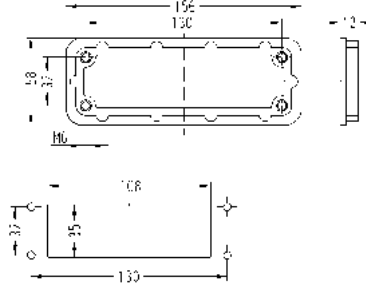
Hoods/housings for harsh outdoor environments
Screw locking

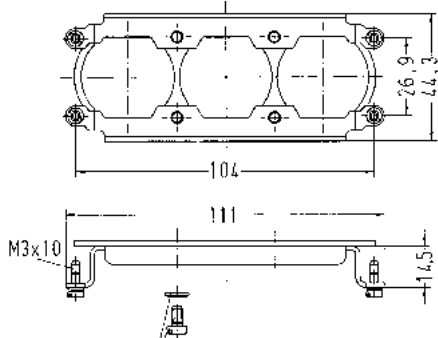
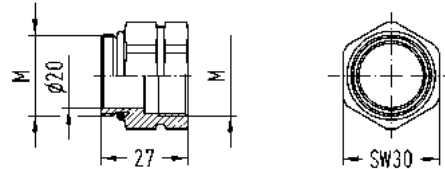
Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry 	3x M25		19 40 024 0461	
Han® HPR , Hoods, Top entry, High construction 	3x M32		19 40 024 0467	
Frame, 3-pin 			09 11 000 9963	 Tightening torque Fixing screws M3: 0.5 Nm Tightening torque Fixing screws M4: 1.5 Nm



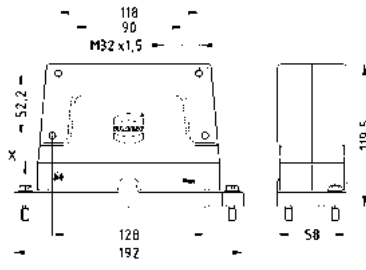
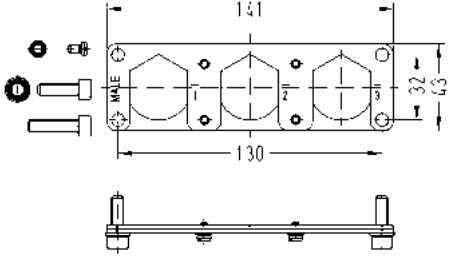
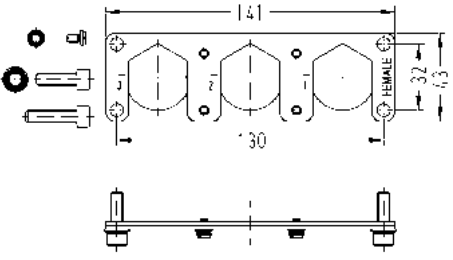
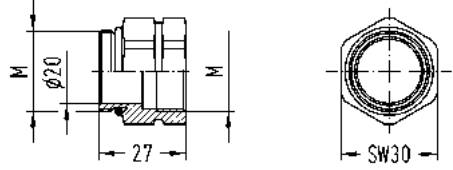
Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Hexagonal adapter, With O-ring  to reach the electrical data up to 4000 V 18 kV 3		M25 M32	19 36 000 5134 19 36 000 5135	

Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Han® HPR , Bulkhead mounted housings 			09 40 024 0311	
Han® HPR , Surface mounted housing, Horizontal version, Top entry 	3x M25		19 40 024 0931	
Han® HPR , Surface mounted housing, Top entry 	3x M25		19 40 024 1231	
Mounting frames, Han® HPR, Thread M6 			09 40 000 9904	 Panel cut out

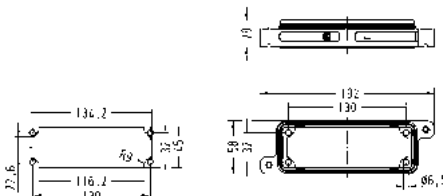
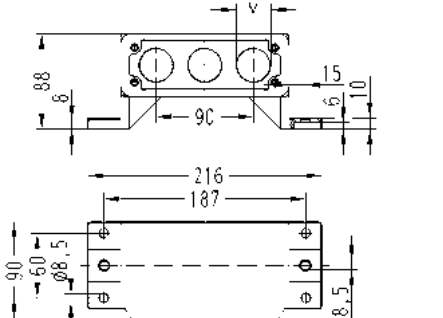
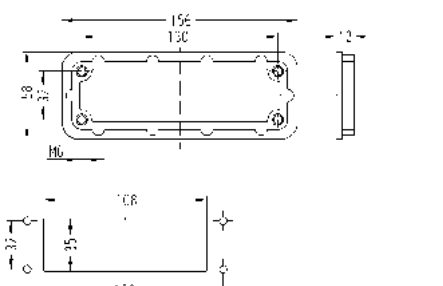
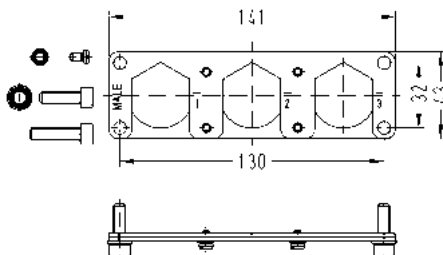
Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Frame, 3-pin 			09 11 000 9963	 Tightening torque Fixing screws M3: 0.5 Nm Tightening torque Fixing screws M4: 1.5 Nm
Hexagonal adapter, With O-ring 		M25	19 36 000 5134	
to reach the electrical data up to 4000 V 18 kV 3				

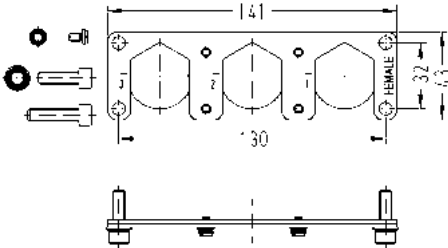
Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Enlarged, Top entry 	3x M32		19 40 024 0468	
Frame, for male inserts, 3x Han® HC Modular 350, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25 			09 11 000 9957	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm
Frame, for female inserts, 3x Han® HC Modular 350, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25 			09 11 000 9958	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm
Hexagonal adapter, With O-ring  to reach the electrical data up to 4000 V 18 kV 3		M32	19 36 000 5135	

Han HC
Modular

Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Bulkhead mounted housings, Enlarged 		09 40 024 0368	
Han® HPR , Surface mounted housing, Horizontal version, Enlarged, Top entry  Bulkhead mounted housing 09 40 024 0368 not included, please order separately	3x M32	19 40 024 0968	
Mounting frames, Han® HPR, Thread M6 		09 40 000 9904	 Panel cut out
Frame, for male inserts, 3x Han® HC Modular 350, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25 		09 11 000 9957	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Frame, for female inserts, 3x Han® HC Modular 350, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25 		09 11 000 9958	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm

Hoods/housings for harsh outdoor environments
Screw locking

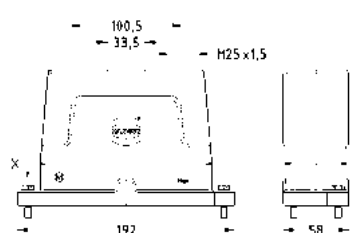
Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)

Han® HPR ,
Hoods,
Enlarged,
Top entry



4x M25

19 40 024 0478



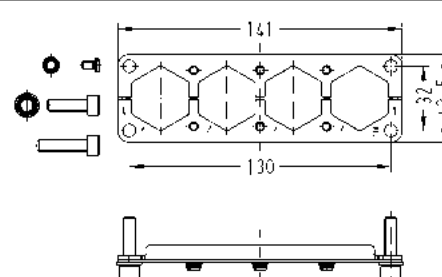
Frame,
for male inserts,
4x Han® HC Modular 350,

Pack contents:

4 x M4 screw,
4 x washer SK S4,
4 x washer SK S6,
4 x cheese-head screw M6 x 20,
4 x cheese-head screw M6 x 35,
4 x heat shrink tube



09 11 000 9964



Tightening torque Fixing screws M6: 10 Nm
Tightening torque Screws M4: 1.5 Nm

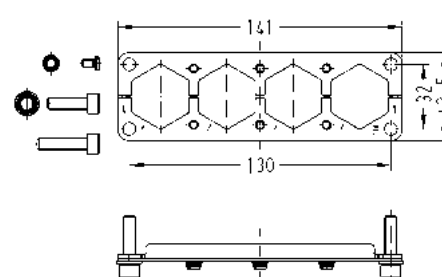
Frame,
for female inserts,
4x Han® HC Modular 350,

Pack contents:

4 x M4 screw,
4 x washer SK S4,
4 x washer SK S6,
4 x cheese-head screw M6 x 20,
4 x cheese-head screw M6 x 35,
4 x heat shrink tube



09 11 000 9965



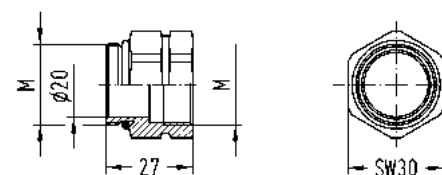
Tightening torque Fixing screws M6: 10 Nm
Tightening torque Screws M4: 1.5 Nm

Hexagonal adapter,
With O-ring

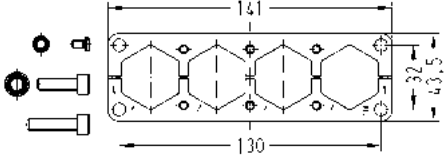
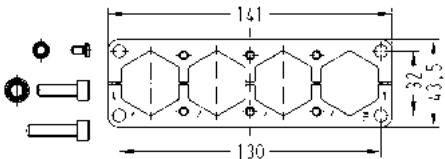


M25

19 36 000 5134



to reach the electrical data up to
4000 V 18 kV 3

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Frame, for male inserts, 4x Han® HC Modular 350, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 35, 4 x heat shrink tube 		09 11 000 9964	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm
Frame, for female inserts, 4x Han® HC Modular 350, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 35, 4 x heat shrink tube 		09 11 000 9965	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm

Features

- Hoods/housings for more demanding environmental requirements
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Locking lever made of high-quality stainless steel

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	FPM
Material (locking)	Stainless steel
Material (accessories)	Metal

Specifications and approvals



Hoods/housings for more demanding environmental requirements
Single locking lever

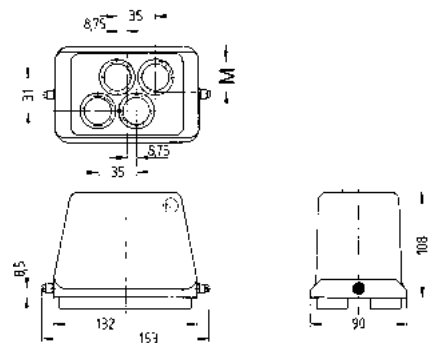
Identification	Cable entry	Part number	Drawing (dimensions in mm)

Han® M ,
Hoods,
Top entry



4x M25

19 37 048 0401



Han HC
Modular

Frame,
for 4 x HC 350 contacts + 2 x Han® Q 5/0

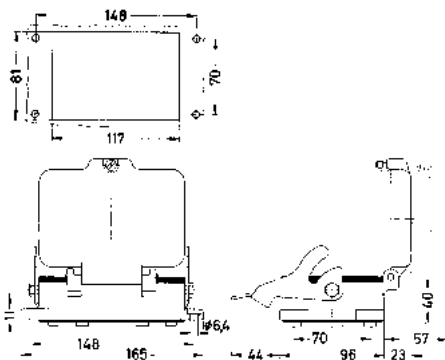


09 11 000 9954



Tightening torque Fixing screws M3: 0.5 Nm
Tightening torque Fixing screws Han® Q 5/0:
0.25 Nm
Tightening torque Cross-tying screws 1.5 Nm

Hoods/housings for more demanding environmental requirements
Single locking lever

Identification	Part number	Drawing (dimensions in mm)
Han® M , Bulkhead mounted housings, With thermo-plastic cover 	09 37 048 0301	
Frame, for 4 x HC 350 contacts + 2 x Han® Q 5/0 	09 11 000 9955	 Tightening torque Fixing screws M3: 0.5 Nm Tightening torque Fixing screws Han® Q 5/0: 0.25 Nm Tightening torque Cross-tying screws 1.5 Nm

Han HC
Modular

Features

- Contacts for fine stranded wire
- Low mating forces
- Suitable for HPR® hoods and housings
- UL approvals for axial-screw and screw termination

Technical characteristics

Electrical data acc. to IEC 61984	650 A 4.000 V 18 kV 3
Rated current	650 A
Rated voltage	4000 V
Rated impulse voltage	18 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega, \leq 0.2 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate, Polyamide
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

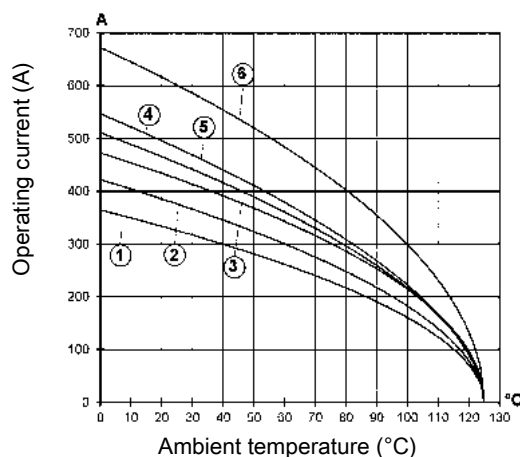
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

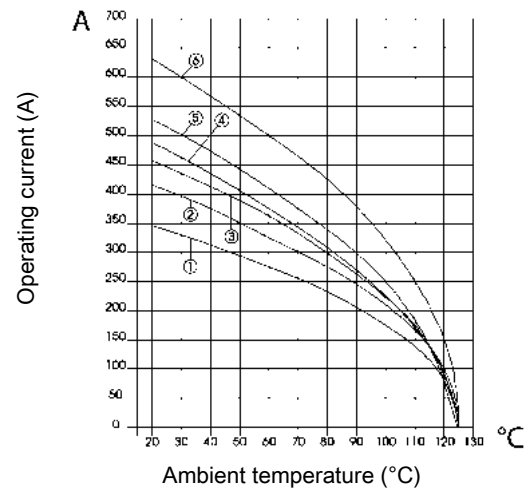
Crimp termination



- ① Conductor cross-section 70 mm²
- ② Conductor cross-section 95 mm²
- ③ Conductor cross-section 120 mm²
- ④ Conductor cross-section 150 mm²
- ⑤ Conductor cross-section 185 mm²
- ⑥ Conductor cross-section 240 mm²

Derating

Screw termination / axial screw termination



- ① Conductor cross-section 70 mm²
- ② Conductor cross-section 95 mm²
- ③ Conductor cross-section 120 mm²
- ④ Conductor cross-section 150 mm²
- ⑤ Conductor cross-section 185 mm²
- ⑥ Conductor cross-section 240 mm²

Specifications and approvals

EN 60664-1
IEC 61984



Details

Contact resistance crimp contact: $\leq 0.3 \text{ m}\Omega$

Contact resistance screw contact: $\leq 0.2 \text{ m}\Omega$

Contact resistance axial screw contact: $\leq 0.2 \text{ m}\Omega$

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Hex key (A/F 8) see chapter 90

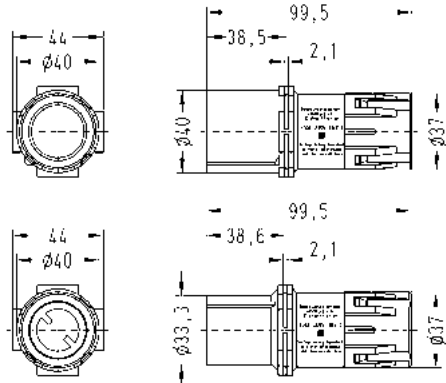

for more technical details (i.e. number of crimping operations or crimping position) see eCatalogue

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

650 A 4.000 V 18 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han® HC Modular , Crimp termination  Please order crimp contacts separately.	70 ... 240	09 11 001 3012	09 11 001 3112	 max. insulation diameter 70...185 mm²: 27 mm max. insulation diameter 240 mm²: 32 mm																					
TC 650 , Crimp contact, Contact surface: Silver plated 	70 95 120 150 185 240	09 11 000 6161 09 11 000 6162 09 11 000 6163 09 11 000 6164 09 11 000 6165 09 11 000 6168	09 11 000 6261 09 11 000 6262 09 11 000 6263 09 11 000 6264 09 11 000 6265 09 11 000 6268	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length A</th></tr><tr><td>70 mm²</td><td>11.5</td><td>42 mm</td></tr><tr><td>95 mm²</td><td>13.5</td><td>42 mm</td></tr><tr><td>120 mm²</td><td>15.5</td><td>42 mm</td></tr><tr><td>150 mm²</td><td>17</td><td>42 mm</td></tr><tr><td>185 mm²</td><td>19</td><td>42 mm</td></tr><tr><td>240 mm²</td><td>21.5</td><td>46 mm</td></tr></table> for stranded wire according to IEC 60 228 Class 5 Crimp zone acc. to DIN 46235	Wire gauge	Ø	Stripping length A	70 mm²	11.5	42 mm	95 mm²	13.5	42 mm	120 mm²	15.5	42 mm	150 mm²	17	42 mm	185 mm²	19	42 mm	240 mm²	21.5	46 mm
Wire gauge	Ø	Stripping length A																							
70 mm²	11.5	42 mm																							
95 mm²	13.5	42 mm																							
120 mm²	15.5	42 mm																							
150 mm²	17	42 mm																							
185 mm²	19	42 mm																							
240 mm²	21.5	46 mm																							

Han HC Modular

650 A 4.000 V 18 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® HC Modular , Screw termination, Contact surface: Silver plated 	70 ... 240	09 11 001 2675	09 11 001 2775	

Features

- Hoods/housings for harsh outdoor environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Excellent EMC characteristics
- Screw locking M6
- Field of application: for external electrical interconnections in vehicles, in highly demanding environments and wet areas, as well as for sensitive interconnections that have to be shielded
- Distinguishing feature: colour-coded black, internal seal

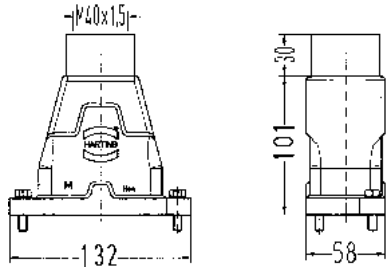
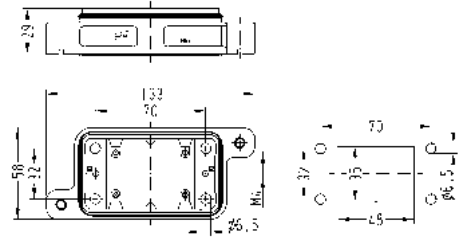

Technical characteristics

Limiting temperature	-40 ... +125 °C
Tightening torque	4 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69K
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Aluminium die-cast, Corrosion resistant
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel
Material (accessories)	Metal

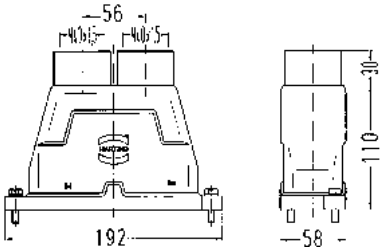
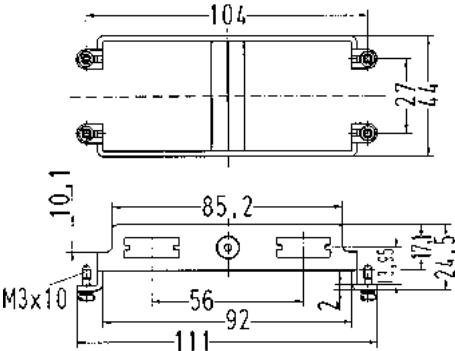
Specifications and approvals



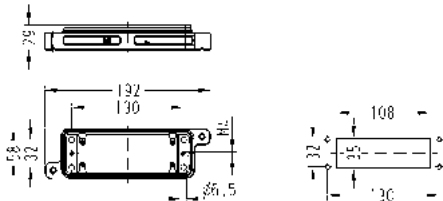
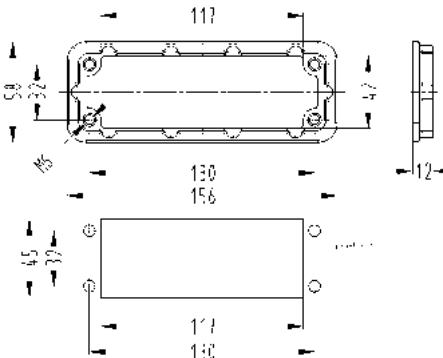
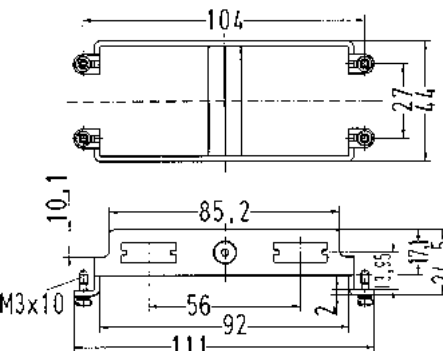
Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, With adapter, Top entry 	1x M40	19 40 006 0418	
Han® HPR , Bulkhead mounted housings 		09 40 006 0314	
Frame, 1-pin 		09 11 000 9971	 M3x10 Tightening torque Fixing screws M3: 0.5 Nm

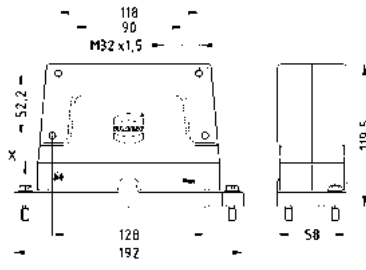
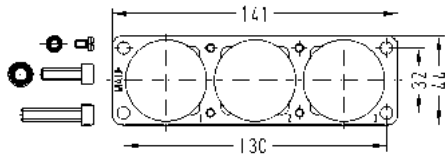
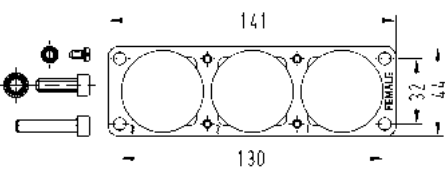
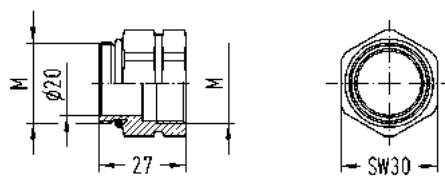
Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, With adapter, Top entry 	2x M40	19 40 024 0438	
Frame, 2-pin 		09 11 000 9972	 Tightening torque Fixing screws M3: 0.5 Nm Tightening torque M4: 1.5 Nm

Hoods/housings for harsh outdoor environments
Screw locking



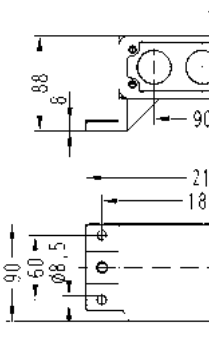
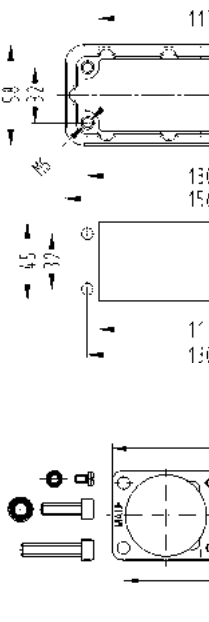
Identification	Part number	Drawing (dimensions in mm)
Han® HPR , Bulkhead mounted housings 	09 40 024 0311	
Mounting frames, Han® HPR, Thread M6 	09 40 000 9955	
Frame, 2-pin 	09 11 000 9972	 Tightening torque Fixing screws M3: 0.5 Nm Tightening torque M4: 1.5 Nm

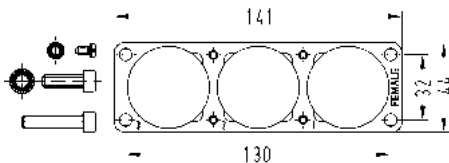



Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Enlarged, Top entry 	3x M32		19 40 024 0468	
Frame, for male inserts, 3x Han® HC Modular 650, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 35 			09 11 000 9973	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm
Frame, for female inserts, 3x Han® HC Modular 650, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 35 			09 11 000 9974	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm
Hexagonal adapter, With O-ring  to reach the electrical data up to 4000 V 18 kV 3		M32	19 36 000 5135	

Han HC
Modular

Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Han® HPR , Bulkhead mounted housings, Enlarged 			09 40 024 0368	
Han® HPR , Surface mounted housing, Horizontal version, Enlarged, Top entry  Bulkhead mounted housing 09 40 024 0368 not included, please order separately	3x M32		19 40 024 0968	
Mounting frames, Han® HPR, Thread M6  Frame, for male inserts, 3x Han® HC Modular 650, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 35 			09 40 000 9955 09 11 000 9973	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm

Identification	Cable entry	Size	Part number	Drawing (dimensions in mm)
Frame, for female inserts, 3x Han® HC Modular 650, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 35 			09 11 000 9974	  Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm
Hexagonal adapter, With O-ring  to reach the electrical data up to 4000 V 18 kV 3		M32	19 36 000 5135	 

Features

- Hoods/Housings for higher EMC requirements
- Easy assembly due to split hood and surface mounted housing
- Many assembly possibilities due to separate assembly panels
- External termination of PE termination on hood and surface mounted housing
- Ideal motor/drive connector for transportation sector
- Secure and a visible connection of screening braid of shielded cables

Technical characteristics

Limiting temperature	-40 ... +125 °C
Tightening torque	4 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69K
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Aluminium die-cast, Corrosion resistant
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel
Material (accessories)	Metal, Stainless steel

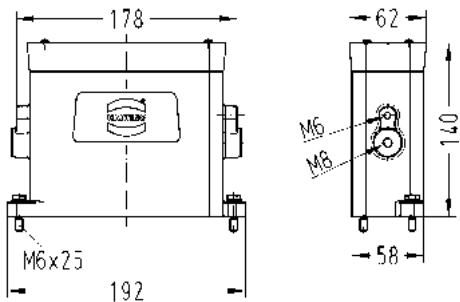
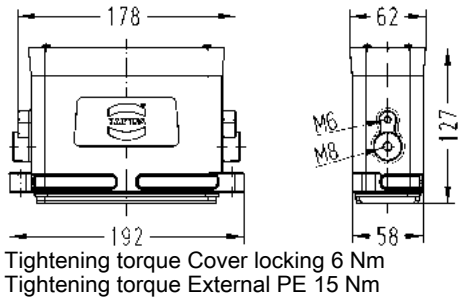
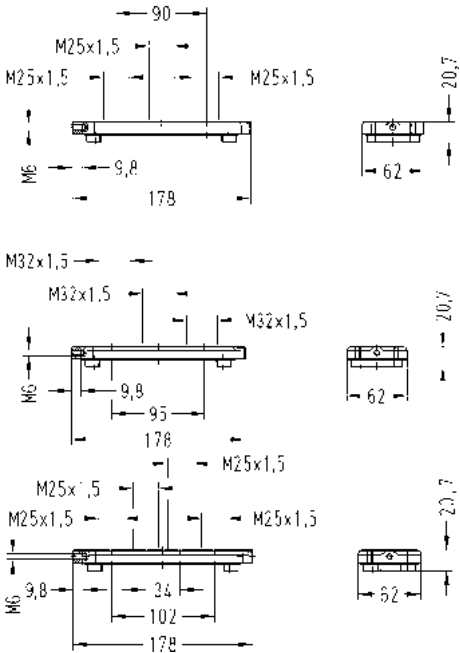
Specifications and approvals



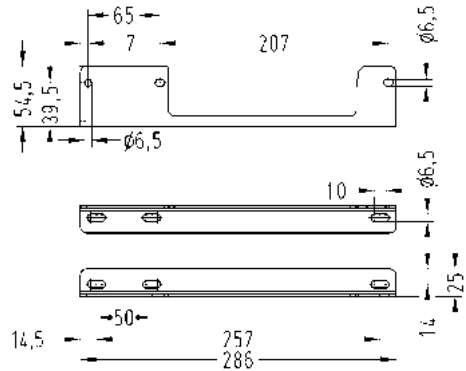



Details

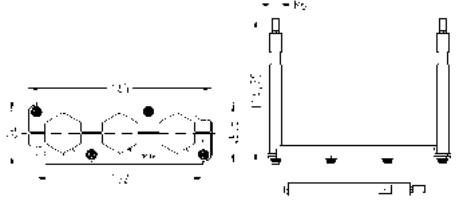
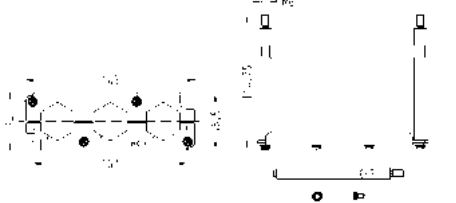
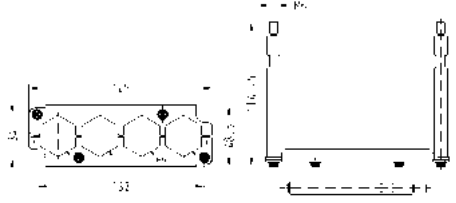
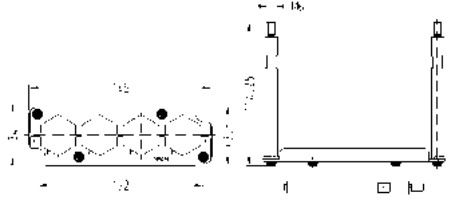
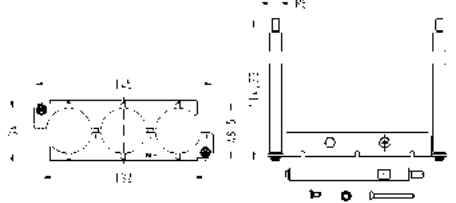
Insertion / Removal tool 09 99 000 0334 for shielding clamps
see chapter 90

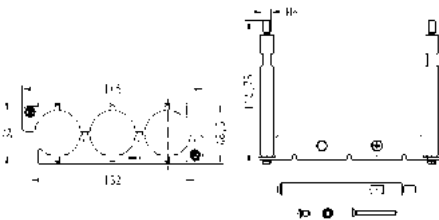
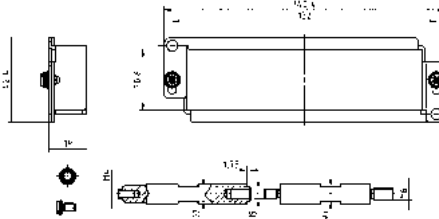
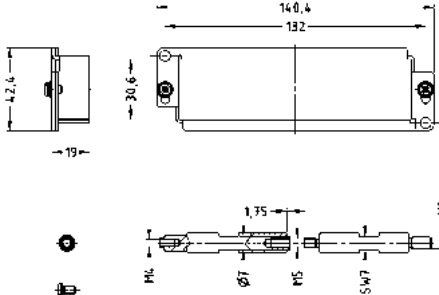
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR EasyCon , Hoods 		09 40 024 0451	 Tightening torque Cover locking 6 Nm Tightening torque External PE 15 Nm
Han® HPR EasyCon , Surface mounted housing 		09 40 024 0951	 Tightening torque Cover locking 6 Nm Tightening torque External PE 15 Nm
Han® HPR EasyCon , Mounting cover, for surface mounted housings, for hoods 	3x M25 3x M32 4x M25	19 40 024 9901 19 40 024 9903 19 40 024 9902	

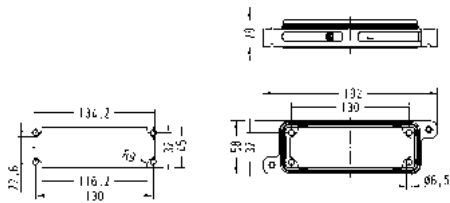
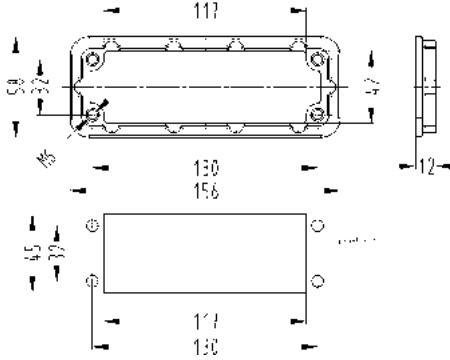
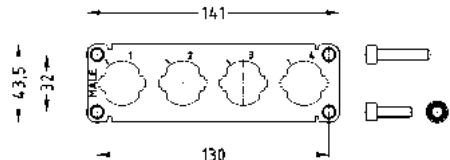
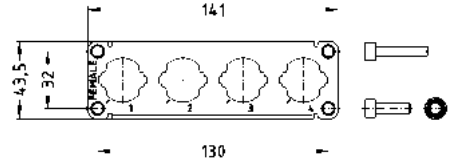
Han HC
Modular

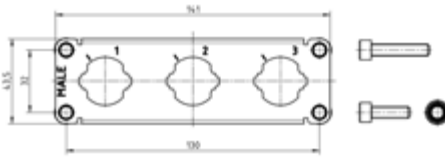
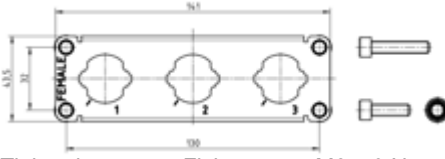
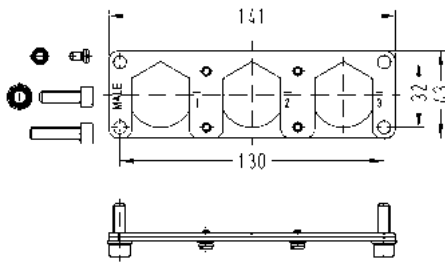
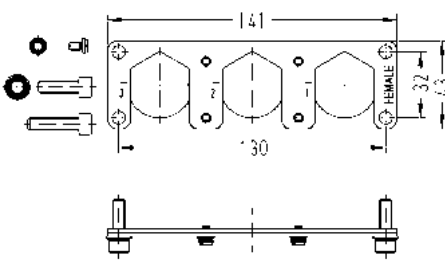
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Mounting panel, Long version, Pack contents: 6 x M6 screw, 6 x washer SK S6		09 40 000 9925	 Tightening torque Fixing screws M6: 6 Nm
Mounting panel, Short version, Pack contents: 4x M6 screw, 4 x washer SK S6		09 40 000 9926	 Tightening torque Fixing screws M6: 6 Nm
Frame, for male inserts, 4x Han® HC Modular 250, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25		09 40 024 9903	 Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm
Frame, for female inserts, 4x Han® HC Modular 250, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25		09 40 024 9904	 Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm

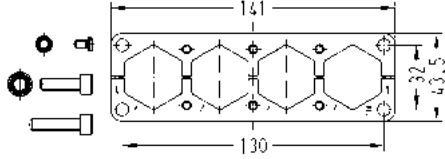
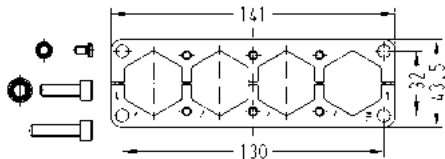
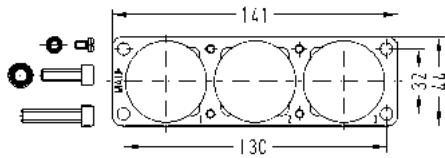
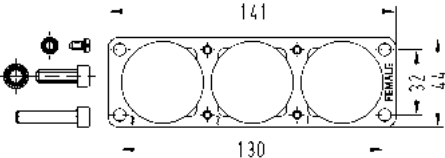
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Frame, for male inserts, 3x Han® HC Modular 350, Pack contents: 2 x distance bolt (A/F 7), 4 x M4 screw, 4 x washer SK S4		09 40 024 9911	 Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm
Frame, for female inserts, 3x Han® HC Modular 350, Pack contents: 2 x distance bolt (A/F 7), 4 x M4 screw, 4 x washer SK S4		09 40 024 9912	 Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm
Frame, for male inserts, 4x Han® HC Modular 350, Pack contents: 2 x distance bolt (A/F 7), 4 x M4 screw, 4 x washer SK S4, 4 x heat shrink tube		09 40 024 9913	 Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm
Frame, for female inserts, 4x Han® HC Modular 350, Pack contents: 2 x distance bolt (A/F 7), 4 x M4 screw, 4 x washer SK S4, 4 x heat shrink tube		09 40 024 9914	 Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm
Frame, for male inserts, 3x Han® HC Modular 650, Pack contents: 2 x distance bolt (A/F 7), 2 x M4 screw, 2 x washer SK S4, 2 x M4 countersunk screw		09 40 024 9921	 Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm Tightening torque M4: 1.5 Nm

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Frame, for female inserts, 3x Han® HC Modular 650, Pack contents: 2 x distance bolt (A/F 7), 2 x M4 screw, 2 x washer SK S4, 2 x M4 countersunk screw 		09 40 024 9922	 Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm Tightening torque M4: 1.5 Nm
Han-Modular® , Frame, for up to 8 single modules, Marking A ... H, Pack contents: 2 x M4/M5 distance bolts (A/F 7), 2 x M5/M6 distance bolts (A/F 7), 4 x M4 screw, 4 x washer SK S4 		09 40 024 9931	 Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm Tightening torque M4: 1.5 Nm
Han-Modular® , Frame, for up to 8 single modules, Marking a ... h, Pack contents: 2 x M4/M5 distance bolts (A/F 7), 2 x M5/M6 distance bolts (A/F 7), 4 x M4 screw, 4 x washer SK S4 		09 40 024 9932	 Tightening torque Distance bolt 6 Nm Tightening torque Fixing screws M4: 1.5 Nm Tightening torque M4: 1.5 Nm

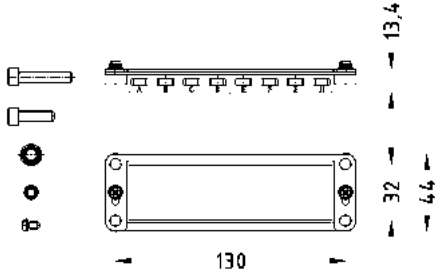
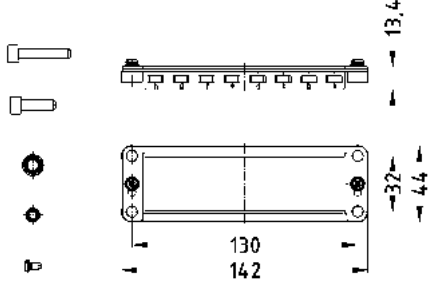
Hoods/housings for harsh outdoor environments
Screw locking

Identification	Part number	Drawing (dimensions in mm)
Han® HPR , Bulkhead mounted housings, Enlarged 	09 40 024 0368	
Mounting frames, Han® HPR, Thread M6 	09 40 000 9955	
Frame, for male inserts, 4x Han® HC Modular 250, Pack contents: 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25, 4 x washer SK S6 	09 11 000 9927	 Tightening torque Fixing screws M6: 10 Nm
Frame, for female inserts, 4x Han® HC Modular 250, Pack contents: 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25, 4 x washer SK S6 	09 11 000 9928	 Tightening torque Fixing screws M6: 10 Nm

Identification	Part number	Drawing (dimensions in mm)
Frame, for male inserts, 3x Han® HC Modular 250, Pack contents: 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25, 4 x washer SK S6	09 11 000 9931	 Tightening torque Fixing screw M6: 10 Nm
Frame, for female inserts, 3x Han® HC Modular 250, Pack contents: 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25, 4 x washer SK S6	09 11 000 9932	 Tightening torque Fixing screw M6: 10 Nm
Han HC Modular Frame, for male inserts, 3x Han® HC Modular 350, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25	09 11 000 9957	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm
Frame, for female inserts, 3x Han® HC Modular 350, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25	09 11 000 9958	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm

Identification	Part number	Drawing (dimensions in mm)
Frame, for male inserts, 4x Han® HC Modular 350, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 35, 4 x heat shrink tube 	09 11 000 9964	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm
Frame, for female inserts, 4x Han® HC Modular 350, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 35, 4 x heat shrink tube 	09 11 000 9965	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm
Frame, for male inserts, 3x Han® HC Modular 650, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 35 	09 11 000 9973	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm
Frame, for female inserts, 3x Han® HC Modular 650, Pack contents: 4 x M4 screw, 4 x washer SK S4, 4 x washer SK S6, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 35 	09 11 000 9974	 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm



Identification	Part number	Drawing (dimensions in mm)
Han-Modular®, Frame, for up to 8 single modules, Marking A ... H, Pack contents: 2 x M4 screw, 2 x washer SK S4, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25, 4 x washer SK S6 	09 11 000 9935	 130 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm
Han-Modular®, Frame, for up to 8 single modules, Marking a ... h, Pack contents: 2 x M4 screw, 2 x washer SK S4, 4 x cheese-head screw M6 x 20, 4 x cheese-head screw M6 x 25, 4 x washer SK S6 	09 11 000 9936	 130 142 Tightening torque Fixing screws M6: 10 Nm Tightening torque Screws M4: 1.5 Nm

Han HC
Modular

Technical characteristics

Material (seal)	EPDM
Material (cable glands)	Brass, nickel plated
Material (clamping ring)	Polyamide

Han HC
Modular

Features

- Hoods/housings for harsh outdoor environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Excellent EMC characteristics
- Vibration resistant acc. to IEC 61373 category 1B (Category 2 possible with usage of M6 distance bolts)

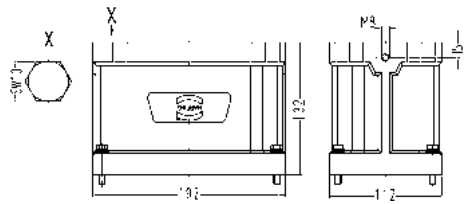
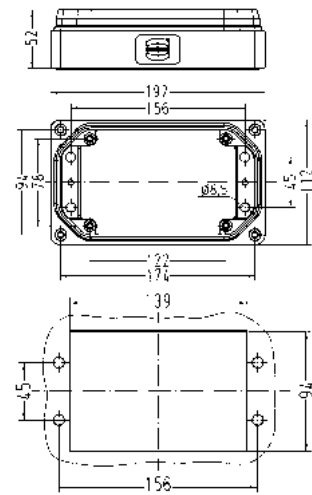
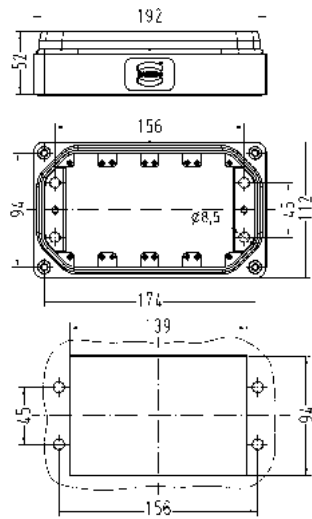
Technical characteristics

Limiting temperature	-40 ... +125 °C
Tightening torque	4 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69K
Material (hood/housing)	Aluminium die-cast, Corrosion resistant
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel
Material (accessories)	Metal

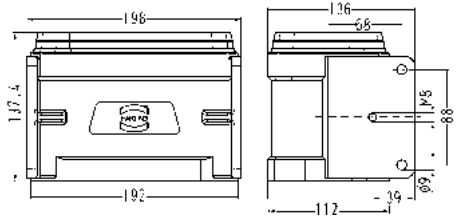

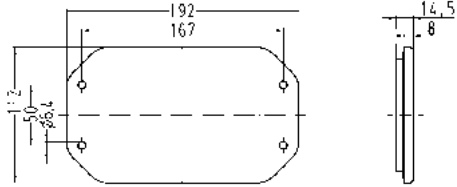
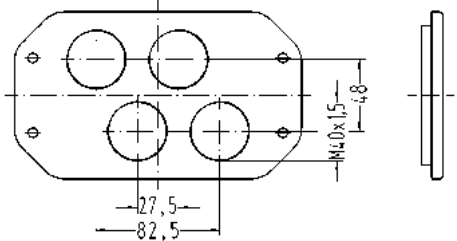
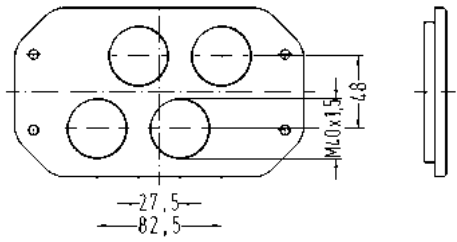
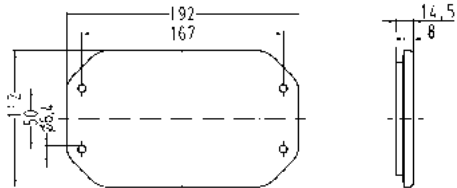
Specifications and approvals

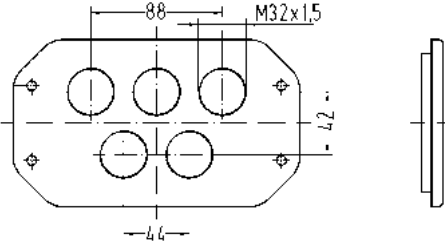
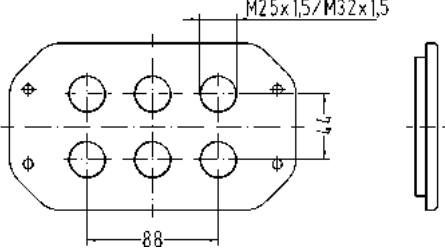
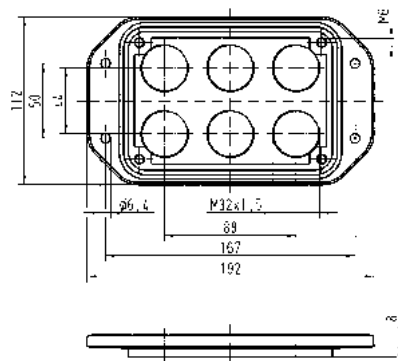
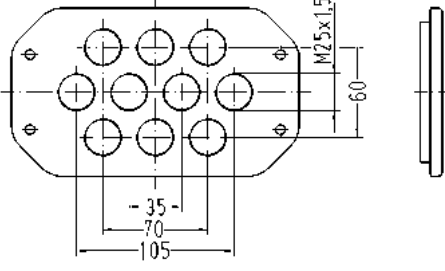


Hoods/housings for harsh outdoor environments
Screw locking

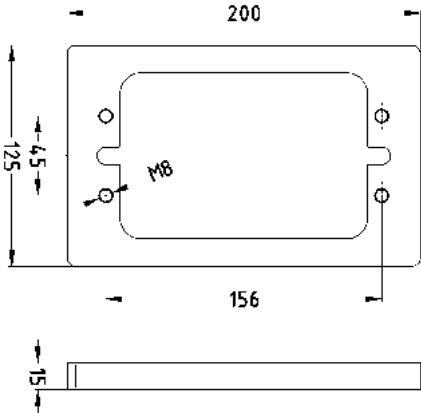
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry 		09 40 048 0451	
Han® HPR , Bulkhead mounted housings 		09 40 048 0311	 Panel cut out
Han® HPR , Bulkhead mounted housings, for 4 standard inserts - size 16 B 		09 40 048 0331	 Panel cut out



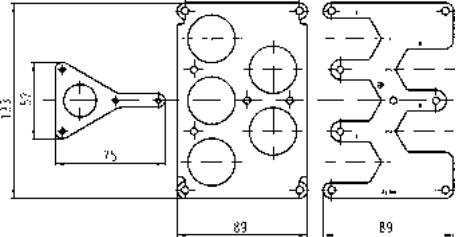

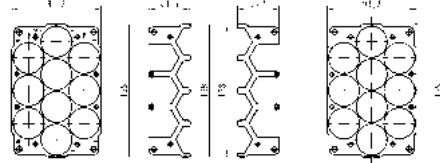

Han HC
Modular

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Surface mounted housing, Horizontal version, Top entry 		09 40 048 0951	
Han® HPR , Protection cover for bulkhead and cable to cable housing, Metal 		09 40 048 5401	
Han® HPR , Mounting cover, Distance bolt M5, Pack contents: 4 distance pieces, 4x M6 screw, 4 washers 		09 40 048 9803	 Basic size for above mentioned covers
Han® HPR , Mounting cover, Distance bolt M5, for male inserts, Pack contents: 4 distance pieces, 4x M6 screw, 4 washers 	4x M40	19 40 048 9801	
Han® HPR , Mounting cover, Distance bolt M5, for female inserts, Pack contents: 4 distance pieces, 4x M6 screw, 4 washers 	4x M40	19 40 048 9901	
Han® HPR , Mounting cover, Distance bolt M6, Without cable entry, Pack contents: 4 distance pieces, 4x M6 screw, 4 washers 		09 40 048 9801	

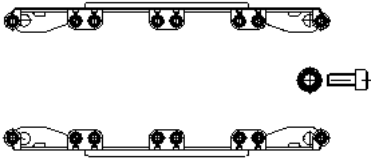
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Mounting cover, Distance bolt M6, 5 cable entries, Pack contents: 4 distance pieces, 4x M6 screw, 4 washers	5x M32	19 40 048 9812	
Han® HPR , Mounting cover, Distance bolt M6, 6 cable entries, Pack contents: 4 distance pieces, 4x M6 screw, 4 washers	6x M25 6x M32	19 40 048 9820 19 40 048 9822	 
Han® HPR , Mounting cover, Distance bolt M6, 10 cable entries, Pack contents: 4 distance pieces, 4x M6 screw, 4 washers	10x M25	19 40 048 9860	



Identification	Cable entry	Part number	Drawing (dimensions in mm)
Mounting frames, Han® HPR 		09 40 000 9965	

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Frame, for 6 x HC 350 contacts 	09 40 048 9806	09 40 048 9906	
Frame, for 4 x HC 350 contacts + PE 	09 40 048 9809	09 40 048 9909	
Frame, for 4 x HC 350 contacts + 2 x Han® Q 5/0 	09 40 048 9810	09 40 048 9910	
Frame, for 10 x HC 350 contacts 	09 40 048 9860	09 40 048 9960	
Frame, for 4 x HC 650 contacts + 2 x Han® Q 5/0 	09 40 048 9811	09 40 048 9911	



Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Frame, for 4 standard inserts - size 16 B  Suitable for hoods and surface mounted housings in conjunction with cover 09 40 048 9803/19 40 048 9801/19 40 048 9901 only	09 40 048 9912	09 40 048 9912	

Han HC
Modular

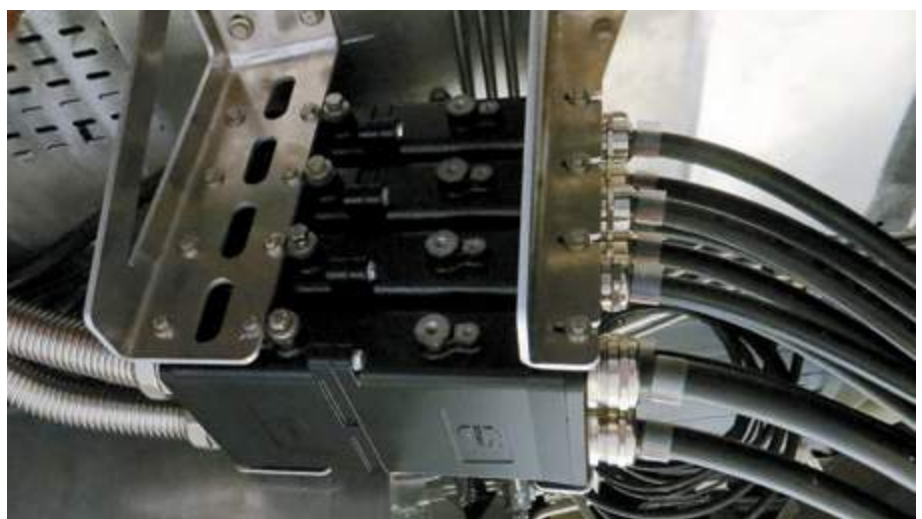
Innovative High Current Connectors for Power Transmission on Trains



Photo courtesy: Stadtwerke München, Munich

The Split hood and housing “open system” of the Han® 24HPR EasyCon with the innovative concept for shielded cables is an excellent solution for the versatile power requirements and the rapid moving operational cycle on Trains.

In use are the approved Han® HC Modular 350A and 650A Crimp-Contacts.



Han HC
Modular

Contents	Page
Han-Power® S with 1x Han® Q 4/2	15.2
Han-Power® S with 2x Han® Q 4/2	15.4
Han-Power® S with 1x Han® Q 4/2 with maintenance switch	15.6
Han-Power® S with 1x Han® Q 4/2 and on/off Switch	15.8
Han-Power® S with 1x Han® Q 4/2, metal.....	15.10
Han-Power® S with 1x Han® Q 8/0	15.12
Han-Power® S with 2x Han® Q 8/0	15.14
Han-Power® T with 3x HARTING PushPull Power	15.16
Han-Power® T with 3x Han® Q 2/0.....	15.18
Han-Power® T with 3x Han® Q 4/0.....	15.20
Han-Power® T with 3x Han® Q 5/0.....	15.22
Han-Power® T with 3x Han® Q 7/0.....	15.24
Han-Power® T with 3x Han® Q 4/2.....	15.26
Han-Power® T with 3x Han-Modular® Twin	15.28
Accessories	15.30

Features

- Compact design saves space
- No interruption of the energy supply
- Leading PE contact within the insert
- Assembly with standard tools
- Black plastic hood, top entry
- Cable to cable housings with male insert and hood with female insert

Technical characteristics

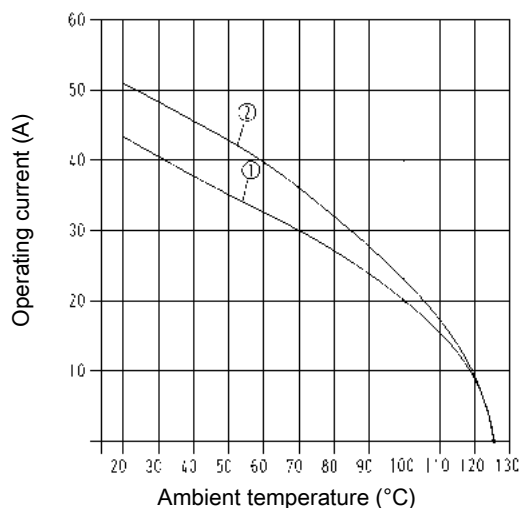
Number of contacts	4
Additional contacts	+ 2 additional signal contacts
Termination method	IDC insulation displacement termination
Electrical data acc. to IEC 61984	40 A 400/690 V 6 kV 3
Rated current	40 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Electrical data, signal	10 A 250 V 4 kV 3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	250 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® Q 4/2 Conductor cross-section 4 mm²
 ② Han® Q 4/2 Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
 IEC 61984

Details

The Han-Power® S connector is suitable for the assembly of serial power bus.

Having assembled the energy supply Han-Power® S can be inserted at any place of the power cable. The cable jacket has to be removed, the conductor is placed without interruption in the IDC.

Han-Power® S is suitable for cables with single strands manufactured acc. to DIN VDE 0281/ EN 60228. For the distribution of the device Han-Compact® hoods or cable to cable housings are used.

This power supply has to be realized with one Han-Compact® cable to cable hood.

Number of contacts

4+ 

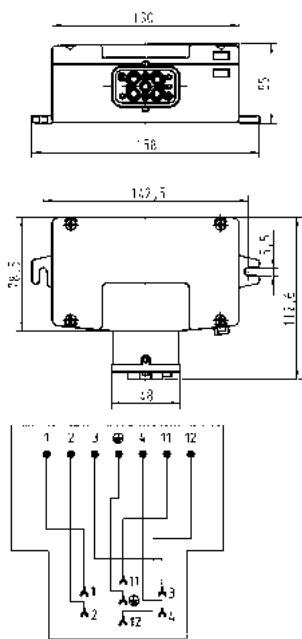
40 A 400/690 V 6 kV 3
+ 2 additional signal contacts
10 A 250 V 4 kV 3

Identification	Conductor cross-section (mm²)	Part number	Drawing (dimensions in mm)

Han-Power® S ,
Energy distributor,
With 1x Han® Q 4/2,
Female insert,
in Han-Compact® Hoods



2,5 ... 4 4 ... 6	09 12 008 4804 09 12 008 4806



Wiring diagram

Han-
Power

Features

- Compact design saves space
- No interruption of the energy supply
- Leading PE contact within the insert
- Assembly with standard tools
- Black plastic hood, top entry
- Cable to cable housings with male insert and hood with female insert

Technical characteristics

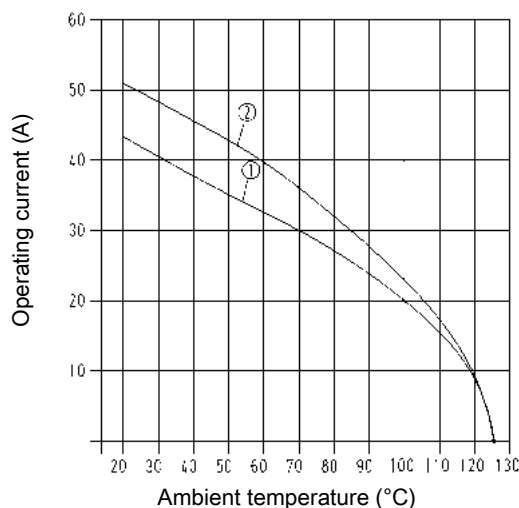
Number of contacts	4
Additional contacts	+ 2 additional signal contacts
Termination method	IDC insulation displacement termination
Electrical data acc. to IEC 61984	40 A 400/690 V 6 kV 3
Rated current	40 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Electrical data, signal	10 A 250 V 4 kV 3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	250 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® Q 4/2 Conductor cross-section 4 mm²
 ② Han® Q 4/2 Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
 IEC 61984

Details

The Han-Power® S connector is suitable for the assembly of serial power bus.

Having assembled the energy supply Han-Power® S can be inserted at any place of the power cable. The cable jacket has to be removed, the conductor is placed without interruption in the IDC.

Han-Power® S is suitable for cables with single strands manufactured acc. to DIN VDE 0281/ EN 60228. For the distribution of the device Han-Compact® hoods or cable to cable housings are used.

This power supply has to be realized with one Han-Compact® cable to cable hood.

Number of contacts

4+ 

40 A 400/690 V 6 kV 3
+ 2 additional signal contacts
10 A 250 V 4 kV 3

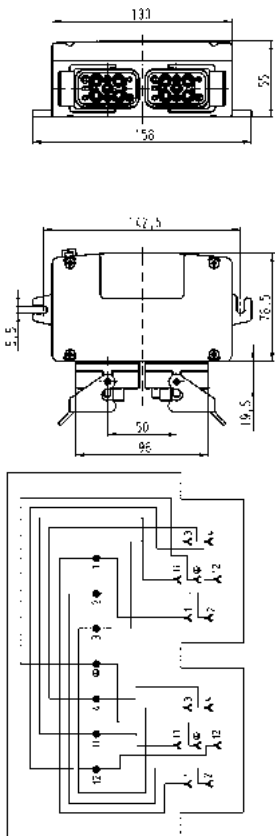
Identification	Conductor cross-section (mm²)	Part number	Drawing (dimensions in mm)

Han-Power® S ,
Energy distributor,
With 2 x Han® Q 4/2,
Female insert,
in Han-Compact® Housings, bulkhead
mounting



4 ... 6

09 12 008 4807



Wiring diagram

Features

- Compact design saves space
- No interruption of the energy supply
- Leading PE contact within the insert
- Assembly with standard tools

Technical characteristics

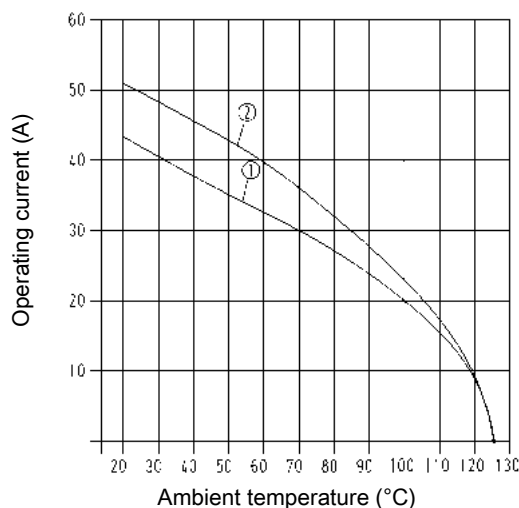
Number of contacts	4
Additional contacts	+ 2 additional signal contacts
Termination method	IDC insulation displacement termination
Electrical data acc. to IEC 61984	5 A 230/400 V 4 kV 2
Rated current	5 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	2
Electrical data, signal	10 A 250 V 4 kV 2
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	2
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	250 V
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-25 ... +55 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® Q 4/2 Conductor cross-section 4 mm²
 ② Han® Q 4/2 Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
 IEC 61984

Details

The Han-Power® S connector is suitable for the assembly of serial power bus.

Having assembled the energy supply Han-Power® S can be inserted at any place of the power cable. The cable jacket has to be removed, the conductor is placed without interruption in the IDC.

Han-Power® S is suitable for cables with single strands manufactured acc. to DIN VDE 0281/ EN 60228. For the distribution of the device Han-Compact® hoods or cable to cable housings are used.

This power supply has to be realized with one Han-Compact® cable to cable hood.

Technical data of switches

Electrical data acc. to IEC 61058-1 (VDE 0630 sect. 1)

for switch-disconnectors

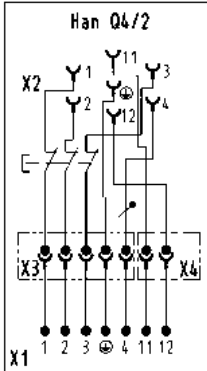
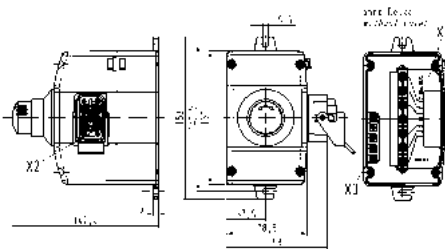
Rated voltage 250 V~ / 400 V~

Rated current 16 (10) A / 10 (5) A

Number of contacts

4+ 

5 A 230/400 V 4 kV 2
+ 2 additional signal contacts
10 A 250 V 4 kV 2

Identification	Conductor cross-section (mm²)	Part number	Drawing (dimensions in mm)
Han-Power® S , Energy distributor, With 1x Han® Q 4/2, Female insert, in Han-Compact® Hoods, With maintenance switch  4 ... 6 09 12 008 4620  Wiring diagram			

Features

- Compact design saves space
- No interruption of the energy supply
- Leading PE contact within the insert
- Assembly with standard tools

Technical characteristics

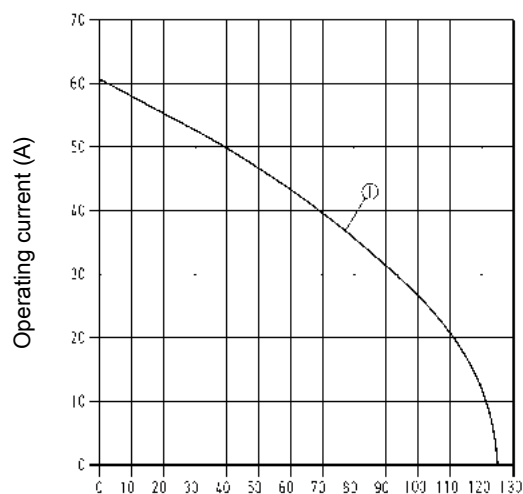
Number of contacts	4
Termination method	IDC insulation displacement termination
Electrical data acc. to IEC 61984	10 A 230/400 V 4 kV 3
Rated current	10 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



Ambient temperature (°C)
Energy supply Conductor cross-section 10 mm²

Specifications and approvals

EN 60664-1
IEC 61984

Details

The Han-Power® S connector is suitable for the assembly of serial power bus.

Having assembled the energy supply Han-Power® S can be inserted at any place of the power cable. The cable jacket has to be removed, the conductor is placed without interruption in the IDC.

Han-Power® S is suitable for cables with single strands manufactured acc. to DIN VDE 0281/ EN 60228. For the distribution of the device Han-Compact® hoods or cable to cable housings are used.

This power supply has to be realized with one Han-Compact® cable to cable hood.

Power side

Electrical data acc. to EN 61984

Interface to connector

10 A 230/400 V 4 kV 3

Frequency 50 Hz

Energy bus

50 A 230/400 V 4 kV 3

Max. operating temperature -5°C ... 60°C

Degree of protection

acc. to DIN EN 60529 IP65

Mechanical working life ≥ 500 mating cycles

Security fixing

nach IEC 60127-1;

nach UL 4248-1 / UL 512

nach CSA C22.2 no. 39

Rated current 10 A

Rated voltage 250 V

Technical data of switches

Electrical data acc. to IEC 60947

16 A 750 V 0.5 kA

Rated current 16 A

Rated voltage 750 V

Rated short-circuit current 0.5 kA

Mechanical working life 10 000 operations

4+ 

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
Han-Power® S , Energy distributor, With 1x Han® Q 4/2, Female insert, in Han-Compact® Hoods, On/off Switch 	10	09 12 008 4650	

Features

- Compact design saves space
- No interruption of the energy supply
- Leading PE contact within the insert
- Assembly with standard tools

Technical characteristics

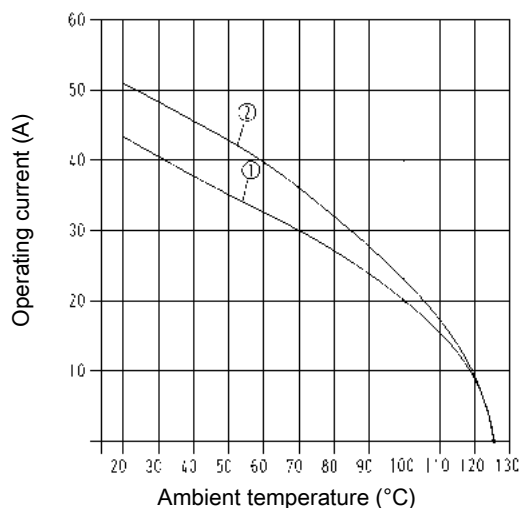
Number of contacts	4
Additional contacts	+ 2 additional signal contacts
Termination method	IDC insulation displacement termination
Electrical data acc. to IEC 61984	40 A 400/690 V 6 kV 3
Rated current	40 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Electrical data, signal	10 A 250 V 4 kV 3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	250 V
Rated voltage acc. to CSA	250 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® Q 4/2 Conductor cross-section 4 mm²
 ② Han® Q 4/2 Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
 IEC 61984

Details

The Han-Power® S connector is suitable for the assembly of serial power bus.

Having assembled the energy supply Han-Power® S can be inserted at any place of the power cable. The cable jacket has to be removed, the conductor is placed without interruption in the IDC.





Han-Power® S is suitable for cables with single strands manufactured acc. to DIN VDE 0281/ EN 60228. For the distribution of the device Han-Compact® hoods or cable to cable housings are used.

This power supply has to be realized with one Han-Compact® cable to cable hood.

Number of contacts

4+ 

40 A 400/690 V 6 kV 3
+ 2 additional signal contacts
10 A 250 V 4 kV 3

Identification	Conductor cross-section (mm²)	Part number	Drawing (dimensions in mm)
Han-Power® S , Energy distributor, With 1x Han® Q 4/2, Female insert, in Han-Compact® Housings, bulkhead mounting 	4 ... 6	09 12 008 4901	  Wiring diagram
Han-Power® S , Energy distributor, With 1x Han® Q 4/2, Female insert, in Han-Compact® Housings, bulkhead mounting, Without signal contacts 	10	09 12 008 4951	  Wiring diagram

Features

- Compact design saves space
- No interruption of the energy supply
- Leading PE contact within the insert
- Assembly with standard tools
- Black plastic hood, top entry

Technical characteristics

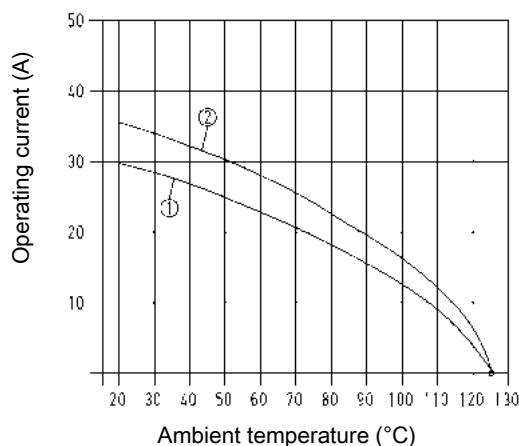
Number of contacts	8
Termination method	IDC insulation displacement termination
Electrical data acc. to IEC 61984	25 A 500 V 6 kV 3
Rated current	25 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide, Fibre-glass reinforced
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® Q 8/0 Conductor cross-section 2.5 mm²
- ② Han® Q 8/0 Conductor cross-section 4 mm²
- ③ Han® Q 8/0 Conductor cross-section 6 mm²

Specifications and approvals

EN 60664-1
IEC 61984

Details

The Han-Power® S connector is suitable for the assembly of serial power bus.

Having assembled the energy supply Han-Power® S can be inserted at any place of the power cable. The cable jacket has to be removed, the conductor is placed without interruption in the IDC.

Han-Power® S is suitable for cables with single strands manufactured acc. to DIN VDE 0281/ EN 60228. For the distribution of the device Han-Compact® hoods or cable to cable housings are used.

This power supply has to be realized with one Han-Compact® cable to cable hood.

Number of contacts

8+ 

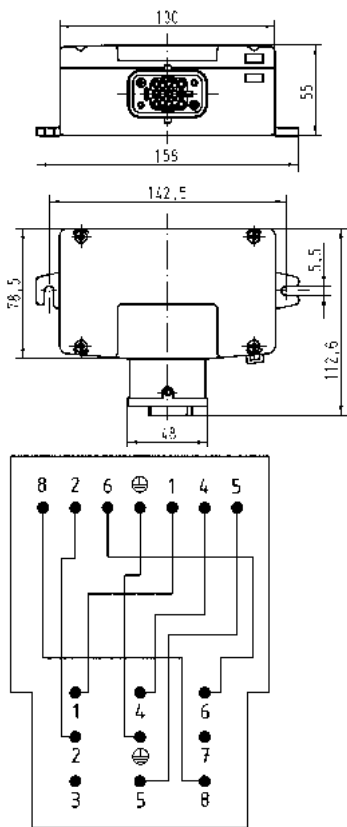
25 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number	Drawing (dimensions in mm)

Han-Power® S ,
Energy distributor,
With 1x Han® Q 8/0,
Female insert,
in Han-Compact® Hoods



2,5 ... 4 4 ... 6	09 12 008 4801 09 12 008 4811



Wiring diagram

Features

- Compact design saves space
- No interruption of the energy supply
- Leading PE contact within the insert
- Assembly with standard tools
- Black plastic hood, top entry

Technical characteristics

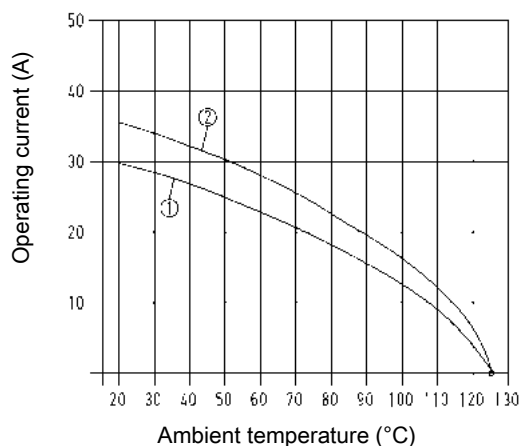
Number of contacts	6
Termination method	IDC insulation displacement termination
Electrical data acc. to IEC 61984	25 A 500 V 6 kV 3
Rated current	25 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® Q 8/0 Conductor cross-section 2.5 mm²
 ② Han® Q 8/0 Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
 IEC 61984

Details

The Han-Power® S connector is suitable for the assembly of serial power bus.

Having assembled the energy supply Han-Power® S can be inserted at any place of the power cable. The cable jacket has to be removed, the conductor is placed without interruption in the IDC.

Han-Power® S is suitable for cables with single strands manufactured acc. to DIN VDE 0281/ EN 60228. For the distribution of the device Han-Compact® hoods or cable to cable housings are used.

This power supply has to be realized with one Han-Compact® cable to cable hood.

Number of contacts

6+ 

25 A 500 V 6 kV 3

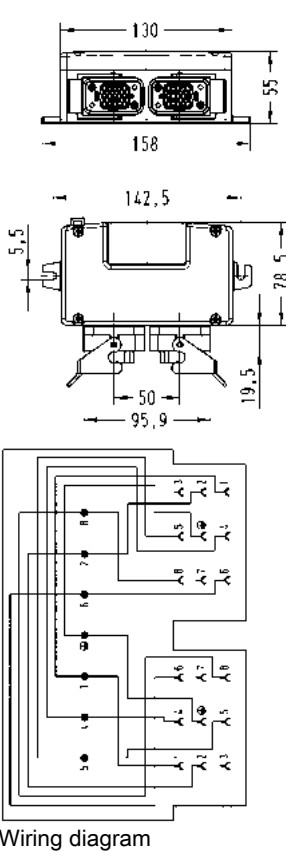
Identification	Conductor cross-section (mm²)	Part number	Drawing (dimensions in mm)

Han-Power® S ,
Energy distributor,
With 2 x Han® Q 8/0,
Female insert,
in Han-Compact® Housings, bulkhead
mounting



2,5 ... 4

09 12 008 4802



Han-
Power

Technical characteristics

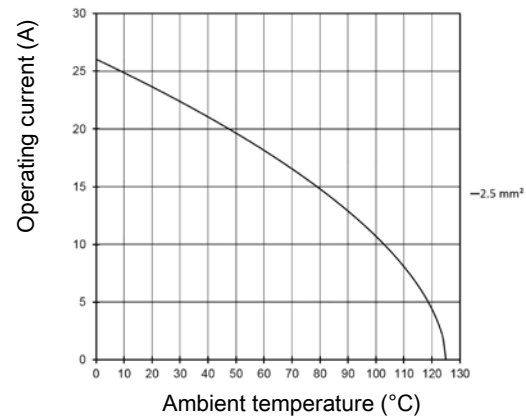
Number of contacts	4
Electrical data acc. to IEC 61984	12 A 48 V 1,5 kV 3
Rated current	12 A
Rated voltage	48 V
Rated impulse voltage	1.5 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Flammability acc. to UL 94	V-0
Mating cycles	≥ 750
Degree of protection acc. to IEC 60529	IP65, IP67
Material (hood/housing)	Polyamide
Colour (hood/housing)	RAL 9005 (jet black)

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



Specifications and approvals

EN 60664-1
IEC 61984

Features

- One connection for the power input, the power output and to connect with the device
- 2 power contacts
- Plastic housings are integrated in the moulding

Technical characteristics

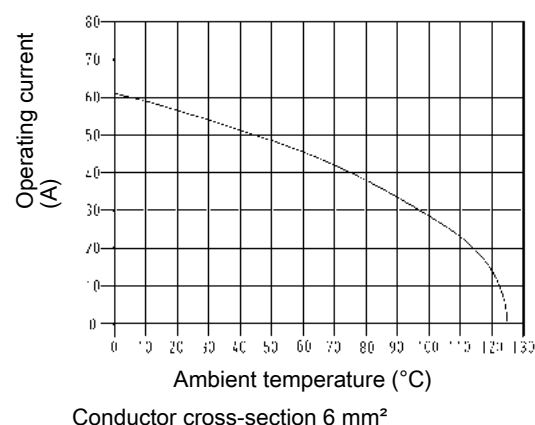
Number of contacts	2
Electrical data acc. to IEC 61984	40 A 400 V 6 kV 3
Rated current	40 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (hood/housing)	Polyamide
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



Specifications and approvals

EN 60664-1
IEC 61984

Number of contacts

2+

40 A 400 V 6 kV 3

Identification

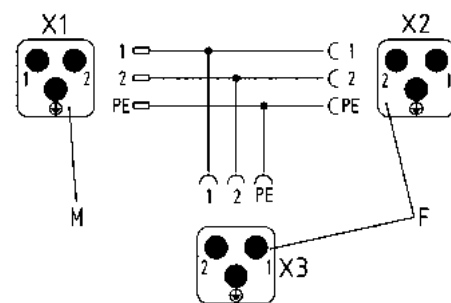
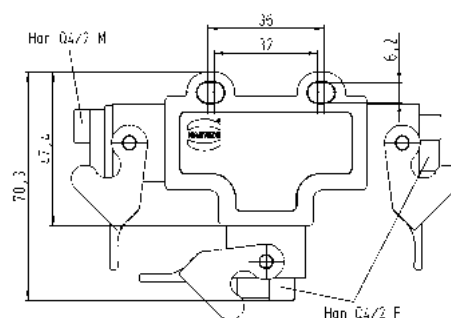
Han-Power® T,
Energy distributor,
With 3x Han® Q 2/0,
In Han® 3 A Housings, bulkhead mounting



Part number

09 12 008 4752

Drawing
(dimensions in mm)



Wiring diagram

Technical characteristics

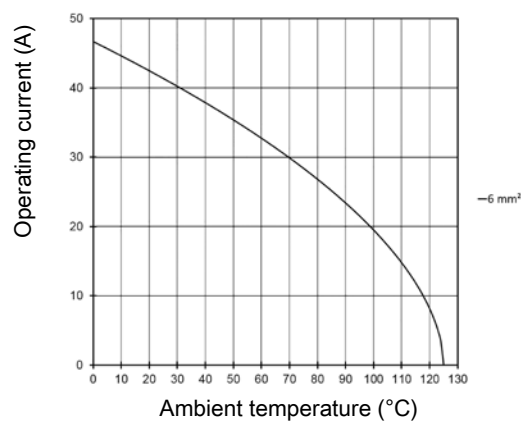
Number of contacts	4
Electrical data acc. to IEC 61984	40 A 830 V 8 kV 3
Rated current	40 A
Rated voltage	830 V
Rated impulse voltage	8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (hood/housing)	Polyamide
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



Specifications and approvals

EN 60664-1
IEC 61984

Number of contacts

4+

40 A 830 V 8 kV 3

Identification

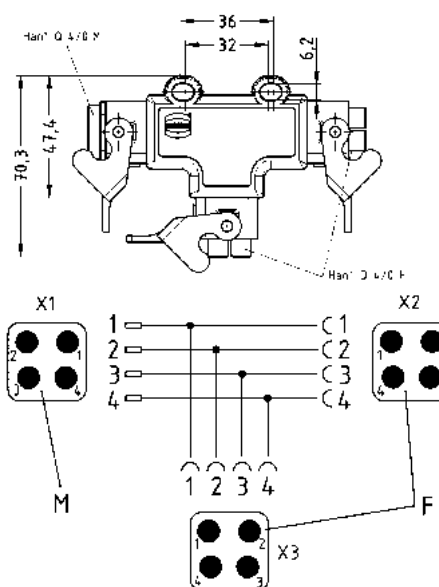
Han-Power® T,
Energy distributor,
With 3x Han® Q 4/0,
In Han® 3 A Housings, bulkhead mounting



Part number

09 12 008 4756

Drawing
(dimensions in mm)



Wiring diagram

Han-Power

Features

- One connection for the power input, the power output and to connect with the device
- Plastic housings are integrated in the moulding

Technical characteristics

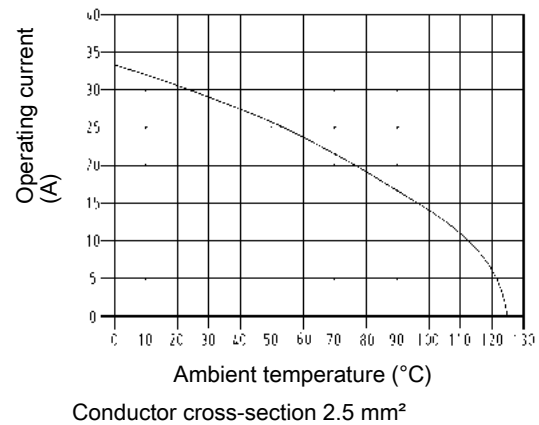
Number of contacts	5, 4
Electrical data acc. to IEC 61984	16 A 230/400 V 4 kV 3
Rated current	16 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (hood/housing)	Polyamide
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



Specifications and approvals

EN 60664-1
IEC 61984

Number of contacts

5+

16 A 230/400 V 4 kV 3

Identification

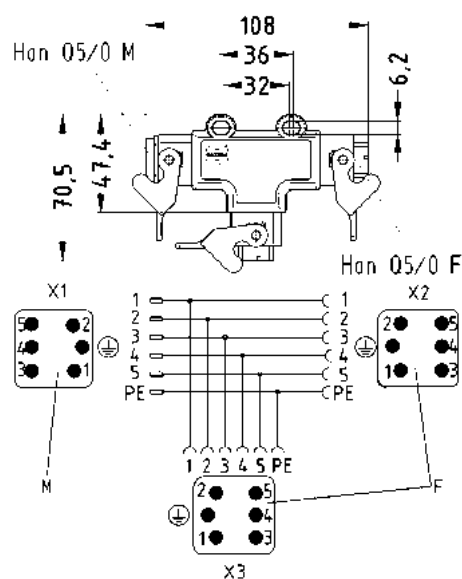
Han-Power® T ,
Energy distributor,
With 3x Han® Q 5/0,
In Han® 3 A Housings, bulkhead mounting,
5-pin



Part number

09 12 008 4753

Drawing
(dimensions in mm)

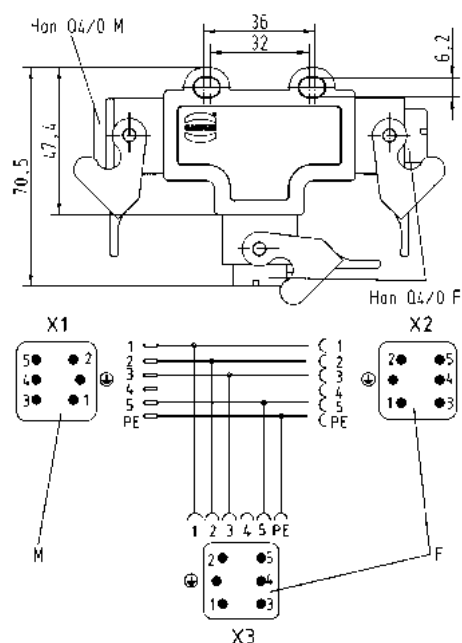


Wiring diagram

Han-Power® T ,
Energy distributor,
With 3x Han® Q 5/0,
In Han® 3 A Housings, bulkhead mounting,
4-pin



09 12 008 4751



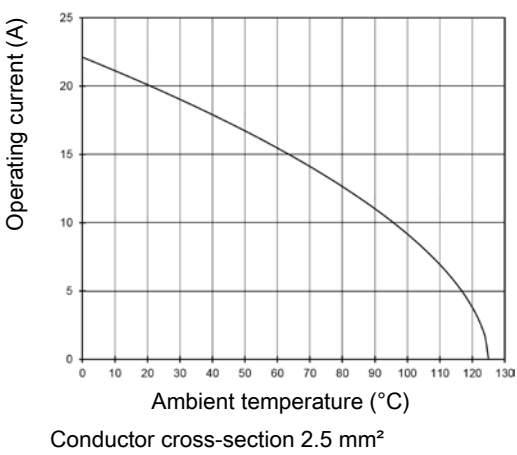
Wiring diagram

Technical characteristics

Number of contacts	7
Electrical data acc. to IEC 61984	10 A 400 V 6 kV 3
Rated current	10 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≤1 mΩ
Mating cycles	≥500
Material (hood/housing)	Polyamide
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide
Material (contacts)	Copper alloy

Derating

Current carrying capacity
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.
Measuring and testing techniques acc. to IEC 60512-5-2



Specifications and approvals

EN 60664-1
IEC 61984

Number of contacts

7+ 

10 A 400 V 6 kV 3

Identification

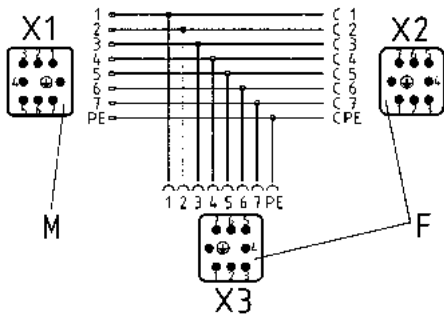
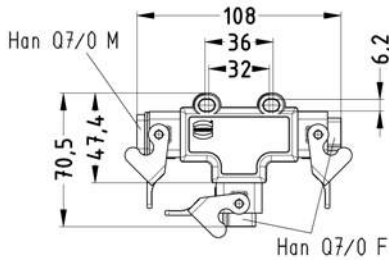
Han-Power® T ,
Energy distributor,
With 3x Han® Q 7/0,
In Han® 3 A Housings, bulkhead mounting



Part number

09 12 008 4757

Drawing
(dimensions in mm)



Wiring diagram

Features

- One connection for the power input, the power output and to connect with the device
- Finger safe male and female contacts
- 4 power contacts
- 2 signal contacts
- Metal hoods / housings

Technical characteristics

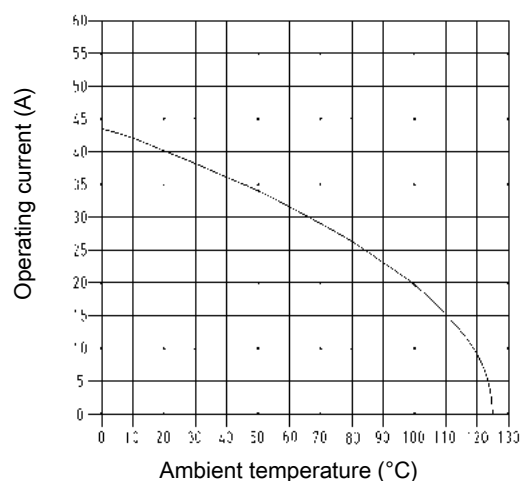
Number of contacts	4
Additional contacts	+ 2 additional signal contacts
Electrical data acc. to IEC 61984	40 A 400/690 V 6 kV 3
Rated current	40 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Electrical data, signal	10 A 250 V 4 kV 3
Rated current (signal)	10 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to UL (signal)	250 V
Rated voltage acc. to CSA	250 V
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega$
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
IEC 61984

Number of contacts

4+ 

40 A 400/690 V 6 kV 3
+ 2 additional signal contacts
10 A 250 V 4 kV 3

Identification

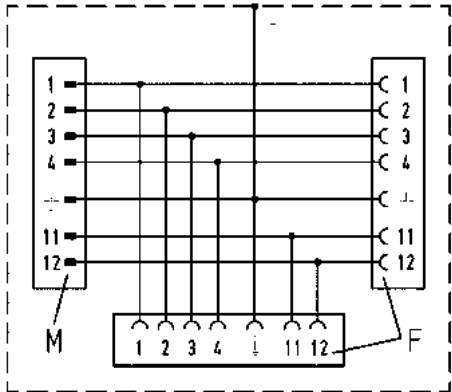
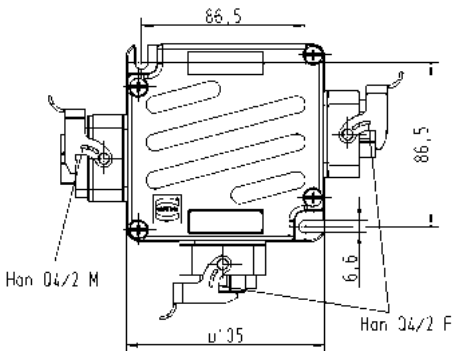
Han-Power® T ,
Energy distributor,
With 3x Han® Q 2/0,
in Han-Compact® Housings, bulkhead mounting



Part number

09 12 008 4720

Drawing
(dimensions in mm)



Wiring diagram

Features

- One connection for the power input and the power output
- 1 T-connection to device
- 3 power contacts
- 4 signal contacts
- Metal hoods / housings
- Locking levers: Han-Easy Lock®

Technical characteristics

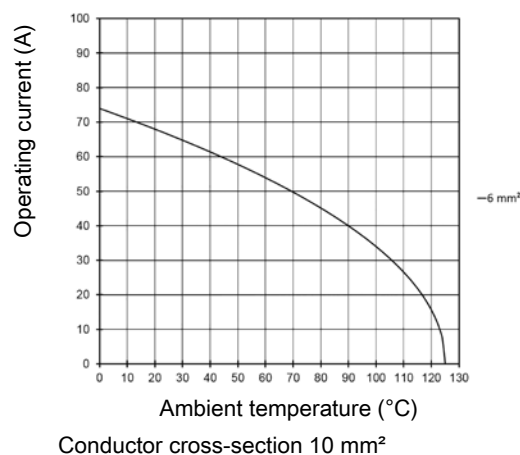
Number of contacts	3
Additional contacts	+ 4 additional signal contacts
Electrical data acc. to IEC 61984	40 A 400/690 V 6 kV 3
Rated current	40 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	3
Electrical data, signal	16 A 400 V 6 kV 3
Rated current (signal)	16 A
Rated voltage (signal)	400 V
Rated impulse voltage (signal)	6 kV
Pollution degree (signal)	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



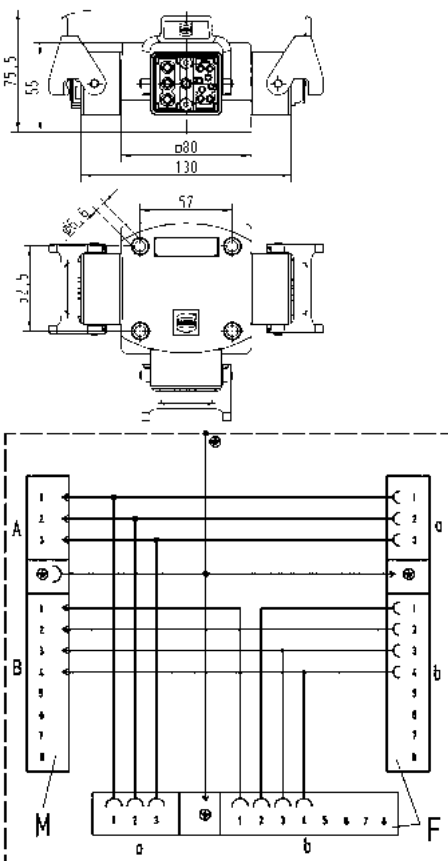
Specifications and approvals

EN 60664-1
IEC 61984

Number of contacts

3

40 A 400/690 V 6 kV 3
+ 4 additional signal contacts
16 A 400 V 6 kV 3

Identification	Part number	Drawing (dimensions in mm)
Han-Power® T , Energy distributor, With 3x Han-Modular® Twin, Bulkhead mounted housings  09 12 008 4760  Wiring diagram		

Technical characteristics

Material (seal) NBR
Colour (seal) Black

Technical characteristics

Material (accessories) NBR
Colour (accessories) Black


Identification	Cable diameter (mm)	Part number	Drawing (dimensions in mm)

Grommet,
Han-Power® T




7 ... 10
10 ... 13
13 ... 16
16 ... 19
19 ... 22

09 12 000 9969
09 12 000 9970
09 12 000 9971
09 12 000 9972
09 12 000 9973



Dummy plugs



09 12 000 9974

Contents	Page
Module overview for applications with Han® HMC	16.3
Han D® HMC.....	16.5
Han DD® HMC	16.8
Han E® HMC.....	16.13
Han® EEE HMC.....	16.18
Contacts	16.21
Han® HMC hoods/housings.....	16.25
Docking frame	16.32

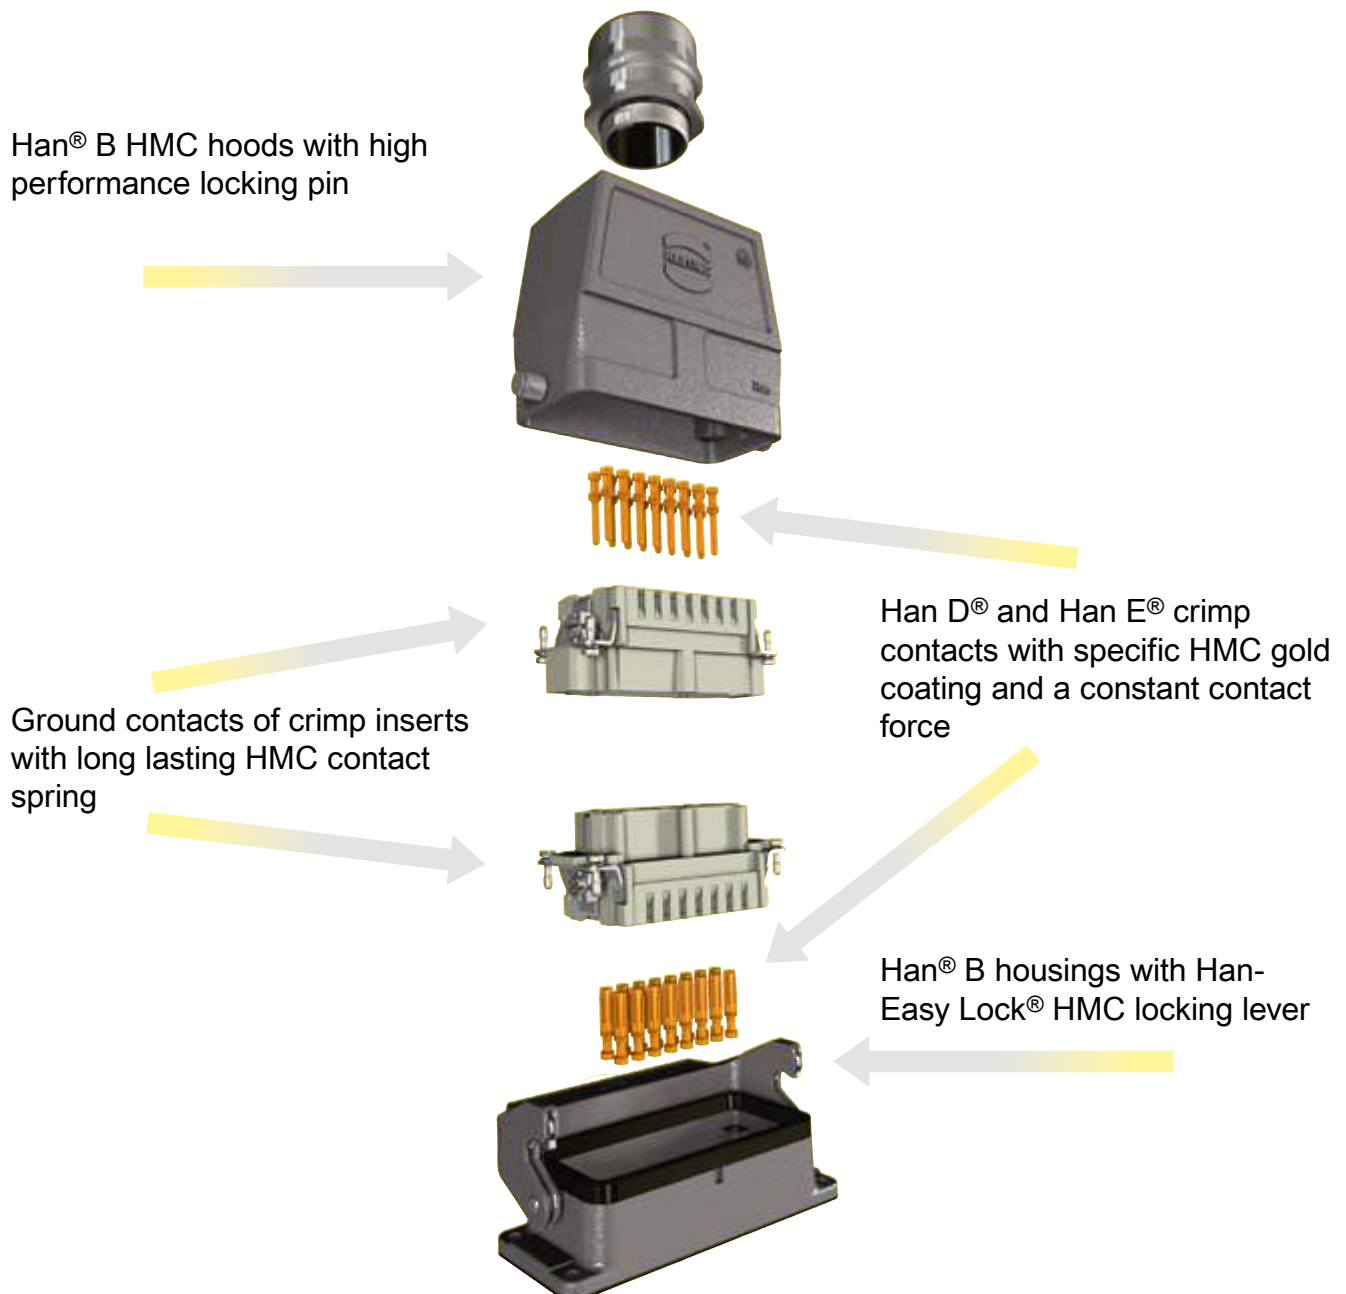
Features

This series Han® HMC (High Mating Cycles) is a connector series specifically aiming at industrial applications for 10,000 mating cycles.

Benefits:


- High mechanical robustness
- Simple and easy understandable design
- Optimized concept for signal and power transmission
- Low mating and unmating forces
- High contact density

General Description



Module overview for applications with Han® HMC



Series	Han E® module	Han® EE module	Han E® Protected module	Han® EEE module
Number of contacts	6	8	6	20
Modules	Crimp terminal 	Crimp terminal 	Crimp terminal 	Crimp terminal 
Rated current	16 A	16 A	16 A	16 A
Rated voltage	500 V	400 V	830 V	500 V
Wire gauge	0.14 ... 4 mm²	0.14 ... 4 mm²	0.14 ... 4 mm²	0.14 ... 4 mm²
Male insert (M)	09 14 006 3001	09 14 008 3001	09 14 006 3041	09 14 020 3001
Female insert (F)	09 14 006 3101	09 14 008 3101	09 14 006 3141	09 14 020 3101
Series	Han DD® module	Han® DDD module	Han® High Density module	
Number of contacts	12	17	25	
Modules	Crimp terminal 	Crimp terminal 	Crimp terminal 	
Rated current	10 A	10 A	4 A	
Rated voltage	250 V	160 V	50 V	
Wire gauge	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.08 ... 0.52 mm²	
Male insert (M)	09 14 012 3001	09 14 017 3001	09 14 025 3001	
Female insert (F)	09 14 012 3101	09 14 017 3101	09 14 025 3101	
Series	Han® 40 A Crimp module	Han® C module	Han® CC Protected module	Han® CD module
Number of contacts	2	3	4	3 / 4
Modules	Crimp terminal 	Crimp terminal 	Crimp terminal 	Crimp terminal 
Rated current	40 A	40 A	40 A	40 A / 10 A
Rated voltage	1000 V	690 V	830 V	830 V / 830 V
Wire gauge	1.5 ... 10 mm²	1.5 ... 10 mm²	1.5 ... 6 mm²	0.15 ... 6 mm² / 0.14 ... 2.5 mm²
Male insert (M)	09 14 002 3002	09 14 003 3001	09 14 004 3041	09 14 007 3001
Female insert (F)	09 14 002 3102	09 14 003 3101	09 14 004 3141	09 14 007 3101

Han
HMC

Module overview for applications with Han® HMC



Series	Han® GigaBit HMC module	Han® MegaBit HMC module	Han® MegaBit HMC module	Han® Shielded HMC module
Numbers of contacts	8	2 x 4	2 x 4	20
Termination	Crimp termination 	Crimp termination 	Crimp termination 	Crimp termination 
Wire gauge	Ethernet Cat. 6A 0.08 ... 0.52 mm ²	Ethernet Cat. 5e 0.14 ... 2.5 mm ²	Ethernet Cat. 5e 0.14 ... 2.5 mm ²	0.08 ... 0.52 mm ²
Male insert (M)	09 14 208 3011	09 14 208 3016	09 14 208 3017	09 14 220 3013
Female insert (F)	09 14 208 3111	09 14 208 3116	09 14 208 3117	09 14 220 3113

Series	Hinged frame HMC 6 B	Hinged frame HMC 10 B	Hinged frame HMC 16 B	Hinged frame HMC 24 B
Number of modules	2	3	4	6
				
Marking (A...F)	09 14 206 0303	09 14 210 0303	09 14 216 0303	09 14 224 0303
Marking (a...f)	09 14 206 0313	09 14 210 0313	09 14 216 0313	09 14 224 0313

Series	Docking frame 6 B	Docking frame 10 B	Docking frame 16 B	Docking frame 24 B
Number of modules	2	3	4	6
				
Marking (A...F)	09 14 006 1701	09 14 010 1701	09 14 016 1701	09 14 024 1701
Marking (a...f)	09 14 006 1711	09 14 010 1711	09 14 016 1711	09 14 024 1711

for more technical details see chapter 06

Features

- High density of contacts
- Time saving rapid termination by use of crimping contacts
- for requirements up to 250 V / 10 A
- for hoods/housings in the Han® B HMC series
- Han D® HMC contacts available with special HMC gold plating for 10,000 mating cycles

Technical characteristics

Number of contacts	40, 64
Electrical data acc. to IEC 61984	10 A 250 V 4 kV 3
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles with other HMC components	≥ 10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

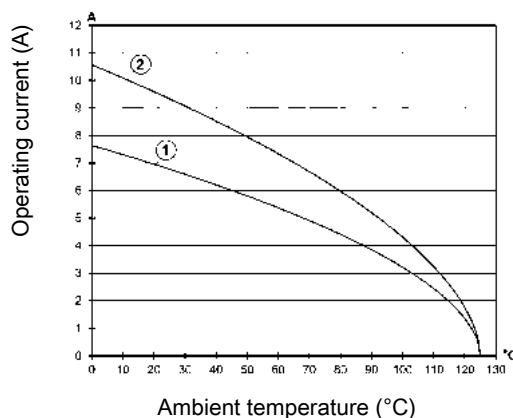
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

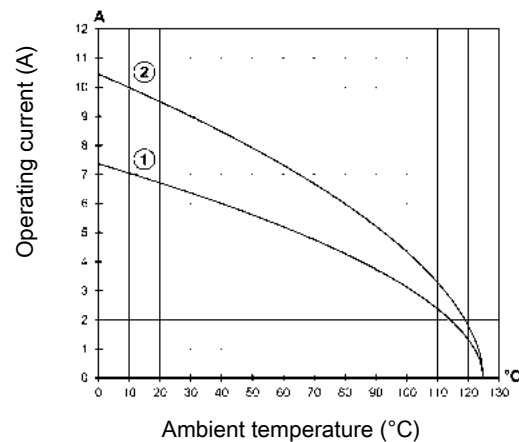
Han® 40 D HMC



- ① 0.75 mm²
② 1.5 mm²

Derating

Han® 64 D HMC



- ① 0.75 mm²
② 1.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
EN 175301-801





Number of contacts

40+

10 A 250 V 4 kV 3

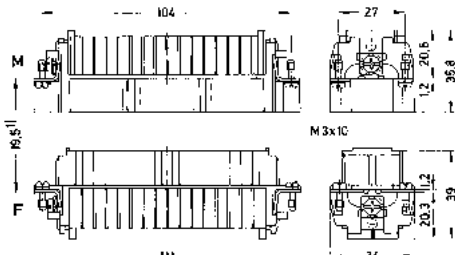

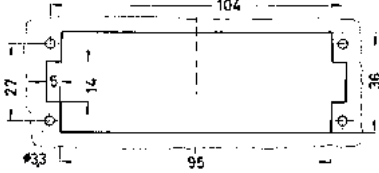
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D[®] HMC, Crimp termination Please order crimp contacts separately.	0,14 ... 2,5	09 21 240 3001	09 21 240 3101	1) distance for contact max. 21 mm Contact arrangement (view from termination side) Panel cut out for use without hood

Han HMC

Number of contacts

64+ 

10 A 250 V 4 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D® HMC, Crimp termination  Please order crimp contacts separately.	0,14 ... 2,5	09 21 264 3001	09 21 264 3101	 1) distance for contact max. 21 mm  Contact arrangement (view from termination side)  Panel cut out for use without hood

Features

- High density of contacts
- Time saving rapid termination by use of crimping contacts
- for requirements up to 250 V / 10 A
- for hoods/housings in the Han[®] B HMC series
- Han D[®] HMC contacts available with special HMC gold plating for 10,000 mating cycles

Technical characteristics

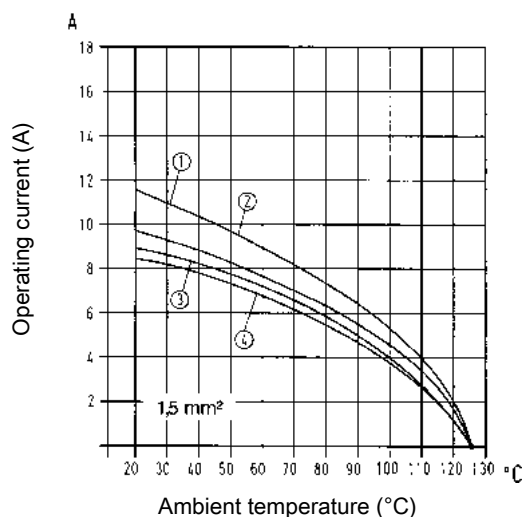
Number of contacts	24, 42, 72, 108
Electrical data acc. to IEC 61984	10 A 250 V 4 kV 3
Rated current	10 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles with other HMC components	≥ 10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

Derating

Current carrying capacity

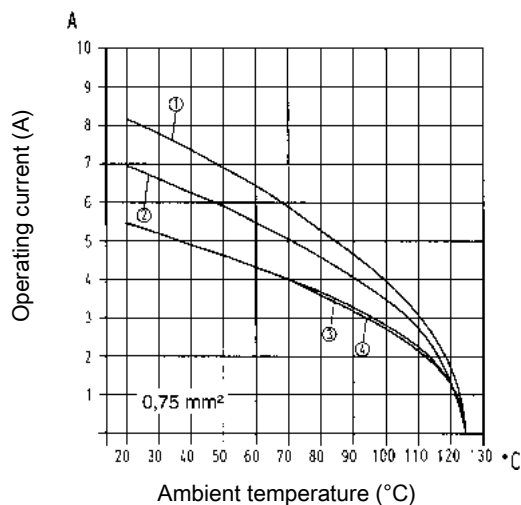
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han[®] 24 DD HMC
- ② Han[®] 42 DD HMC
- ③ Han[®] 72 DD HMC
- ④ Han[®] 108 DD HMC

Derating



- ① Han[®] 24 DD HMC
- ② Han[®] 42 DD HMC
- ③ Han[®] 72 DD HMC
- ④ Han[®] 108 DD HMC

Specifications and approvals

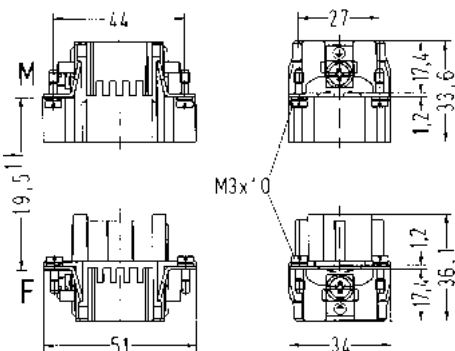


EN 60664-1
IEC 61984



Number of contacts

24+ 

10 A 250 V 4 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han DD® HMC, Crimp termination  Please order crimp contacts separately. Only with docking frame.	0,14 ... 2,5	09 16 224 3001	09 16 224 3101	 1) distance for contact max. 21 mm  Contact arrangement (view from termination side)  Panel cut out for use without hood



Number of contacts

42+

10 A 250 V 4 kV 3


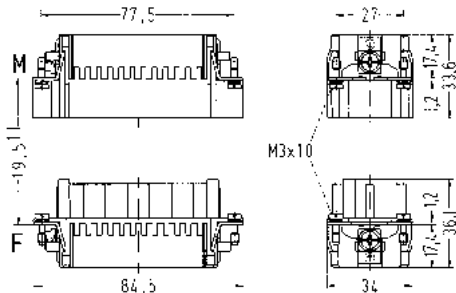


Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han DD® HMC, Crimp termination Please order crimp contacts separately.	0,14 ... 2,5	09 16 242 3001	09 16 242 3101	1) distance for contact max. 21 mm 1) distance for contact max. 21 mm Panel cut out for use without hood

Han HMC

Number of contacts

72+ 

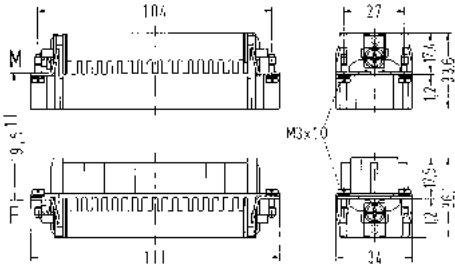

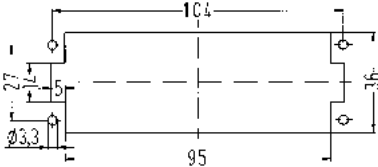
10 A 250 V 4 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han DD® HMC, Crimp termination  Please order crimp contacts separately.	0,14 ... 2,5	09 16 272 3001	09 16 272 3101	  Contact arrangement (view from termination side)  Panel cut out for use without hood

Number of contacts

108+ 

10 A 250 V 4 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han DD® HMC, Crimp termination  Please order crimp contacts separately.	0,14 ... 2,5	09 16 208 3001	09 16 208 3101	 1) distance for contact max. 21 mm  Contact arrangement (view from termination side)  Panel cut out for use without hood

Features

- Time saving rapid termination by use of crimping contacts
- for hoods/housings in the Han® B HMC series
- Han E® HMC contacts available with special HMC gold plating for 10,000 mating cycles

Technical characteristics

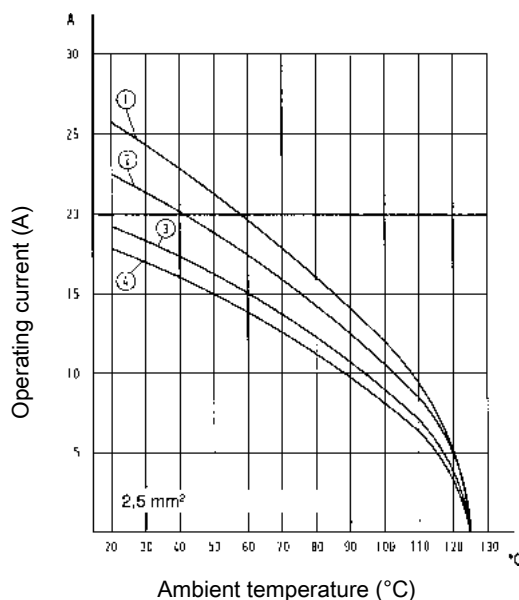
Number of contacts	6, 10, 16, 24
Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles with other HMC components	≥ 10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

Derating

Current carrying capacity

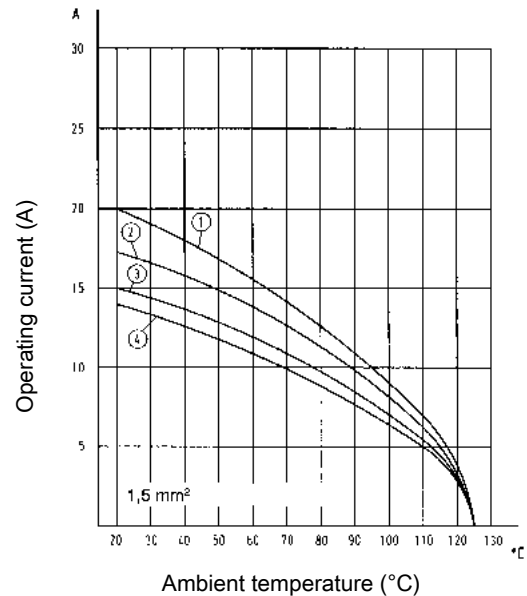
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 6 E HMC
- ② Han® 10 E HMC
- ③ Han® 16 E HMC
- ④ Han® 24 E HMC

Derating



- ① Han® 6 E HMC
- ② Han® 10 E HMC
- ③ Han® 16 E HMC
- ④ Han® 24 E HMC

Specifications and approvals

EN 60664-1
IEC 61984

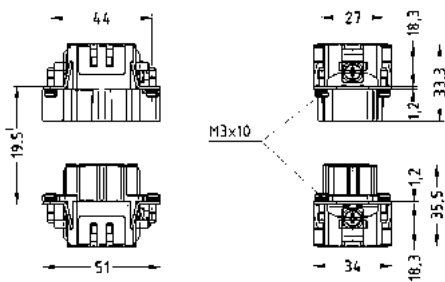







Number of contacts

6+

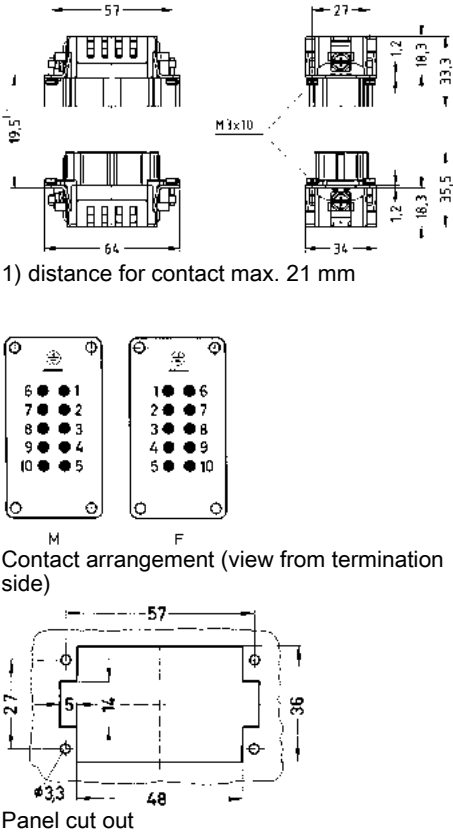
16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E® HMC, Crimp termination  Please order crimp contacts separately. Only with docking frame.	0,14 ... 4	09 33 206 2602	09 33 206 2702	 1) distance for contact max. 21 mm   M F Contact arrangement (view from termination side)  Panel cut out

Number of contacts

10+ 

16 A 500 V 6 kV 3

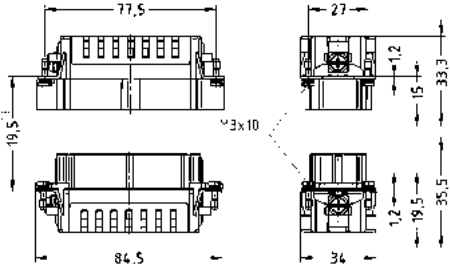


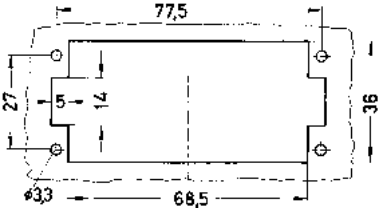
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E® HMC, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 33 210 2602	09 33 210 2702	



Number of contacts

16+

16 A 500 V 6 kV 3

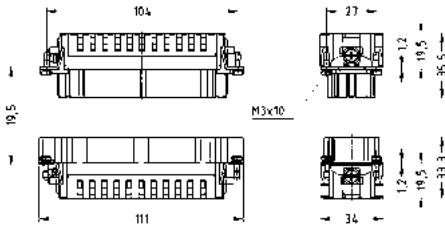


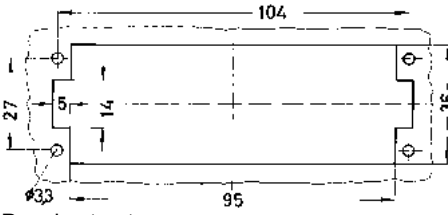
Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E[®] HMC, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 33 216 2602	09 33 216 2702	 1) distance for contact max. 21 mm  M  F Contact arrangement (view from termination side)  Panel cut out

Han HMC

Number of contacts

24+ 

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E® HMC, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 33 224 2602	09 33 224 2702	 1) distance for contact max. 21 mm   M F Contact arrangement (view from termination side)  Panel cut out

Features

- Time saving rapid termination by use of crimping contacts
- Coded insert
- for hoods/housings in the Han® B HMC series
- Han E® HMC contacts available with special HMC gold plating for 10,000 mating cycles

Technical characteristics

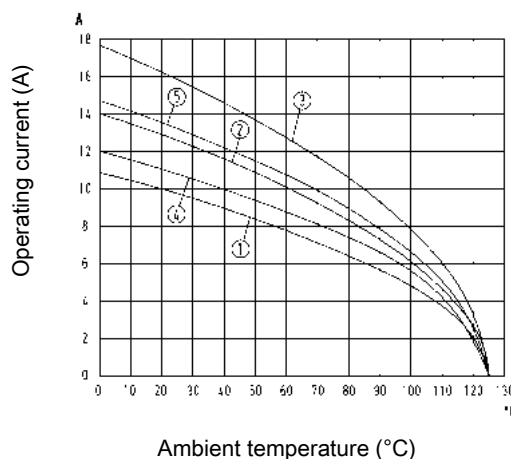
Number of contacts	40, 64
Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles with other HMC components	≥ 10000
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Han® 64 EEE HMC 1.5 mm²
- ② Han® 64 EEE HMC 2.5 mm²
- ③ Han® 64 EEE HMC 4 mm²
- ④ Han® 40 EEE HMC 1.5 mm²
- ⑤ Han® 40 EEE HMC 2.5 mm²

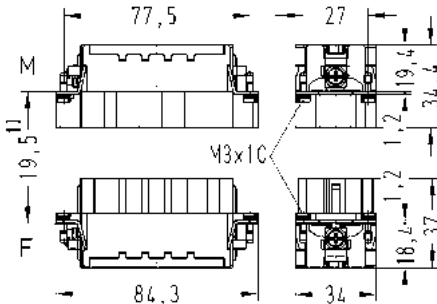

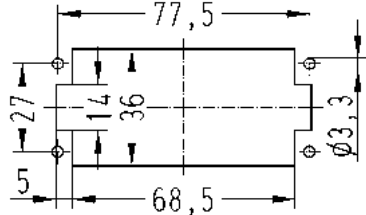
Specifications and approvals

EN 60664-1
IEC 61984

Number of contacts

40+ 

16 A 500 V 6 kV 3

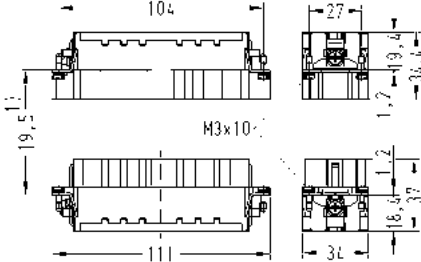

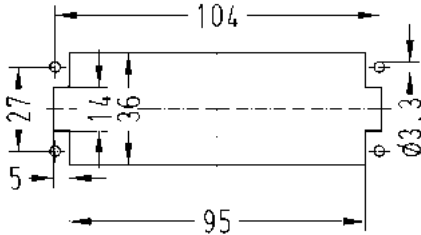
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® EEE HMC, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 32 240 3001	09 32 240 3101	 1) distance for contact max. 21 mm  M F Contact arrangement (view from termination side)  Panel cut out

Han
HMC

Number of contacts

64+ 

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® EEE HMC, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 32 264 3001	09 32 264 3101	  Contact arrangement (view from termination side)  Panel cut out

Technical characteristics

Contact resistance	≤3 mΩ
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic

Specifications and approvals

EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Coding pin

Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D® HMC, Crimp contact, Contact surface: HMC gold plated	0,14 ... 0,37	09 15 200 6124	09 15 200 6224	

Technical characteristics

Contact resistance	≤1 mΩ
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic

Specifications and approvals

EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Coding pin

Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
Han E® HMC, Crimp contact, Contact surface: HMC gold plated	0,14 ... 0,37	09 33 200 6117	09 33 200 6217																												
	0,5	09 33 200 6122	09 33 200 6222																												
	0,75	09 33 200 6115	09 33 200 6215																												
	1	09 33 200 6118	09 33 200 6218																												
	1,5	09 33 200 6116	09 33 200 6216																												
	2,5	09 33 200 6123	09 33 200 6223																												
	4	09 33 200 6119	09 33 200 6221																												
Han E® Han® EE Han® EEE , Coding pin for crimp inserts only			09 33 000 9954	<table><tr><th colspan="2">Conductor cross-section</th><th>Identification</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22</td><td>no groove</td></tr><tr><td>0.5 mm²</td><td>AWG 20</td><td>no groove</td></tr><tr><td>0.75 mm²</td><td>AWG 18</td><td>1 groove*</td></tr><tr><td>1 mm²</td><td>AWG 18</td><td>1 groove</td></tr><tr><td>1.5 mm²</td><td>AWG 16</td><td>2 grooves</td></tr><tr><td>2.5 mm²</td><td>AWG 14</td><td>3 grooves</td></tr><tr><td>3 mm²</td><td>AWG 12</td><td>wide groove</td></tr><tr><td>4 mm²</td><td>AWG 12</td><td>no groove</td></tr></table> * on the back crimp collar Stripping length 7.5 mm	Conductor cross-section		Identification	0.14-0.37 mm²	AWG 26-22	no groove	0.5 mm²	AWG 20	no groove	0.75 mm²	AWG 18	1 groove*	1 mm²	AWG 18	1 groove	1.5 mm²	AWG 16	2 grooves	2.5 mm²	AWG 14	3 grooves	3 mm²	AWG 12	wide groove	4 mm²	AWG 12	no groove
	Conductor cross-section		Identification																												
	0.14-0.37 mm²	AWG 26-22	no groove																												
	0.5 mm²	AWG 20	no groove																												
	0.75 mm²	AWG 18	1 groove*																												
	1 mm²	AWG 18	1 groove																												
	1.5 mm²	AWG 16	2 grooves																												
	2.5 mm²	AWG 14	3 grooves																												
	3 mm²	AWG 12	wide groove																												
	4 mm²	AWG 12	no groove																												

Technical characteristics

Contact resistance	≤1 mΩ
Material (contacts)	Copper alloy

Specifications and approvals


EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® C HMC, Crimp contact, Contact surface: HMC gold plated	1,5	09 32 200 6114	09 32 200 6224	
	2,5	09 32 200 6115	09 32 200 6225	
	4	09 32 200 6119	09 32 200 6229	
	6	09 32 200 6118	09 32 200 6228	
	10	09 32 200 6117	09 32 200 6227	



Leiterquerschnitt		Ø	Abisolierlänge der Litze
1,5 mm²	AWG 16	1,75	9,5 mm
2,5 mm²	AWG 14	2,25	9,5 mm
4 mm²	AWG 12	2,85	9,5 mm
6 mm²	AWG 10	3,5	9,5 mm
10 mm²	AWG 8	4,3	15 mm

Technical characteristics

Material (contacts) Copper alloy

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)												
		Male	Female													
D-Sub , Crimp contact, Straight Turned , Contact surface: HMC gold plated	0,08 ... 0,21 0,13 ... 0,33 0,33 ... 0,52	09 67 000 7570 09 67 000 5570 09 67 000 8570	09 67 000 7470 09 67 000 5470 09 67 000 8470	<table><tr><th>Leiterquerschnitt</th><th>Ø</th><th>Abisolierlänge der Litze</th></tr><tr><td>0,08 - 0,21 mm²</td><td>AWG 28-24</td><td>4 mm</td></tr><tr><td>0,13 - 0,33 mm²</td><td>AWG 26-22</td><td>4 mm</td></tr><tr><td>0,33 - 0,52 mm²</td><td>AWG 22-20</td><td>4 mm</td></tr></table>	Leiterquerschnitt	Ø	Abisolierlänge der Litze	0,08 - 0,21 mm²	AWG 28-24	4 mm	0,13 - 0,33 mm²	AWG 26-22	4 mm	0,33 - 0,52 mm²	AWG 22-20	4 mm
Leiterquerschnitt	Ø	Abisolierlänge der Litze														
0,08 - 0,21 mm²	AWG 28-24	4 mm														
0,13 - 0,33 mm²	AWG 26-22	4 mm														
0,33 - 0,52 mm²	AWG 22-20	4 mm														
																

Han
HMC

Features

- Metal hoods / housings
- Locking levers: Han-Easy Lock® with special locking reel
- Field of application: for excellent mechanical and electrical protection in demanding environments, for example, in the automobile and mechanical engineering industries also for process and regulation control applications
- Distinguishing feature: hoods/housings colour-coded grey (RAL 7037)

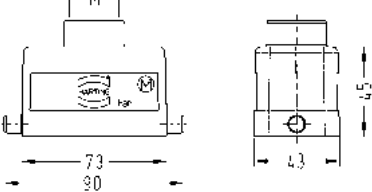
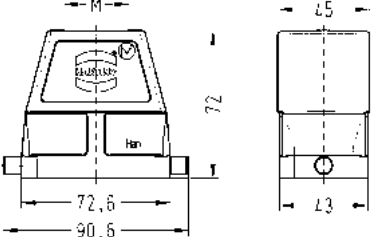
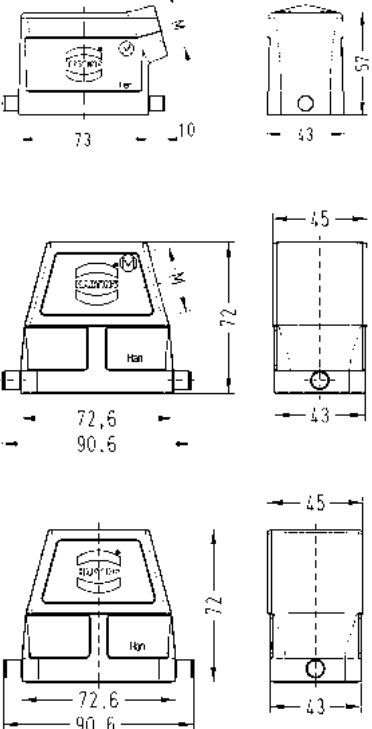
Technical characteristics

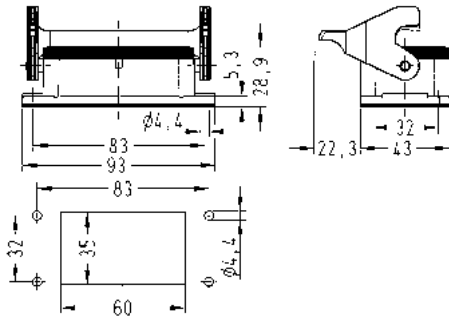
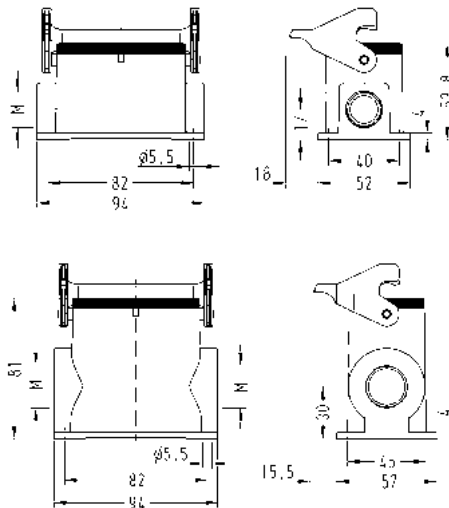
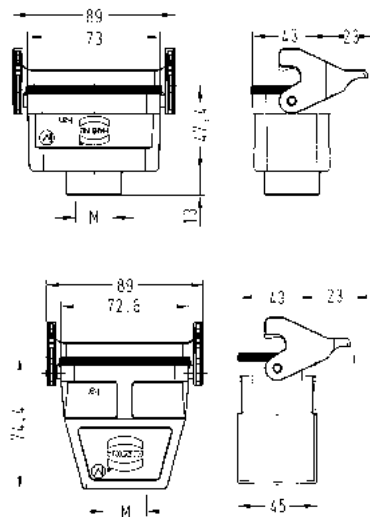
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94 (locking levers)	V-0
Mating cycles with other HMC components	≥10000
Degree of protection acc. to IEC 60529	IP65
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)

Specifications and approvals

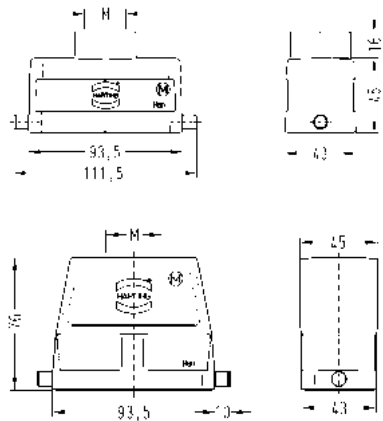
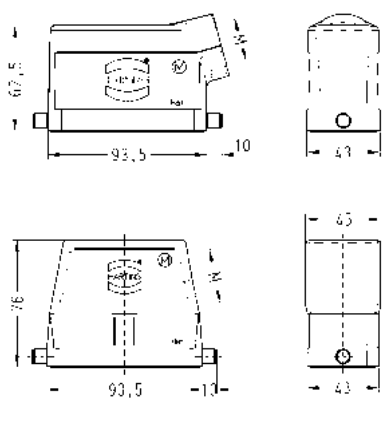
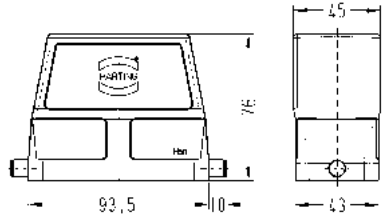


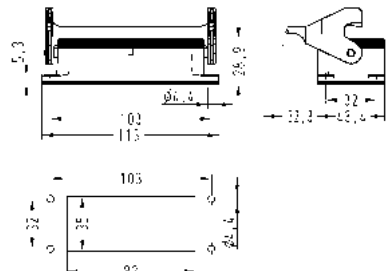
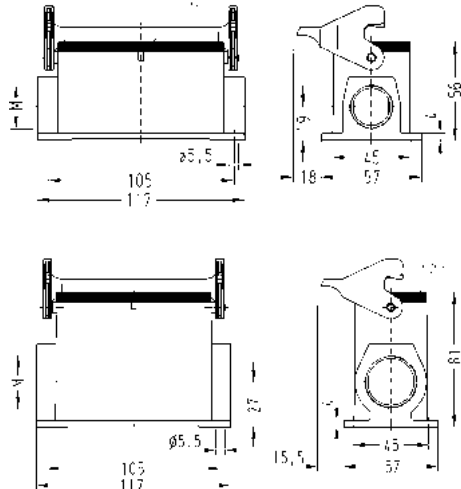
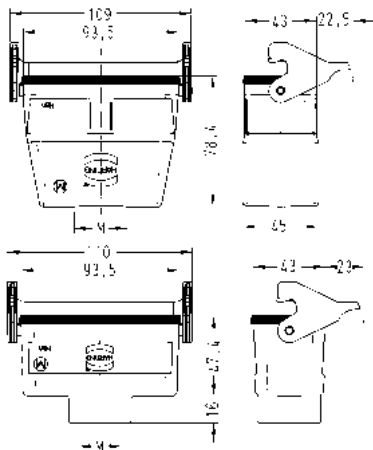
Special hoods and housings for high mating cycles
Single locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® HMC , Hoods, Top entry 	1x M20 1x M25 1x M32	19 30 210 1440 19 30 210 1441	19 30 210 0447	
Han® HMC , Hoods, Side entry 	1x M20 1x M25 1x M32	19 30 210 1540 19 30 210 1541	19 30 210 0547	
Han® HMC , Hoods, Without cable entry 			09 30 210 0803	

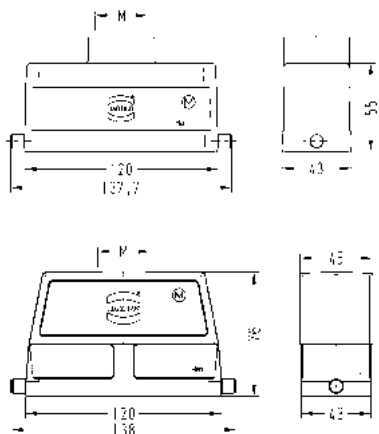
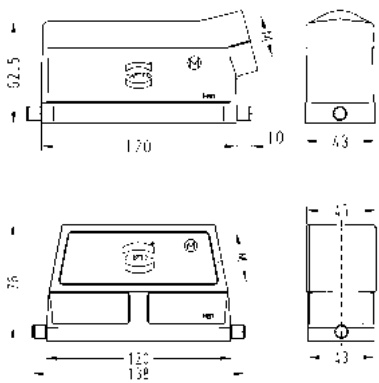
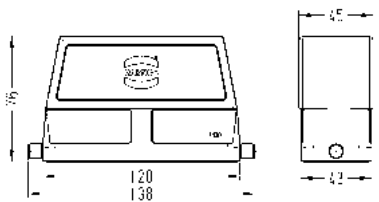
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® HMC , Bulkhead mounted housings, Han-Easy Lock® 		09 30 210 0305		 Panel cut out
Han® HMC , Surface mounted housing, Side entry, Han-Easy Lock® 	1x M20 2x M20 2x M25 2x M32	19 30 210 1250 19 30 210 1290	19 30 210 0291 19 30 210 0292	
Han® HMC , Cable to cable housing, Top entry, Han-Easy Lock® 	1x M20 1x M25	19 30 210 1750	19 30 210 0756	

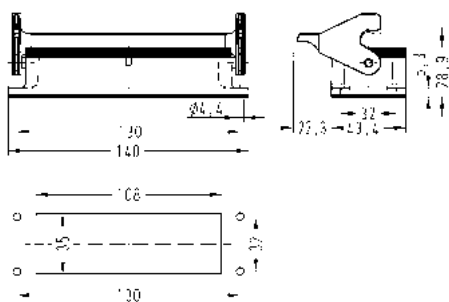
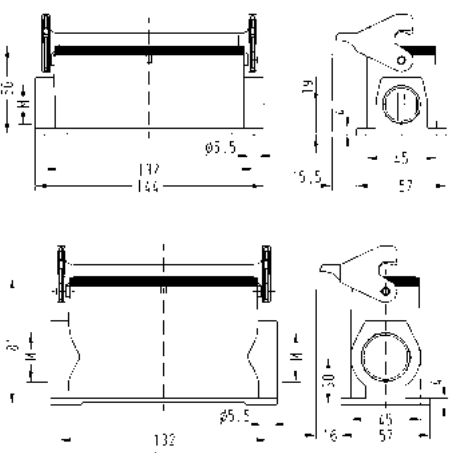
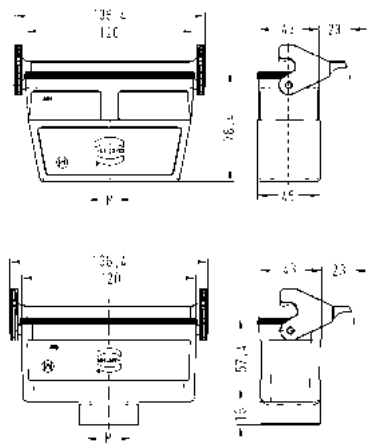
Special hoods and housings for high mating cycles
Single locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® HMC , Hoods, Top entry 	1x M25 1x M32 1x M40	19 30 216 1441 19 30 216 1442	19 30 216 0447 19 30 216 0448	
Han® HMC , Hoods, Side entry 	1x M25 1x M32 1x M40	19 30 216 1541 19 30 216 1542	19 30 216 0547 19 30 216 0548	
Han® HMC , Hoods, Without cable entry 			09 30 216 0803	

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® HMC , Bulkhead mounted housings, Han-Easy Lock® 		09 30 216 0307		 Panel cut out
Han® HMC , Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 1x M32 2x M25 2x M32	19 30 216 1251 19 30 216 1291	19 30 216 0252 19 30 216 0291 19 30 216 0292	
Han® HMC , Cable to cable housing, Top entry, Han-Easy Lock® 	1x M25 1x M32	19 30 216 1751 19 30 216 1752	19 30 216 0757	

Special hoods and housings for high mating cycles
Single locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® HMC , Hoods, Top entry 	1x M32 1x M40	19 30 224 1442	19 30 224 0447 19 30 224 0448	
Han® HMC , Hoods, Side entry 	1x M25 1x M32 1x M40	19 30 224 1541 19 30 224 1542	19 30 224 0547 19 30 224 0548	
Han® HMC , Hoods, Without cable entry 			09 30 224 0803	

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® HMC , Bulkhead mounted housings, Han-Easy Lock® 		09 30 224 0307		 Panel cut out
Han® HMC , Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 2x M25 2x M32	19 30 224 1251 19 30 224 1291	19 30 224 0292	
Han® HMC , Cable to cable housing, Top entry, Han-Easy Lock® 	1x M32	19 30 224 1752	19 30 224 0757	

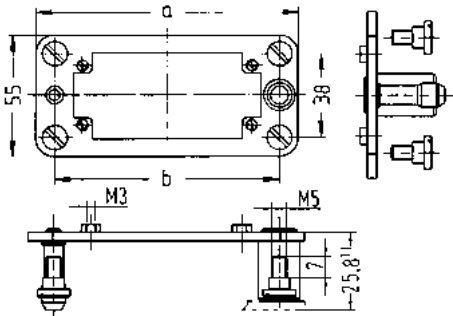
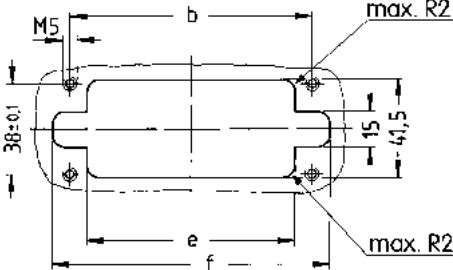


Features

- Suitable for all inserts of the series Han E®, Han E® HMC, Han EE®, Han EE® HMC, Han EEE®, Han EEE® HMC, Han® ES, Han D® (size B), Han D® HMC, Han DD®, Han DD® HMC, Han-Com®, Han® HsB, Han-Modular®
- Due to the floating system of the docking frame the PE connection of the mounting base has to be installed separately.
- Inserts are protected against mechanical damage

Technical characteristics

Mating cycles	≥500
Mating cycles with other HMC components	≥10000
Material (accessories)	Stainless steel

Identification	Size	Part number	Drawing (dimensions in mm)
Docking frame, Pack contents: 1 frame, 4 cheese head shoulder screws (Steel, zinc plated) to fix the docking frame  Pull-in-range x-axis: ± 1.5 mm Pull-in-range y-axis: ± 1.5 mm	06 B 10 B 16 B 24 B	09 30 006 1704 09 30 010 1704 09 30 016 1704 09 30 024 1704	 Distance for electrical and FO contacts max. 27 mm; for Han-Modular® series max. 26.5 mm 6 B: a=86; b=69 10 B: a=99; b=82 16 B: a= 119.5 ; b= 102.5 24 B: a=146; b=129  6 B: b= 69; e= 54.5; f= 84 10 B: b= 82; e= 67.5; f= 97 16 B: b= 102.5; e= 88; f= 117.5 24 B: b= 129; e= 114.5; f= 144

Contents	Page
Han® High Temp inserts.....	17.3
Han® High Temp contacts.....	17.8
Han® High Temp hoods/housings	17.9

Description

We used high-quality materials with wide temperature ranges to produce connectors that are uniquely suited for a wide variety of applications.

These connectors can withstand temperatures up to 200 °C – so they can be used directly in machines and facilities that would otherwise require cumbersome and complex constructions.

For our users, this delivers direct advantages:

- The electro-mechanical design process is optimized.
Machine parts which are exposed to high temperatures can be designed modularly.
- The work process is optimized
since lower wiring complexity results in reduced maintenance costs.
- The after-sales phase is optimized
because this more service-friendly approach results in less outages and down times.

Design overview

The basic structure of the Han® High Temp connector consists of a bulkhead mounted housing and a cable-side hood.

Hoods and housings:

The aluminium die-cast hoods and housings feature a highly compressed surface with excellent non-stick properties. It also has a special non-stick coating on the bulkhead-side seal which allows easy handling without significant sticking.

Inserts:

The Han® High Temp series features very rugged contact inserts, which are really the heart of any connector. The LCP injection-moulded insert delivers outstanding temperature resistance coupled with excellent mechanical stability.

Contacts:

Our new temperature resistant contacts, for either screw or crimp terminations, ensure reliable connections with minimal contact resistance even at extreme temperatures.



Han® High Temp connectors
remain robust and reliable for their entire lifespan!

Features

- Reliable also at extreme temperatures up to 200 °C
- All piece parts (contacts, insert material, hoods and housings, seals and grounding elements) are designed in a temperature resistant way

Technical characteristics

Number of contacts	6, 10, 16, 24
Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +200 °C With Han® High Temp components
Mating cycles	≥ 500
Material (insert)	LCP

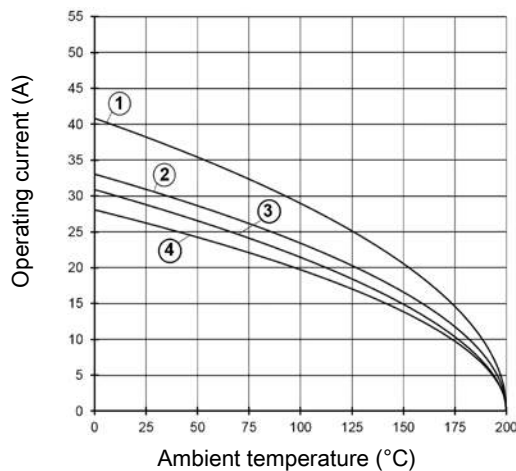
Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

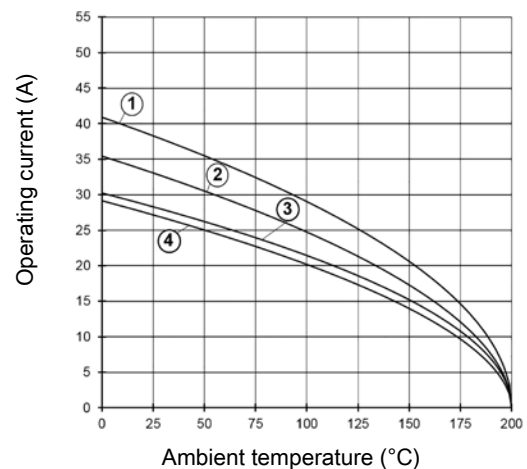
Crimp termination



- ① Han® 6 E High Temp 2,5 mm²
- ② Han® 10 E High Temp 2,5 mm²
- ③ Han® 16 E High Temp 2,5 mm²
- ④ Han® 24 E High Temp 2,5 mm²

Derating

Screw termination



- ① Han® 6 E High Temp 2.5 mm²
- ② Han® 10 E High Temp 2.5 mm²
- ③ Han® 16 E High Temp 2.5 mm²
- ④ Han® 24 E High Temp 2.5 mm²

Specifications and approvals

EN 60664-1

IEC 61984



Details

Han® High Temp crimp inserts are only for use with the special Han® High Temp crimp contacts.

Tightening torque 0.5 Nm


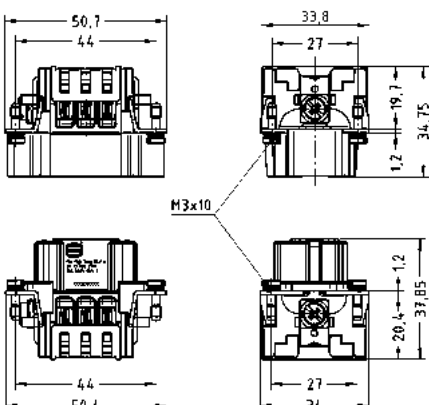
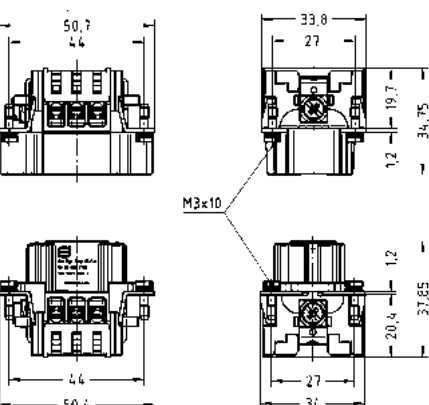
Tightening torque PE screw 1.2 Nm

High
Temp

Number of contacts

6+ 


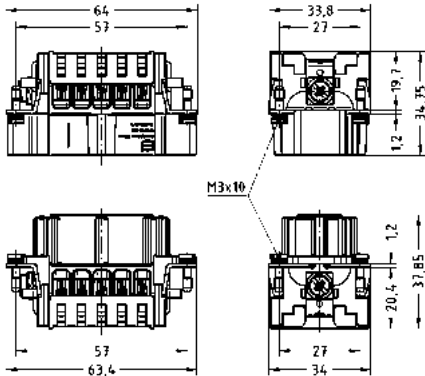

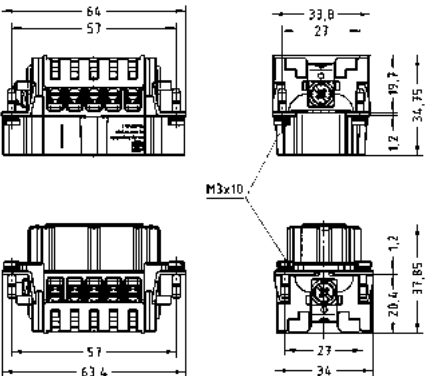
16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E® High Temp, Crimp termination  Please order crimp contacts separately.	0,5 ... 2,5	09 33 806 2604	09 33 806 2704	
Han E® High Temp, Screw termination, With wire protection 	0,5 ... 2,5	09 33 806 2603	09 33 806 2703	

Number of contacts

10+ 

16 A 500 V 6 kV 3

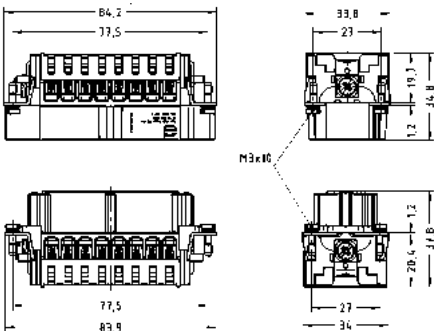

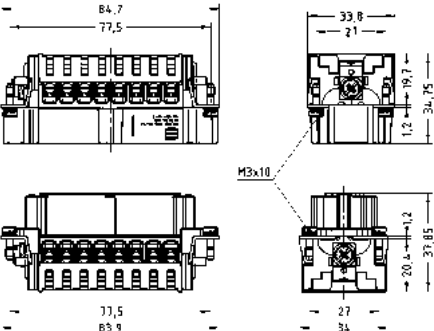
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E® High Temp, Crimp termination  Please order crimp contacts separately.	0,5 ... 2,5	09 33 810 2604	09 33 810 2704	
Han E® High Temp, Screw termination, With wire protection 	0,5 ... 2,5	09 33 810 2603	09 33 810 2703	

High Temp

Number of contacts

 $16 + \textcircled{\text{⏏}}$

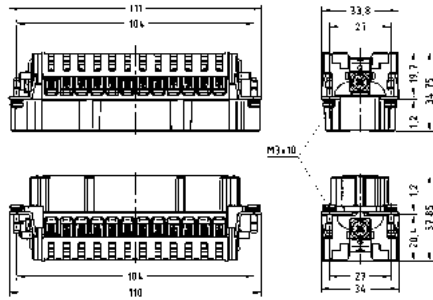
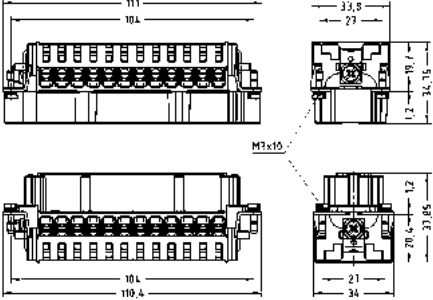
16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E® High Temp, Crimp termination  Please order crimp contacts separately.	0,5 ... 2,5	09 33 816 2604	09 33 816 2704	
Han E® High Temp, Screw termination, With wire protection 	0,5 ... 2,5	09 33 816 2603	09 33 816 2703	

Number of contacts

24+ 

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E® High Temp, Crimp termination  Please order crimp contacts separately.	0,5 ... 2,5	09 33 824 2604	09 33 824 2704	
Han E® High Temp, Screw termination, With wire protection 	0,5 ... 2,5	09 33 824 2603	09 33 824 2703	

High Temp

Technical characteristics

Contact resistance ≤1 mΩ
Material (contacts) Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90
Remarks on the crimp technique
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
Han E® High Temp, Crimp contact, Contact surface: Silver plated	0,5	09 33 800 6121	09 33 800 6220																												
	0,75	09 33 800 6114	09 33 800 6214																												
	1	09 33 800 6105	09 33 800 6205																												
	1,5	09 33 800 6104	09 33 800 6204																												
	2,5	09 33 800 6102	09 33 800 6202																												
<table><tr><th colspan="2">Conductor cross-section</th><th>Identification</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22</td><td>no groove</td></tr><tr><td>0.5 mm²</td><td>AWG 20</td><td>no groove</td></tr><tr><td>0.75 mm²</td><td>AWG 18</td><td>1 groove*</td></tr><tr><td>1 mm²</td><td>AWG 18</td><td>1 groove</td></tr><tr><td>1.5 mm²</td><td>AWG 16</td><td>2 grooves</td></tr><tr><td>2.5 mm²</td><td>AWG 14</td><td>3 grooves</td></tr><tr><td>3 mm²</td><td>AWG 12</td><td>wide groove</td></tr><tr><td>4 mm²</td><td>AWG 12</td><td>no groove</td></tr></table>					Conductor cross-section		Identification	0.14-0.37 mm²	AWG 26-22	no groove	0.5 mm²	AWG 20	no groove	0.75 mm²	AWG 18	1 groove*	1 mm²	AWG 18	1 groove	1.5 mm²	AWG 16	2 grooves	2.5 mm²	AWG 14	3 grooves	3 mm²	AWG 12	wide groove	4 mm²	AWG 12	no groove
Conductor cross-section		Identification																													
0.14-0.37 mm²	AWG 26-22	no groove																													
0.5 mm²	AWG 20	no groove																													
0.75 mm²	AWG 18	1 groove*																													
1 mm²	AWG 18	1 groove																													
1.5 mm²	AWG 16	2 grooves																													
2.5 mm²	AWG 14	3 grooves																													
3 mm²	AWG 12	wide groove																													
4 mm²	AWG 12	no groove																													
* on the back crimp collar																															
Stripping length 7.5 mm																															

High Temp

Features

- Reliable also at extreme temperatures up to 200 °C
- All piece parts (contacts, insert material, hoods and housings, seals and grounding elements) are designed in a temperature resistant way
- Hoods/Housings, corrosion resistant metal
- Electrically conductive surface

Technical characteristics

Limiting temperature	-40 ... +125 °C, -40 ... +200 °C With Han® High Temp components
Degree of protection acc. to IEC 60529	IP65
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Electrical conductive, Uncoated
Colour (hood/housing)	Unpainted
Material (seal)	FPM
Colour (seal)	Red

Specifications and approvals

ⓂGL

Hoods/Housings for higher EMC requirements
Single locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	


Han® EMC/B
Han® High Temp ,
Hoods,
Top entry



1x M20
1x M25
1x M32

19 62 806 1440

19 62 806 0446
19 62 806 0447





Han® EMC/B
Han® High Temp ,
Hoods,
Side entry



1x M20
1x M25
1x M32

19 62 806 1540



19 62 806 0546
19 62 806 0547



Han® High Temp ,
Bulkhead mounted housings







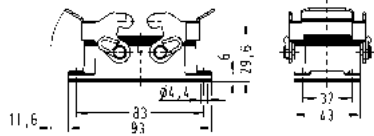



09 62 806 0391



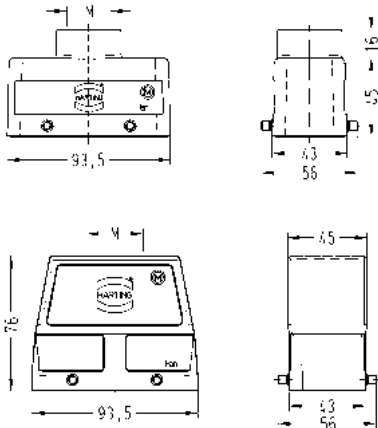
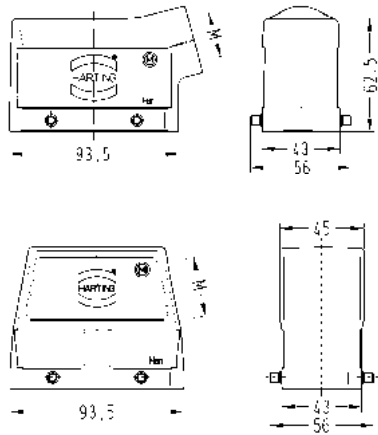
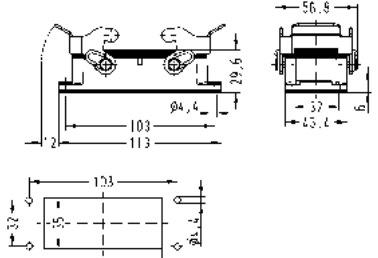
Panel cut out

Hoods/Housings for higher EMC requirements
Double locking lever










Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B Han® High Temp , Hoods, Top entry 	1x M20 1x M25 1x M32	19 62 810 1420 19 62 810 1421	19 62 810 0426 19 62 810 0427	   
Han® EMC/B Han® High Temp , Hoods, Side entry 	1x M20 1x M25 1x M32	19 62 810 1520	19 62 810 0526 19 62 810 0527	 
Han® High Temp , Bulkhead mounted housings 		09 62 810 0391		  Panel cut out

High
Temp

Hoods/Housings for higher EMC requirements
Double locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B Han® High Temp , Hoods, Top entry 	1x M25 1x M32	19 62 816 1421	19 62 816 0427	
Han® EMC/B Han® High Temp , Hoods, Side entry 	1x M25 1x M32	19 62 816 1521	19 62 816 0527	
Han® High Temp , Bulkhead mounted housings 		09 62 816 0391		 Panel cut out

Hoods/Housings for higher EMC requirements
Double locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B Han® High Temp , Hoods, Top entry 	1x M32	19 62 824 1422	19 62 824 0427	   
Han® EMC/B Han® High Temp , Hoods, Side entry 	1x M25 1x M32 1x M40	19 62 824 1521	19 62 824 0527 19 62 824 0528	   
Han® High Temp , Bulkhead mounted housings 		09 62 824 0391		 Panel cut out

High
Temp

Contents	Page
Han-Brid® Cu	19.6
Han-Brid® FO	19.10
Han-Brid® Coax ETCS	19.13
Han-Brid® Quintax 3 A	19.15
Han-Brid® Quintax 3 A with coaxial contacts	19.17
Han-Brid® Quintax 3 A with Han-Quintax® contacts	19.19
Han-Brid® Quintax 3 A with Han-Quintax® HD contacts	19.20
Han-Brid® RJ45 C	19.21
Han-Brid® USB	19.24
Han-Brid® FireWire	19.25
Han® 4 A SC	19.26
Hoods/Housings, metal Han® 3 A	19.28
Hoods/Housings, thermoplastic Han® 3 A	19.30
Han® M hoods/housings	19.33
Han® EMC hoods/housings	19.35
Han-INOX® hoods/housings	19.37
Han® HPR hoods/housings	19.39

Data interfaces

Han-Brid® F.O.

- Is suitable for all HP Versatile Link (Horizontal Package) transmitters and receivers
- Data rates: Standard 12 Mbit/s, suitable for all common fieldbus systems
- Insert allows integration of HP standard contacts for POF and HCS®* fibres
- Temperature range -40 °C ... +70 °C

Han-Brid® Cu

- For termination of a shielded twisted pair
- Insert for 2x Han D® male or female contacts
- Connection of the shield by means of shielding plate and fixing clamps
- Connection of the device side can be realized either by a printed circuit board as a modular version or as part of the appliance PCB
- Insert for bulkhead mounted housing or the coupling housing are always equipped with a screening spring

Bus Terminator

- Active bus terminator in male and female version
- Standard Han® 3 A hoods and housings
- Power supply to the termination network via electrical contacts of Han-Brid®
- Integrated, galvanically separated DC/DC converter 24 V / 5 V

Han-Brid® Quintax 3 A

- Possibility to terminate shielded four/eight wires conductors
- Possibility to terminate Coax cable with large diameter
- Suitable for all 4-wire bus systems
- Suitable for shielded cable conductor diameter 3 – 9.5 mm
- Transmission of shielding separately from the hood's ground
- Connections are carried out acc. to DIN EN 50 173, Cat. 5
- Temperature range -40 °C ... +70 °C

Han-Brid® RJ45 C

- Suitable for standard RJ 45 Plug and Jack, shielded version
- Connections provided for conductors acc. to DIN EN 50 173, Cat. 5
- Termination from the device side is carried out via a PCB, two versions are possible: modular version or as part of the appliance PCB
- Assembly with standard tools
- Insert for 2 Han-D® male or female contacts offers the combination with electrical bus connector
- Rated current 10 A
- Rated voltage 24 V
- termination side 0.14 - 2.5 mm²

Han-Brid® USB

- Insert for all Han® 3 A hoods and housings
- Hood with glued sealing
- Simple and low-cost termination via insert of a patch cable
- Strain-relief via cable tie

Han-Brid® FireWire

- Insert for all Han® 3 A hoods and housings
- Hood with glued sealing
- Simple and low-cost termination via insert of a patch cable
- Strain-relief via cable tie
- Compatible to IEEE 1394

Han® 4 A SC

- Suitable with housings, size Han® 3 A including versions Han® M, Han® EMV and Han® HPR
- Degree of protection up to IP 68
- For fibre optic SC contacts; up to 4 SC contacts per connector
- For 1 mm POF
- For Multimode fibre 50 - 62.5 / 125 µm and Single-mode fibre 9 / 125 µm
- Full ceramic sleeves for a minimal insertion loss


* HCS® = Hard Clad Silica (registered trade mark of the SpecTran Corporation)

Overview (Sample: Han-Brid® Cu)

Thermoplastic
09 20 003 0320 (light grey)
09 20 003 0327 (black)

Metal
09 20 003 0301

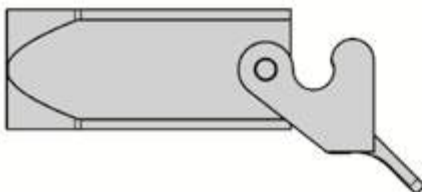
EMC
09 62 003 0301



Thermoplastic
19 20 003 0720 (light grey)
19 20 003 0727 (black)

Metal
19 20 003 1750


EMC
19 62 003 1750



Thermoplastic
19 20 003 0220 (light grey)
19 20 003 0227 (black)


Metal
19 20 003 1250

EMC
19 62 003 1250



Device side
09 12 006 2611
09 12 006 2695
09 12 006 2694

Cable side
09 12 006 3111



Thermoplastic
19 20 003 0423 (light grey)
19 20 003 0426 (black)

Metal
19 20 003 1443

EMC
19 62 003 1443




Cable side
09 12 006 3001

Device side
09 12 006 2701
09 12 006 2795
09 12 006 2794

Thermoplastic
19 20 003 0623 (light grey)
19 20 003 0627 (black)

Metal
19 20 003 1643

EMC
19 62 003 1643



Overview (Sample: Han-Brid® RJ45 C)

Thermoplastic
09 20 003 0320 (light grey)
09 20 003 0327 (black)

Metal
09 20 003 0301

EMC
09 62 003 0301

Device side
09 12 003 2770
09 12 003 2774
09 12 003 2776

Cable side
09 12 003 3011
09 12 003 3021
09 12 003 3031

Thermoplastic
19 20 003 0423 (light grey)
19 20 003 0427 (black)

Metal
09 20 003 1443


EMC
19 62 003 1443



Thermoplastic
19 20 003 0623 (light grey)
19 20 003 0627 (black)

Metal
19 20 003 1643

EMC
19 62 003 1643



Features

General Description

The Han-Brid® series allows the connection of a data interface and a power supply in a single space saving connector. This means that it is now possible to provide data transmission and power to devices in a single bus structure. This hybrid connector family includes provision for connection of a max. 50 V, 10 A power supply together with a range of inserts for connection of a variety of data protocols and transmission medias:

- Han-Brid® F.O. for plastic (POF) or for HCS®* optical fibre
- Han-Brid® Cu for shielded twisted pair
- Han-Brid® Quintax 3 A for Coax cable with large diameter
- Han-Brid® Quintax 3 A for shielded 4 or 8 wire bus systems
- Han-Brid® RJ45 C for Ethernet application
- Han-Brid® USB / Firewire for fast data transmission

Han-Brid® inserts fit into the standard plastic as well as metal hoods and housings with seal of the Han® 3 A series offering a degree of protection IP 65 according to DIN EN 60 529. For harsher environments Han® 3 HPR hoods and housings with a degree of protection of IP 68 can be used.

Power supply

- Han D® male and female with standard crimp contacts (Order crimp contacts separately)
- Rated current 10 A
- Rated voltage 50 V
- termination side 0.14 - 2.5 mm²
- Approval 

Features

- for termination of a shielded twisted pair
- Insert for Han D® male or female contacts
- Connection of the shield by means of shielding plate and fixing clamps
- Connection of the device side can be realised either by a printed circuit board as a modular version or as part of the appliance PCB
- Insert for bulkhead mounted or cable to cable housings are always equipped with a screening spring
- Active bus terminator in standard Han® 3 A hoods and housings
- Power supply to the termination network via electrical contacts of Han-Brid®
- Integrated, galvanically separated DC/DC converter 24 V / 5 V

Technical characteristics

Number of contacts	2
Additional contacts	+ 4 electrical contacts 10 A + option for PE
Electrical data acc. to IEC 61984	10 A 50 V 0,8 kV 3
Rated current	10 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (hood/housing)	Polycarbonate, Zinc die-cast
Colour (hood/housing)	RAL 9005 (jet black), RAL 7037 (dust grey)

Specifications and approvals

IEC 61984
UL 1977 ECBT2.E235076



Number of contacts

2

10 A 50 V 0,8 kV 3
+ 4 electrical contacts 10 A + option for PE

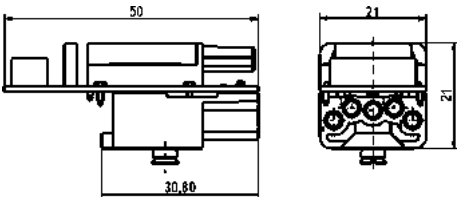
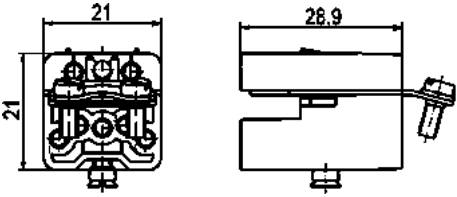


Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Brid®, Hybrid field bus connector Device side	09 12 006 2611		Also available as single parts: 09 12 002 2611 Upper part, loaded 09 12 002 3011 Upper part, unloaded 09 12 004 3011 Lower part, unloaded
Han-Brid®, Hybrid field bus connector Cable side		09 12 006 3111	Contact arrangement (view from termination side)

Number of contacts

2
10 A 50 V 0,8 kV 3
+ 4 electrical contacts 10 A + option for PE



Identification		Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Brid®, Hybrid field bus connector	Device side		09 12 006 2701	
				 Also available as single parts: 09 12 002 2701 Upper part, loaded 09 12 002 3101 Upper part, unloaded 09 12 004 3101 Lower part, unloaded
Han-Brid®, Hybrid field bus connector	Cable side	09 12 006 3001		



Number of contacts

2

10 A 50 V 0,8 kV 3
+ 4 electrical contacts 10 A + option for PE



Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Brid®, Bus terminator, Plastic hoods/housings	09 12 006 2691	09 12 006 2791	
Han-Brid®, Bus terminator, Metal hoods / housings	09 12 006 2692	09 12 006 2792	
Han-Brid®, Panel feed through	09 12 006 2694	09 12 006 2794	
Han-Brid®, Panel feed through	09 12 006 2695	09 12 006 2795	
With cage clamp			

Han-Brid



Features

- Is suitable for all HP Versatile Link (Horizontal Package) transmitters and receivers
- Data rates: Standard 12 Mbit/s, suitable for all common field-bus systems
- Insert allows integration of HP standard contacts for POF and HCS® fibres

Technical characteristics

Number of contacts	2
Additional contacts	+ 4 electrical contacts 10 A + option for PE
Electrical data acc. to IEC 61984	10 A 50 V 0,8 kV 3
Rated current	10 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Limiting temperature	-40 ... +70 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

Specifications and approvals

IEC 61984
UL 1977 ECBT2.E235076

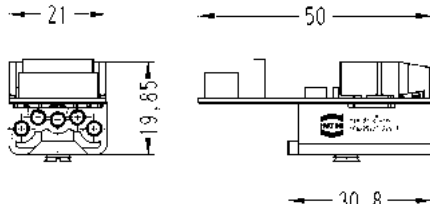
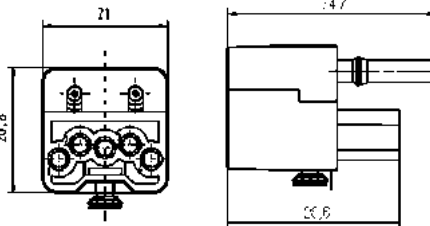
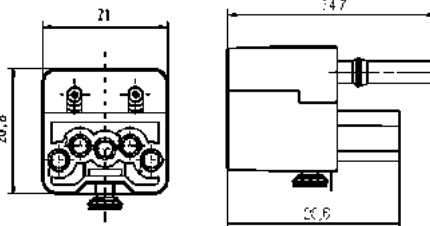
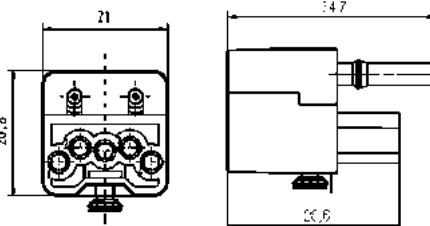


Number of contacts

2

10 A 50 V 0,8 kV 3
+ 4 electrical contacts 10 A + option for PE



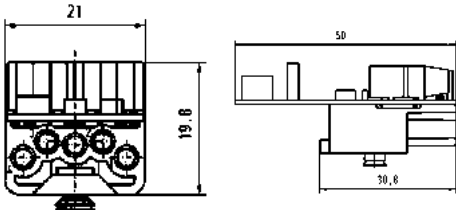
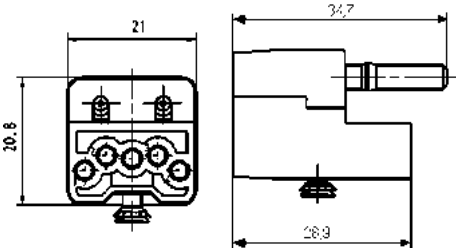
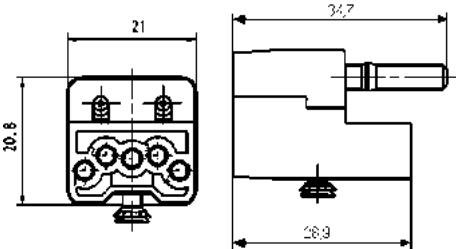
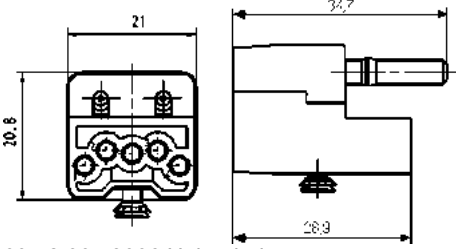
Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Brid®, Hybrid field bus connector  Device side FO (f) + Han D® (m) With PCB	09 12 004 2611		 Contact arrangement (view from termination side) Also available as single parts: 09 12 004 3011 Lower part, unloaded
Han-Brid®, Hybrid field bus connector  Cable side FO (m) + Han D® (f) for POF		09 12 004 2711	 09 12 004 3111 Unloaded
Han-Brid®, Hybrid field bus connector  Cable side FO (m) + Han D® (f) for POF crimpless		09 12 004 2713	 09 12 004 3113 Unloaded
Han-Brid®, Hybrid field bus connector  Cable side FO (m) + Han D® (f) for HCS® fibre		09 12 004 2716	 09 12 004 3116 Unloaded

Number of contacts

2

10 A 50 V 0,8 kV 3
+ 4 electrical contacts 10 A + option for PE



Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Brid®, Hybrid field bus connector  Device side FO (f) + Han D® (f) With PCB		09 12 004 2701	 Also available as single parts: 09 12 004 3101 Lower part, unloaded
Han-Brid®, Hybrid field bus connector  Cable side FO (m) + Han D® (m) for POF	09 12 004 2601		 09 12 004 3001 Unloaded
Han-Brid®, Hybrid field bus connector  Cable side With FO contacts FO (m) + Han D® (m) for POF crimpless	09 12 004 2603		 09 12 004 3003 Unloaded
Han-Brid®, Hybrid field bus connector  Cable side FO (m) + Han D® (m) for HCS® fibre	09 12 004 2606		 09 12 004 3006 Unloaded

Features

- For Eurobalise coaxial cable with diameter of 10.8 mm
- Fast, easy and secure assembly
- Shielding is connected by means of a crimp flange with strain relief
- Combinable with Han® 3 HPR hoods and housings with metric cable gland

Technical characteristics

Number of contacts	1
Additional contacts	+ shielding
Electrical data acc. to IEC 61984	16 A 50 V 0,8 kV 3
Rated current	16 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Impedance	50 Ω
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate, Zinc alloy
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

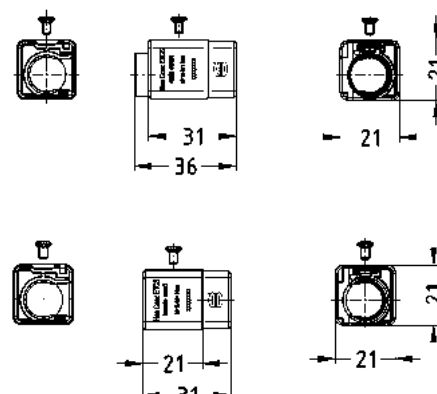
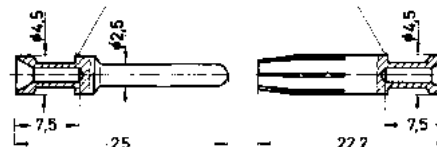
Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

1

16 A 50 V 0,8 kV 3
+ shielding

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																		
		Male	Female																			
Han-Brid® , Crimp termination  Please order contacts separately.		09 15 001 3004	09 15 001 3104																			
Han® Coax ETCS , 1 + shielding for Han E® crimp contacts  Please order crimp contacts separately.	0,14 ... 5,5	09 15 001 6101	09 15 001 6201																			
Han E® , Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5 4 5,5	09 33 000 6117 09 33 000 6122 09 33 000 6115 09 33 000 6118 09 33 000 6116 09 33 000 6123 09 33 000 6119 09 33 000 6139	09 33 000 6217 09 33 000 6222 09 33 000 6215 09 33 000 6218 09 33 000 6216 09 33 000 6223 09 33 000 6221 09 33 000 6239	<table><tr><th>Conductor cross-section</th><th>Identification</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22 no groove</td></tr><tr><td>0.5 mm²</td><td>AWG 20 no groove</td></tr><tr><td>0.75 mm²</td><td>AWG 18 1 groove*</td></tr><tr><td>1 mm²</td><td>AWG 18 1 groove</td></tr><tr><td>1.5 mm²</td><td>AWG 16 2 grooves</td></tr><tr><td>2.5 mm²</td><td>AWG 14 3 grooves</td></tr><tr><td>3 mm²</td><td>AWG 12 wide groove</td></tr><tr><td>4 mm²</td><td>AWG 12 no groove</td></tr></table> * on the back crimp collar Stripping length 7.5 mm	Conductor cross-section	Identification	0.14-0.37 mm²	AWG 26-22 no groove	0.5 mm²	AWG 20 no groove	0.75 mm²	AWG 18 1 groove*	1 mm²	AWG 18 1 groove	1.5 mm²	AWG 16 2 grooves	2.5 mm²	AWG 14 3 grooves	3 mm²	AWG 12 wide groove	4 mm²	AWG 12 no groove
Conductor cross-section	Identification																					
0.14-0.37 mm²	AWG 26-22 no groove																					
0.5 mm²	AWG 20 no groove																					
0.75 mm²	AWG 18 1 groove*																					
1 mm²	AWG 18 1 groove																					
1.5 mm²	AWG 16 2 grooves																					
2.5 mm²	AWG 14 3 grooves																					
3 mm²	AWG 12 wide groove																					
4 mm²	AWG 12 no groove																					

Features

- Possibility to terminate shielded four/eight wires conductors (2 pair STP)
- Possibility to terminate Coax cable with large diameter
- Suitable for all 4-wire bus systems
- Suitable for shielded cable conductor diameter 3 ... 9.5 mm
- Transmission of shielding separately from the hood's ground
- Connections are carried out acc. to EN 50173, Cat. 5

Technical characteristics

Number of contacts	1, 4, 8
Additional contacts	+ shielding + 2 power contacts
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +70 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984



Details

ATTENTION! Han-Brid® Quintax in Han® HPR housings only to be used with the long version!

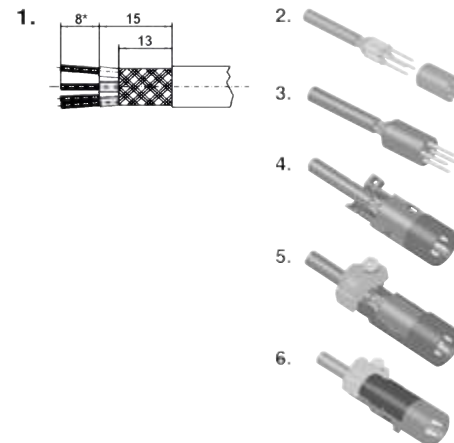
Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Assembly instructions



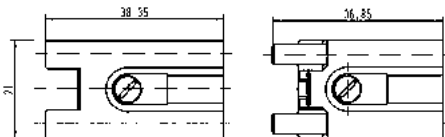

1. Strip cable acc. to drawing 1 and fold the shielding over the cable.
2. Crimp Han D® contacts onto the wires.
3. Insert Han D® contacts into corresponding cavities of insulator until they are snapped in.
4. Fit the insert including the cable into the opened shielded bushing. The coding pin of the shielded bushing has to meet the groove of the insulator.
5. Clamp the tilt over the shielding onto the cable by means of the special clamp (small opening for cable diameter of 3 ... 6 mm, large opening for cable diameter of 6 ... 9.5 mm).
6. Check the wiring. Close the shielded bushing with the cover and insert it into the corresponding cavity of the Quintax Module as usual.

Number of contacts

1,4,8

+ shielding + 2 power contacts



Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han-Brid® , Crimp termination  Please order contacts separately.	0,14 ... 2,5	09 15 003 3001	09 15 003 3101																						
Han D® , Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></table>	Wire gauge	Ø	Stripping length	0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm	0.5 mm² AWG 20	1.1 mm	8 mm	0.75 mm² AWG 18	1.3 mm	8 mm	1 mm² AWG 18	1.45 mm	8 mm	1.5 mm² AWG 16	1.75 mm	8 mm	2.5 mm² AWG 14	2.25 mm	6 mm
Wire gauge	Ø	Stripping length																							
0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm																							
0.5 mm² AWG 20	1.1 mm	8 mm																							
0.75 mm² AWG 18	1.3 mm	8 mm																							
1 mm² AWG 18	1.45 mm	8 mm																							
1.5 mm² AWG 16	1.75 mm	8 mm																							
2.5 mm² AWG 14	2.25 mm	6 mm																							

Number of contacts

1

10 A 50 V 0,8 kV 3
+ shielding

Technical characteristics

Number of contacts	1
Additional contacts	+ shielding
Electrical data acc. to IEC 61984	10 A 50 V 0,8 kV 3
Rated current	10 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Contact resistance	≤3 mΩ
Impedance	75 Ω
Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Material (insert)	Zinc alloy
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984

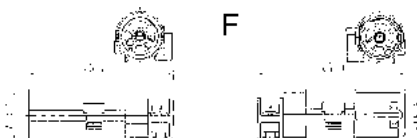
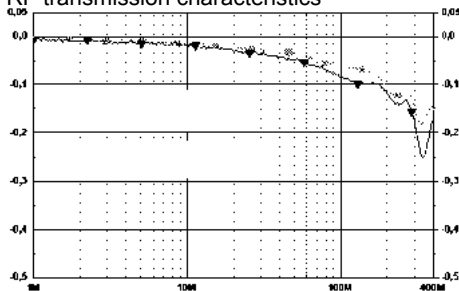



Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																					
		Male	Female																						
Han® D Coax , for Han D® crimp contacts  Please order crimp contacts separately.	0,14 ... 2,5	09 15 001 3013	09 15 001 3113	M F  RF transmission characteristics  ▣ 75 Ohm Cable ▼ 75 Ohm Cable with Han D® Coax  <table><thead><tr><th>Wire gauge</th><th>∅</th><th>Stripping length</th></tr></thead><tbody><tr><td>0.14-0.37 mm² AWG 26-22</td><td>0.9 mm</td><td>8 mm</td></tr><tr><td>0.5 mm² AWG 20</td><td>1.1 mm</td><td>8 mm</td></tr><tr><td>0.75 mm² AWG 18</td><td>1.3 mm</td><td>8 mm</td></tr><tr><td>1 mm² AWG 18</td><td>1.45 mm</td><td>8 mm</td></tr><tr><td>1.5 mm² AWG 16</td><td>1.75 mm</td><td>8 mm</td></tr><tr><td>2.5 mm² AWG 14</td><td>2.25 mm</td><td>6 mm</td></tr></tbody></table>	Wire gauge	∅	Stripping length	0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm	0.5 mm² AWG 20	1.1 mm	8 mm	0.75 mm² AWG 18	1.3 mm	8 mm	1 mm² AWG 18	1.45 mm	8 mm	1.5 mm² AWG 16	1.75 mm	8 mm	2.5 mm² AWG 14	2.25 mm	6 mm
Wire gauge	∅	Stripping length																							
0.14-0.37 mm² AWG 26-22	0.9 mm	8 mm																							
0.5 mm² AWG 20	1.1 mm	8 mm																							
0.75 mm² AWG 18	1.3 mm	8 mm																							
1 mm² AWG 18	1.45 mm	8 mm																							
1.5 mm² AWG 16	1.75 mm	8 mm																							
2.5 mm² AWG 14	2.25 mm	6 mm																							
Han D® , Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 15 000 6124 09 15 000 6123 09 15 000 6125 09 15 000 6122 09 15 000 6121 09 15 000 6126	09 15 000 6224 09 15 000 6223 09 15 000 6225 09 15 000 6222 09 15 000 6221 09 15 000 6226																						

Number of contacts

1

16 A 50 V 0,8 kV 3
+ shielding

Technical characteristics

Number of contacts	1
Additional contacts	+ shielding
Electrical data acc. to IEC 61984	16 A 50 V 0,8 kV 3
Rated current	16 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Contact resistance	≤1 mΩ
Impedance	50 Ω
Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Material (insert)	Zinc alloy
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984







Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																								
		Male	Female																									
Han® E Coax , for Han E® crimp contacts  Please order crimp contacts separately.	0,14 ... 5,5	09 15 001 3023	09 15 001 3123	M  F  <table><tr><td>Han E® Coax with RG 213 cable (2.5 mm²)</td><td>200 MHz</td><td>500 MHz</td><td>1.0 GHz</td><td>1.2 GHz</td><td>1.5 GHz</td><td>2.0 GHz</td><td>2.5 GHz</td></tr><tr><td>Return loss [dB]</td><td>23.8</td><td>21.1</td><td>>18.7</td><td>>17.7</td><td>>16.4</td><td>>14.1</td><td>>12.0</td></tr><tr><td>Attenuation [dB]</td><td>0.07</td><td>0.11</td><td>0.17</td><td>0.2</td><td><0.23</td><td><0.53</td><td><2.0</td></tr></table>	Han E® Coax with RG 213 cable (2.5 mm²)	200 MHz	500 MHz	1.0 GHz	1.2 GHz	1.5 GHz	2.0 GHz	2.5 GHz	Return loss [dB]	23.8	21.1	>18.7	>17.7	>16.4	>14.1	>12.0	Attenuation [dB]	0.07	0.11	0.17	0.2	<0.23	<0.53	<2.0
Han E® Coax with RG 213 cable (2.5 mm²)	200 MHz	500 MHz	1.0 GHz	1.2 GHz	1.5 GHz	2.0 GHz	2.5 GHz																					
Return loss [dB]	23.8	21.1	>18.7	>17.7	>16.4	>14.1	>12.0																					
Attenuation [dB]	0.07	0.11	0.17	0.2	<0.23	<0.53	<2.0																					
Han E® , Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5	09 33 000 6117 09 33 000 6122 09 33 000 6115 09 33 000 6118 09 33 000 6116 09 33 000 6123	09 33 000 6217 09 33 000 6222 09 33 000 6215 09 33 000 6218 09 33 000 6216 09 33 000 6223	 																								

4



Number of contacts

8

5 A 50 V 0,8 kV 3
+ shielding

Technical characteristics

Number of contacts	8
Additional contacts	+ shielding
Electrical data acc. to IEC 61984	5 A 50 V 0,8 kV 3
Rated current	5 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0



Technical characteristics

Mating cycles	≥500
Material (insert)	Zinc alloy
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984



Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)												
		Male	Female													
Han-Quintax® High Density , for Han® D-Sub crimp contacts  Please order crimp contacts separately. D-Sub , Crimp contact, Turned , Pack contents: Single contact 	0,09 ... 0,52	09 15 008 3013	09 15 008 3113	M  F  <table><tr><th>Wire gauge</th><th>max. insulation diameter</th><th>Stripping length</th></tr><tr><td>0.09-0.25 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.13-0.33 mm²</td><td>1.7</td><td>4 mm</td></tr><tr><td>0.25-0.52 mm²</td><td>1.7</td><td>4 mm</td></tr></table>	Wire gauge	max. insulation diameter	Stripping length	0.09-0.25 mm²	1.7	4 mm	0.13-0.33 mm²	1.7	4 mm	0.25-0.52 mm²	1.7	4 mm
Wire gauge	max. insulation diameter	Stripping length														
0.09-0.25 mm²	1.7	4 mm														
0.13-0.33 mm²	1.7	4 mm														
0.25-0.52 mm²	1.7	4 mm														
	0,09 ... 0,25 0,13 ... 0,33 0,25 ... 0,52	09 67 000 7576 09 67 000 5576 09 67 000 8576	09 67 000 7476 09 67 000 5476 09 67 000 8476													

Features

- Suitable for standard RJ 45 Plug and Jack, shielded version
- Connections are carried out acc. to EN 50173, Cat. 5
- Connection of the device side can be realised either by a printed circuit board as a modular version or as part of the appliance PCB
- Assembly with standard tools
- Insert for 2 Han-D® male or female contacts offers the combination with electrical bus connector

Technical characteristics

Number of contacts	2
Additional contacts	+ RJ45
Electrical data acc. to IEC 61984	10 A 24 V 0,8 kV 3
Rated current	10 A
Rated voltage	24 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

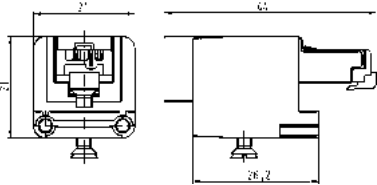
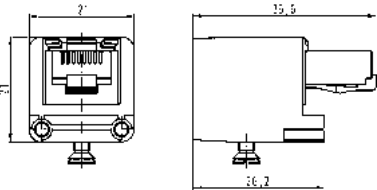
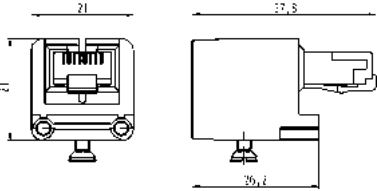
Specifications and approvals

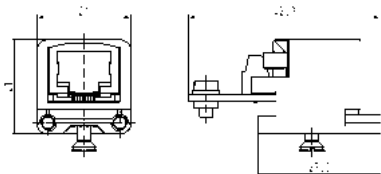
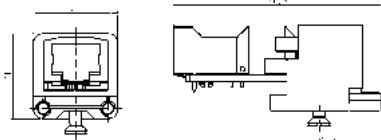
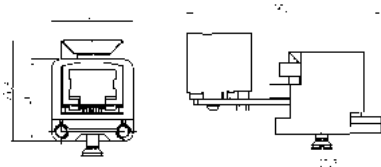
IEC 61984
UL 1977 ECBT2.E235076



Number of contacts

2
10 A 24 V 0,8 kV 3
+ RJ45

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Brid® , hybrid network connector 	09 12 003 3011		
With RJ Industrial Han-Brid® , hybrid network connector, 10 Gbit/s 	09 12 003 3015		
With RJ Industrial Han-Brid® , hybrid network connector, Cat. 6_A 	09 12 003 3016		
With RJ Industrial Han-Brid® , hybrid network connector 	09 12 003 3021		
With Stewart RJ45 Han-Brid® , hybrid network connector 	09 12 003 3031		
With HIROSE RJ45			

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Brid®, hybrid network connector		09 12 003 2770	
Panel feed through With 4-pin terminal block			
Han-Brid®, hybrid network connector		09 12 003 2774	
Panel feed through Straight			
Han-Brid®, hybrid network connector		09 12 003 2776	
Panel feed through Angled			



Number of contacts

2

1 A 50 V 0,8 kV 3
+ USB

Features

Specifications and approvals

- Insert for all Han® 3 A hoods with glued seal
- Simple and cost effective termination by plug in patch cable
- Cable tie strain relief



Technical characteristics

Number of contacts	2
Additional contacts	+ USB
Electrical data acc. to IEC 61984	1 A 50 V 0,8 kV 3
Rated current	1 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Contact resistance	≥4 mΩ
Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Han-Brid

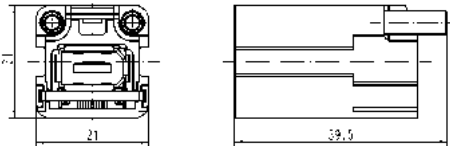
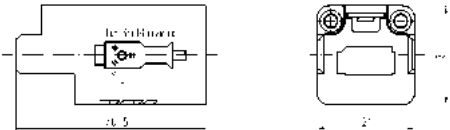
Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Brid®  Device side	09 12 001 2794	09 12 001 3091	
Han-Brid®  Cable side			

Number of contacts

2

1 A 50 V 0,8 kV 3
+ FireWire

Features	Specifications and approvals
- Insert for all Han® 3 A hoods with glued seal - Simple and cost effective termination by plug in patch cable - Cable tie strain relief - Compatibel to IEEE 1394	EN 60664-1 IEC 61984 UL 1977 ECBT2.E235076 
Technical characteristics	
Number of contacts 2 Additional contacts + FireWire Electrical data acc. to IEC 61984 1 A 50 V 0,8 kV 3 Rated current 1 A Rated voltage 50 V Rated impulse voltage 0.8 kV Pollution degree 3 Insulation resistance $\geq 10^{10} \Omega$ Contact resistance $\geq 4 \text{ m}\Omega$ Limiting temperature -40 ... +85 °C Flammability acc. to UL 94 V-0 Mating cycles ≥ 500 Material (insert) Polycarbonate Colour (insert) RAL 7032 (pebble grey)	

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Brid®  Device side Han-Brid®  Cable side	09 12 001 2774	09 12 001 3071	 

Han-Brid

Features

- Suitable for housings, size Han® 3 A including versions Han® M, Han® EMC and Han® HPR
- Degree of protection up to IP68
- Suitable for HARTING SC contacts
- for Multimode fibre 50 - 62.5 / 125 µm and Singlemode fibre 9 / 125 µm
- 4 full ceramic sleeves for a minimal insertion loss
- 1 mm POF


Technical characteristics

Number of contacts	4
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

Details

Assembly instructions

Male module



Assemble the SC contact

- ① Push the SC contact from the side into the relevant insert
- ② Push the spring clip over the contact body.

Assembly instructions

Female module






Assemble the SC contact

- ① Push the centering ferrule (included in delivery) on the SC contact
- ② Push the SC contact from the side into the relevant insert
- ③ Push the spring clip over the contact body.

Number of contacts

4



Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Brid®, for FO  Please order contacts separately.	09 20 004 4701	09 20 004 4711	 Contact arrangement (view from termination side) The female inserts are equipped with centering ferrules. 4 ferrules are included within the delivery.
SC contact, for 1 mm plastic fibre Crimp termination 	20 10 001 5211	20 10 001 5211	
SC contact, for 1 mm plastic fibre IDC termination 	20 10 001 5217	20 10 001 5217	
SC contact, for singlemode fibre 9/125 µm 	20 10 125 5220	20 10 125 5220	
SC contact, for GI fibre 50/125 µm for ceramic ferrule 62.5/125 µm 	20 10 125 5211	20 10 125 5211	
SC contact, for SI fibre (HCS®) 200/230 µm 	20 10 230 5211	20 10 230 5211	

Features

- Hoods/housings for industrial applications
- With glued seal




Technical characteristics

Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Degree of protection acc. to IEC 60529	IP44, IP67, With seal screw 09 20 000 9918
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR

Details

The special hoods with glued seal can be combined with standard housings (see chapter 31).

Standard hoods and housings for industrial applications
Single locking lever

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A® , Hoods, for Han-Brid®, With glued seal, With integrated cable gland, Top entry	1x Integrated 1x Integrated	5 ... 13 6 ... 12	19 20 003 1423 19 20 003 1425	
Han A® , Hoods, for Han-Brid®, With glued seal, Top entry	1x M20		19 20 003 1443	
Han A® , Hoods, for Han-Brid®, With glued seal, Side entry	1x M20		19 20 003 1643	



Features

- Hoods/housings for industrial applications
- With glued seal

Technical characteristics

Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Degree of protection acc. to IEC 60529	IP44, IP67, With seal screw 09 20 000 9918
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 7032 (pebble grey), RAL 9005 (jet black)
Material (seal)	NBR



Specifications and approvals



Details

The special hoods with glued seal can be combined with standard housings (see chapter 31).

Standard hoods and housings for industrial applications
Single locking lever

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A® , Hoods, With glued seal, With integrated cable gland, Top entry 	1x Integrated	9 ... 17	19 20 003 0413	
Han A® , Hoods, With glued seal, With integrated cable gland, Black, Top entry	1x Integrated	9 ... 17	19 20 003 0418	
Han A® , Hoods, for Han-Brid®, With glued seal, Top entry 	1x M20		19 20 003 0423	
Han A® , Hoods, for Han-Brid®, With glued seal, Black, Top entry 	1x M20 1x M25		19 20 003 0426 19 20 003 0436	
Han A® , Hoods, With glued seal, Top entry 	1x M25		19 20 003 0433	

Han-Brid



Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)

Han A® ,
Hoods,
for Han-Brid®,
With glued seal,
Side entry



1x M20

19 20 003 0623



Han A® ,
Hoods,
for Han-Brid®,
With glued seal,
Black,
Side entry



1x M20

19 20 003 0626

Features

- Hoods/housings for more demanding environmental requirements
- Corrosion resistance ASTM B117-09 (500 h)
- With glued seal

Technical characteristics





Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65, IP67
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	FPM

Details

The special hoods with glued seal can be combined with standard housings (see chapter 31).



Hoods/housings for more demanding environmental requirements
Single locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)	
Han® M , Hoods, With glued seal, Top entry 	1x M20	19 37 003 1443		
Han® M , Hoods, With glued seal, Side entry 	1x M20	19 37 003 1643		

Han-
Brid

Features

- Hoods/Housings for higher EMC requirements
- With glued seal

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44, IP67, With seal screw 09 20 000 9918
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Electrical conductive
Colour (hood/housing)	Unpainted
Material (seal)	NBR

Details

The special hoods with glued seal can be combined with standard housings (see chapter 31).



Hoods/Housings for higher EMC requirements
Single locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)	
Han® EMC , Hoods, With glued seal, Top entry	1x M20	19 62 003 1443		
Han® EMC , Hoods, With glued seal, Side entry	1x M20	19 62 003 1643		

Han-
Brid

Features

- Hoods/housings for harsh environments
- Extremely resistant to chemicals and other aggressive influences
- Made completely from high-quality stainless steel
- Extremely resistant to corrosion
- With glued seal

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP67
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Stainless steel
Surface (hood/housing)	Electrical conductive
Colour (hood/housing)	Unpainted
Material (seal)	NBR




Specifications and approvals



Details

The special hoods with glued seal can be combined with standard housings (see chapter 31).

Hoods/housings for harsh environments
Single locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)	
Han-INOX® , Hoods, With glued seal, Top entry	1x M20	19 44 003 1443		
Han-INOX® , Hoods, With glued seal, Side entry	1x M20	19 44 003 1643	 	

Han-
Brid

Features

- Hoods/housings for harsh outdoor environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Excellent EMC characteristics
- Screw locking M4
- Field of application: for external electrical interconnections in vehicles, in highly demanding environments and wet areas, as well as for sensitive interconnections that have to be shielded
- Distinguishing feature: colour-coded black, internal seal

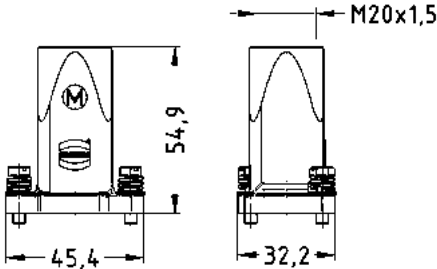


Technical characteristics

Limiting temperature	-40 ... +125 °C
Tightening torque	2 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69K
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated, Chromated
Colour (hood/housing)	RAL 9005 (jet black)
Material (locking)	Stainless steel

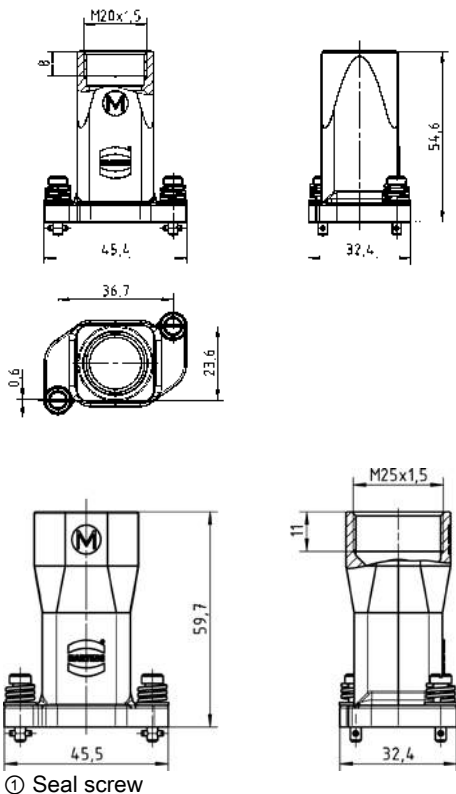
Specifications and approvals



Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry, Pack contents: With seal screw 	1x M20 1x M25	19 40 703 0410 19 40 703 0411	  

Hoods/housings for harsh outdoor environments
Toggle locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry, Pack contents: With seal screw  1x M20 1x M25 19 40 003 0400 19 40 003 0401  ① Seal screw			

Han-
Brid


Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry, Pack contents: With seal screw	1x M20 1x M25	19 40 003 0410 19 40 003 0411	


Contents	Page
Han-Fast® Lock.....	20.11
PCB adapter for Han DD®	20.13
PCB adapter for Han® DDD module	20.16
PCB adapter for Han® 40 A Axial module	20.19
PCB adapter for Han E®	20.21
PCB adapter for Han® Q 4/2	20.23
PCB adapter for Han® Q 5/0	20.26
PCB adapter for Han® Q 7/0	20.29
PCB adapter for Han® Q 8/0	20.32
PCB adapter for Han® Q 12/0	20.35

Layout of PCB


Han® 24 DD



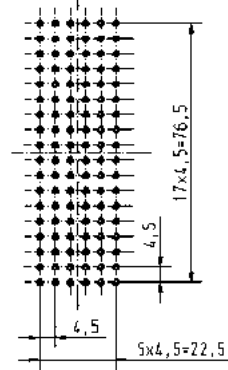
Han® 42 DD



Han® 72 DD



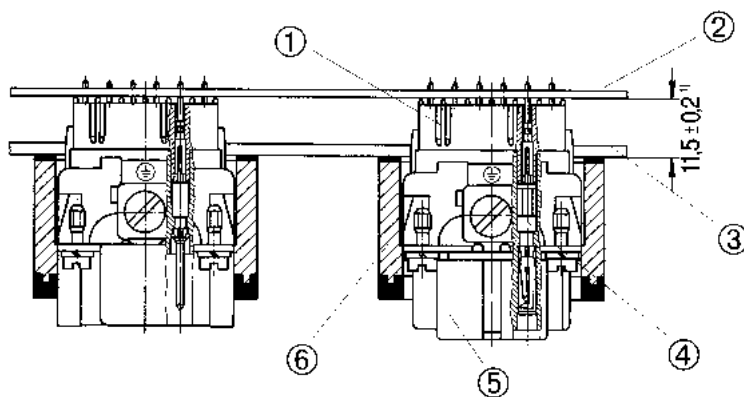
Han® 108 DD



Recommended hole diameter:

0.8 mm

Assembly situation




- ① PCB adapter
- ② Printed circuit board (PCB)
- ③ Switch board panel
- ④ Han DD® double contact
- ⑤ Han DD® insert
- ⑥ Han® B bulkhead mounted housing


1) for Han® B EMC housings spacing of 12.5 ± 0.2 mm is necessary as no flange seal is used

Layout of PCB


Han® 6 E



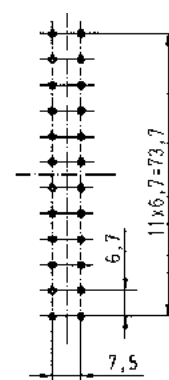
Han® 10 E



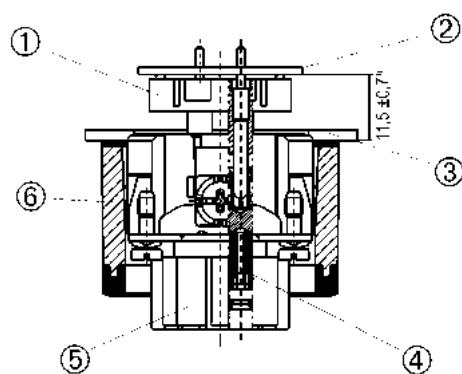
Han® 16 E



Han® 24 E



Assembly situation




- ① PCB adapter
- ② Printed circuit board (PCB)
- ③ Switch board panel
- ④ Han E® double contact
- ⑤ Han E® insert
- ⑥ Han® B bulkhead mounted housing

1) for Han® B EMC housings spacing of 12.5 ± 0.7 mm is necessary as no flange seal is used

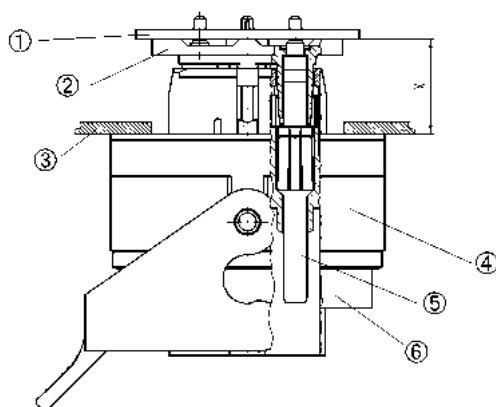
Layout of PCB

Dimensions in mm



Assembly situation

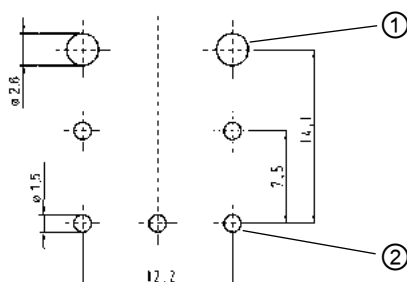
X = 16+1 with signal contact or 16+2 without signal contact



- ① Printed circuit board (PCB)
- ② PCB adapter
- ③ Switch board panel
- ④ Han-Compact® bulkhead mounted housing
- ⑤ Han® C double contact
- ⑥ Han® Q 4/2 insert

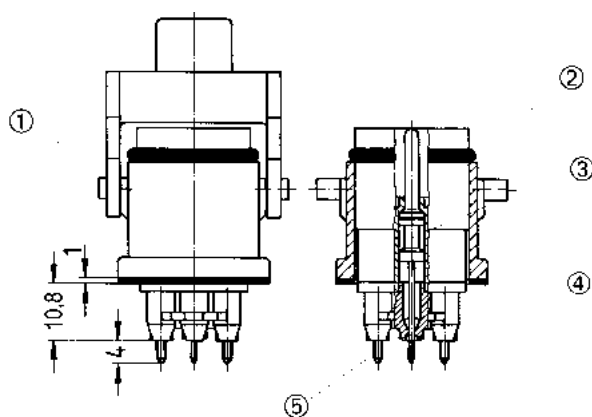
Layout of PCB

Dimensions in mm



- ① Recommended hole diameter: 2.6 mm
- ② Recommended hole diameter: 1.5 mm

Assembly situation




- ① Han® 3 A bulkhead mounting housing
- ② Han® Q 5/0
- ③ Solder contacts
- ④ PCB adapter
- ⑤ Connection to printed circuit board

PCB

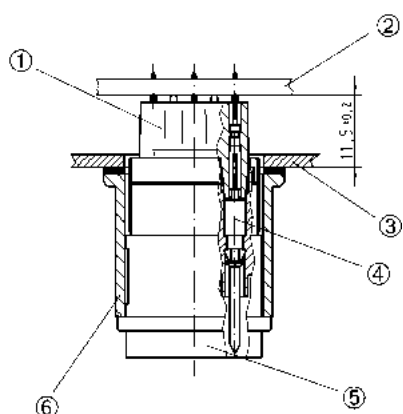
Layout of PCB

Dimensions in mm



- ① Median plane of the housing
- ② Recommended hole diameter: 0.8 mm


Assembly situation



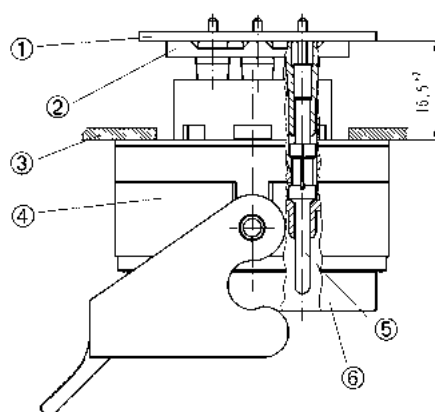
- ① PCB adapter
- ② Printed circuit board (PCB)
- ③ Switch board panel
- ④ Han D® double contact
- ⑤ Han® Q 7/0 Insert
- ⑥ Han® 3 A bulkhead mounting housing

Layout of PCB

Dimensions in mm



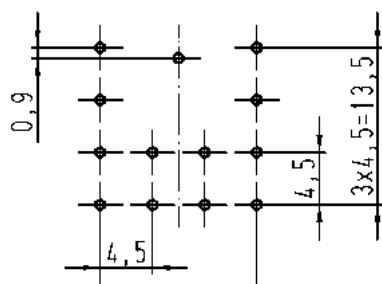
Assembly situation



- ① Printed circuit board (PCB)
- ② PCB adapter
- ③ Switch board panel
- ④ Han-Compact® bulkhead mounted housing
- ⑤ Han E® double contact
- ⑥ Han® Q 8/0 Insert

PCB

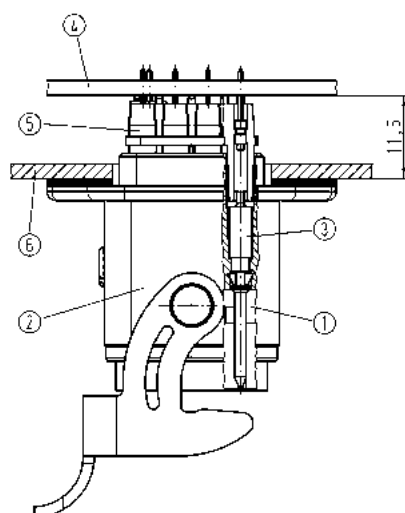
Layout of PCB



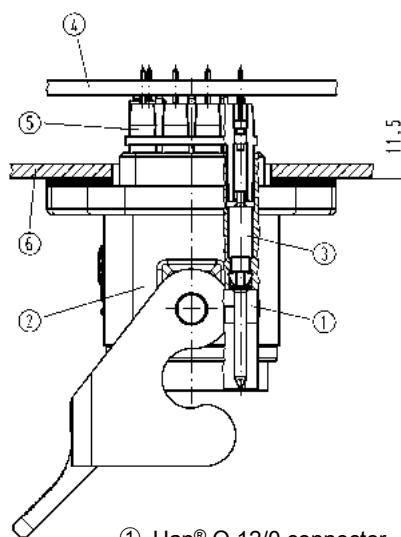
Dimensions in mm
Recommended hole diameter: 0.8 mm

Assembly situation

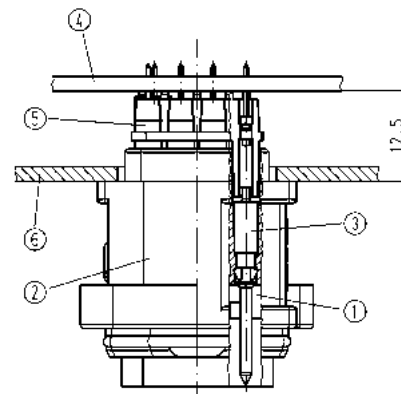
Han® 3 A Standard / EMC



Han® 3 A plastic



Han® 3 A HPR

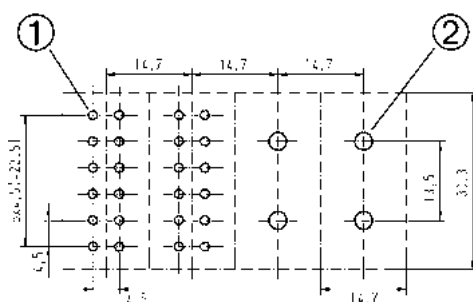


- ① Han® Q 12/0 connector
- ② Han® 3 A housing bulkhead mounting
- ③ R15-double contact

- ④ Printed circuit board (PCB)
- ⑤ PCB adapter
- ⑥ Switch board panel

Layout of PCB

Dimensions in mm

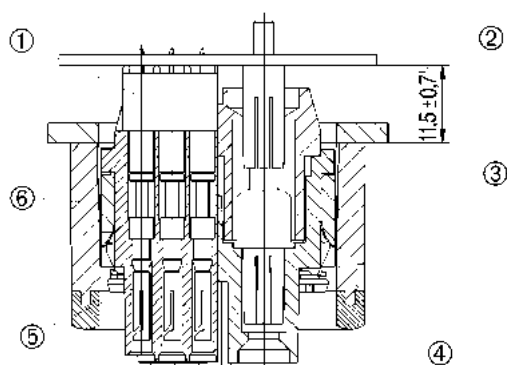


Han DD® module

Han® 40 A module

- ① Recommended hole diameter: 0.8 mm
- ② Recommended hole diameter: 3.2 mm

Assembly situation

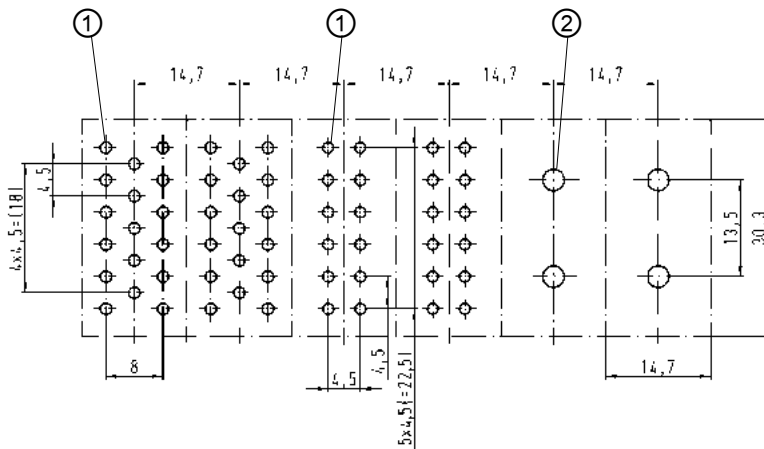


- ① Han DD® PCB-adapter
- ② Han® C solder contact
- ③ Switch board panel
- ④ Module for connection to printed circuit board
- ⑤ Han D® double contact
- ⑥ Han® B bulkhead mounted housing

¹⁾ for Han® B EMC housings spacing of 12.5 ± 0.7 mm is necessary as no flange seal is used

Layout of PCB

Dimensions in mm

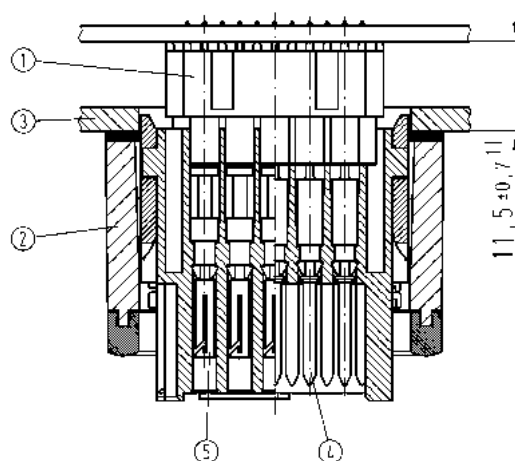


- ① Recommended hole diameter: 0.8 mm
- ② Recommended hole diameter: 3.2 mm

Han® DDD module Han® DD module Han® 70 A module

Assembly situation

Dimensions in mm



- ① Han DDD® PCB adapter 5 pins
- ② Han® B bulkhead mounted housing
- ③ Switch board panel
- ④ Han D® double male contact, 09 15 000 6197
- ⑤ Han D® double female contact, 09 15 000 6291

1) for Han® B EMV hood and housing spacing of 12.5 ± 0.7 mm is necessary as no flange seal is used.

For further information and Han-Modular® frames please refer to chapter 06 (Han-Modular®)

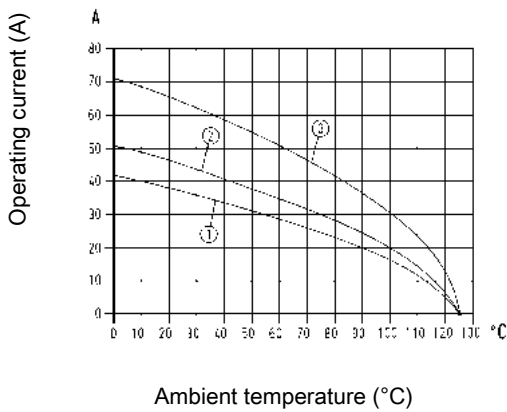
Features

- Solder free PCB termination
- PCB contact with locking element
- Machine processing
- Flexible in terms of applications
- Practical and easy handling
- Fast assembly to PCB
- Locking directly on the PCB

Technical characteristics

Contact resistance	≤2 mΩ
Material (locking)	Copper alloy
Surface (locking)	Passivated
Material (contacts)	Copper alloy

Derating



- ① Conductor cross-section 4 mm²
- ② Conductor cross-section 6 mm²
- ③ Conductor cross-section 10 mm²

Specifications and approvals

UL 1977 ECBT2.E235076

Details

The new connection of wires to the PCB offers optimized PCB design, combined with outstanding contact qualities.

The Han-Fast® Lock is flexible and allows a fast and simple PCB connection. The PCB has one drilled hole and a pad.

The inner surface of the plated drilled hole serves as the interface. The Han-Fast® Lock is simply inserted into the through-plated PCB hole. The locking pin is pushed in and hence locks the contact into position.

The solder free connection technique is easy to handle and to operate. Maintenance has been made simple with the facility to detach the contact.

Han-Fast® Lock also supports SMD assembly of the PCB.

- Current up to 60 Amps
- Standard drilled hole with pad
- Position independent of connector
- Solder free PCB termination
- Easy locking solution



Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
Han-Fast® Lock , PCB contact, With pin , Pack contents: Single contact Contact surface: Silver plated	1,5 ... 2,5 4 ... 6 10	09 08 000 7122 09 08 000 7123 09 08 000 7124	 Stripping length 7.5 mm
Han-Fast® Lock , PCB contact, With pin Angled , Pack contents: Single contact Contact surface: Silver plated	1,5 ... 2,5 4 ... 6 10	09 08 000 7222 09 08 000 7223 09 08 000 7224	 Stripping length 7.5 mm
Han-Fast® Lock , PCB contact, With pin , Pack contents: On a reel Contact surface: Silver plated	1,5 ... 2,5 4 ... 6 10	09 08 000 6122 09 08 000 6123 09 08 000 6124	 Stripping length 7.5 mm

Features

- Robust design
- Suitable for standard and EMC hoods and housings
- Low wiring costs
- High density of contacts

Technical characteristics

Electrical data acc. to IEC 61984	7,5 A 250 V 4 kV 3
Rated current	7.5 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Material (insert)	Polyamide
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076

Details

Han DD® crimp inserts see chapter 02


Modules see chapter 06

Han® B bulkhead mounted housings see chapter 31

Crimping tools see chapter 90

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	




Han D[®],
PCB contact,
Contact surface:
Silver plated



PCB adapter,
In the Han DD[®] crimp insert,
In the Han DD[®] module,
In the Han[®] DDD module (different electrical
data: 7.5 A 160 V 2.5 kV 3)



for PCB's up to 1.6 mm





09 16 000 9905 a= 2.6
09 16 000 9908 a= 3.4

PCB adapter,
In the Han DD[®] crimp insert,
In the Han DD[®] module,
In the Han[®] DDD module (different electrical
data: 7.5 A 160 V 2.5 kV 3)



for PCB's up to 2.4 mm

09 16 000 9908 09 16 000 9908

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han D® , PCB contact, Contact surface: Silver plated  09 15 000 6191 09 15 000 6294 			
PCB adapter, In the Han DD® crimp insert, In the Han DD® module, In the Han® DDD module (different electrical data: 7.5 A 160 V 2.5 kV 3)  for PCB's up to 1.6 mm 09 16 000 9905 09 16 000 9905 			
PCB adapter, In the Han DD® crimp insert, In the Han DD® module, In the Han® DDD module (different electrical data: 7.5 A 160 V 2.5 kV 3)  for PCB's up to 2.4 mm 09 16 000 9908 09 16 000 9908 09 16 000 9905 a= 2.6 09 16 000 9908 a= 3.4			

Features

- Robust design
- Suitable for standard and EMC hoods and housings
- Low wiring costs
- High density of contacts

Technical characteristics

Electrical data acc. to IEC 61984	7,5 A 250 V 4 kV 3
Rated current	7.5 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Material (insert)	Polyamide
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076


Details

Han DD® crimp inserts see chapter 02





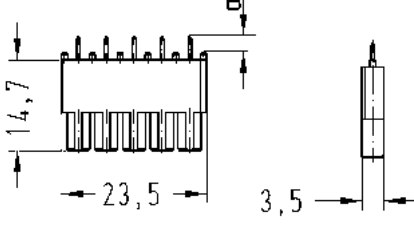
Modules see chapter 06

Han® B bulkhead mounted housings see chapter 31

Crimping tools see chapter 90



For a 17-pin PCB termination with the Han® DDD module two 6-pin and one 5-pin PCB adapters are necessary.
(electrical data: 7.5 A 160 V 2.5 kV 3)

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han D®, PCB contact, Contact surface: Silver plated 	09 15 000 6197	09 15 000 6291	 
PCB adapter, In the Han DD® crimp insert, In the Han DD® module, In the Han® DDD module (different electrical data: 7.5 A 160 V 2.5 kV 3)  for PCB's up to 1.6 mm	09 16 000 9905	09 16 000 9905	  09 16 000 9905 a= 2.6 09 16 000 9908 a= 3.4
PCB adapter, In the Han DD® crimp insert, In the Han DD® module, In the Han® DDD module (different electrical data: 7.5 A 160 V 2.5 kV 3)  for PCB's up to 2.4 mm	09 16 000 9908	09 16 000 9908	
PCB adapter, 5-pin, In the Han® DDD module  for PCB's up to 1.6 mm	09 16 000 9915	09 16 000 9915	 09 16 000 9915 a= 2.6 09 16 000 9918 a= 3.4

PCB adapter for Han® DDD module



Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
PCB adapter, 5-pin, In the Han® DDD module  for PCB's up to 2.4 mm	09 16 000 9918	09 16 000 9918	

PCB

Features

- Modular assembly
- Robust design
- Suitable for standard and EMC hoods and housings
- Low wiring costs

Technical characteristics

Electrical data acc. to IEC 61984	40 A 500 V 6 kV 3
Rated current	40 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Material (insert)	Polycarbonate
Material (contacts)	Copper alloy


Specifications and approvals

EN 60664-1
IEC 61984

Details

Hinged frames see chapter 06



Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han® C , PCB contact, Contact surface: Silver plated 	09 32 000 6295		
PCB adapter, In the Han® 40 A Axial module 	09 14 002 2603	09 14 002 2703	

Features

- Robust design
- Suitable for standard and EMC hoods and housings
- Low wiring costs
- Counter connector available with screw, crimp or cage clamp termination

Technical characteristics

Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Material (insert)	Polycarbonate
Material (contacts)	Copper alloy

Specifications and approvals



EN 60664-1
IEC 61984

Details

Han E® crimp inserts see chapter 03

Hoods/Housings see chapter 31

Crimping tools see chapter 90

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han E® , PCB contact, Contact surface: Silver plated 	09 33 000 6180	09 33 000 6280	
PCB adapter, In the Han E® crimp insert 	09 33 000 9996	09 33 000 9996	



Features

- Robust design
- Low wiring costs
- High density of contacts
- Suitable for Han-Compact® hoods and housings

Technical characteristics

Electrical data acc. to IEC 61984	30 A 400/690 V 6 kV 2
Rated current	30 A
Rated voltage conductor-earth	400 V
Rated voltage conductor-conductor	690 V
Rated impulse voltage	6 kV
Pollution degree	2
Electrical data, signal	7,5 A 250 V 4 kV 2
Rated current (signal)	7.5 A
Rated voltage (signal)	250 V
Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	2
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Flammability acc. to UL 94 (locking levers)	V-0
Degree of protection acc. to IEC 60529	IP65
Degree of protection acc. to UL 50	4, 12
Material (insert)	LCP
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide
Colour (locking)	RAL 9005 (jet black)
Material (contacts)	Copper alloy




Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076




Details

Han® Q inserts see chapter 13
Crimping tools see chapter 90

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han® C , PCB contact, Contact surface: Silver plated	09 32 000 6180	09 32 000 6280	
Han D® , PCB contact, Contact surface: Silver plated	09 15 000 6191	09 15 000 6293	
PCB adapter, In the Han® Q 4/2	09 12 006 9901	09 12 006 9901	
for PCB's up to 2.4 mm			

Hoods/housings for industrial applications
Double locking lever

Identification	Part number	Drawing (dimensions in mm)
Han-Compact® , Bulkhead mounted housings, Straight  09 12 008 0327  2445,919,5 26,922,732,213,4 28,7		

Features

- Robust design
- Suitable only for EMC housings size Han® 3 A
- Additional robust and secure PE-connection between housing and PCB

Technical characteristics




Electrical data acc. to IEC 61984	10 A 230/400 V 4 kV 3
Rated current	10 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44, IP67, With seal screw 09 20 000 9918
Material (insert)	Polycarbonate
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Electrical conductive
Colour (hood/housing)	Unpainted
Material (seal)	NBR
Material (locking)	Steel
Surface (locking)	Zinc plated
Material (contacts)	Copper alloy

Specifications and approvals

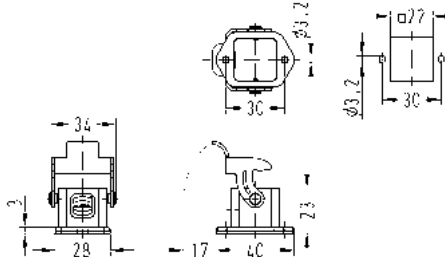
EN 60664-1
IEC 61984


Details

Han® Q inserts see chapter 13
Crimping tools see chapter 90

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han E® , PCB contact, Contact surface: Silver plated  PCB adapter, 5-pin, In the Han® Q 5/0  for PCB's up to 2.4 mm	09 33 000 6195	09 33 000 6295	
	09 12 000 9905	09 12 000 9905	 Adapter PE contact panel 

Hoods/Housings for higher EMC requirements
Single locking lever

Identification	Part number	Drawing (dimensions in mm)
Han® EMC , Bulkhead mounted housings, Straight, for PCB termination with Han® Q 5/0  PCB	09 62 003 0304	

Features

- Robust design
- Suitable for standard and EMC hoods and housings
- High density of contacts

Technical characteristics

Electrical data acc. to IEC 61984	7,5 A 250 V 4 kV 3
Rated current	7.5 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44, IP67, With seal screw 09 20 000 9918
Material (insert)	Polycarbonate
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Steel
Surface (locking)	Zinc plated
Material (contacts)	Copper alloy

Specifications and approvals





EN 60664-1
IEC 61984



Details


Han® Q inserts see chapter 13

Crimping tools see chapter 90

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han D®, PCB contact, Contact surface: Silver plated 	09 15 000 6190	09 15 000 6290	 
PCB adapter, In the Han® Q 7/0  for PCB's up to 2.4 mm	09 12 000 9908	09 12 000 9908	 

PCB

Standard hoods and housings for industrial applications
Single locking lever

Identification	Part number	Drawing (dimensions in mm)
Han A® , Bulkhead mounted housings, Straight 	09 20 003 0301	 Panel cut out 22 x 22 mm

Features

- Robust design
- Suitable for Han-Compact® hoods and housings
- Low wiring costs
- High density of contacts

Technical characteristics

Electrical data acc. to IEC 61984	16 A 230/400 V 4 kV 2
Rated current	16 A
Rated voltage conductor-earth	230 V
Rated voltage conductor-conductor	400 V
Rated impulse voltage	4 kV
Pollution degree	2
Contact resistance	≤3 mΩ
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Flammability acc. to UL 94 (locking levers)	V-0
Degree of protection acc. to IEC 60529	IP65
Degree of protection acc. to UL 50	4, 12
Material (insert)	LCP
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide
Colour (locking)	RAL 9005 (jet black)
Material (contacts)	Copper alloy

Specifications and approvals


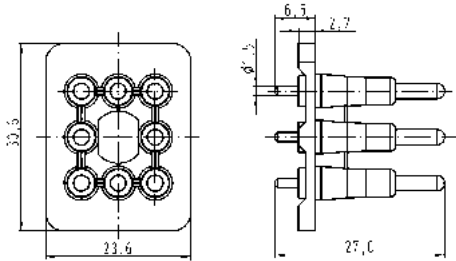
EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076




Details

Han® Q inserts see chapter 13

Crimping tools see chapter 90

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han E® , PCB contact, Contact surface: Silver plated  PCB adapter, In the Han® Q 8/0  for PCB's up to 1.6 mm	09 33 000 6180	09 33 000 6280	
	09 12 008 9901	09 12 008 9901	

Hoods/housings for industrial applications
Double locking lever

Identification	Part number	Drawing (dimensions in mm)
Han-Compact®, Bulkhead mounted housings, Straight 	09 12 008 0327	

Features

- Robust design
- Suitable for standard and EMC hoods and housings
- High density of contacts

Technical characteristics

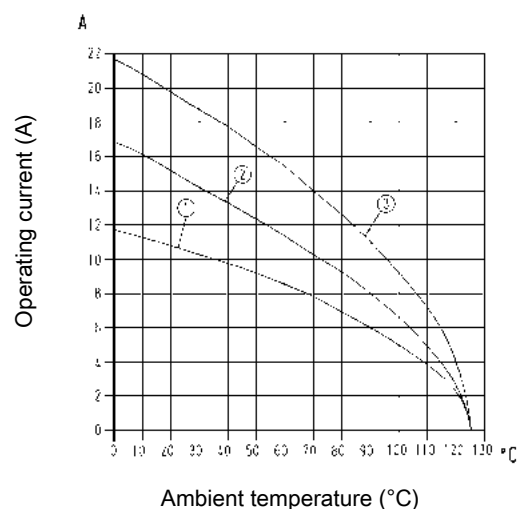
Number of contacts	12
Electrical data acc. to IEC 61984	7,5 A 250 V 4 kV 3
Rated current	7.5 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 0.75 mm²
- ② Conductor cross-section 1.5 mm²
- ③ Conductor cross-section 2.5 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

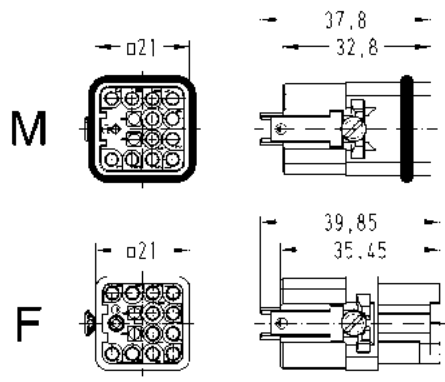


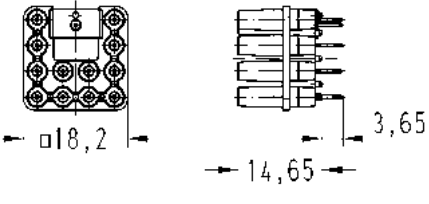
Crimping tools see chapter 90



Number of contacts

12+

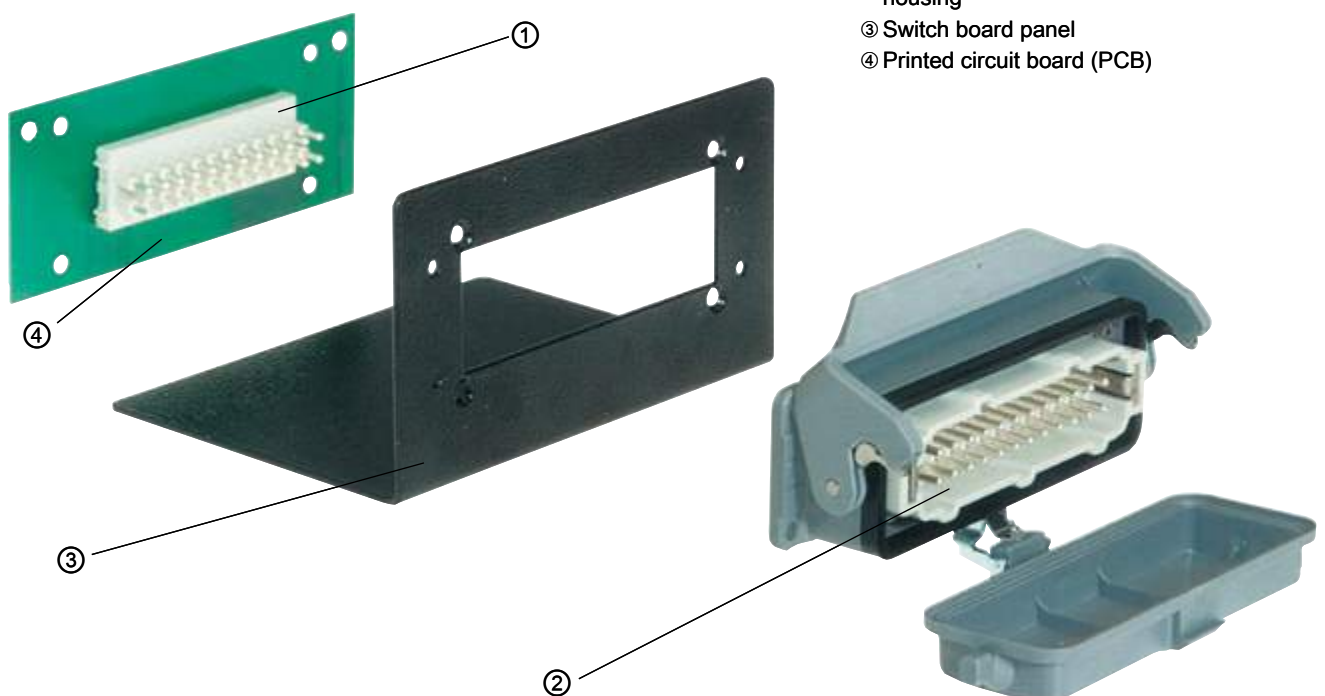
7,5 A 250 V 4 kV 3

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han® Q , for PCB adapter, Solder termination  Please order contacts separately.	09 12 012 3002	09 12 012 3102	
Han D® , PCB contact, Contact surface: Silver plated 	09 15 000 6191	09 15 000 6297	
PCB adapter, In the Han® Q 12/0  for PCB's up to 2.4 mm	09 12 012 9901	09 12 012 9901	

- Secondary mating between industrial connector and printed circuit board.
- No higher force is applied on the soldering joint when mating the industrial connector due to an additional mating point.
- No wiring between printed circuit board and industrial connector necessary.
- This means no wiring faults → no testing, no costs
- Connecting times are minimized.
- Easy handling is time and cost saving.
- The production of mechanical and electrical / electronical components can be completely separated.
- Possibility to reach a higher degree of automation in the production (e.g. wave soldering of the PCBs).



Han DD® and Han® Q 5/0 PCB adapter
Wilhelm Fette GmbH, Germany



- ① PCB adapter for Han E®
- ② Han E® connector in a bulkhead mounted housing
- ③ Switch board panel
- ④ Printed circuit board (PCB)

Contents	Page
Inserts for Han- <i>Yellock</i> ® 10.....	25.7
Inserts for adapter frames	25.9
Quick Lock module	25.11
Crimp module	25.13
Multiplier block.....	25.15
Multiplier	25.17
Adapter frames	25.20
Monoblocks	25.23
Han- <i>Yellock</i> ® 10 hoods/housings.....	25.26
Han- <i>Yellock</i> ® 30 hoods/housings.....	25.29
Han- <i>Yellock</i> ® 60 hoods/housings.....	25.36
Accessories	25.43

Description of the Han-Yellock® system

The Han-Yellock® - a special Han® connector

Han-Yellock® is a new product series which retains the core functionality but differs significantly from current size and shape formats. The approach of this series makes many new functions possible, for example:

- An internal, latched locking mechanism on the hood
- Multiplies the potentials in the connector with Han-Yellock® modules
- Usage of Han-Modular® modules with adapter frames
- Insulators can snap into the front or back walls of the housing
- Protected Earth contact (PE) in crimp or Quick Lock termination

These new technical features encourage sustained and effective improvements:

when purchasing products –

- Less article numbers and less inventory,

when planning for the electrical and mechanical layout –

- Less wiring work within a machine,

during the work flow –

- Less steps in the work flow and quicker assembly,

and during the after-sales stage –

- Reduced down times because of the latched locking mechanism and maintenance-friendly design



Assembly details

Design overview

The Han-Yellock® interface consists of a housing, bulkhead mounting, on the housing side and a carrier hood with cover on the cable side.

Han-Yellock® offers the following features when assembling components:

- Han-Yellock® modules require only male crimp contacts.
- The PE is contacted on the housing; it can be connected with crimp and/or Quick Lock contacts.
- The Han-Yellock® hoods/housing are not plug-compatible with all other Han® hood/housing series.

The Han-Yellock® system can be used with a variety of insulators and contact inserts in order to establish an interface.

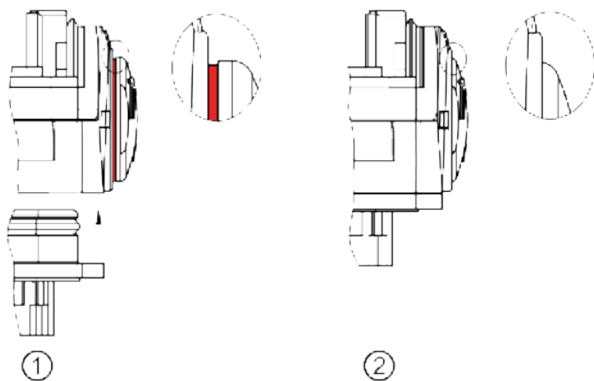
The Locking

The locking ability is a key function of the Han-Yellock®. The function makes connections and disconnections safe, simple and quick – even under harsh industrial conditions.

Main advantages include:

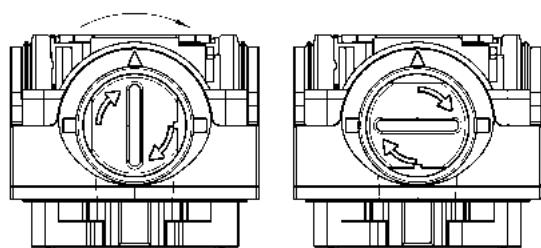
- Easy handling
- Resistance to vibrations and shock
- Protected against accidental opening
- Compact, space-saving design

Han-Yellock® features a patented internal locking mechanism. The locking takes place as the cable and device sides are simply joined together. A red ring around the perimeter of the push button will be visible if the housing halves do not snap together properly. This ring disappears as soon as the internally protected stainless steel springs snap into place.



- ① unlocked
② locked

This press-button locking also features an integrated blocking function. The locking mechanism can be locked by rotating the button 90°. It is then no longer possible to open the connector.



„open“

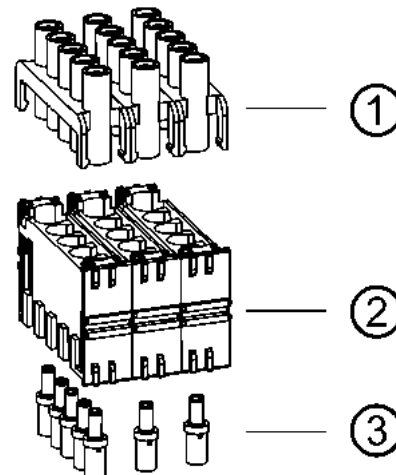
„blocked“

The press button can be set back to its visually open position only after the button is turned back 90°. It is then possible to release the two housing halves by pressing the snap-in button.

This feature provides an elegant mechanism for preventing an accidental opening of the connector – and no additional components are needed for it.

Han-Yellock® modules

This new product series enables an improved approach and strategy for electrical planning and procurement. For assembling the Han-Yellock® connector only male crimp contacts are needed. The conduct between the two male contacts is made by multipliers.



- ① multiplier
② Han-Yellock® module
③ Han-Yellock® crimp contacts

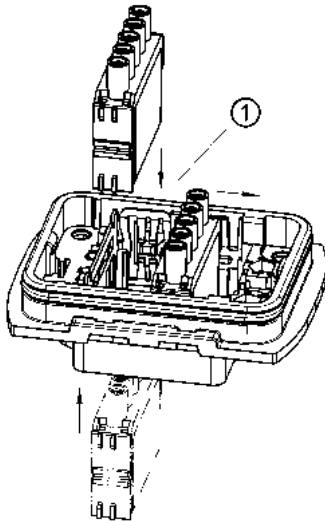
This concept allows a 1:1 wire to wire arrangement and in addition the use of bridges. Two to five contacts can be arranged.

It does not matter if the bridge attachment is inserted on the cable side or the housing side of the connector.

In the past, terminals blocks have been responsible for the function of multiplying potentials. But now this function has been integrated into the connector for a quick, compact and easy-to-service solution.

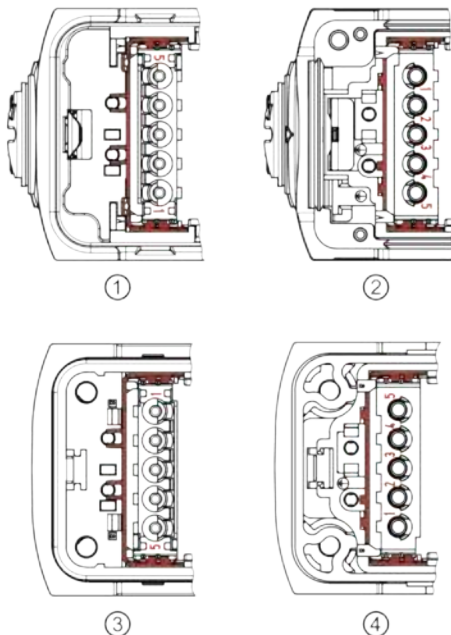
Inserting the module into the hoods/housing

- The Han-Yellock® module should only be inserted into the „A“ plug-in position in the metal clamp.




① plug-in position „A“

- The illustration shows the orientation of the module (see arrangement of contacts 1 ... 5).

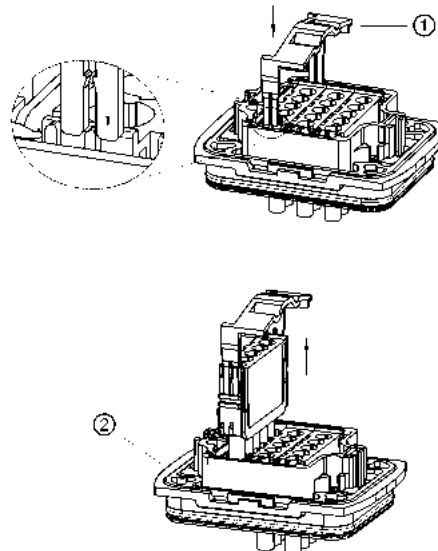


- ① Carrier hood, mating side
- ② Carrier hood, connection side
- ③ Housing, bulkhead mounting, mating side
- ④ Housing, bulkhead mounting, connection side
- A distinct click can be heard when the module snaps into position. It is then pushed along the rail to its final position. The plug-in slots must always be completely filled.



Disassembling the Han-Yellock® module

- The removal tool (part no. 11 99 000 0001) is required to take out the module.
- The following illustration shows how to insert the removal tool into the metal clamp. The tool should then be pressed down until it reaches the end stop.
- The tool is then pulled back and the module comes out of the housing.
- The removal can be made from the connection side as well as from the mating side.

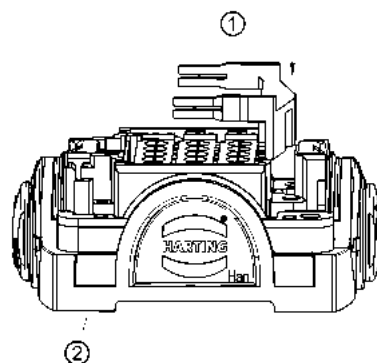


① removal tool

② housing, bulkhead mounting

The process is identical for both housings, bulkhead mounting, and carrier hoods.

The removal tool can be stored on the carrier hood:



① removal tool

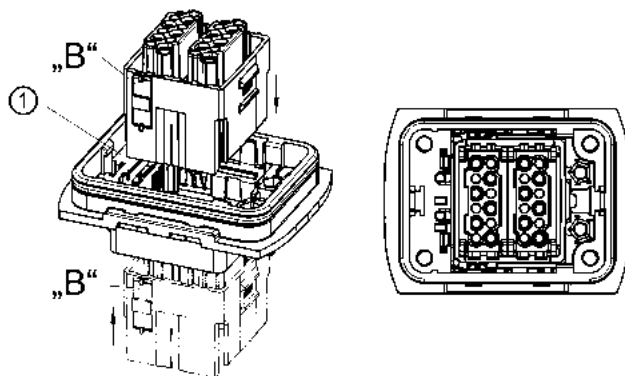
② carrier hood

Han-Yellock® adapter frame

Han-Modular® series interfaces can be established using the Han-Yellock® adapter frame. The connection is based on a male/female contact arrangement.

Inserting the adapter frame in the housing:

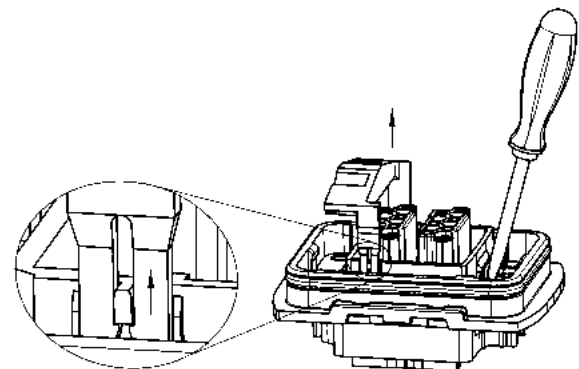
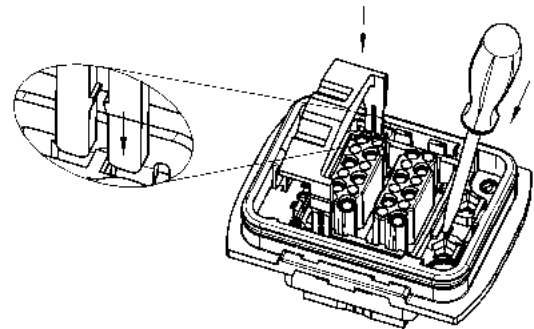
- The adapter frame can be snapped into the housing, bulkhead mounting, on the termination side and the mating side (refer to the illustration).
- The lateral plastic tabs („B“) are pressed into the metal clamps on the housing.
- The adapter frame then snaps in with a distinctly audible click.



① metal clamp

Removal the adapter frame:

- The removal tool part no. 11 99 000 0001 is required for disassembly.
- The removal tool is inserted into the metal clamp and pressed down as shown in the following illustration. A screwdriver need also be placed into the notch in the housing.
- The removal tool should then be pulled outwards to remove the adapter frame from the housing.
- The removal can be made from the termination side as well as from the mating side.
- The process is identical for both housings, bulkhead mounting, and carrier hoods.



Han-Yellock® Protection covers

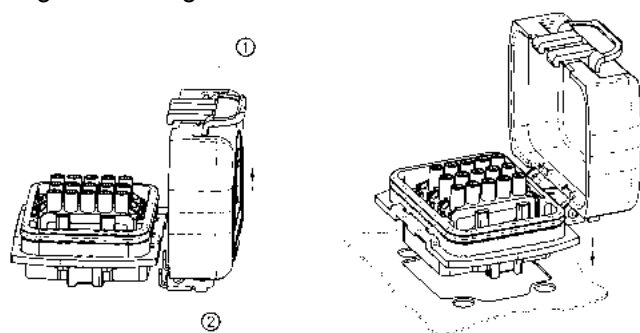
Protection cover function

To protect the insert against dust and water it is possible to use a Han-Yellock® protection cover.

The protection cover comes with a metal bearing pedestal and can be installed during initial or retrofit installation.

The Han-Yellock® design offer the possibility to snap in the pedestal either on the left or on the right side of the housing.

The direction of the cover movement can flip without turning the housing and inserts.



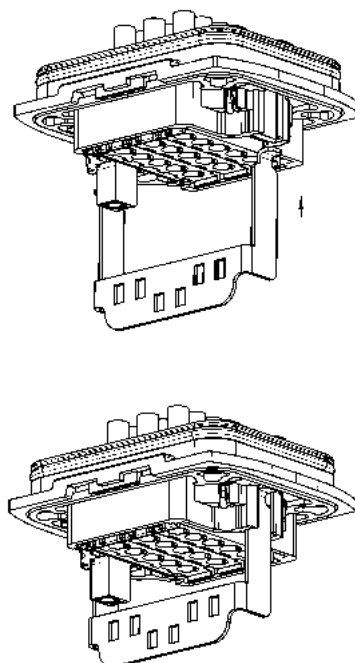
- ① cover
- ② bearing pedestal

Han-Yellock® Ground terminal

Ground terminal assembly

On the housing side ground terminals can be used.

After placing the frame deeply inside the housing slots the housing will be fixed to the panel leading to solid mounting of the complete set.



Series	Han® 3 A	Han® 3 A Quick Lock	Han® 3 A Quick Lock	Han® 4 A
Number of contacts	3 + ⊕	3 + ⊕	3 + ⊕	4 + ⊕
Termination	Screw terminal 	Quick Lock termination 	Quick Lock termination 	Screw terminal 
Rated current	10 A	10 A	10 A	10 A
Rated voltage	230 / 400 V	230 / 400 V	230 / 400 V	230 / 400 V
Wire gauge	0.75 ... 1.5 mm²	0.5 ... 2.5 mm²	0.25 ... 1.5 mm²	0.75 ... 1.5 mm²
Male insert (M)	09 20 003 2611	09 20 003 2633	09 20 003 2634	09 20 004 2611
Female insert (F)	09 20 003 2711	09 20 003 2733	09 20 003 2734	09 20 004 2711
Series	Han® 4 A Quick Lock	Han® 4 A Quick Lock	Han® 8 D	Han® 8 D Quick Lock
Number of contacts	4 + ⊕	4 + ⊕	8	8
Termination	Quick Lock termination 	Quick Lock termination 	Crimp terminal 	Quick Lock termination 
Rated current	10 A	10 A	10 A	10 A
Rated voltage	230 / 400 V	230 / 400 V	~ 50 V / – 120 V	~ 50 V / – 120 V
Wire gauge	0.5 ... 2.5 mm²	0.25 ... 1.5 mm²	0.14 ... 2.5 mm²	0.25 ... 1.5 mm²
Male insert (M)	09 20 004 2633	09 20 004 2634	09 36 008 3001	09 36 008 2632
Female insert (F)	09 20 004 2733	09 20 004 2734	09 36 008 3101	09 36 008 2732
Series	Han® Q 2/0	Han® Q 2/0	Han® Q 2/0	Han® Q 2/0
Number of contacts	2 + ⊕	2 + ⊕	2 + ⊕	2 + ⊕
Termination	Axial screw terminal 	Axial screw terminal 	Crimp terminal 	Axial screw terminal 
Rated current	40 A	40 A	40 A	40 A
Rated voltage	400 V	400 V	400 V	830 V
Wire gauge	2.5 ... 6 mm²	4 ... 10 mm²	1.5 ... 10 mm²	2.5 ... 6 mm²
Male insert (M)	09 12 002 2653	09 12 002 2651	09 12 002 3051	09 12 002 2654
Female insert (F)	09 12 002 2753	09 12 002 2751	09 12 002 3151	09 12 002 2754

Yellock



By using in Han-Yellock® 10 hoods/housings the seal on the insert has to be removed.

Series	Han® Q 2/0	Han® Q 2/0	Han® Q 3/0	Han® Q 5/0
Number of contacts	2 + ⊕	2 + ⊕	3 + ⊕	5 + ⊕
Termination	Axial screw terminal 	Crimp terminal 	Crimp terminal	Crimp terminal 
Rated current	40 A	40 A	40 A	16 A
Rated voltage	830 V	830 V	400 V	230 / 400 V
Wire gauge	4 ... 10 mm²	1.5 ... 10 mm²	1.5 ... 10 mm²	0.14 ... 2.5 mm²
Male insert (M)	09 12 002 2652	09 12 002 3052	09 12 003 3051	09 12 005 3001
Female insert (F)	09 12 002 2752	09 12 002 3152	09 12 003 3151	09 12 005 3101

Series	Han® Q 5/0 Quick Lock	Han® Q 7/0	Han® Q 12/0	
Number of contacts	5 + ⊕	7 + ⊕	12 + ⊕	
Termination	Quick Lock termination 	Crimp terminal 	Crimp termination/ Quick Lock termination 	
Rated current	16 A	10 A	10 A	
Rated voltage	230 / 400 V	400 V	400 V	
Wire gauge	0.5 ... 2.5 mm²	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	
Male insert (M)	09 12 005 2633	09 12 007 3001	09 12 012 3001	
Female insert (F)	09 12 005 2733	09 12 007 3101	09 12 012 3101	

Series	Han-Brid® RJ45 C	Han-Brid® RJ45 C	Han-Brid® RJ45 C	Han-Brid® RJ45 C
Number of contacts	2 / 8	2 / 8	2 / 8	2 / 8
Termination	Crimp terminal / RJ45 	Crimp terminal / RJ45 	Crimp terminal / RJ45 	Crimp terminal / RJ45 
Rated current	10 A	10 A	10 A	10 A
Rated voltage	24 V	24 V	24 V	24 V
Wire gauge	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²
Male insert (M)	09 12 003 3021	09 12 003 3031		
Female insert (F)			09 12 003 2774	09 12 003 2776

By using in Han-Yellock® 10 hoods/housings the seal on the insert has to be removed.

Series	Han® CC Protected module	Han® CD module	Han E® module	Han® E Quick Lock module
Number of contacts	4	3	6	6
Modules	Crimp terminal 	Crimp terminal 	Crimp terminal 	Quick Lock termination 
Rated current	40 A	40 A	16 A	16 A
Rated voltage	830 V	830 V	500 V	500 V
Wire gauge	1.5 ... 6 mm²	1.5 ... 6 mm²	0.14 ... 4 mm²	0.5 ... 2.5 mm²
Series	Han® EE module	Han® EE Quick Lock module	Han E® Protected module	Han® EEE module
Number of contacts	8	8	6	20
Modules	Crimp terminal 	Quick Lock termination 	Crimp terminal 	Crimp terminal 
Rated current	16 A	16 A	16 A	16 A
Rated voltage	400 V	400 V	830 V	500 V
Wire gauge	0.14 ... 4 mm²	0.5 ... 2.5 mm²	0.14 ... 4 mm²	0.14 ... 4 mm²
Series	Han® ES module	Han DD® module	Han DD® Quick Lock module	Han® DDD module
Number of contacts	5	12	12	17
Modules	Cage-clamp terminal 	Crimp terminal 	Quick Lock termination 	Crimp terminal 
Rated current	16 A	10 A	10 A	10 A
Rated voltage	400 V	250 V	250 V	160 V
Wire gauge	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.25 ... 1.5 mm²	0.14 ... 2.5 mm²
Series	Han® High Density module	Han® D-Sub module		
Number of contacts	25	9		
Modules	Crimp terminal 	Crimp terminal 		
Rated current	4 A	5 A		
Rated voltage	50 V	50 V		
Wire gauge	0.08 ... 0.52 mm²	0.08 ... 0.52 mm²		

Yellow

Series	Han® USB module	Han® GigaBit module		
Number of contacts	4	8		
Modules	USB 2.0	Ethernet Cat. 6		
				

Series	Han-Quintax® module				Han® Multi module
Number of contacts	2				
Modules					
Contacts	Han-Quintax® contact 4 + shielding 	High Density Quintax contact 8 + shielding 	Han D® Coax contact 75 Ω 1 + shielding  75 Ω	Han E® Coax contact 50 Ω 1 + shielding  50 Ω	Coaxial contact  50 Ω RG 174 75 Ω RG 179 50 Ω RG 58

Features

- Snap-in assembly from mating side and from termination side
- Bus bar within bridge attachments
- Finger safe design
- Fast and tool-less assembly
- Mating compatible to the crimp version

Technical characteristics

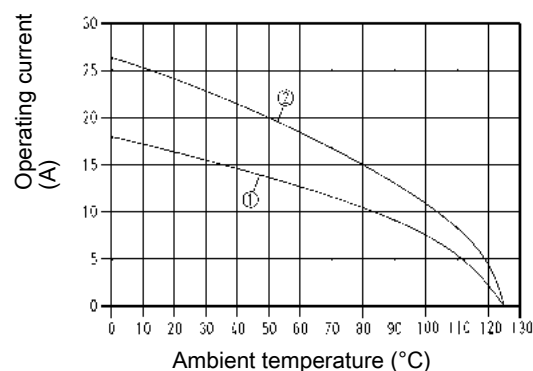
Number of contacts	5
Electrical data acc. to IEC 61984	20 A 500 V 6 kV 3, 10 A 500 V 6 kV 3
Rated current	20 A, 10 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 2 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2




- ① Conductor cross-section 1.5 mm²
 ② Conductor cross-section 2.5 mm²
 for connector with 3 Han-Yellock® modules, fully loaded (multiplier 1:1)

Specifications and approvals

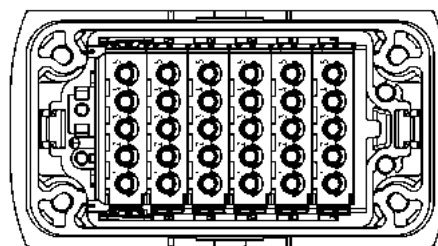
EN 60664-1
 IEC 61984
 UL 1977 ECBT2.E235076



Details



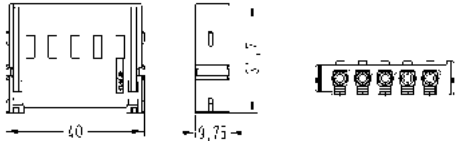
Placement for Han-Yellock® 30 with 3 Han-Yellock® modules



Placement for Han-Yellock® 60 with 6 Han-Yellock® modules

Number of contacts

5
20 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number	Drawing (dimensions in mm)
Han- <i>Yellowlock</i>®, Han-Quick Lock® termination, 20 A Contact surface: Silver plated  Blue slide	0,5 ... 2,5	11 05 105 2633	 Stripping length 10 mm
Han- <i>Yellowlock</i>®, Han-Quick Lock® termination, 10 A Contact surface: Silver plated  Black slide	0,25 ... 1,5	11 05 105 2634	

Yellowlock

Features

- Snap-in assembly from mating side and from termination side
- Wiring with male contacts only
- Bus bar within bridge attachments
- Finger safe design
- Fast and tool-less assembly

Technical characteristics

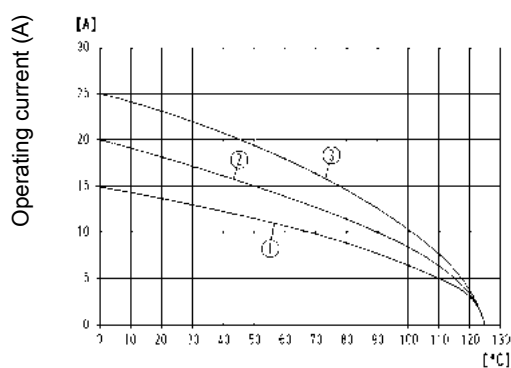
Number of contacts	5
Electrical data acc. to IEC 61984	20 A 500 V 6 kV 3
Rated current	20 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 2 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey), RAL 5015 (sky blue), RAL 3000 (flame red)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



Ambient temperature (°C)

- ① Conductor cross-section 1.5 mm²
- ② Conductor cross-section 2.5 mm²
- ③ Conductor cross-section 4 mm²
for connector with 3 Han-Yellock® modules, fully loaded
(multiplier 1:1)

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076




Details

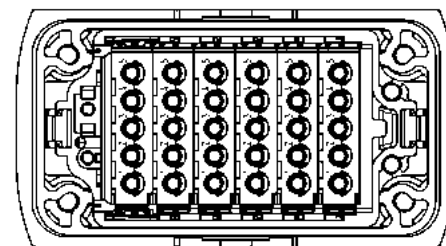
Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.



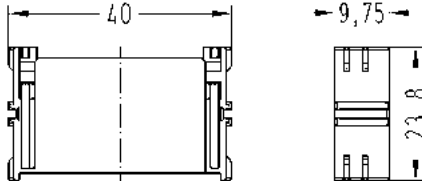


Placement for Han-Yellock® 30 with 3 Han-Yellock® modules



Placement for Han-Yellock® 60 with 6 Han-Yellock® modules

Number of contacts

5
20 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number	Drawing (dimensions in mm)																											
Han- <i>Yellock</i>® , Crimp termination, Contact surface: Silver plated 	0,14 ... 4 0,14 ... 4 0,14 ... 4	11 05 105 3001 11 05 105 3011 11 05 105 3012	  11 05 105 3001 Grey 11 05 105 3011 Blue 11 05 105 3012 Red																											
Han- <i>Yellock</i>® , Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5 3 4	11 05 000 6101 11 05 000 6102 11 05 000 6103 11 05 000 6104 11 05 000 6105 11 05 000 6106 11 05 000 6107 11 05 000 6108																												
Han- <i>Yellock</i>® , Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5 3 4	11 05 000 6121 11 05 000 6122 11 05 000 6123 11 05 000 6124 11 05 000 6125 11 05 000 6126 11 05 000 6127 11 05 000 6128	<table><tr><th colspan="2">Wire gauge</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22</td><td>6.5 mm</td></tr><tr><td>0.5 mm²</td><td>AWG 20</td><td>6.5 mm</td></tr><tr><td>0.75 mm²</td><td>AWG 18</td><td>6.5 mm</td></tr><tr><td>1 mm²</td><td>AWG 18</td><td>6.5 mm</td></tr><tr><td>1.5 mm²</td><td>AWG 16</td><td>6.5 mm</td></tr><tr><td>2.5 mm²</td><td>AWG 14</td><td>6.5 mm</td></tr><tr><td>3 mm²</td><td>AWG 12</td><td>6.5 mm</td></tr><tr><td>4 mm²</td><td>AWG 12</td><td>6.5 mm</td></tr></table> Removal tool 09 99 000 0319 See chapter 90	Wire gauge		Stripping length	0.14-0.37 mm²	AWG 26-22	6.5 mm	0.5 mm²	AWG 20	6.5 mm	0.75 mm²	AWG 18	6.5 mm	1 mm²	AWG 18	6.5 mm	1.5 mm²	AWG 16	6.5 mm	2.5 mm²	AWG 14	6.5 mm	3 mm²	AWG 12	6.5 mm	4 mm²	AWG 12	6.5 mm
Wire gauge		Stripping length																												
0.14-0.37 mm²	AWG 26-22	6.5 mm																												
0.5 mm²	AWG 20	6.5 mm																												
0.75 mm²	AWG 18	6.5 mm																												
1 mm²	AWG 18	6.5 mm																												
1.5 mm²	AWG 16	6.5 mm																												
2.5 mm²	AWG 14	6.5 mm																												
3 mm²	AWG 12	6.5 mm																												
4 mm²	AWG 12	6.5 mm																												

Features

- Up to 3 Han-Yellock® multipliers can be used in one multiplier bloc
- By using the multipliers, the potential of one up to five contacts can be multiplied
- Needs 3 places in the Han-Modular® Docking frame and Hinged frame
- Wiring with male contacts only

Technical characteristics

Number of contacts	15
Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

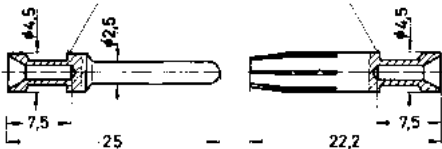
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

15

16 A 500 V 6 kV 3



Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-<i>Yellox</i>®, Multiplier block, Crimp termination  Please order crimp contacts separately.	0,14 ... 4	09 14 015 3001	09 14 015 3101	
Han E®, Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5 3 4	09 33 000 6127 09 33 000 6121 09 33 000 6114 09 33 000 6105 09 33 000 6104 09 33 000 6102 09 33 000 6106 09 33 000 6107		

Features

- Snap-in assembly from mating side and from termination side
- Bus bar within bridge attachments
- Visible bridge position from mating side and from termination side
- Fast and easy exchange

Technical characteristics

Number of contacts	5
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey), RAL 3000 (flame red), RAL 5015 (sky blue)


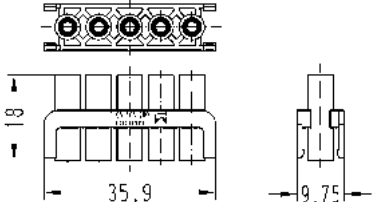

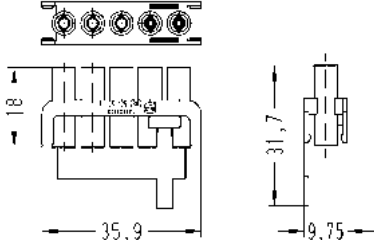

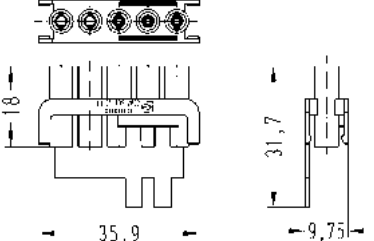
Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Number of contacts

5

Identification	Part number	Drawing (dimensions in mm)
Han- <i>Yellock</i>[®] , Multiplier, 0 Bridged contacts, 5 Unbridged contacts 	11 05 105 2801	Circuit diagram  
Han- <i>Yellock</i>[®] , Multiplier, 2 Bridged contacts, 3 Unbridged contacts 	11 05 105 2802	Circuit diagram  
Han- <i>Yellock</i>[®] , Multiplier, 3 Bridged contacts, 2 Unbridged contacts 	11 05 105 2803	Circuit diagram  

Yellock

Identification		Part number	Drawing (dimensions in mm)
Han-<i>Yellock</i>[®], Multiplier, 4 Bridged contacts, 1 Unbridged contacts		11 05 105 2804	Circuit diagram
Han-<i>Yellock</i>[®], Multiplier, 5 Bridged contacts, 0 Unbridged contacts		11 05 105 2805 11 05 105 2815	Circuit diagram 11 05 105 2805 Red 11 05 105 2815 Blue
Han-<i>Yellock</i>[®], Multiplier, 2 Bridged contacts, 3 Bridged contacts		11 05 105 2823	Circuit diagram

Features

- Suitable for Han-Modular® modules
- Fast and tool-less assembly
- Snap-in assembly from mating side and from termination side
- Removal from mating side and from termination side possible

Technical characteristics

Flammability acc. to UL 94	V-0
Material (accessories)	Polycarbonate
Colour (accessories)	RAL 7032 (pebble grey)

Specifications and approvals

EN 60664-1
IEC 61984



Details

Han-Yellock® adapter frame

Han-Modular® series interfaces can be established using the Han-Yellock® adapter frame. The connection is based on a male/female contact arrangement.

Inserting the adapter frame in the housing:

The adapter frame can be snapped into the housing, bulkhead mounting, on the termination side and the mating side (refer to the illustration).

The lateral plastic tabs („B“) are pressed into the metal clamps on the housing.

The adapter frame then snaps in with a distinctly audible click.

① metal clamp

Removal of the adapter frame

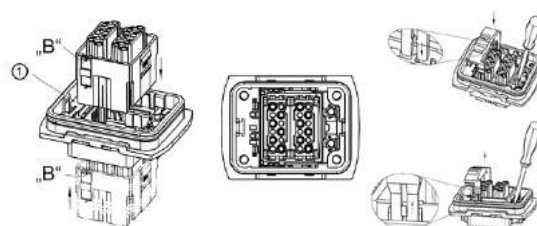
The removal tool part no. 11 99 000 0001 is required for disassembly. (see chapter 90)

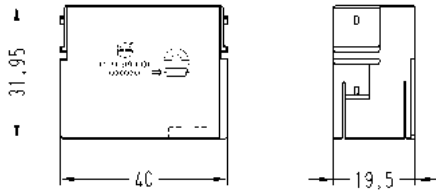
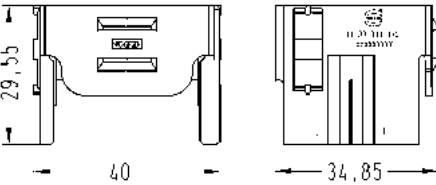
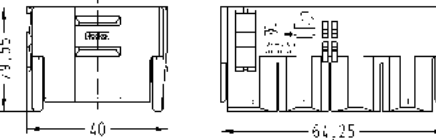
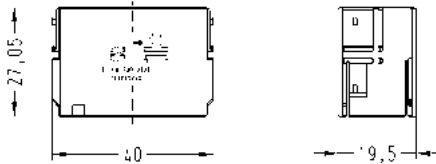
The removal tool is inserted into the metal clamp and pressed down as shown in the following illustration. A screwdriver need also be placed into the notch in the housing.

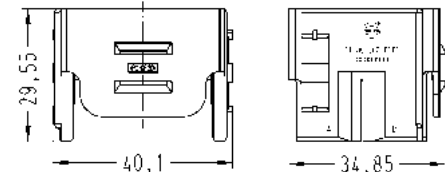
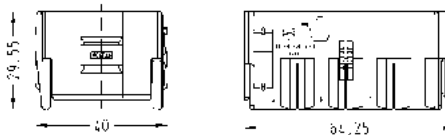
The removal tool should then be pulled outwards to remove the adapter frame from the housing.

The removal can be made from the termination side as well as from the mating side.

The process is identical for both housings, bulkhead mounting, and carrier hoods.



Identification		Part number	Drawing (dimensions in mm)
Han- <i>Yellock</i>[®] , Adapter frames, for bulkhead mounted housings, for Han- <i>Yellock</i>[®] 30, for Han- <i>Yellock</i>[®] 60  Mounting/removal from termination side only!		11 00 200 0301	
Han- <i>Yellock</i>[®] , Adapter frames, for bulkhead mounted housings, for Han- <i>Yellock</i>[®] 30 		11 00 300 0301	
Han- <i>Yellock</i>[®] , Adapter frames, for bulkhead mounted housings, for Han- <i>Yellock</i>[®] 60 		11 00 600 0301	
Han- <i>Yellock</i>[®] , Adapter frames, for carrier hoods, for Han- <i>Yellock</i>[®] 30, for Han- <i>Yellock</i>[®] 60  Mounting/removal from termination side only!		11 00 200 0101	

Identification		Part number	Drawing (dimensions in mm)																																				
Han- Yellock® , Adapter frames, for carrier hoods, for Han- Yellock® 30		11 00 300 0101																																					
Han- Yellock® , Adapter frames, for carrier hoods, for Han- Yellock® 60		11 00 600 0101	 <table><tr><th>Combinations</th><th colspan="5">Han-Yellock® Hood/Housing</th></tr><tr><td></td><th>30</th><th>30</th><th>60</th><th>60</th><th>60</th></tr><tr><td>Han-Yellock® 20 Adapter frame (for Han-Yellock® 30 und 60)</td><td>1</td><td></td><td>2</td><td>1</td><td></td></tr><tr><td>Han-Yellock® 30 Adapter frame</td><td></td><td>1</td><td></td><td></td><td></td></tr><tr><td>Han-Yellock® 60 Adapter frame</td><td></td><td></td><td></td><td></td><td>1</td></tr><tr><td>Han-Yellock® Module</td><td>1</td><td></td><td>2</td><td>4</td><td></td></tr></table>	Combinations	Han-Yellock® Hood/Housing						30	30	60	60	60	Han-Yellock® 20 Adapter frame (for Han-Yellock® 30 und 60)	1		2	1		Han-Yellock® 30 Adapter frame		1				Han-Yellock® 60 Adapter frame					1	Han-Yellock® Module	1		2	4	
Combinations	Han-Yellock® Hood/Housing																																						
	30	30	60	60	60																																		
Han-Yellock® 20 Adapter frame (for Han-Yellock® 30 und 60)	1		2	1																																			
Han-Yellock® 30 Adapter frame		1																																					
Han-Yellock® 60 Adapter frame					1																																		
Han-Yellock® Module	1		2	4																																			

Features

- Snap-in assembly from mating side and from termination side
- Finger safe design
- Fast and tool-less assembly

Technical characteristics

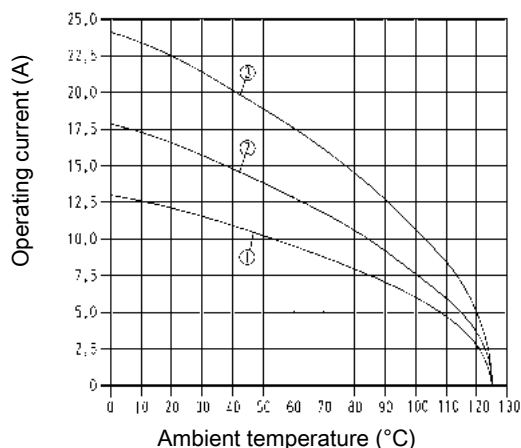
Number of contacts	25, 48
Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 2 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy

Derating

Current carrying capacity

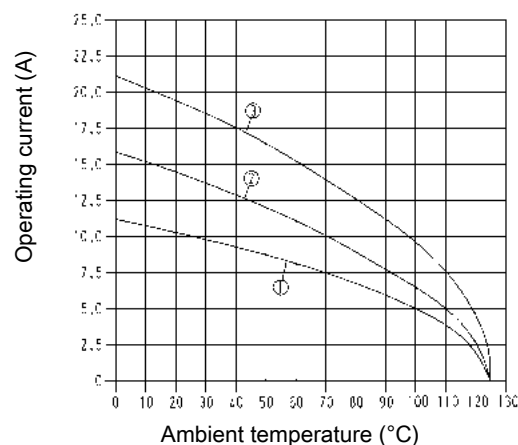
The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2



- ① Conductor cross-section 1.5 mm²
- ② Conductor cross-section 2.5 mm²
- ③ Conductor cross-section 4 mm²

Derating



- ① Conductor cross-section 1.5 mm²
- ② Conductor cross-section 2.5 mm²
- ③ Conductor cross-section 4 mm²

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076



Details

Crimping tools see chapter 90

Remarks on the crimp technique

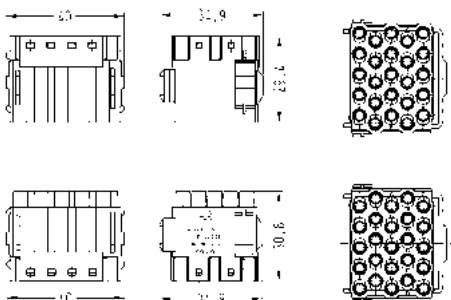

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.



Number of contacts

25

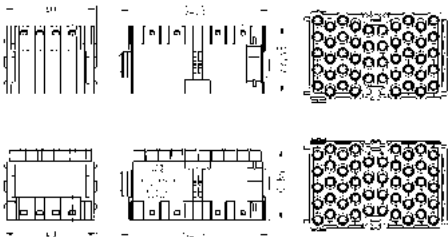

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
Han- <i>Yellock</i>® , Crimp termination  Please order crimp contacts separately. ATTENTION! It is not possible to use 2 monoblocks 30 in the Han- <i>Yellock</i>® 60 series!	0,14 ... 4	11 05 325 3001	11 05 325 3101																												
Han- <i>Yellock</i>® , Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5 3 4	11 05 000 6101 11 05 000 6102 11 05 000 6103 11 05 000 6104 11 05 000 6105 11 05 000 6106 11 05 000 6107 11 05 000 6108	11 05 000 6201 11 05 000 6202 11 05 000 6203 11 05 000 6204 11 05 000 6205 11 05 000 6206 11 05 000 6207 11 05 000 6208																												
Han- <i>Yellock</i>® , Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5 3 4	11 05 000 6121 11 05 000 6122 11 05 000 6123 11 05 000 6124 11 05 000 6125 11 05 000 6126 11 05 000 6127 11 05 000 6128	11 05 000 6221 11 05 000 6222 11 05 000 6223 11 05 000 6224 11 05 000 6225 11 05 000 6226 11 05 000 6227 11 05 000 6228	<table><tr><th colspan="2">Wire gauge</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22</td><td>6.5 mm</td></tr><tr><td>0.5 mm²</td><td>AWG 20</td><td>6.5 mm</td></tr><tr><td>0.75 mm²</td><td>AWG 18</td><td>6.5 mm</td></tr><tr><td>1 mm²</td><td>AWG 18</td><td>6.5 mm</td></tr><tr><td>1.5 mm²</td><td>AWG 16</td><td>6.5 mm</td></tr><tr><td>2.5 mm²</td><td>AWG 14</td><td>6.5 mm</td></tr><tr><td>3 mm²</td><td>AWG 12</td><td>6.5 mm</td></tr><tr><td>4 mm²</td><td>AWG 12</td><td>6.5 mm</td></tr></table> Removal tool 09 99 000 0319 See chapter 90	Wire gauge		Stripping length	0.14-0.37 mm²	AWG 26-22	6.5 mm	0.5 mm²	AWG 20	6.5 mm	0.75 mm²	AWG 18	6.5 mm	1 mm²	AWG 18	6.5 mm	1.5 mm²	AWG 16	6.5 mm	2.5 mm²	AWG 14	6.5 mm	3 mm²	AWG 12	6.5 mm	4 mm²	AWG 12	6.5 mm
Wire gauge		Stripping length																													
0.14-0.37 mm²	AWG 26-22	6.5 mm																													
0.5 mm²	AWG 20	6.5 mm																													
0.75 mm²	AWG 18	6.5 mm																													
1 mm²	AWG 18	6.5 mm																													
1.5 mm²	AWG 16	6.5 mm																													
2.5 mm²	AWG 14	6.5 mm																													
3 mm²	AWG 12	6.5 mm																													
4 mm²	AWG 12	6.5 mm																													

Number of contacts

48

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)																											
		Male	Female																												
Han- <i>Yellock</i>® , Crimp termination  Please order crimp contacts separately.	0,14 ... 4	11 05 648 3001	11 05 648 3101																												
Han- <i>Yellock</i>® , Crimp contact, Contact surface: Silver plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5 3 4	11 05 000 6101 11 05 000 6102 11 05 000 6103 11 05 000 6104 11 05 000 6105 11 05 000 6106 11 05 000 6107 11 05 000 6108	11 05 000 6201 11 05 000 6202 11 05 000 6203 11 05 000 6204 11 05 000 6205 11 05 000 6206 11 05 000 6207 11 05 000 6208	 <table><tr><th colspan="2">Wire gauge</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22</td><td>6.5 mm</td></tr><tr><td>0.5 mm²</td><td>AWG 20</td><td>6.5 mm</td></tr><tr><td>0.75 mm²</td><td>AWG 18</td><td>6.5 mm</td></tr><tr><td>1 mm²</td><td>AWG 18</td><td>6.5 mm</td></tr><tr><td>1.5 mm²</td><td>AWG 16</td><td>6.5 mm</td></tr><tr><td>2.5 mm²</td><td>AWG 14</td><td>6.5 mm</td></tr><tr><td>3 mm²</td><td>AWG 12</td><td>6.5 mm</td></tr><tr><td>4 mm²</td><td>AWG 12</td><td>6.5 mm</td></tr></table> Removal tool 09 99 000 0319 See chapter 90	Wire gauge		Stripping length	0.14-0.37 mm²	AWG 26-22	6.5 mm	0.5 mm²	AWG 20	6.5 mm	0.75 mm²	AWG 18	6.5 mm	1 mm²	AWG 18	6.5 mm	1.5 mm²	AWG 16	6.5 mm	2.5 mm²	AWG 14	6.5 mm	3 mm²	AWG 12	6.5 mm	4 mm²	AWG 12	6.5 mm
Wire gauge		Stripping length																													
0.14-0.37 mm²	AWG 26-22	6.5 mm																													
0.5 mm²	AWG 20	6.5 mm																													
0.75 mm²	AWG 18	6.5 mm																													
1 mm²	AWG 18	6.5 mm																													
1.5 mm²	AWG 16	6.5 mm																													
2.5 mm²	AWG 14	6.5 mm																													
3 mm²	AWG 12	6.5 mm																													
4 mm²	AWG 12	6.5 mm																													
Han- <i>Yellock</i>® , Crimp contact, Contact surface: Gold plated 	0,14 ... 0,37 0,5 0,75 1 1,5 2,5 3 4	11 05 000 6121 11 05 000 6122 11 05 000 6123 11 05 000 6124 11 05 000 6125 11 05 000 6126 11 05 000 6127 11 05 000 6128	11 05 000 6221 11 05 000 6222 11 05 000 6223 11 05 000 6224 11 05 000 6225 11 05 000 6226 11 05 000 6227 11 05 000 6228																												

Features

- Hoods/housings for industrial applications
- Highly EMC resistant
- High robustness due to internal locking mechanism
- Compatible with inserts size Han® 3 A

Technical characteristics

Un-/locking temperature	-10 ... +85°C
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65, IP67
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated, Zinc passivation
Colour (hood/housing)	RAL 7021 (black grey), Metallic
Material (seal)	NBR
Material (locking)	Polyamide, Stainless steel
Colour (locking)	Melon yellow

Specifications and approvals

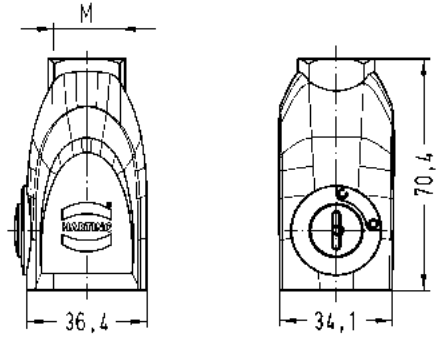
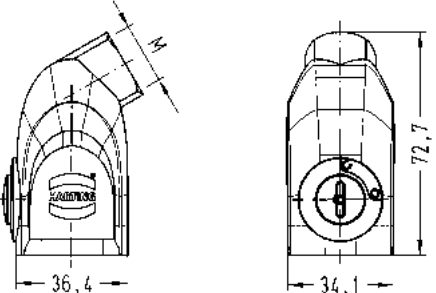
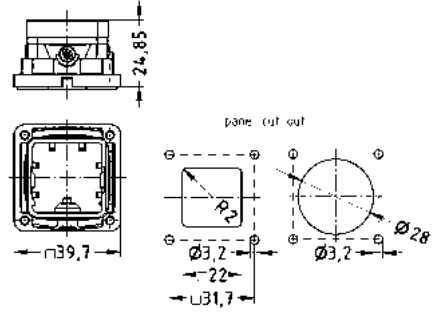
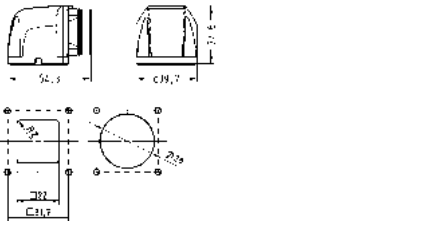
EN 60664-1
IEC 61984





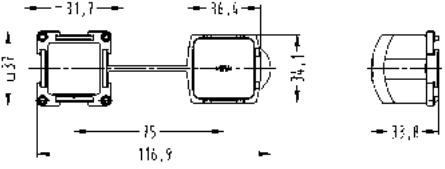

Details

For use with inserts Han® Q, the seal on the insert has to be removed.

Hoods/housings for industrial applications
Push button

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-<i>Yellowlock</i>®, Hoods, Top entry 	1x M20 1x M25	11 20 003 1400 11 20 003 1401	
Han-<i>Yellowlock</i>®, Hoods, Side entry 	1x M20 1x M25	11 20 003 1600 11 20 003 1601	
Han-<i>Yellowlock</i>®, Bulkhead mounted housings, Straight 		11 20 003 0300	
Han-<i>Yellowlock</i>®, Bulkhead mounted housings, Angled 		11 20 003 0800	

Yellow

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han- <i>Yellock</i> ®, Protection cover for hoods, Thermoplastic 		11 20 003 5456	
Han- <i>Yellock</i> ®, Protection cover for bulkhead mounted housings, With seal, Thermoplastic 		11 20 003 5406	
Han- <i>Yellock</i> ®, Protection cover for bulkhead mounted housings, Thermoplastic 		11 20 003 5407	

Features

- for three Han-Yellok® modules
- High robustness due to internal locking mechanism
- Two-part hood
- Earthed contacts PE in crimped or Han-Quick Lock® termination
- Protection cover retrofit on housing side

Technical characteristics


Un-/locking temperature	-10 ... +85°C
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65, IP67
Material (hood/housing)	Zinc die-cast, Aluminium die-cast
Surface (hood/housing)	Zinc passivation, Powder-coated, Passivated
Colour (hood/housing)	Metallic, RAL 7021 (black grey), RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide, Stainless steel
Colour (locking)	Melon yellow

Specifications and approvals

EN 60664-1
IEC 61984




Details



① M4 fixing screw (screw length > 20 mm, tightening torque: 1Nm)

② Panel fastener (tightening torque: 2.3 Nm)



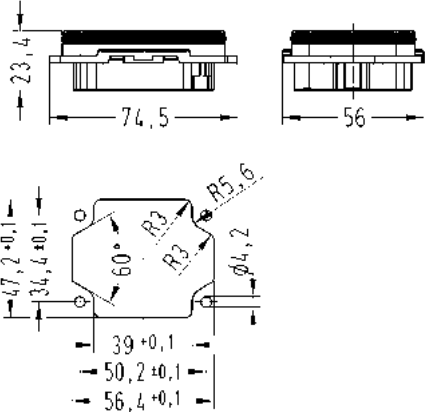
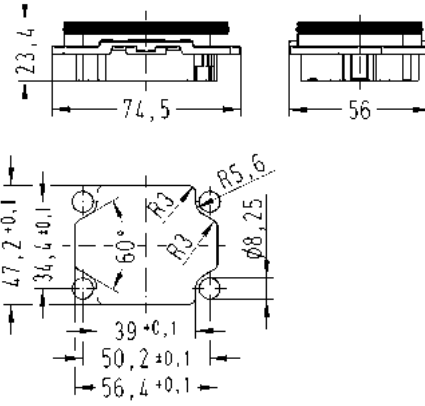
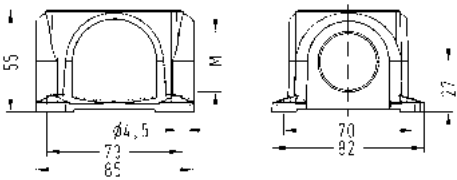
① Shell with top entry

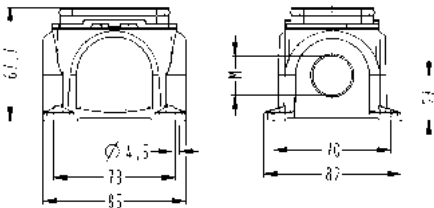
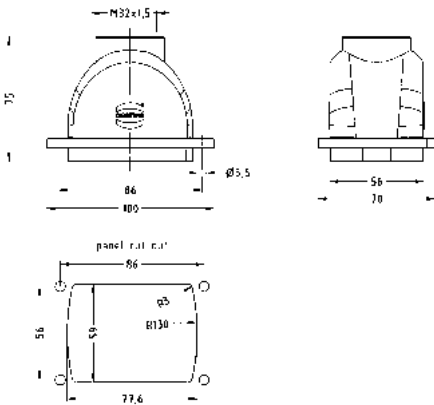
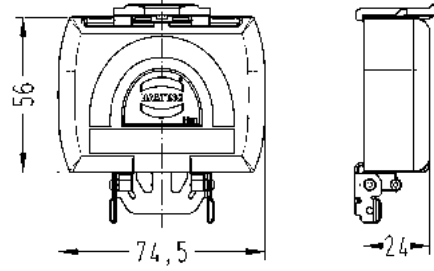
② Cable entry M20 ... M40

③ Carrier hood with push button release

④ Bulkhead mounted housings

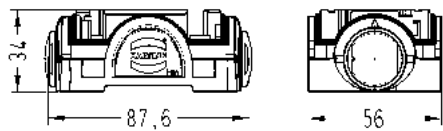
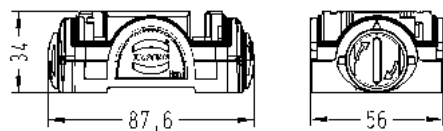
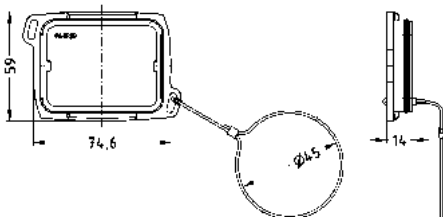
Hoods/housings for industrial applications

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han- <i>Yellock</i> ®, Bulkhead mounted housings 		11 12 300 0301	
Han- <i>Yellock</i> ®, Bulkhead mounted housings, Pack contents: incl. 4 panel fastener 		11 12 300 0302	
Han- <i>Yellock</i> ®, Surface mounted housing, Side entry 	1x M20 1x M25 1x M32 2x M20 2x M25 2x M32	11 12 300 1200 11 12 300 1201 11 12 300 1202 11 12 300 1204 11 12 300 1205 11 12 300 1206	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Yellock®, Surface mounted housing, incl. bulkhead mounted housings, Side entry 	1x M20 1x M25 1x M32 2x M20 2x M25 2x M32	11 12 300 1210 11 12 300 1211 11 12 300 1212 11 12 300 1214 11 12 300 1215 11 12 300 1216	
Han-Yellock®, Panel feed through housing, Top entry 	1x M32	11 12 300 1702	
Han-Yellock®, Protection cover for bulkhead mounted housings, Thermoplastic 		11 12 300 5401	

Hoods/housings for industrial applications
Push button

Identification	Cable entry	Part number	Drawing (dimensions in mm)	
Han-Yellock® , Shell, Top entry	1x M20 1x M25 1x M32	11 12 300 1400 11 12 300 1401 11 12 300 1402		
Han-Yellock® , Shell, Side entry	1x M20 1x M25 1x M32	11 12 300 1500 11 12 300 1501 11 12 300 1502		
Han-Yellock® , Shell, White, Side entry	1x M20	11 12 300 1510		
Han-Yellock® , Shell, EMC version, Side entry	1x M25	11 12 300 1581		
Han-Yellock® , Shell, Angled entry	1x M20 1x M25 1x M32	11 12 300 1600 11 12 300 1601 11 12 300 1602		

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han- <i>Yellock</i> ®, Carrier hood, Plain push button 		11 12 300 0100	
Han- <i>Yellock</i> ®, Carrier hood, Push button, slot 		11 12 300 0110	
Han- <i>Yellock</i> ®, Protection covers for carrier hoods, With fixing cord, Thermoplastic 		11 12 300 5451	



Hoods/housings for outdoor applications

Identification	Part number	Drawing (dimensions in mm)

Han- *Yellock*[®] ,
Bulkhead mounted housings

11 13 300 0301

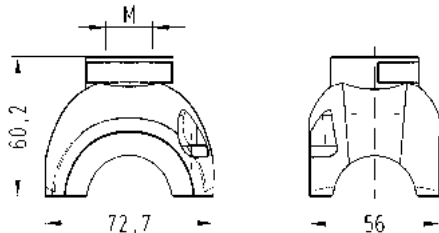
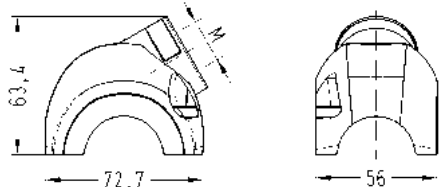
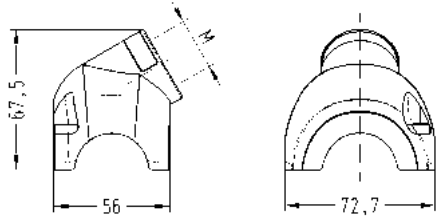


Han- *Yellock*[®] ,
Bulkhead mounted housings,
Pack contents:
incl. 4 panel fastener

11 13 300 0302



Hoods/housings for outdoor applications
Push button

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Yellock®, Shell, Top entry 	1x M25	11 13 300 1401	
Han-Yellock®, Shell, Side entry 	1x M25	11 13 300 1501	
Han-Yellock®, Shell, Angled entry 	1x M25	11 13 300 1601	
Han-Yellock®, Carrier hood, Plain push button 		11 13 300 0100	
Han-Yellock®, Carrier hood, Push button, slot 		11 13 300 0110	

Yellock

Features

- for six Han-Yellock® modules
- High robustness due to internal locking mechanism
- Two-part hood
- Earthed contacts PE in crimped or Han-Quick Lock® termination
- Protection cover retrofit on housing side

Technical characteristics


Un-/locking temperature	-10 ... +85°C
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65, IP67
Material (hood/housing)	Zinc die-cast, Aluminium die-cast
Surface (hood/housing)	Passivated, Powder-coated
Colour (hood/housing)	Metallic, RAL 7021 (black grey), RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide, Stainless steel
Colour (locking)	Melon yellow

Specifications and approvals

EN 60664-1
IEC 61984

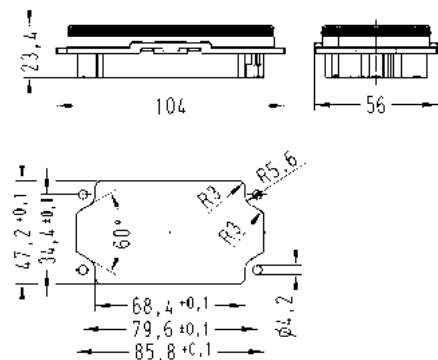
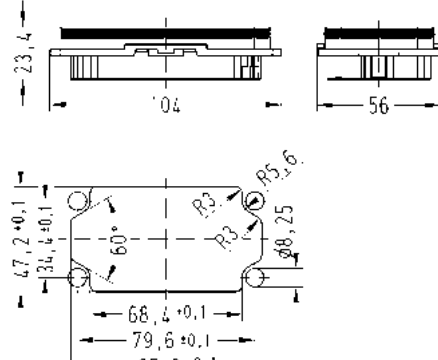
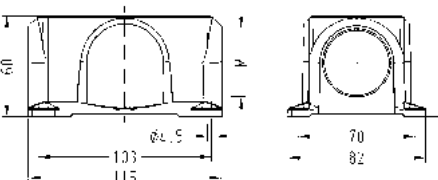
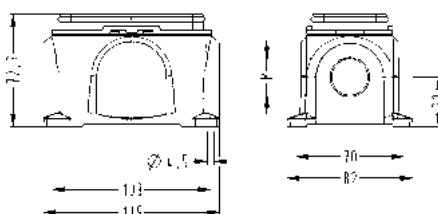


Details

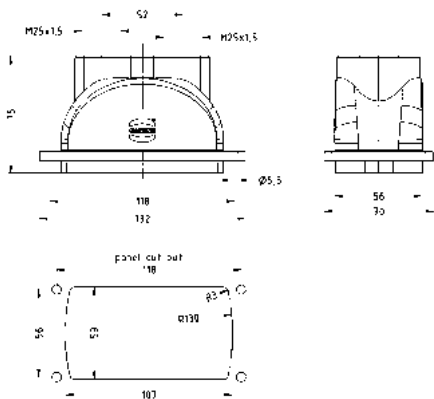
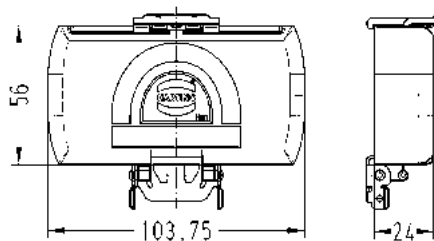


- ① M4 fixing screw (screw length > 20 mm, tightening torque: 1Nm)
② Panel fastener (tightening torque: 2.3 Nm)

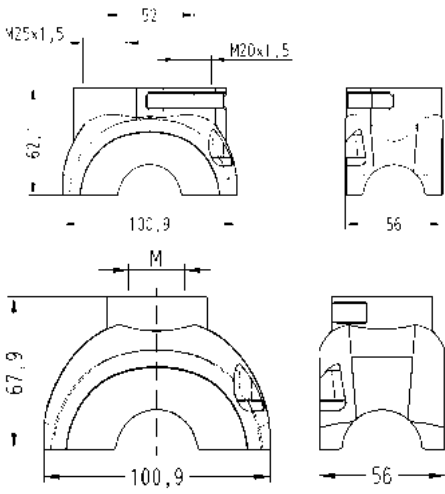
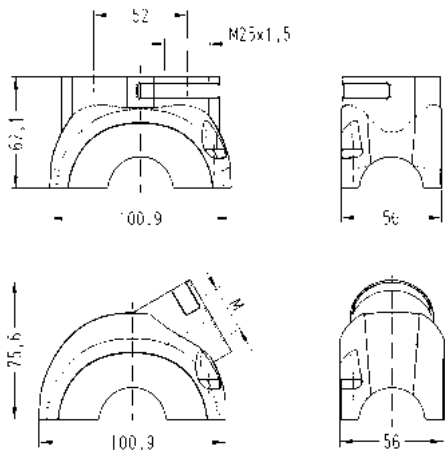

Hoods/housings for industrial applications


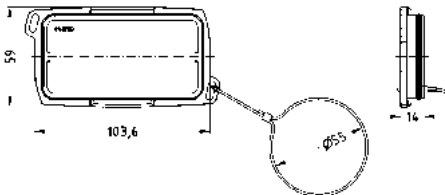
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Yellok®, Bulkhead mounted housings 		11 12 600 0301	
Han-Yellok®, Bulkhead mounted housings, Pack contents: incl. 4 panel fastener 		11 12 600 0302	
Han-Yellok®, Surface mounted housing, Side entry 	1x M25 1x M32 1x M40 2x M25 2x M32 2x M40	11 12 600 1201 11 12 600 1202 11 12 600 1203 11 12 600 1205 11 12 600 1206 11 12 600 1207	
Han-Yellok®, Surface mounted housing, incl. bulkhead mounted housings, Side entry 	1x M25 1x M32 1x M40 2x M25 2x M32 2x M40	11 12 600 1211 11 12 600 1212 11 12 600 1213 11 12 600 1215 11 12 600 1216 11 12 600 1217	

Yellow

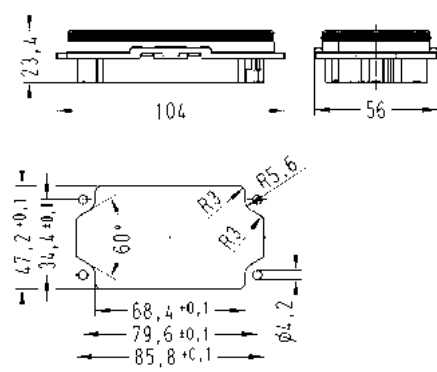
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han- <i>Yellock</i> ®, Panel feed through housing, Top entry 	2x M25	11 12 600 1711	
Han- <i>Yellock</i> ®, Protection cover for bulkhead mounted housings, Thermoplastic 		11 12 600 5401	

Hoods/housings for industrial applications
Push button

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Yello [®] , Shell, Top entry 	1x M20, 1x M25 1x M25 1x M32 1x M40 2x M25	11 12 600 1415 11 12 600 1401 11 12 600 1402 11 12 600 1403 11 12 600 1411	
Han-Yello [®] , Shell, Side entry 	1x M25 1x M32 1x M40	11 12 600 1501 11 12 600 1502 11 12 600 1503	
Han-Yello [®] , Carrier hood, Plain push button 		11 12 600 0100	

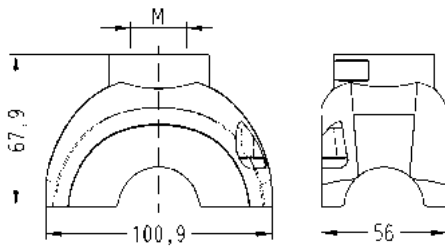
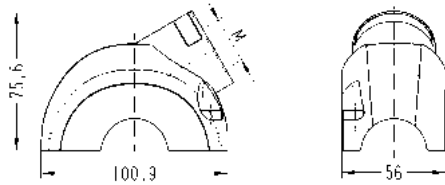


Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-<i>Yellock</i>®, Carrier hood, Push button, slot 		11 12 600 0110	
Han-<i>Yellock</i>®, Protection covers for carrier hoods, With fixing cord, Thermoplastic 		11 12 600 5451	

Hoods/housings for outdoor applications

Identification	Part number	Drawing (dimensions in mm)
Han- <i>Yello</i> ck® , Bulkhead mounted housings	11 13 600 0301	
Han- <i>Yello</i> ck® , Bulkhead mounted housings, Pack contents: incl. 4 panel fastener	11 13 600 0302	



Hoods/housings for outdoor applications
Push button

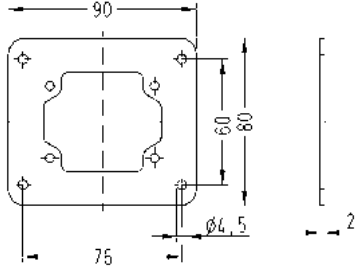
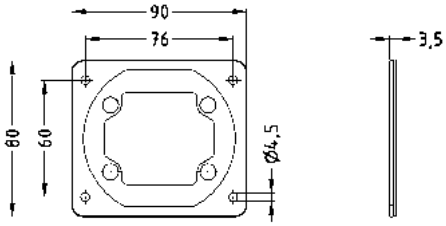
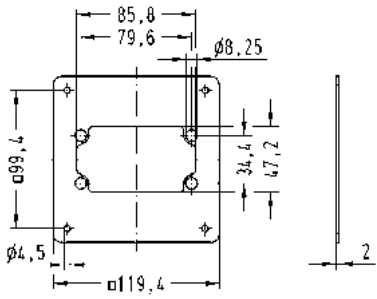
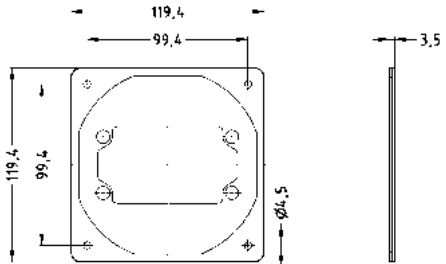
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Yellock®, Shell, Top entry 	1x M32 1x M40	11 13 600 1402 11 13 600 1403	
Han-Yellock®, Shell, Side entry 	1x M32	11 13 600 1502	
Han-Yellock®, Carrier hood, Plain push button 		11 13 600 0100	
Han-Yellock®, Carrier hood, Push button, slot 		11 13 600 0110	

Technical characteristics

Material (seal) NBR
Colour (seal) Black

Technical characteristics

Material (accessories) Steel, zinc plated, Thermoplastic

Identification	Part number	Drawing (dimensions in mm)
Adapter plate, for Han- <i>Yellowlock</i>® 30  Circular 68 mm punch for Han- <i>Yellowlock</i>® panel cut out	11 00 300 9601	
Adapter plate, for Han- <i>Yellowlock</i>® 30, With seal 	11 00 300 9603	
Adapter plate, for Han- <i>Yellowlock</i>® 60 	11 00 600 9601	
Adapter plate, for Han- <i>Yellowlock</i>® 60, With seal 	11 00 600 9603	

Yellowlock

Identification		Part number	Drawing (dimensions in mm)
Flange gasket, for Han- <i>Yellock</i> ® 10		11 20 003 9904	
Flange gasket, for Han- <i>Yellock</i> ® 30		11 00 300 9503	
Flange gasket, for Han- <i>Yellock</i> ® 60		11 00 600 9503	
Profile gasket, for Han- <i>Yellock</i> ® 10		11 20 003 9905	
Profile gasket, for Han- <i>Yellock</i> ® 30		11 00 300 9501	
Profile gasket, for Han- <i>Yellock</i> ® 60		11 00 600 9501	
Shaped gasket, for Han- <i>Yellock</i> ® 30		11 00 300 9502	

Identification		Part number	Drawing (dimensions in mm)
Shaped gasket, for Han- <i>Yellock</i> ® 60		11 00 600 9502	
Shielding frame, for Han- <i>Yellock</i> ® 30, for strain relief clamp		11 12 300 5201	
Shielding frame, for Han- <i>Yellock</i> ® 30, Earthing with saddle terminals		11 12 300 5202	
Shielding frame, for Han- <i>Yellock</i> ® 60, for strain relief clamp		11 12 600 5201	
Han- <i>Yellock</i> ®, Coding element, Pack contents: 8 pieces per frame		11 00 000 9501	
Fixing screws, M3, for Han- <i>Yellock</i> ® 10		11 20 003 9903	

Identification	Part number	Drawing (dimensions in mm)
Identification strip, Pack contents: 500 pieces on a reel 	11 00 000 9601	
PE / N rail, Suitable for Han- <i>Yellock</i>® 30 surface mounted housing, Pack contents: 1 bar with fixing screws 	11 00 000 9512	
PE / N rail, Suitable Han- <i>Yellock</i>® 60 surface mounted housing, Pack contents: 1 bar with fixing screws 	11 00 000 9511	

Technical characteristics

Contact resistance	≤2 mΩ
Material (contacts)	Copper alloy

Specifications and approvals

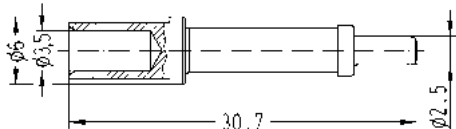
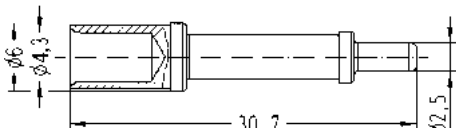
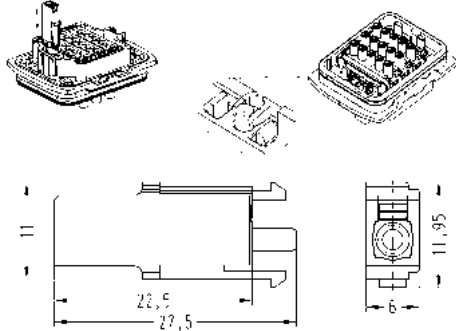
EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Yellok® , Crimp termination, PE contact, Contact surface: Silver plated 	6 10	11 00 000 9509 11 00 000 9510		 Stripping length 7.5 mm  Stripping length 7.5 mm
Han-Yellok® , Han-Quick Lock® termination, PE contact chamber 	0,5 ... 2,5	11 05 001 2601	11 05 001 2601	 Stripping length 10 mm

Yellok



Yellock

Contents	Page
Module overview for applications with Han-Eco®	29.2
Han-Eco® Monoblocks	29.6
Hoods/housings for industrial applications	29.11
Hoods/housings for outdoor applications	29.27
Accessories	29.44

		Han® 100 A Axial module	Han® 100 A Crimp module	Han® 100 A Single module	Han® 70 A Crimp module
70 - 100 A					
	Number of contacts	1*	2*	1	2
	Electrical data	100 A / 1000 V	100 A / 1000 V	100 A / 830 V	70 A / 1000 V
	Termination type	Axial screw termination	Crimp termination	Crimp termination	Crimp termination
	Cross-section	16 ... 35 mm²	10 ... 35 mm²	10 ... 35 mm²	6 ... 25 mm²
	Male module (M)	09 14 002 2651	09 14 002 3051	09 14 001 3031	09 14 002 3041
	Female module (F)	09 14 002 2751	09 14 002 3151	09 14 001 3131	09 14 002 3141
	Cross-section	10 ... 25 mm²	-	-	-
40 - 70 A					
	Number of contacts	2	1 + (4 x Han E®)	2	3
	Electrical data	70 A / 1000 V	70 A / 1000 V	40 A / 1000 V	40 A / 690 V
	Termination type	Axial screw termination	Axial screw termination	Axial screw termination	Axial screw termination
	Cross-section	14 ... 22 mm²	14 ... 22 mm²	6 ... 10 mm²	6 ... 10 mm²
	Male module (M)	09 14 002 2647	09 14 005 2647	09 14 002 2602	09 14 003 2602
	Female module (F)	09 14 002 2742	09 14 005 2742	09 14 002 2702	09 14 003 2702
	Cross-section	6 ... 16 mm²	6 ... 16 mm²	2.5 ... 8 mm²	2.5 ... 8 mm²
16 A					
	Number of contacts	6	8	5	5
	Electrical data	16 A / 500 V	16 A / 400 V	16 A / 400 V	16 A / 230/400 V
	Termination type	Quick Lock termination	Quick Lock termination	Cage clamp termination	Screw termination
	Cross-section	0.5 ... 2.5 mm²	0.5 ... 2.5 mm²	0.14 ... 2.5 mm²	0.5 ... 2.5 mm²
	Male module (M)	09 14 006 2633	09 14 008 2633	09 14 005 2616	09 14 005 2601
	Female module (F)	09 14 006 2733	09 14 008 2733	09 14 005 2716	09 14 005 2701
≤ 10 A					
	Number of contacts	12, silver plated	12, gold plated		
	Electrical data	10 A / 250 V	10 A / 250 V		
	Termination type	Quick Lock termination	Quick Lock termination		
	Cross-section	0.25 ... 1.5 mm²	0.25 ... 1.5 mm²		
	Male module (M)	09 14 012 2632	09 14 012 2634		
	Female module (F)	09 14 012 2732	09 14 012 2734		

* Double module, requires two places in the frame

40 A		Han® A Crimp module	Han® C module	Han® CC module	Han® CD module
	Number of contacts	2	3	4	3 + 4
	Electrical data	40 A / 1000 V	40 A / 690 V	40 A / 830 V	40 A + 10 A / 830 V
	Cross-section	1.5 ... 10 mm²	1.5 ... 6 mm²	1.5 ... 6 mm²	0.14 ... 6 mm²
	Termination type	Crimp termination, Han® C	Crimp termination, Han® C	Crimp termination, Han® C	Crimp, Han® C + Han D®
	Male module (M)	09 14 002 3002	09 14 003 3001	09 14 004 3041	09 14 007 3001
	Female module (F)	09 14 002 3102	09 14 003 3101	09 14 004 3141	09 14 007 3101
16 A		Han E® module	Han® EE module	Han® EEE module	Han E® Protected module
	Number of contacts	6	8	20*	6
	Electrical data	16 A / 500 V	16 A / 400 V	16 A / 500 V	16 A / 830 V
	Cross-section	0.14 ... 4 mm²	0.14 ... 4 mm²	0.14 ... 4 mm²	0.14 ... 4 mm²
	Termination type	Crimp termination, Han E®	Crimp termination, Han E®	Crimp termination, Han E®	Crimp termination, Han E®
	Male module (M)	09 14 006 3001	09 14 008 3001	09 14 020 3001	09 14 006 3041
	Female module (F)	09 14 006 3101	09 14 008 3101	09 14 020 3101	09 14 006 3141
≤ 10 A		Han DD® module	Han® DDD module	Han DD® Quad module	
	Number of contacts	12	17	25	
	Electrical data	10 A / 250 V	10 A / 150 V	4 A / 50 V	
	Cross-section	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.08 ... 0.52 mm²	
	Termination type	Crimp termination, Han D®	Crimp termination, Han D®	Crimp termination, D-Sub	
	Male module (M)	09 14 012 3002	09 14 017 3001	09 14 025 3001	
	Female module (F)	09 14 012 3102	09 14 017 3101	09 14 025 3101	
High voltage		Han® HV module 40 A	Han® HV module 16 A	Han® HV Single module	
	Number of contacts	2*	2*	2	
	Electrical data	40 A / 2900/5000 V	16 A / 2900/5000 V	16 A / 2500 V	
	Cross-section	1.5 ... 10 mm²	0.14 ... 4 mm²	0.14 ... 4 mm²	
	Termination type	Crimp termination, Han® C	Crimp termination, Han E®	Crimp termination, Han E®	
	Male module (M)	09 14 002 3023	09 14 002 3021	09 14 002 3025	
	Female module (F)	09 14 002 3123	09 14 002 3121	09 14 002 3125	

* Double module, requires two places in the frame

Module overview for applications with Han-Eco®



Han® RJ45 modules	Han® RJ45 module	for patch cable	for IDC	for patch cable	for IDC and preLink	
	- 8 contacts - Cat. 6 _A - 10 Gbit/s					
	Part numbers	Male module (M) 09 14 001 4623	Male module (M) 09 14 001 4623	Female module (F) 09 14 001 4721	Female module (F) 09 14 001 4722	
		Adapter for patch cables: 09 14 000 9966	RJ Industrial IDC: 09 45 400 1560	-	RJ45 female IDC: 09 14 545 1561	
		Patch cable cat. 6: 09 47 474 71xx	-	-	RJ45 female preLink: 09 14 008 4720	
Han-Quintax® modules	Quintax module					
	Number of contacts	2 x 4*	2 x 8*	2 x Coax*	2 x Coax*	
	Male module (M)	09 14 002 3001	09 14 002 3001	09 14 002 3001	09 14 002 3001	
	Female module (F)	09 14 002 3101	09 14 002 3101	09 14 002 3101	09 14 002 3101	
	Insert (Cable Ø ≤ 9.5 mm)					
	Data rate	100 Mbit/s (Cat. 5e)	100 Mbit/s (Cat. 5e)	≤ 500 Mhz / 75 Ω	≤ 500 Mhz / 50 Ω	
	Electrical data	10 A / 50 V	5 A / 50 V	10 A / 50 V	16 A / 50 V	
	Cross-section	0.14 ... 2.5 mm²	0.09 ... 0.52 mm²	0.14 ... 2.5 mm²	0.14 ... 4 mm²	
	Termination type	Crimp termination, Han D®Crimp termination, D-SubCrimp termination, Han D®Crimp termination, Han E®				
	Male insert (M)	09 15 004 3013	09 15 008 3013	09 15 001 3013	09 15 001 3023	
Female insert (F)	09 15 004 3113	09 15 008 3113	09 15 001 3113	09 15 001 3123		
PE shielding termination	Optional shielding termination to the hinged frame with the aid of Han-Quintax® metal adapter 09 14 000 9915					
Han® GigaBit – Han® MegaBit modules	Adapter Modul					
	Male module (M)	09 14 001 3011	09 14 001 3011	09 14 001 3011	09 14 001 3011	
	Female module (F)	09 14 001 3111	09 14 001 3111	09 14 001 3111	09 14 001 3111	
	Insert (Cable Ø ≤ 14 mm)					
	Number of contacts	8	2 x 4	8	20	
	Data rate	10 Gbit/s (Cat. 6 _A)	2 x 100 Mbit/s (Cat. 5e)	1 Gbit/s (Cat. 5e)	4 A / 32 V	
	Electrical data	5 A / 50 V	10 A / 50 V	10 A / 50 V	0.09 ... 0.52 mm²	
	Cross-section	0.09 ... 0.52 mm²	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.09 ... 0.52 mm²	
	Termination type	Crimp termination, D-Sub	Crimp termination, Han D®	Crimp termination, Han D®	Crimp termination, D-Sub	
	Shielding termination	Crimp flange	2 x crimp flange	Crimp flange	Crimp flange	
	Male insert (M)	09 14 008 3011	09 14 008 3016	09 14 008 3021	09 14 020 3013	
Female insert (F)	09 14 008 3111	09 14 008 3116	09 14 008 3121	09 14 020 3113		
	with PE shielding termination	with PE shielding termination	with PE shielding termination	-		
Male insert (M)	09 14 008 3012	09 14 008 3017	09 14 008 3022			
Female insert (F)	09 14 008 3112	09 14 008 3117	09 14 008 3122			
Serial Bus modules	Han D-Sub module		Han® USB module		Han® FireWire module	
	Number of contacts	9 + shielding	8	6		
	Datenrate	12 Mbit/s (Profibus)	5 Gbit/s (USB 3.0)	400 Mbit/s (IEEE 1394a)		
	Electrical data	5 A / 50 V	1 A / 50 V	1 A / 50 V		
	Cross-section	0.09 ... 0.52 mm²				
	Termination type	Crimp termination, D-Sub	USB patch cable	FireWire patch cable		
Male module (M)	09 14 009 3001	09 14 001 4601	09 14 001 4611			
Female module (F)	09 14 009 3101	09 14 001 4703	09 14 001 4711			

* Double module, requires two places in the frame

for more technical details see chapter 06

Removal tools 09 99 000 0331, 09 99 000 0828 and 09 99 000 0842 see chapter 90

* Take care of the wiring space! Choose inner positions.

Optical modules		Han® SC module	Han® Multi module	Han® Multi module
				
	Number of contacts	4	4	12*
	Male module (M)	09 14 004 4701	09 14 004 4501	09 14 012 4501
	Female module (F)	09 14 004 4713	09 14 004 4512	09 14 012 4512
	Contacts			
	1 mm POF	20 10 001 5211	Male: 20 10 001 4211 Female: 20 10 001 4221	Male: 20 10 001 4211 Female: 20 10 001 4221
	1 mm POF Fast assembly termination	20 10 001 5217		
	SI-Fibre 200 / 230 µm Multi-Mode	20 10 230 5211	Male: 20 10 230 4211 Female: 20 10 230 4221	Male: 20 10 230 4211 Female: 20 10 230 4221
GI-Fibre 50-62.5 / 125 µm Multi-Mode	20 10 125 5211	Male: 20 10 125 4212 Female: 20 10 125 4222	Male: 20 10 125 4212 Female: 20 10 125 4222	
Special modules		Han-Eco® PE module	Han® Dummy module	
	Field of application	for Han-Eco® hoods/housings only		to fill-up empty module places
				
	Number of contacts	1 x PE		
	Electrical data	1.5 ... 16 mm²		
	Cross-section	Screw termination		
	Termination type			
Male module (M)	19 41 001 2600	09 14 000 9950		
Female module (F)	19 41 001 2700			

* Double module, requires two places in the frame

Features

- Suitable for Han-Eco® hoods/housings and the Han-Modular® docking frame
- Higher contact density compared to Han E® standard screw inserts (up to 65%)
- Han-Eco® “click and mate” assembly concept
- 6 coding options


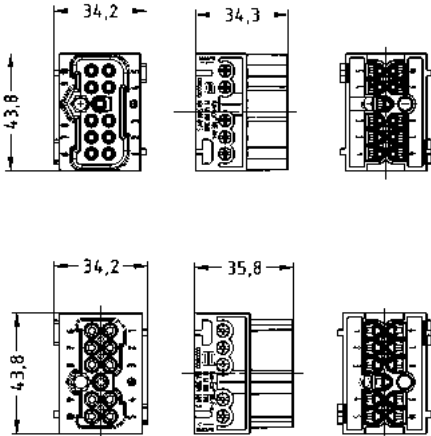
Technical characteristics

Number of contacts	10, 14, 20, 28
Electrical data acc. to IEC 61984	16 A 500 V 6 kV 3
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Rated voltage acc. to CSA	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material (contacts)	Copper alloy
Material (accessories)	Thermoplastic

Number of contacts

10+ 


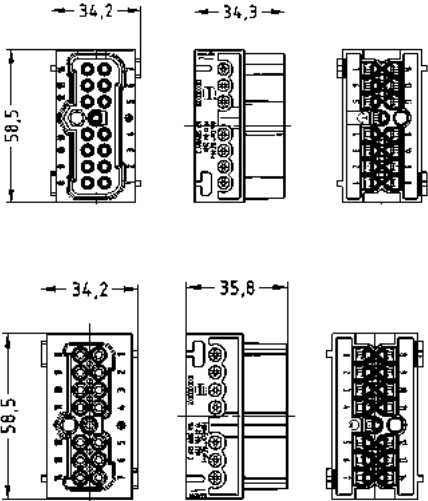

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Eco®, Screw termination, With wire protection, Contact surface: Silver plated 	0,75 ... 2,5	19 41 010 2601	19 41 010 2701	 Tightening torque 0.5 Nm
Coding element 		09 12 000 9901	09 12 000 9902	

Number of contacts

14+ 

16 A 500 V 6 kV 3








Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Eco® , Screw termination, With wire protection, Contact surface: Silver plated 	0,75 ... 2,5	19 41 014 2601	19 41 014 2701	 Tightening torque 0.5 Nm
Coding element 		09 12 000 9901	09 12 000 9902	

Han-Eco

Number of contacts

20+ 

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Eco® , Screw termination, With wire protection, Contact surface: Silver plated 	0,75 ... 2,5	19 41 020 2601	19 41 020 2701	      Tightening torque 0.5 Nm
Coding element 		09 12 000 9901	09 12 000 9902	 



Number of contacts

28+

16 A 500 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Eco®, Screw termination, With wire protection, Contact surface: Silver plated 	0,75 ... 2,5	19 41 028 2601	19 41 028 2701	Tightening torque 0.5 Nm
Coding element 		09 12 000 9901	09 12 000 9902	

Han-Eco

Features

- With integrated cable gland
- Optional PE contact module to hold the protective ground conductor
- Capable for applications according protection class II

Technical characteristics

Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polyamide, Fibre-glass reinforced
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Colour (seal)	RAL 9005 (jet black)
Material (locking)	Polyamide, Fibre-glass reinforced
Colour (locking)	RAL 9005 (jet black)

Specifications and approvals

EN 45545-2
R22: HL1, HL2
R23: HL1, HL2, HL3
R24: HL1, HL2, HL3

Details

Han-Eco® 10 A and 16 A:

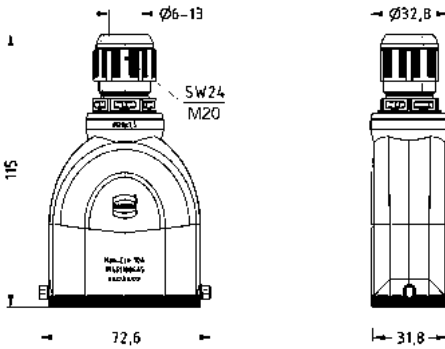
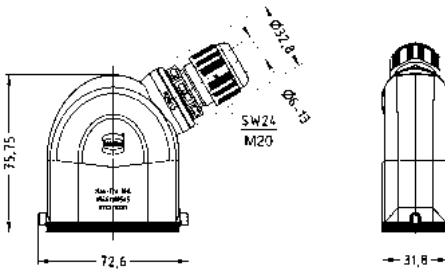
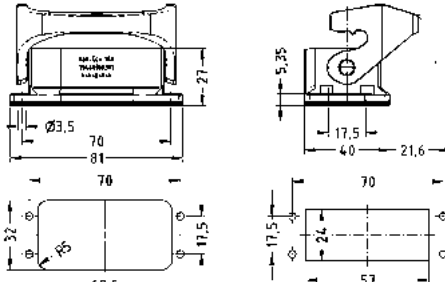
Assembly dimensions are identical for the Han® A bulkhead and surface mounted housings – mating compatible with all metal hoods and housings of the series Han® A.

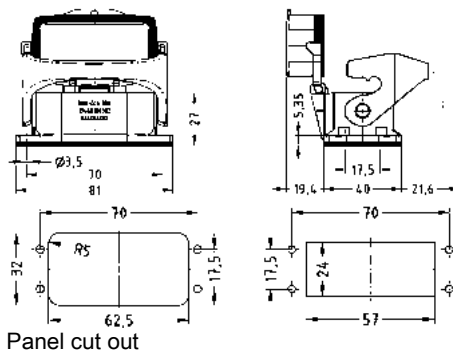
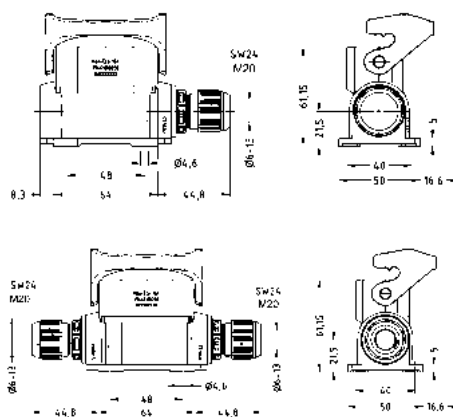
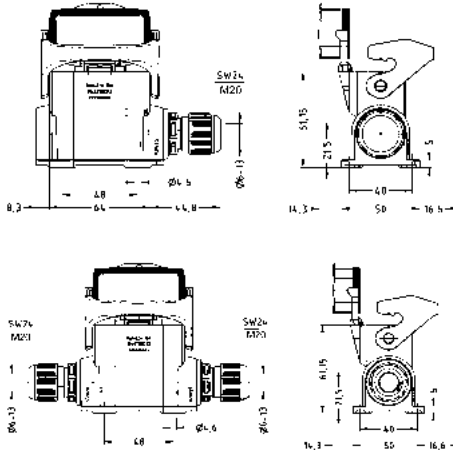
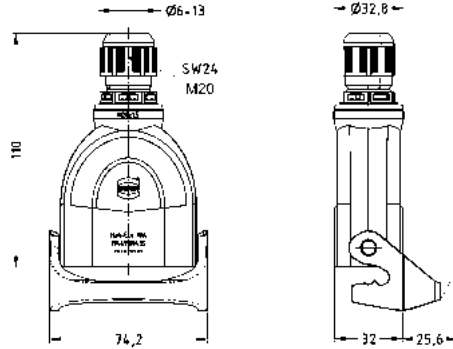
As an option a larger panel cut out for the rear assembly of the bulkhead mounted housings is possible.

Han-Eco® 6 B, 10 B, 16 B and 24 B:

Assembly dimensions are identical for the Han® B bulkhead mounted housings - not mating compatible with the hoods and housings of the series Han® B.

Single locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco® , Hoods, With integrated cable gland, Top entry 	1x M20 1x M25	19 46 110 0445 19 46 110 0446	
Han-Eco® , Hoods, With integrated cable gland, Side entry 	1x M20 1x M25	19 46 110 0545 19 46 110 0546	
Han-Eco® , Bulkhead mounted housings 		19 46 010 0301	 Panel cut out Rear assembly

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco®, Bulkhead mounted housings, With thermo-plastic cover 		19 46 010 0302	 Panel cut out
Han-Eco®, Surface mounted housing, With integrated cable gland, Side entry 	1x M20 1x M25 2x M20 2x M25	19 46 110 0250 19 46 110 0251 19 46 110 0290 19 46 110 0291	
Han-Eco®, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry 	1x M20 1x M25 2x M20 2x M25	19 46 110 0252 19 46 110 0253 19 46 110 0292 19 46 110 0293	
Han-Eco®, Cable to cable housing, With integrated cable gland, Top entry 	1x M20 1x M25	19 46 110 0435 19 46 110 0436	

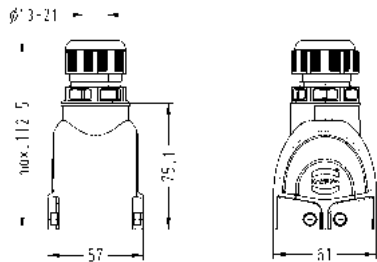
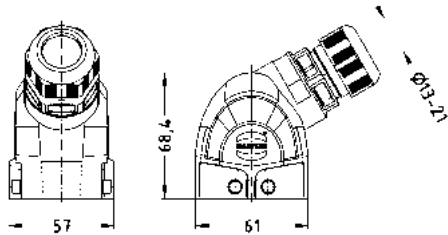
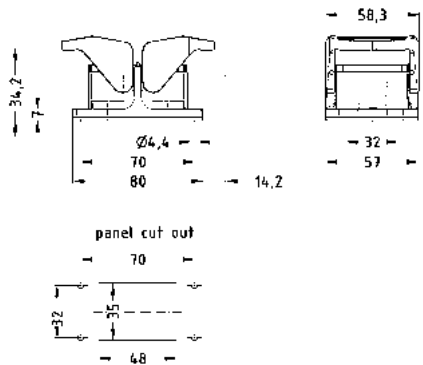
Single locking lever



Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco® , Hoods, With integrated cable gland, Top entry	1x M20 1x M25	19 46 116 0445 19 46 116 0446	
Han-Eco® , Hoods, With integrated cable gland, Side entry	1x M20 1x M25	19 46 116 0545 19 46 116 0546	
Han-Eco® , Bulkhead mounted housings		19 46 016 0301	Panel cut out
Han-Eco® , Bulkhead mounted housings, With thermo-plastic cover		19 46 016 0302	Panel cut out

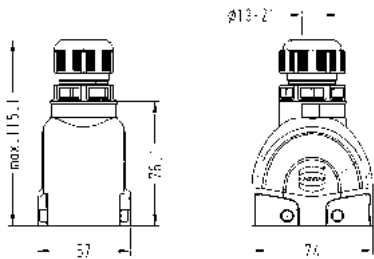
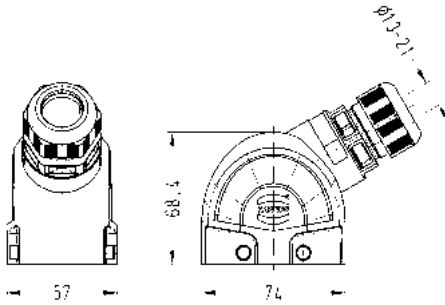
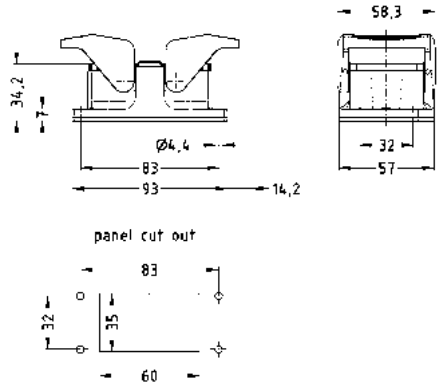
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco® , Surface mounted housing, With integrated cable gland, Side entry	1x M20 1x M25 2x M20 2x M25	19 46 116 0250 19 46 116 0251 19 46 116 0290 19 46 116 0291	
Han-Eco® , Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry	1x M20 1x M25 2x M20 2x M25	19 46 116 0252 19 46 116 0253 19 46 116 0292 19 46 116 0293	
Han-Eco® , Cable to cable housing, With integrated cable gland, Top entry	1x M20 1x M25	19 46 116 0435 19 46 116 0436	

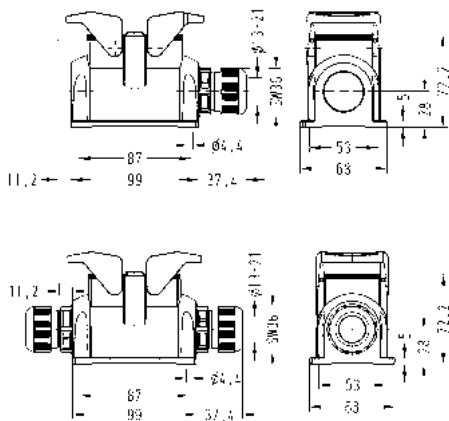
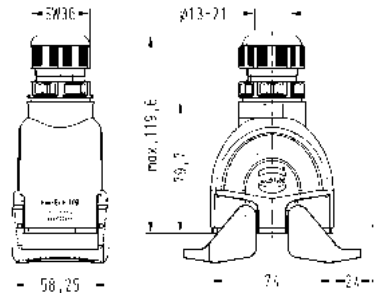
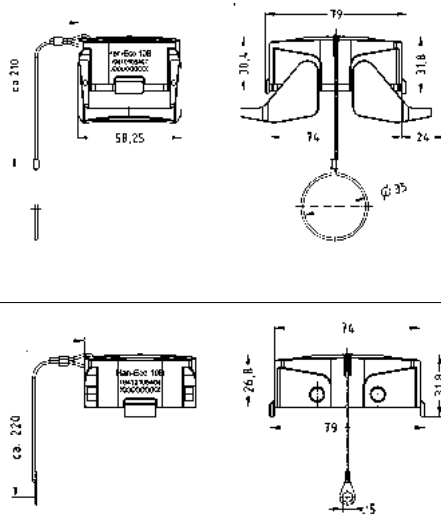
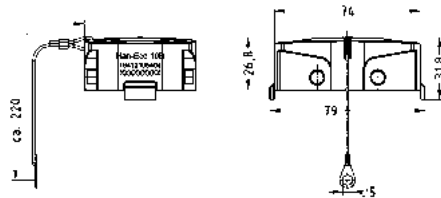
Double locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco® , Hoods, With integrated cable gland, Top entry 	1x M32	19 41 106 0422	
Han-Eco® , Hoods, With integrated cable gland, Side entry 	1x M32	19 41 106 0522	
Han-Eco® , Bulkhead mounted housings 		19 41 006 0301	

Han-
Eco

Double locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco® , Hoods, With integrated cable gland, Top entry 	1x M32	19 41 110 0422	
Han-Eco® , Hoods, With integrated cable gland, Side entry 	1x M32	19 41 110 0522	
Han-Eco® , Bulkhead mounted housings 		19 41 010 0301	

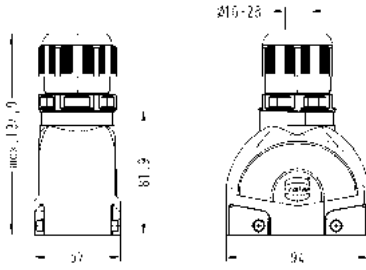
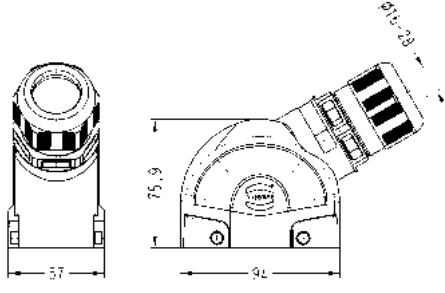
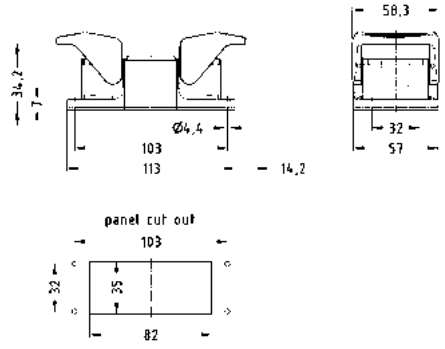
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco®, Surface mounted housing, With integrated cable gland, Side entry 	1x M32 2x M32	19 41 110 0232 19 41 110 0272	
Han-Eco®, Cable to cable housing, With integrated cable gland, Top entry 	1x M32	19 41 110 0722	
Han-Eco®, Protection cover for hoods  Han-Eco®, Protection cover for hoods, With fixing cord 		19 41 010 5406 19 41 010 5407	
Han-Eco®, Protection cover for all housings, With fixing cord 		19 41 010 5404	



Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco® , Protection cover for all housings 		19 41 010 5405	

Han-
Eco

Double locking lever

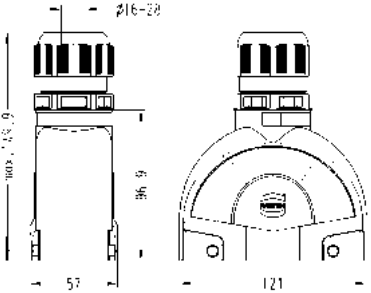
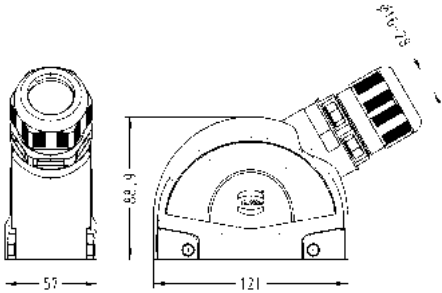
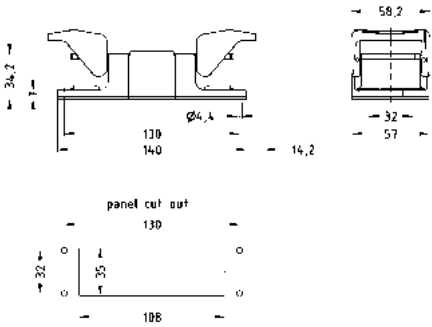
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco® , Hoods, With integrated cable gland, Top entry 	1x M40	19 41 116 0423	
Han-Eco® , Hoods, With integrated cable gland, Side entry 	1x M40	19 41 116 0523	
Han-Eco® , Bulkhead mounted housings 		19 41 016 0301	

Han-
Eco

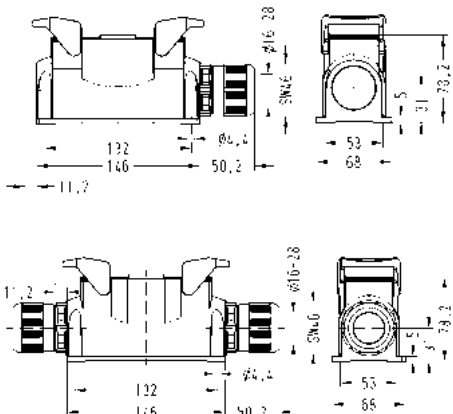
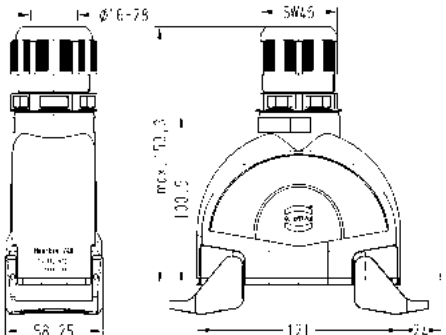
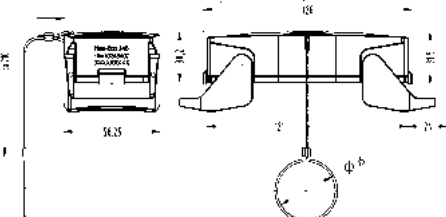
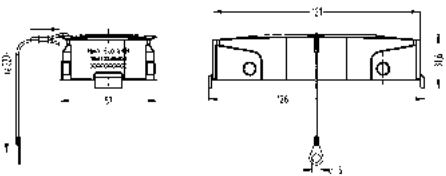
[illegible]

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco® , Protection cover for all housings 		19 41 016 5405	

Double locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco® , Hoods, With integrated cable gland, Top entry 	1x M40	19 41 124 0423	
Han-Eco® , Hoods, With integrated cable gland, Side entry 	1x M40	19 41 124 0523	
Han-Eco® , Bulkhead mounted housings 		19 41 024 0301	

Han-Eco

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco®, Surface mounted housing, With integrated cable gland, Side entry 	1x M40 2x M40	19 41 124 0233 19 41 124 0273	
Han-Eco®, Cable to cable housing, With integrated cable gland, Top entry 	1x M40	19 41 124 0723	
Han-Eco®, Protection cover for hoods 		19 41 024 5406	
Han-Eco®, Protection cover for hoods, With fixing cord 		19 41 024 5407	
Han-Eco®, Protection cover for all housings, With fixing cord 		19 41 024 5404	



Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco® , Protection cover for all housings 		19 41 024 5405	

Han-
Eco

Features

- With integrated cable gland
- Optional PE contact module to hold the protective ground conductor

Technical characteristics

Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polyamide, Fibre-glass reinforced
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	FPM
Colour (seal)	RAL 7001 (silver-grey)
Material (locking)	Polyamide, Fibre-glass reinforced
Colour (locking)	RAL 9005 (jet black)

Specifications and approvals

EN 45545-2
R22: HL1, HL2
R23: HL1, HL2, HL3
R24: HL1, HL2, HL3

Details

Han-Eco® 10 A and 16 A:

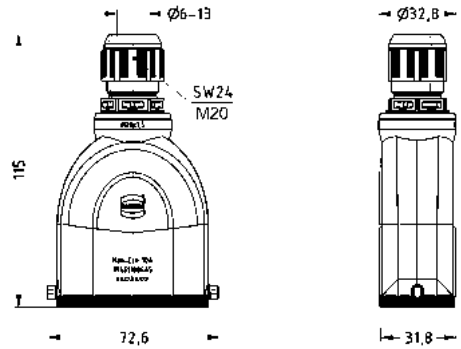
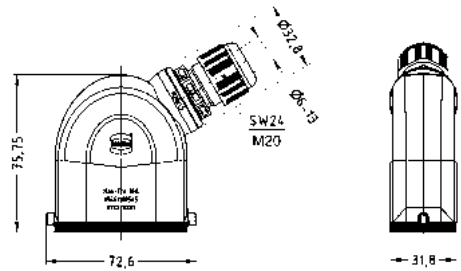
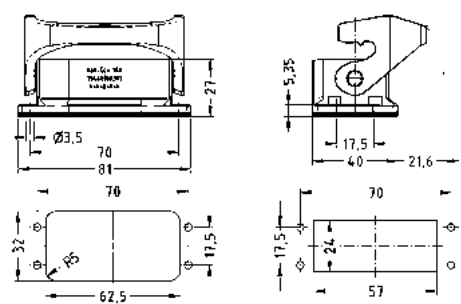
Assembly dimensions are identical for the Han® A bulkhead and surface mounted housings – mating compatible with all metal hoods and housings of the series Han® A.

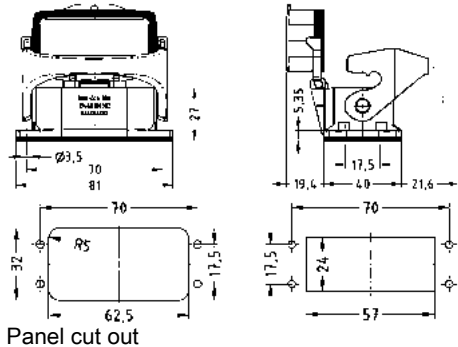
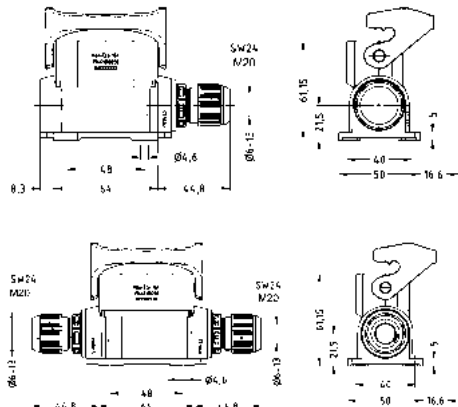
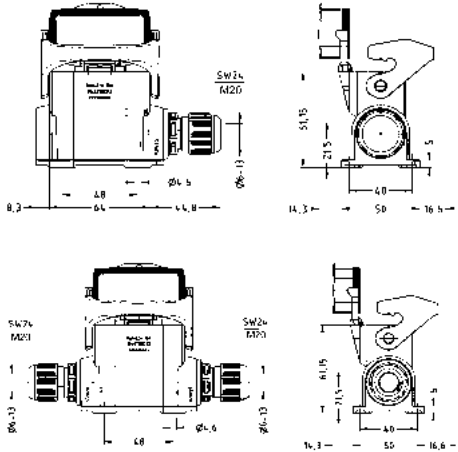
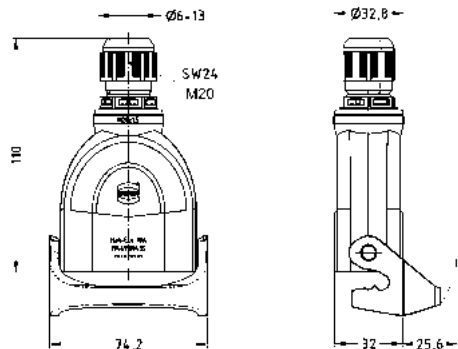
As an option a larger panel cut out for the rear assembly of the bulkhead mounted housings is possible.

Han-Eco® 6 B, 10 B, 16 B and 24 B:

Assembly dimensions are identical for the Han® B bulkhead mounted housings - not mating compatible with the hoods and housings of the series Han® B.

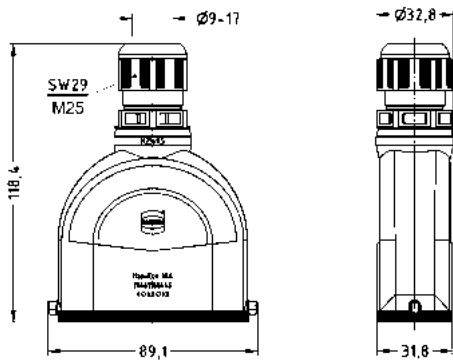
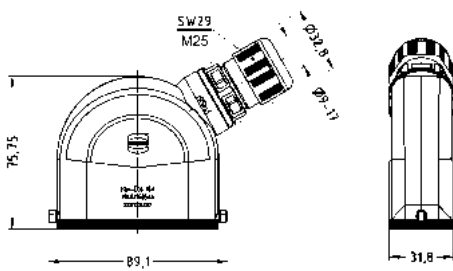
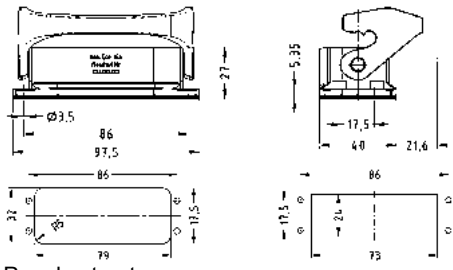
Single locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco® , Hoods, With integrated cable gland, Top entry 	1x M20 1x M25	19 46 310 0445 19 46 310 0446	
Han-Eco® , Hoods, With integrated cable gland 	1x M20 1x M25	19 46 310 0545 19 46 310 0546	
Han-Eco® , Bulkhead mounted housings 		19 46 210 0301	 Panel cut out Rear assembly

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco®, Bulkhead mounted housings, With thermo-plastic cover 		19 46 210 0302	
Han-Eco®, Surface mounted housing, With integrated cable gland, Side entry 	1x M20 1x M25 2x M20 2x M25	19 46 110 0250 19 46 110 0251 19 46 110 0290 19 46 110 0291	
Han-Eco®, Surface mounted housing, With thermo-plastic cover, With integrated cable gland, Side entry 	1x M20 1x M25 2x M20 2x M25	19 46 310 0252 19 46 310 0253 19 46 310 0292 19 46 310 0293	
Han-Eco®, Cable to cable housing, With integrated cable gland, Top entry 	1x M20 1x M25	19 46 110 0435 19 46 110 0436	

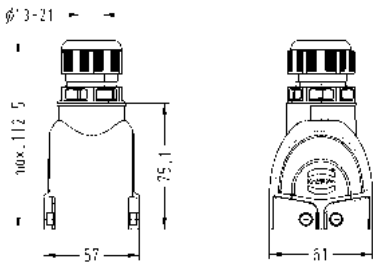
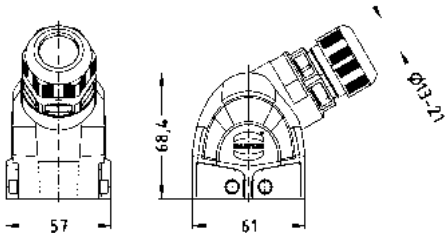
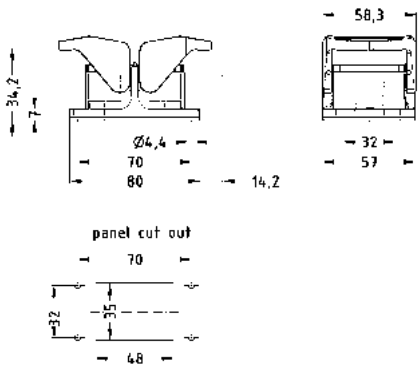
Single locking lever

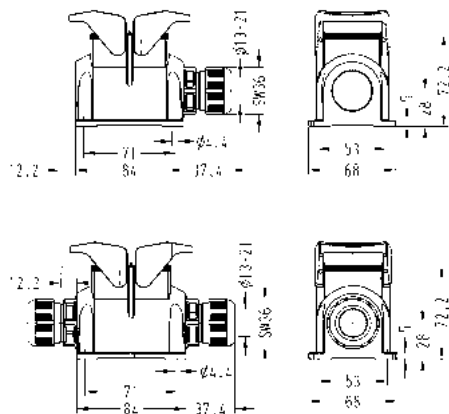
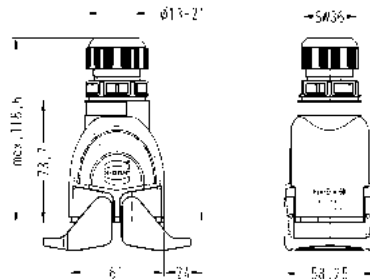
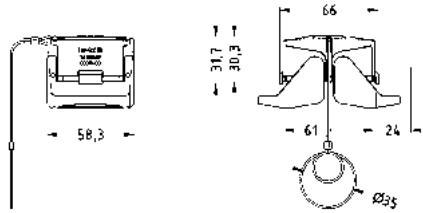


Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco®, Hoods, With integrated cable gland, Top entry 	1x M20 1x M25	19 46 316 0445 19 46 316 0446	
Han-Eco®, Hoods, With integrated cable gland, Side entry 	1x M20 1x M25	19 46 316 0545 19 46 316 0546	
Han-Eco®, Bulkhead mounted housings 		19 46 216 0301	 Panel cut out

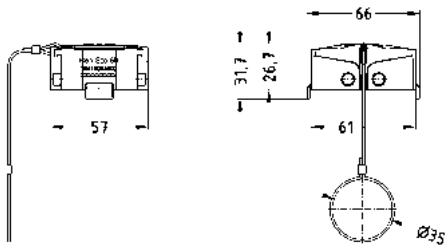

29
.
31

Double locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco® , Hoods, With integrated cable gland, Top entry 	1x M32	19 41 106 0422	
Han-Eco® , Hoods, With integrated cable gland, Side entry 	1x M32	19 41 106 0522	
Han-Eco® , Bulkhead mounted housings 		19 41 206 0301	

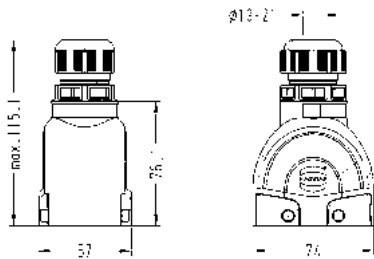
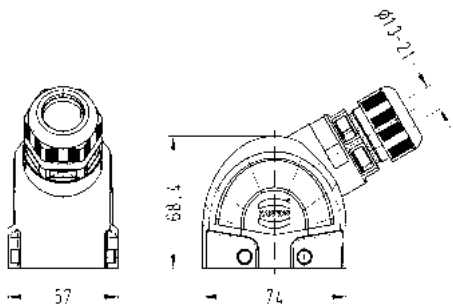
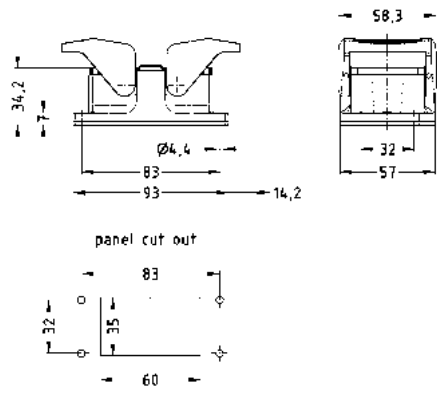
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco®, Surface mounted housing, With integrated cable gland, Side entry 	1x M32 2x M32	19 41 306 0232 19 41 306 0272	
Han-Eco®, Cable to cable housing, With integrated cable gland, Top entry 	1x M32	19 41 306 0722	
Han-Eco®, Protection cover for hoods 		19 41 206 5406	
Han-Eco®, Protection cover for hoods, With fixing cord 		19 41 206 5407	



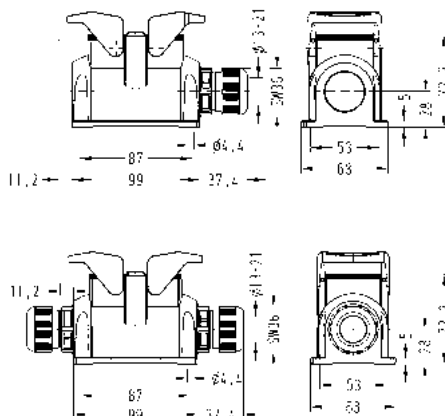
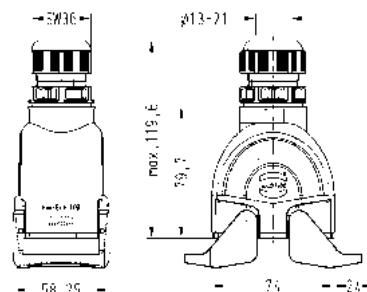
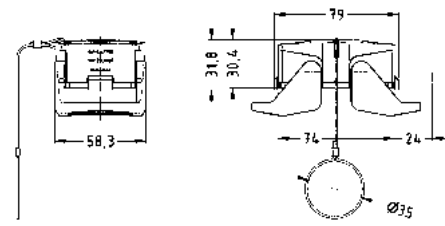
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco®, Protection cover for all housings, With fixing cord 		19 41 006 5402 19 41 006 5404	 
Han-Eco®, Protection cover for all housings 		19 41 006 5405	

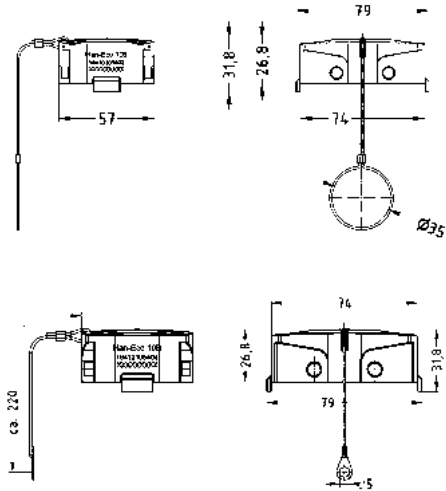
Han-Eco

Double locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco® , Hoods, With integrated cable gland, Top entry 	1x M32	19 41 110 0422	
Han-Eco® , Hoods, With integrated cable gland, Side entry 	1x M32	19 41 110 0522	
Han-Eco® , Bulkhead mounted housings 		19 41 210 0301	

Han-
Eco

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco®, Surface mounted housing, With integrated cable gland, Side entry 	1x M32 2x M32	19 41 310 0232 19 41 310 0272	
Han-Eco®, Cable to cable housing, With integrated cable gland, Top entry 	1x M32	19 41 310 0722	
Han-Eco®, Protection cover for hoods 		19 41 210 5406	
Han-Eco®, Protection cover for hoods, With fixing cord 		19 41 210 5407	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco® , Protection cover for all housings, With fixing cord 		19 41 010 5402 19 41 010 5404	
Han-Eco® , Protection cover for all housings 		19 41 010 5405	

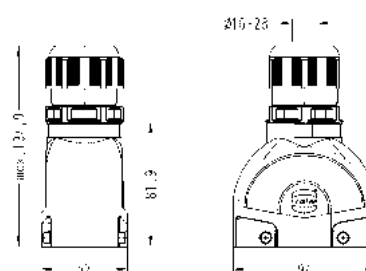
Double locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)

Han-Eco®,
Hoods,
With integrated cable gland,
Top entry

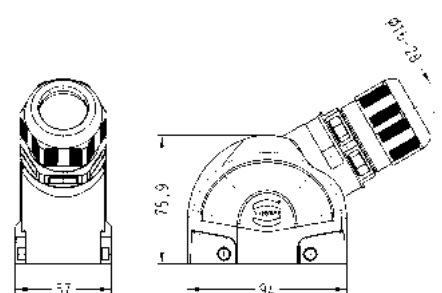

1x M40

19 41 116 0423

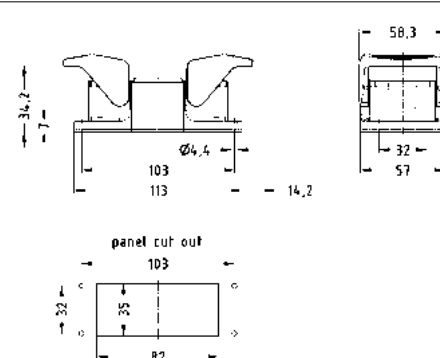

Han-Eco®,
Hoods,
With integrated cable gland,
Side entry

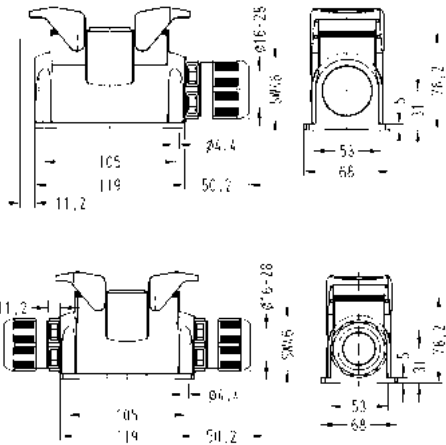
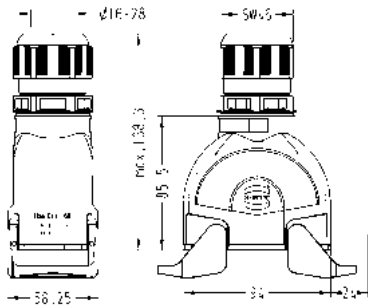
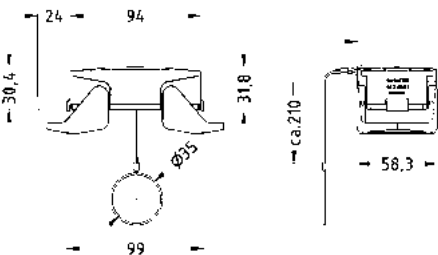

1x M40

19 41 116 0523

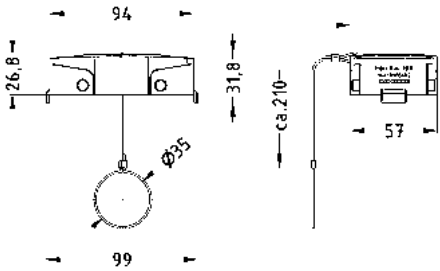
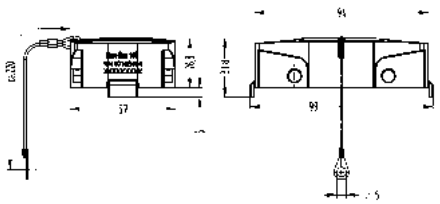

Han-Eco®,
Bulkhead mounted housings


19 41 216 0301



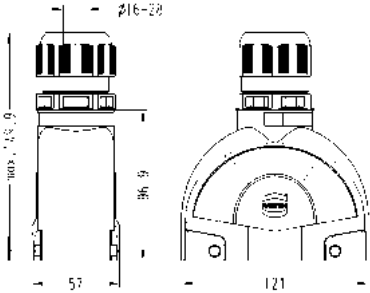
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco®, Surface mounted housing, With integrated cable gland, Side entry 	1x M40 2x M40	19 41 316 0233 19 41 316 0273	
Han-Eco®, Cable to cable housing, With integrated cable gland, Top entry 	1x M40	19 41 316 0723	
Han-Eco®, Protection cover for hoods  Han-Eco®, Protection cover for hoods, With fixing cord 		19 41 216 5406 19 41 216 5407	

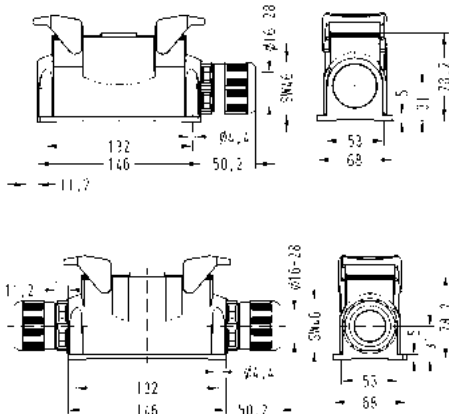
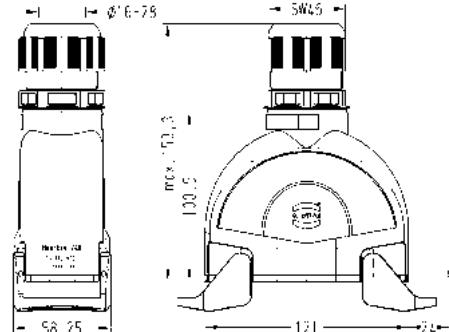
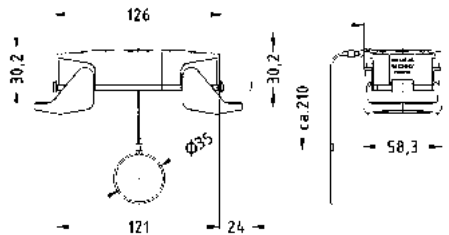


Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco® , Protection cover for all housings, With fixing cord 		19 41 016 5402 19 41 016 5404	
Han-Eco® , Protection cover for all housings 		19 41 016 5405	

Han-Eco

Double locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco® , Hoods, With integrated cable gland, Top entry 	1x M40	19 41 124 0423	

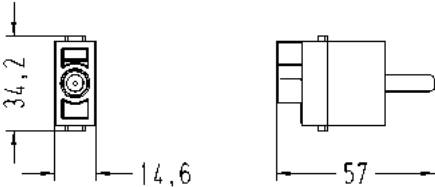
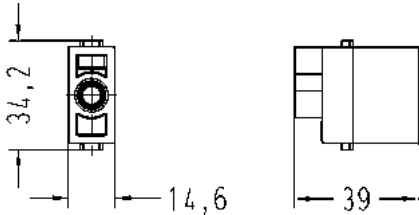
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-Eco®, Surface mounted housing, With integrated cable gland, Side entry 	1x M40 2x M40	19 41 324 0233 19 41 324 0273	
Han-Eco®, Cable to cable housing, With integrated cable gland, Top entry 	1x M40	19 41 324 0723	
Han-Eco®, Protection cover for hoods  Han-Eco®, Protection cover for hoods, With fixing cord 		19 41 224 5406 19 41 224 5407	

29
.
43

Number of contacts

1

Technical characteristics		Specifications and approvals
Number of contacts	1	UL 1977 ECBT2.E235076
Mating cycles	≥500	
Colour (insert)	RAL 7032 (pebble grey)	

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han-Modular®, Han-Eco® contact module, Screw termination  With 09 99 000 0830 HARTING Crimping tool also cable up to 25 mm² with ferrule adaptable	1,5 ... 16	19 41 001 2600	19 41 001 2700	 





Han-Eco

Technical characteristics


Material (cable glands) Polyamide

Technical characteristics

Colour (accessories) RAL 9005 (jet black)

Identification	Size	Clamping range (mm)	Part number	Drawing (dimensions in mm)															
Han-Eco® , Cable gland	M20	6 ... 13	19 41 000 5111	Tightening torque <table><tr><th></th><th>Stutzen</th><th>Hutmutter</th></tr><tr><td>M20</td><td>4 Nm</td><td>3 Nm</td></tr><tr><td>M25</td><td>10 Nm</td><td>4 Nm</td></tr><tr><td>M32</td><td>15 Nm</td><td>4 Nm</td></tr><tr><td>M40</td><td>20 Nm</td><td>20 Nm</td></tr></table>    		Stutzen	Hutmutter	M20	4 Nm	3 Nm	M25	10 Nm	4 Nm	M32	15 Nm	4 Nm	M40	20 Nm	20 Nm
		Stutzen	Hutmutter																
	M20	4 Nm	3 Nm																
	M25	10 Nm	4 Nm																
	M32	15 Nm	4 Nm																
M40	20 Nm	20 Nm																	
M25	9 ... 17	19 41 000 5121																	
M32	13 ... 21	19 41 000 5131																	
M40	16 ... 28	19 41 000 5141																	



Identification	Size	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Han-Eco®, Reduction seal insert	M32	9 ... 14	19 41 000 5132	
	M40	12 ... 20	19 41 000 5142	

Han-
Eco

Technical characteristics

Material (seal) NBR

Technical characteristics

Colour (seal) Black

Identification	Size	Part number	Drawing (dimensions in mm)

Flange gasket,
Han-Eco®



06 B
10 B
16 B
24 B

19 41 000 9801
19 41 000 9802
19 41 000 9803
19 41 000 9804

Profile gasket,
Han-Eco®



06 B
10 B
16 B
24 B

19 41 000 9901
19 41 000 9902
19 41 000 9903
19 41 000 9904

Contents	Page
Hoods/Housings, metal Han® 3 A.....	31.4
Hoods/Housings, thermoplastic Han® 3 A.....	31.10
Standard hoods/housings Han® 10 ... 32 A.....	31.16
Standard hoods/housings Han® B	31.27
Han® Easy Hood hoods/housings.....	31.72
Han-Drive® hoods/housings.....	31.76
Han® 3 M hoods/housings	31.79
Han® M hoods/housings	31.83
Han® 3 EMC hoods/housings	31.97
Han® EMC hoods/housings	31.101
Han® EMC/B hoods/housings.....	31.108
Han® 3 HPR hoods/housings.....	31.118
Han® HPR hoods/housings.....	31.131
Han-INOX® hoods/housings	31.153

Han® 3 A Standard Hoods/Housings Metal hoods/housings for industrial applications

Material	zinc die-cast
Colour	RAL 7037 (grey)
Surface	powder-coated
Locking element	steel, zinc-plated
Lever type	lever, metal
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Flammability acc. to UL 94	V 0
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP44 IP67 is achieved with seal screw 09 20 000 9918

Han-Drive® Housings for motor applications

Material	aluminium die-cast
Colour	non coloured / RAL 7037 (grey)
Surface	electrical conductive / powder-coated / unpainted
Locking element	stainless steel
Lever type	Han-Easy Lock®
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Approval acc. to UL 50	NEMA Type 4/4X/12
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP65

Han® 3 A Hoods/Housings Plastic hoods/housings for industrial applications

Material	polycarbonate
Colour	RAL 7032 (light grey) / RAL 9005 (black)
Locking element	polyamide
Lever type	lever, plastic
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Approval acc. to UL 50	NEMA Type 4/4X/12
Flammability acc. to UL 94	V 0
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP44 IP67 is achieved with seal screw 09 20 000 9918

Han® 3 M Hoods/Housings Hoods/Housings for higher environmental requirements

Material	zinc die-cast
Colour	RAL 9005 (black)
Surface	- Top coat epoxy powder paint
Locking element	stainless steel
Lever type	lever, metal
Hoods/Housings seal	FPM
Limiting temperatures	-40 °C ... +125 °C
Corrosion resistance	ASTM B117-09 (500 h)
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP44 IP67 is achieved with seal screw 09 20 000 9918

Han® Standard Hoods/Housings Metal hoods/housings for industrial applications

Material	aluminium die-cast
Colour	RAL 7037 (grey)
Surface	powder-coated
Locking element	stainless steel
Lever type	Han-Easy Lock®
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Approval acc. to UL 50	NEMA Type 4/4X/12
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP65

Han® M Hoods/Housings Hoods/Housings for higher environmental requirements

Material	aluminium die-cast
Colour	RAL 9005 (black)
Surface	- Top coat epoxy powder paint
Locking element	stainless steel
Lever type	lever, metal
Hoods/Housings seal	FPM
Limiting temperatures	-40 °C ... +125 °C
Approval acc. to UL 50	NEMA Type 4/4X/12
Corrosion resistance	ASTM B117-09 (500 h)
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP65

Han® 3 EMC Hoods/Housings Hoods/Housings for higher EMC requirements

Material	zinc die-cast
Colour	non coloured
Surface	electrical conductive
Locking element	steel, zinc-plated
Lever type	lever, metal
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP44 IP67 is achieved with seal screw 09 20 000 9918

Han-INOX® Hoods/Housings for higher corrosion requirements

Material	stainless steel
Colour	non coloured
Surface	electrical conductive
Locking element	stainless steel
Lever type	lever, metal
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP65 IP67 is achieved with seal screw 09 20 000 9918
- Size Han® 3 A	IP44

Han® EMC Hoods/Housings Hoods/Housings for higher EMC requirements

Material	aluminium die-cast
Colour	non coloured
Surface	electrical conductive
Locking element	
- Screw locking	M5
- Material	stainless steel
- Tightening torque	3 Nm
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Approval acc. to UL 50	NEMA Type 4/4X/12
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP65

Han® 3 HPR Hoods/Housings Hoods/Housings for harsh environmental requirements

Material	zinc die-cast
Colour	RAL 9005 (black)
Surface	
- Top coat	epoxy powder paint / chromated
Locking element	
- Screw locking	M4
- Material	stainless steel
- Tightening torque	2 Nm
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Corrosion resistance	ASTM B117-09 (500 h)
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP65 / IP68 / IP69K

Attention

If inserts of the series Han® Q and Han A® are used, the seal on the insert must be removed. The sealed screw of the insulation body must be replaced by the sealed screw of the hood.

For angled bulkhead or surface mounted housings with through holes in the mounting flange the user must make sure, that the fixing screws seal to the inner part of the housing.

Han® EMC/B Hoods/Housings Hoods/Housings for higher EMC requirements

Material	
- Hoods/Housings	aluminium die-cast
- shielded frames	zinc die-cast alloy
Colour	non coloured
Surface	
- Hoods/Housings	electrical conductive
- shielded frames	electrical conductive
Locking element	stainless steel
Lever type	Han-Easy Lock®
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Approval acc. to UL 50	NEMA Type 4/4X/12
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP65

Han® HPR Hoods/Housings Hoods/Housings for harsh environmental requirements

Material	aluminium die-cast, corrosion resistant
Colour	RAL 9005 (black)
Surface	
- Top coat	epoxy powder paint
Locking element	
- Screw locking	M6
- Material	stainless steel
- Tightening torque	4 Nm
- Toggle locking	
- Material	stainless steel
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Approval acc. to UL 50	NEMA Type 4/4X/12
Corrosion resistance	ASTM B117-09 (500 h)
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP65 / IP68 / IP69K

Features

- Standard hoods and housings for industrial applications
- Slim, space saving construction type





Technical characteristics


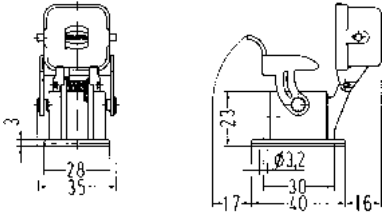
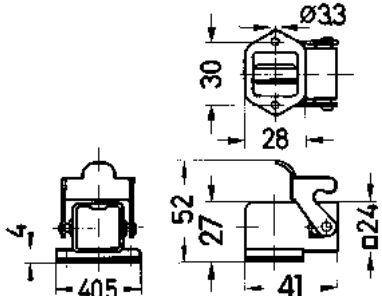
Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44, IP67, With seal screw 09 20 000 9918
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Steel
Surface (locking)	Zinc plated

Specifications and approvals


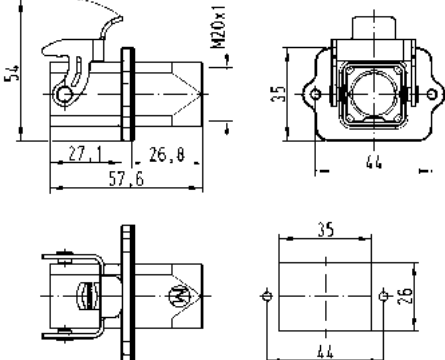





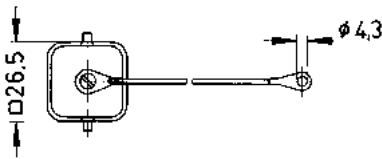

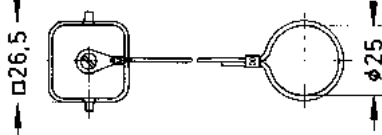
Standard hoods and housings for industrial applications
Single locking lever

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A®, Hoods, With integrated cable gland, Top entry 	1x Integrated 1x Integrated	6 ... 12 11 ... 17	19 20 003 1421 19 20 003 1422	
Han A®, Hoods, Top entry 	1x M20 1x M25		19 20 003 1440 19 20 003 1445	
Han A®, Hoods, Side entry 	1x M20		19 20 003 1640	
Han A®, Screw mounted housings, Top entry 	1x M20		19 20 003 1150	

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A® , Bulkhead mounted housings, Straight 			09 20 003 0301	 Panel cut out 22 x 22 mm
Han A® , Bulkhead mounted housings, Straight, With metal cover, for male inserts 			09 20 003 0305	 Panel cut out 22 x 22 mm
Han A® , Bulkhead mounted housings, Straight, With seal, for female inserts 			09 20 003 0306	
Han A® , Bulkhead mounted housings, Angled 			09 20 003 0801	 Panel cut out 22 x 22 mm

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A® , Bulkhead mounted housings, Angled, 4 fixing screws			09 20 003 0810	
Han A® , Bulkhead mounted housings, Angled, 4 fixing screws, Square mounting flange			09 20 003 0811	
Han A® , Surface mounted housing, Open bottom, Top entry	1x M20		19 20 003 1250	Panel cut out 22 x 22 mm
Han A® , Surface mounted housing, Bottom closed, Top entry	1x M20		19 20 003 1252	

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A®, Cable to cable housing, Top entry 	1x M20 1x M25		19 20 003 1750 19 20 003 1755	
Han A®, Panel feed through housing, Top entry 	1x M20		19 20 003 1120	 Panel cut out
Han A®, Protection cover for hoods, for mounted female insert, Metal, With fixing cord, With seal 			09 20 003 5421	
Han A®, Protection cover for hoods, for mounted male insert or for mounted Han-Brid® insert, Metal, With fixing cord 			09 20 003 5422	
Han A®, Protection cover for all housings, for mounted female insert or for mounted Han-Brid® insert, Metal, With fixing cord, With seal 			09 20 003 5425	

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A®, Protection cover for all housings, for mounted male insert, Metal, With fixing cord 			09 20 003 5426	
Han A®, Protection cover for cable to cable housings, for mounted female insert or for mounted Han-Brid® insert, Metal, With fixing cord, With seal 			09 20 003 5427	
Han A®, Protection cover for cable to cable housings, Metal, With fixing cord 			09 20 003 5428	

Features

- Hoods/housings for industrial applications
- Slim, space saving construction type



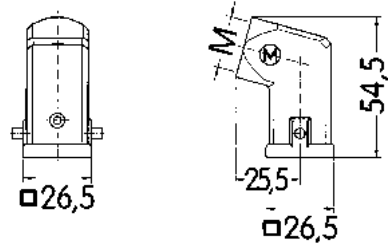
Technical characteristics

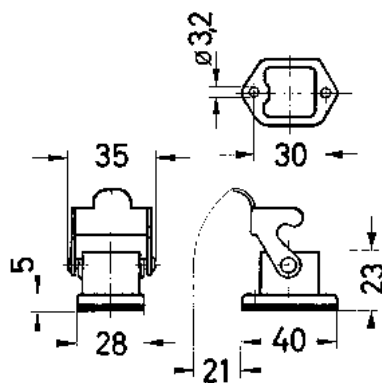
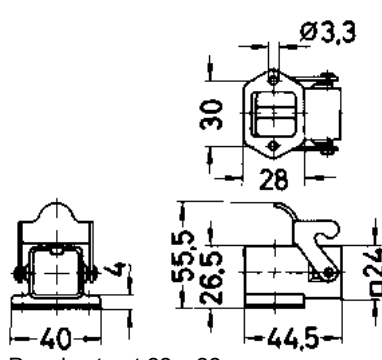
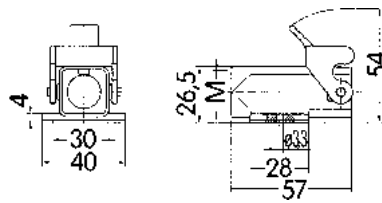
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Flammability acc. to UL 94 (locking levers)	V-0
Degree of protection acc. to IEC 60529	IP44, IP67, With seal screw 09 20 000 9918
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 7032 (pebble grey), RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Polyamide
Colour (locking)	RAL 7032 (pebble grey), RAL 9005 (jet black)


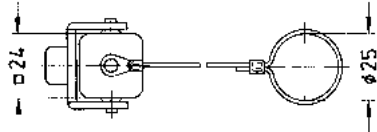
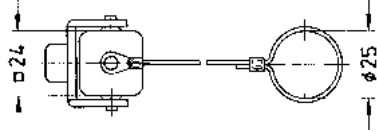

Specifications and approvals


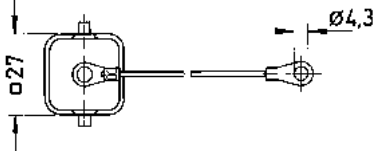
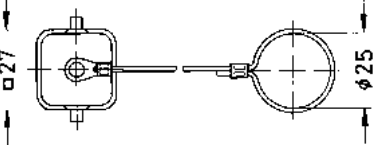
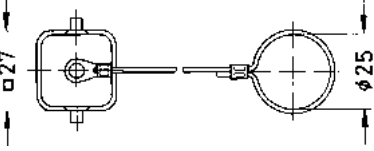


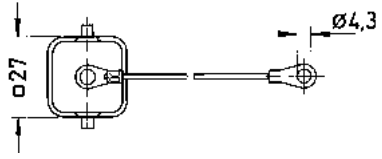
Standard hoods and housings for industrial applications
Single locking lever

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A®, Hoods, With integrated cable gland, Top entry, Grey	1x Integrated 1x Integrated	7 ... 12 9 ... 17	19 20 003 0415 19 20 003 0410	
Han A®, Hoods, Top entry, Grey	1x M20 1x M25		19 20 003 0420 19 20 003 0430	
Han A®, Hoods, Top entry, Black	1x M20 1x M25		19 20 003 0427 19 20 003 0437	
Han A®, Hoods, Side entry, Grey	1x M20		19 20 003 0620	
Han A®, Hoods, Side entry, Black	1x M20		19 20 003 0627	

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A®, Bulkhead mounted housings, Straight, Grey 			09 20 003 0320	 Panel cut out 22 x 22 mm
Han A®, Bulkhead mounted housings, Straight, Black			09 20 003 0327	
Han A®, Bulkhead mounted housings, Angled, Grey 			09 20 003 0820	 Panel cut out 22 x 22 mm
Han A®, Bulkhead mounted housings, Angled, Black			09 20 003 0827	
Han A®, Surface mounted housing, Top entry, Grey 	1x M20		19 20 003 0220	 Panel cut out 22 x 22 mm
Han A®, Surface mounted housing, Top entry, Black	1x M20		19 20 003 0227	

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A®, Cable to cable housing, Top entry, Grey 	1x M20		19 20 003 0720	
Han A®, Cable to cable housing, Top entry, Black	1x M20		19 20 003 0727	
Han A®, Protection cover for hoods, for mounted female insert or for mounted Han-Brid® insert, Thermoplastic, With fixing cord, With seal, Grey 			09 20 003 5441	
Han A®, Protection cover for hoods, for mounted male insert or for mounted Han-Brid® insert, Thermoplastic, With fixing cord, Grey 			09 20 003 5442	
Han A®, Protection cover for all housings, Thermoplastic, Grey 			09 20 003 5407	
Han A®, Protection cover for all housings, for mounted female insert or for mounted Han-Brid® insert, Thermoplastic, With seal, Grey 			09 20 003 5408	

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A®, Protection cover for all housings, for mounted female insert or for mounted Han-Brid® insert, Thermoplastic, With seal, Black 			09 20 003 5409	
Han A®, Protection cover for all housings, for mounted female insert, Thermoplastic, With seal, With fixing cord, Grey 			09 20 003 5445	
Han A®, Protection cover for all housings, for mounted male insert, Thermoplastic, With fixing cord, Grey 			09 20 003 5446	
Han A®, Protection cover for cable to cable housings, for mounted female insert, Thermoplastic, With seal, With fixing cord, Grey 			09 20 003 5447	
Han A®, Protection cover for cable to cable housings, for mounted male insert, Thermoplastic, With fixing cord, Grey 			09 20 003 5448	

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han A®, Protection cover for all housings, for mounted female insert, Thermoplastic, With seal, With fixing cord, Black 			09 20 003 5449	
Han A®, Protection cover for all housings, for mounted male insert, Thermoplastic, With fixing cord, Black 			09 20 003 5450	

Features

- Standard hoods and housings for industrial applications
- Slim, space saving construction type

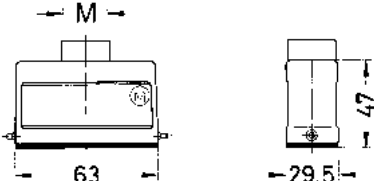
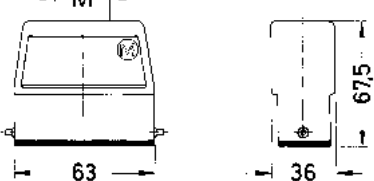
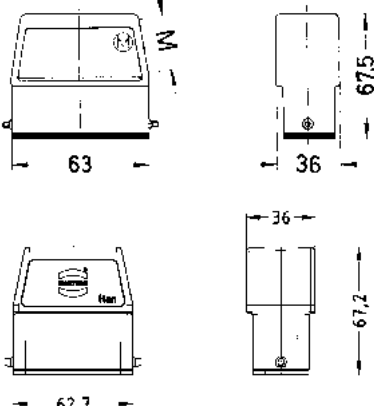
Technical characteristics

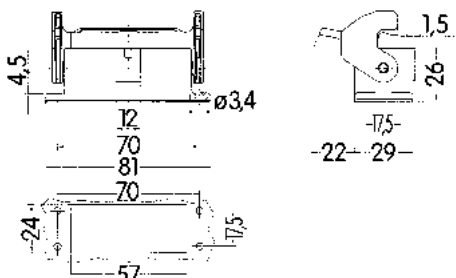
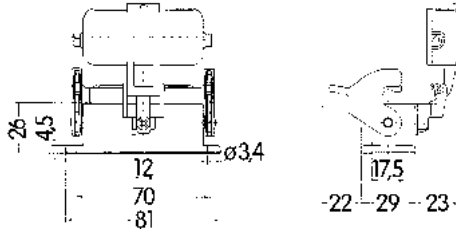
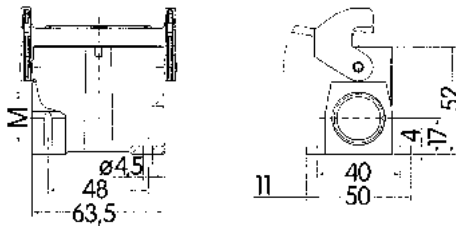
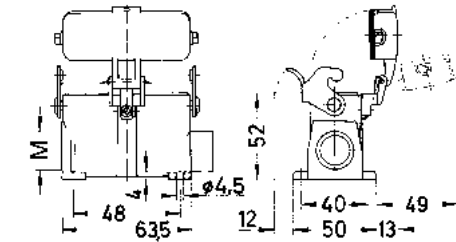
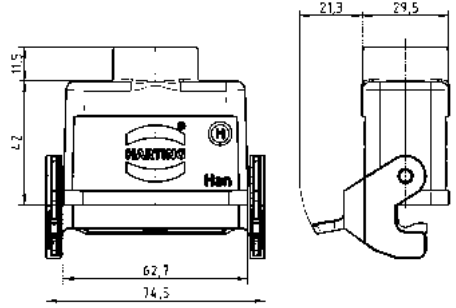
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94 (locking levers)	V-0
Degree of protection acc. to IEC 60529	IP65
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)



Specifications and approvals



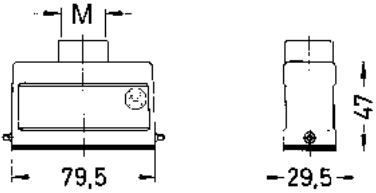
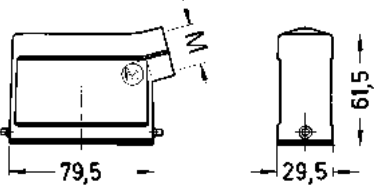
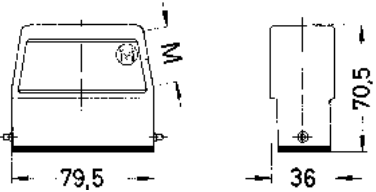
Standard hoods and housings for industrial applications
Single locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han A®, Hoods, Top entry 	1x M20 1x M25	19 20 010 1440	19 20 010 0446		
Han A®, Hoods, Side entry 	1x M20 1x M25	19 20 010 1540	19 20 010 0546		
Han A®, Hoods, Without cable entry 			09 20 010 0801		

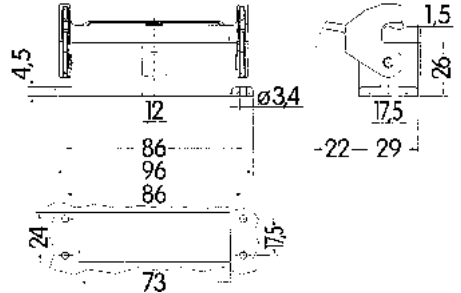
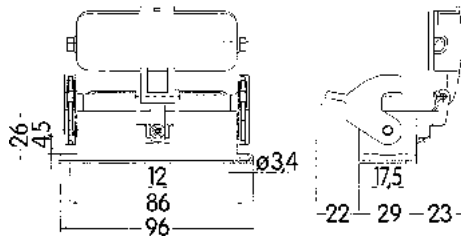
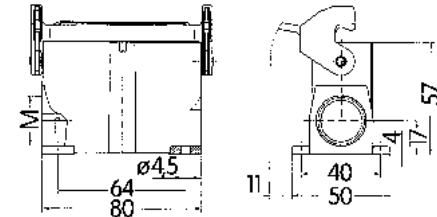
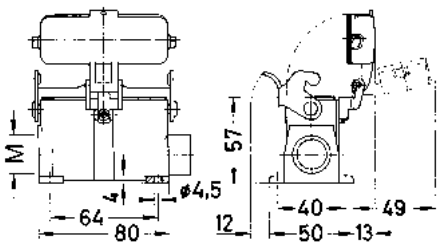

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han A®, Bulkhead mounted housings, Han-Easy Lock® 		09 20 010 0301		 Panel cut out
Han A®, Bulkhead mounted housings, With thermo-plastic cover, Han-Easy Lock® 		09 20 010 0321		
Han A®, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 2x M20	19 20 010 0251 19 20 010 0290		
Han A®, Surface mounted housing, With thermo-plastic cover, Side entry, Han-Easy Lock® 	2x M20		19 20 010 0295	
Han A®, Cable to cable housing, Top entry, Han-Easy Lock® 	1x M20	19 20 010 1730		

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han A®, Protection cover for hoods, Metal, With fixing cord 		09 20 010 5423	09 20 010 5423	
Han A®, Protection cover for bulkhead and cable to cable housing, Metal, With fixing cord 		09 20 010 5425	09 20 010 5425	


Standard hoods and housings for industrial applications
Single locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han A®, Hoods, Top entry 	1x M20 1x M25	19 20 016 1440	19 20 016 0446		
Han A®, Hoods, Side entry 	1x M20 1x M25	19 20 016 1540	19 20 016 0546		
Han A®, Hoods, Without cable entry 			09 20 016 0801		

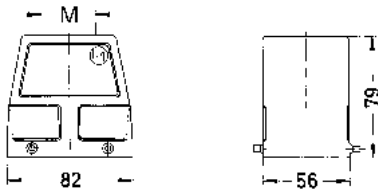
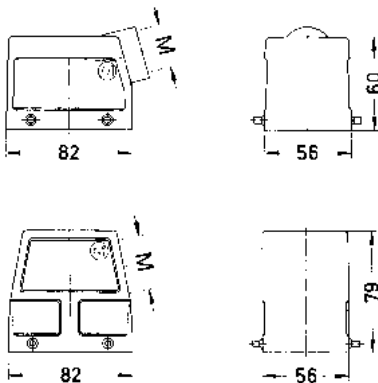
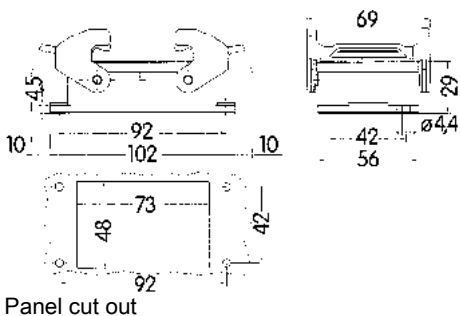
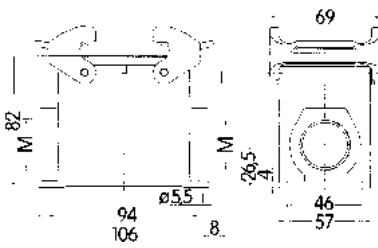
Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han A®, Bulkhead mounted housings, Han-Easy Lock® 		09 20 016 0301		 Panel cut out
Han A®, Bulkhead mounted housings, With thermo-plastic cover, Han-Easy Lock® 		09 20 016 0321		
Han A®, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 2x M20 2x M25	19 20 016 0251 19 20 016 0290 19 20 016 0291		
Han A®, Surface mounted housing, With thermo-plastic cover, Side entry, Han-Easy Lock® 	2x M20	19 20 016 0295		
Han A®, Protection cover for hoods, Metal, With fixing cord, Han-Easy Lock® 		09 20 016 5423	09 20 016 5423	







Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han A® , Protection cover for all housings, Metal, With fixing cord 		09 20 016 5425	09 20 016 5425	

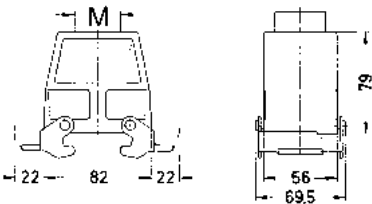
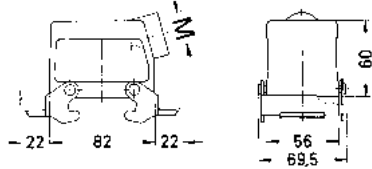
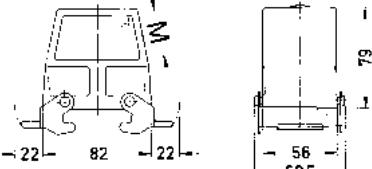
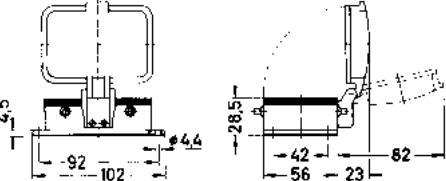

Standard hoods and housings for industrial applications
Double locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han A®, Hoods, Top entry 	1x M25 1x M32		19 20 032 0426 19 20 032 0427	
Han A®, Hoods, Side entry 	1x M25 1x M32	19 20 032 1521	19 20 032 0527	
Han A®, Bulkhead mounted housings, Han-Easy Lock® 		09 20 032 0301		 Panel cut out
Han A®, Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 1x M32 2x M32		19 20 032 0231 19 20 032 0232 19 20 032 0272	

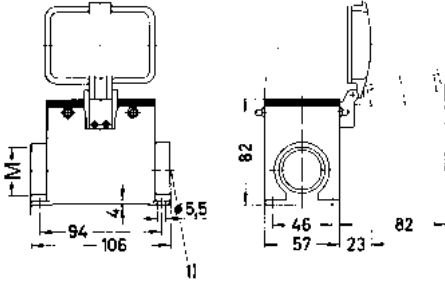


Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han A®, Protection cover for hoods, Metal 		09 20 032 5401	09 20 032 5401		
Han A®, Protection cover for all housings, Metal 		09 20 032 5405	09 20 032 5405		

Standard hoods and housings for industrial applications
Double locking lever (revers)

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han A®, Hoods, Top entry, Han-Easy Lock® 	1x M32		19 20 032 0437	
Han A®, Hoods, Side entry, Han-Easy Lock® 	1x M25 1x M32	19 20 032 1531	19 20 032 0537	 
Han A®, Bulkhead mounted housings, With thermo-plastic cover 		09 20 032 0302		  Panel cut out



Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han A® , Surface mounted housing, With thermo-plastic cover, Side entry 	1x M25		19 20 032 0226	 1) Blind way for one cable entry

Features

- HARTING standard hoods and housings for industrial connectors
- Locking levers: Han-Easy Lock®
- Field of application: for excellent mechanical and electrical protection in demanding environments, for example, in the automobile and mechanical engineering industries also for process and regulation control applications
- Distinguishing feature: hoods/housings colour-coded grey (RAL 7037)
- Many variations: for precise industrial applications

Technical characteristics

Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94 (locking levers)	V-0
Degree of protection acc. to IEC 60529	IP65, IP67, In locked position, IP44, In unlocked position
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)

Specifications and approvals













Details

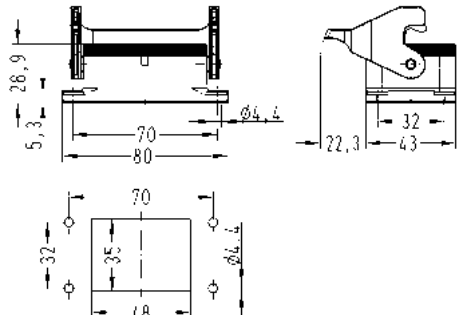
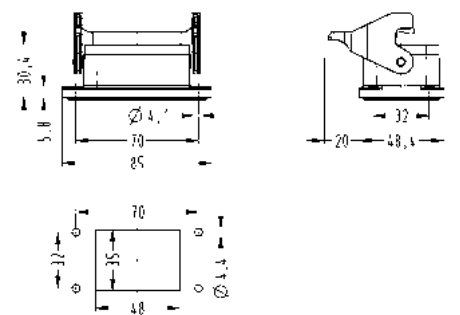
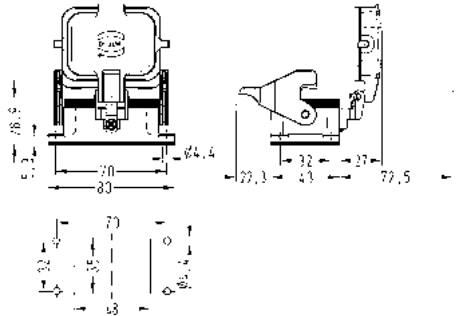
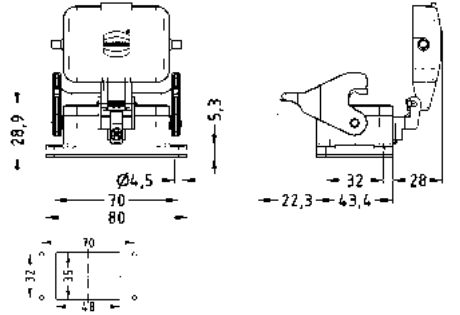
Standard degree of protection: IP65

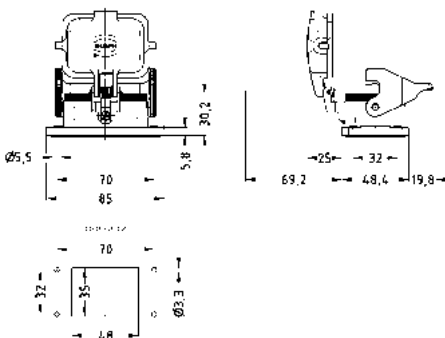
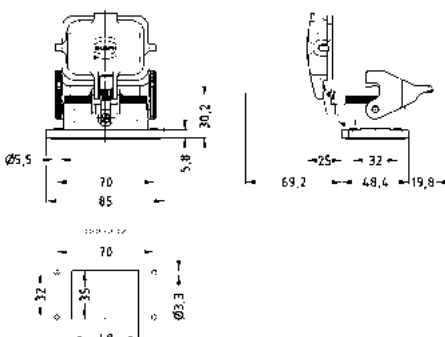
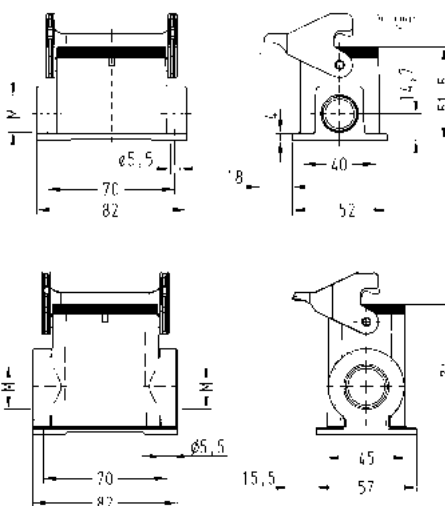
IP67 possible, in combination with special bulkhead mounted housings

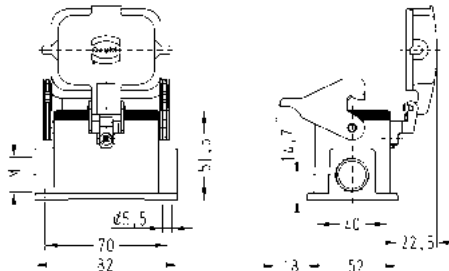
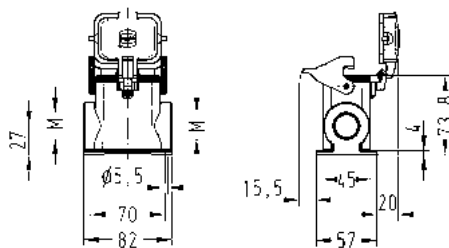
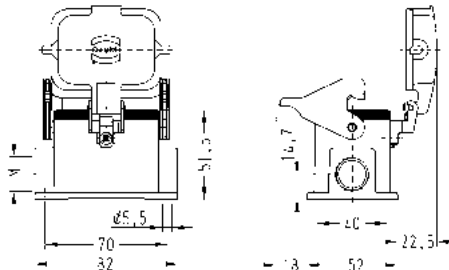
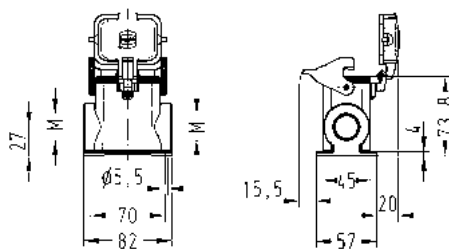
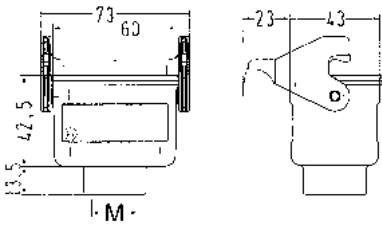
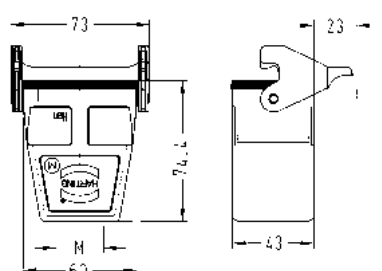
IP44 for self-closing covers in unlocked position

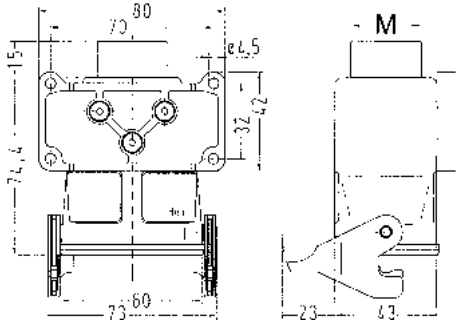

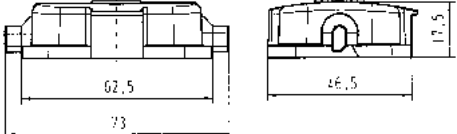


HARTING standard hoods and housings for industrial connectors
Single locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® B , Hoods, Top entry 	1x M20 1x M25 1x M32	19 30 006 1440	19 30 006 0446 19 30 006 0447	 	
Han® B , Hoods, Side entry 	1x M20 1x M25 1x M32	19 30 006 1540 19 30 006 1541	19 30 006 0546 19 30 006 0547	   	
Han® B , Hoods 			09 30 006 0801	   	


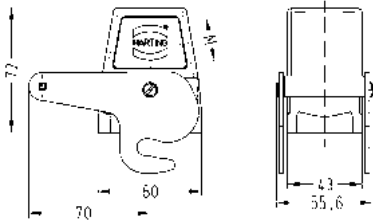
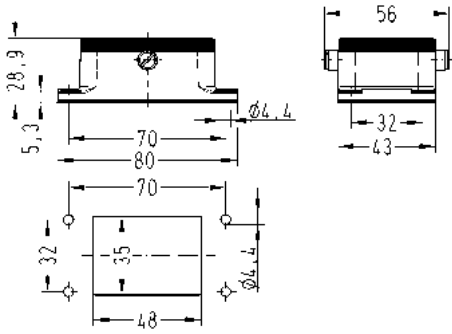
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Bulkhead mounted housings, Han-Easy Lock® 		09 30 006 0301		 Panel cut out
Han® B , Bulkhead mounted housings, Han-Easy Lock®, IP67 		09 30 006 1301		 Panel cut out
Han® B , Bulkhead mounted housings, With thermo-plastic cover, Han-Easy Lock® 		09 30 006 0302		 Panel cut out
Han® B , Bulkhead mounted housings, With metal cover, Han-Easy Lock® 		09 30 006 0318		 Panel cut out

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Bulkhead mounted housings, With self-closing cover, Han-Easy Lock® 		09 30 006 1306		 Panel cut out
Han® B , Bulkhead mounted housings, With thermo-plastic cover, Han-Easy Lock®, IP67 		09 30 006 1308		 Panel cut out
Han® B , Surface mounted housing, Side entry, Han-Easy Lock® 	1x M20 2x M20 2x M25 2x M32	19 30 006 1250 19 30 006 1290	19 30 006 0291 19 30 006 0292	

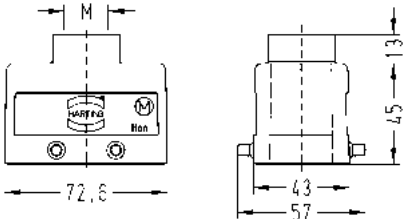
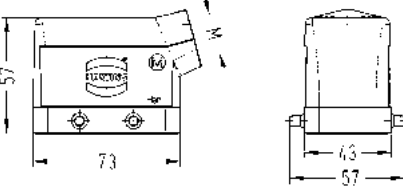
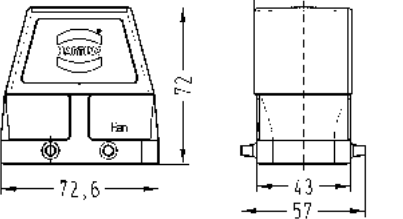
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Surface mounted housing, With thermo-plastic cover, Side entry, Han-Easy Lock® 	1x M20 2x M20 2x M25 2x M32	19 30 006 1255 19 30 006 1295	19 30 006 0296 19 30 006 0297	 
Han® B , Surface mounted housing, With metal cover, Side entry, Han-Easy Lock® 	1x M20 2x M20 2x M25 2x M32	19 30 006 2255 19 30 006 2295	19 30 006 7296 19 30 006 7297	 
Han® B , Cable to cable housing, Top entry, Han-Easy Lock® 	1x M20 1x M25 1x M32	19 30 006 1750	19 30 006 0756 19 30 006 0757	 

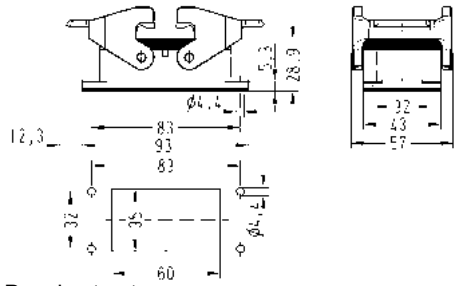
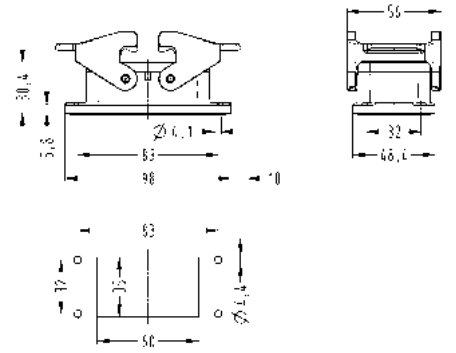
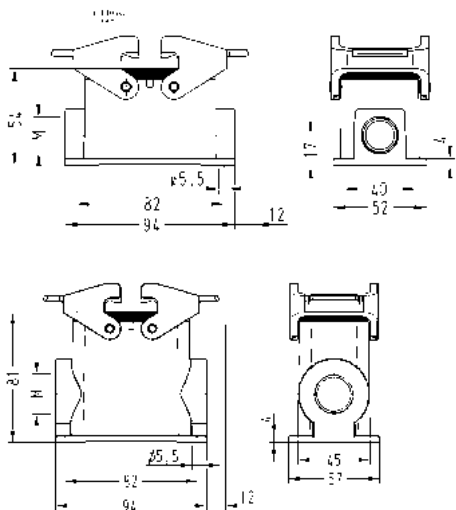
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B, Flange housings, Top entry, Han-Easy Lock® 	1x M25	19 30 006 0716		
Han® B, Protection cover for hoods, With fixing cord, Han-Easy Lock® 		09 30 006 5423	09 30 006 5423	
Han® B, Protection cover for all housings, Thermoplastic 		09 30 006 5404	09 30 006 5404	
Han® B, Protection cover for bulkhead and cable to cable housing, Metal, With fixing cord 		09 30 006 5425	09 30 006 5425	
Han® B, Protection cover for cable to cable housings, Metal, With fixing cord 		09 30 006 5427	09 30 006 5427	

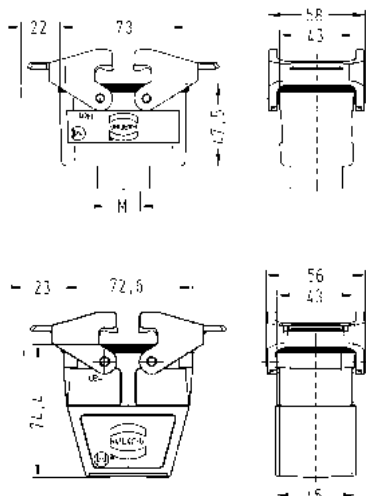
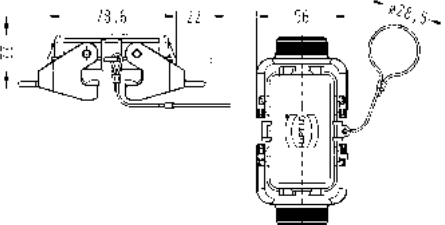
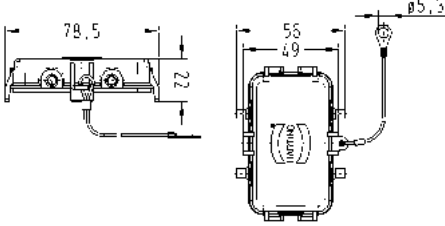
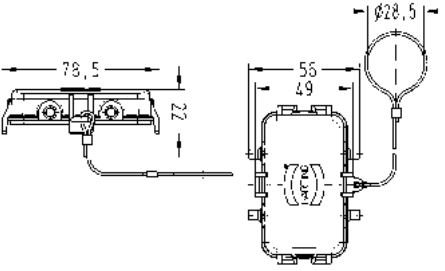
HARTING standard hoods and housings for industrial connectors
Central locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Hoods, Side entry 	1x M25 1x M32		19 30 006 0586 19 30 006 0587	
Han® B , Bulkhead mounted housings 		09 30 006 0381		 Panel cut out

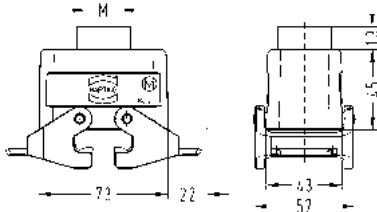
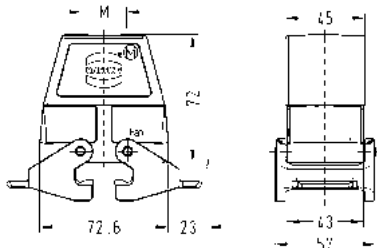
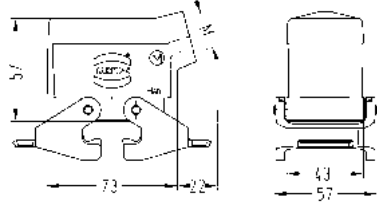
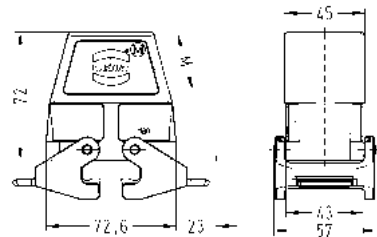
HARTING standard hoods and housings for industrial connectors
Double locking lever

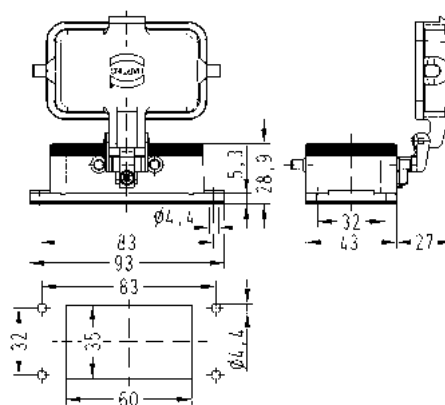
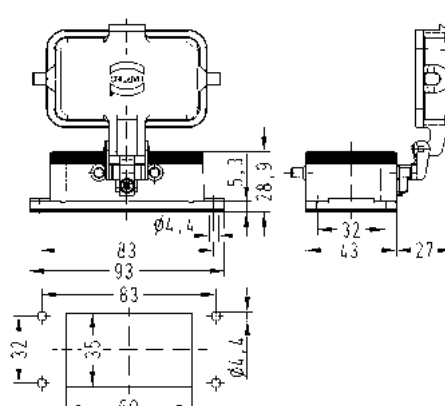
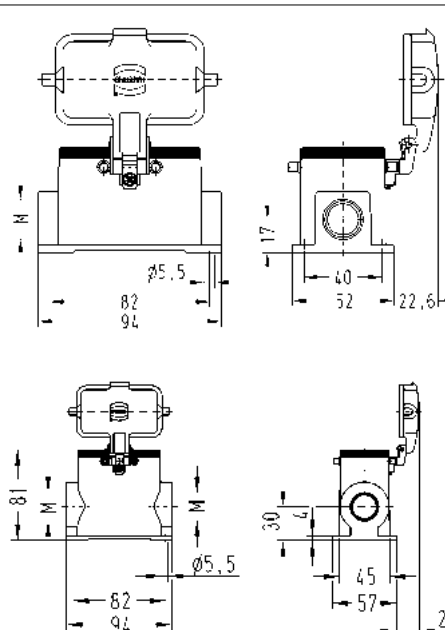
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Hoods, Top entry 	1x M20 1x M25 1x M32 1x M40 2x M20	19 30 010 1420 19 30 010 1421	19 30 010 0427 19 30 010 0428 19 30 010 0465	
Han® B , Hoods, Side entry 	1x M20 1x M25 1x M32	19 30 010 1520 19 30 010 1521	19 30 010 0527	
Han® B , Hoods, Without cable entry 			09 30 010 0801	

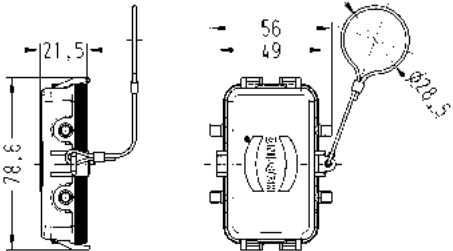
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Bulkhead mounted housings, Han-Easy Lock® 		09 30 010 0301		 Panel cut out
Han® B , Bulkhead mounted housings, Han-Easy Lock®, IP67 		09 30 010 1301		 Panel cut out
Han® B , Surface mounted housing, Side entry, Han-Easy Lock® 	1x M20 1x M25 2x M20 2x M25 2x M32	19 30 010 1230 19 30 010 1231 19 30 010 1270	19 30 010 0231 19 30 010 0271 19 30 010 0272	

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Cable to cable housing, Top entry, Han-Easy Lock® 	1x M20 1x M25 1x M32	19 30 010 1730	19 30 010 0736 19 30 010 0737	
Han® B , Protection cover for hoods, Metal, With fixing cord, Han-Easy Lock® 		09 30 010 5423	09 30 010 5423	
Han® B , Protection cover for all housings, Thermoplastic 		09 30 010 5407	09 30 010 5407	
Han® B , Protection cover for all housings, Metal, With fixing cord 		09 30 010 5425	09 30 010 5425	
Han® B , Protection cover for cable to cable housings, Metal, With fixing cord 		09 30 010 5427	09 30 010 5427	

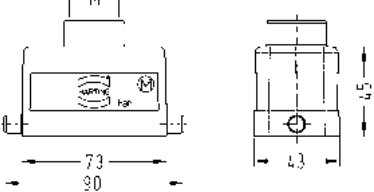
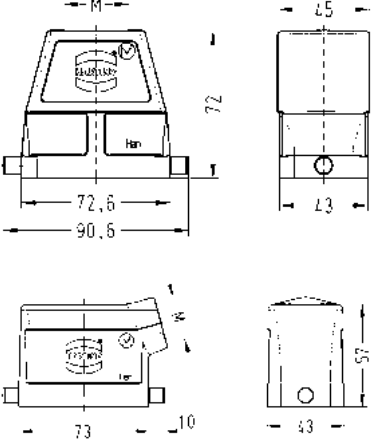
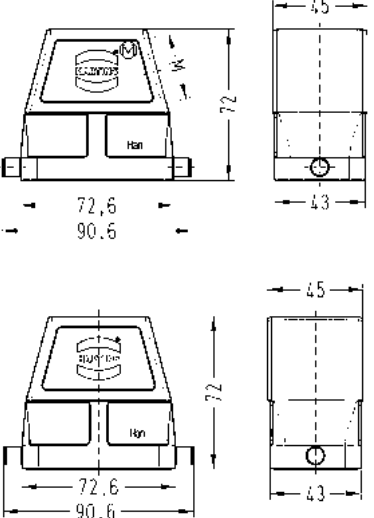
HARTING standard hoods and housings for industrial connectors
Double locking lever (revers)

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Hoods, Top entry, Han-Easy Lock® 	1x M20 1x M25	19 30 010 1430	19 30 010 0436	 
Han® B , Hoods, Side entry, Han-Easy Lock® 	1x M20 1x M32	19 30 010 1530	19 30 010 0537	 

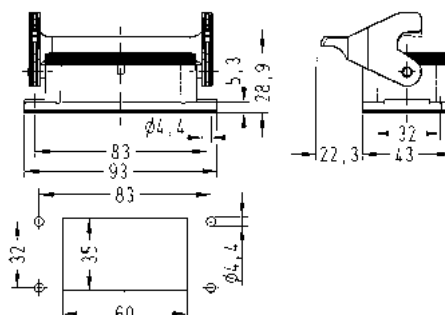
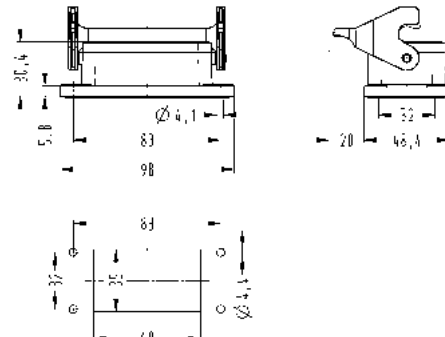
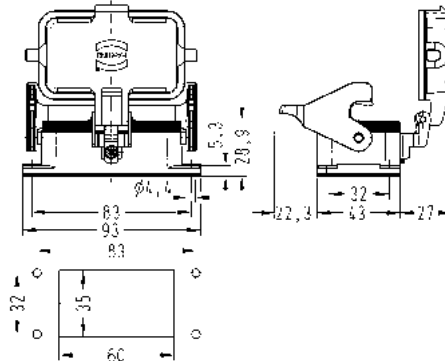
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Bulkhead mounted housings, With thermo-plastic cover 		09 30 010 0302		 Panel cut out
Han® B , Bulkhead mounted housings, With metal cover 		09 30 010 0317		 Panel cut out
Han® B , Surface mounted housing, With thermo-plastic cover, Side entry 	1x M20 2x M20 2x M25	19 30 010 1225 19 30 010 1265	19 30 010 0266	

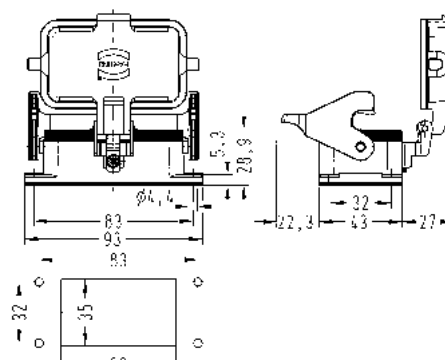
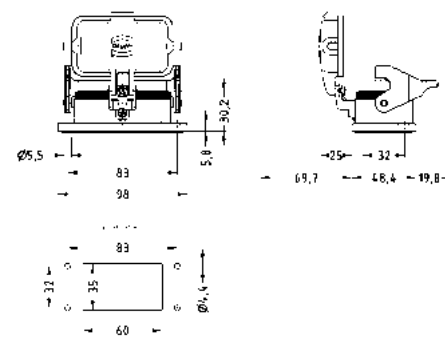
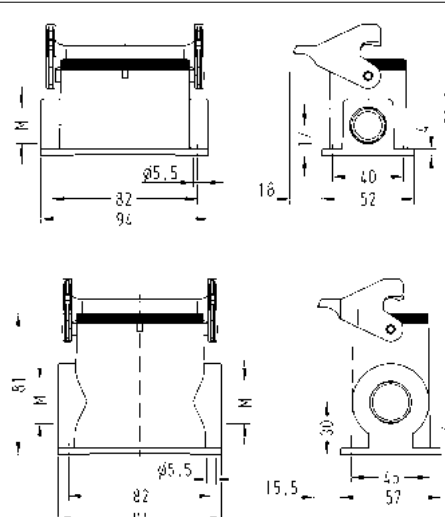
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Protection cover for hoods, Metal, With fixing cord 		09 30 010 5457	09 30 010 5457	

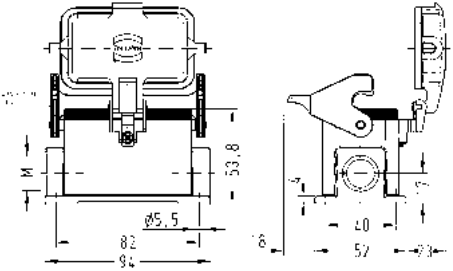
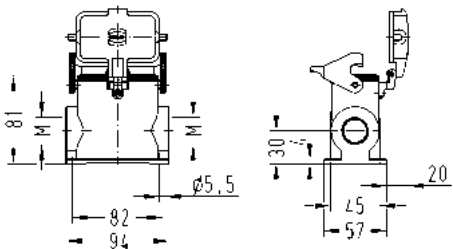
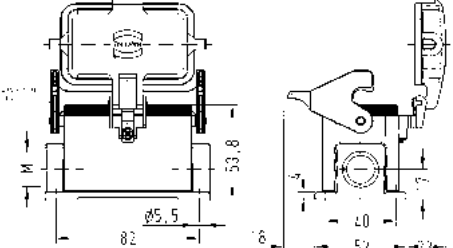
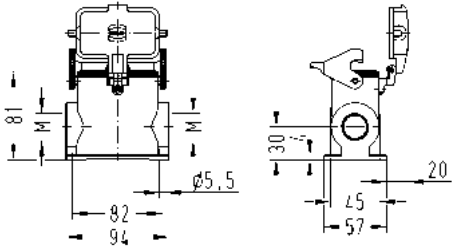
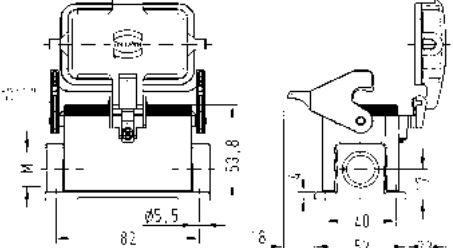
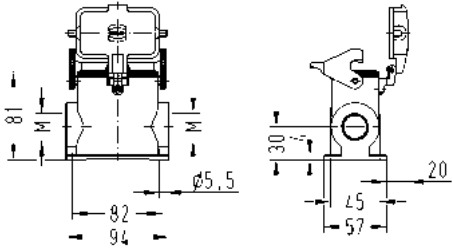
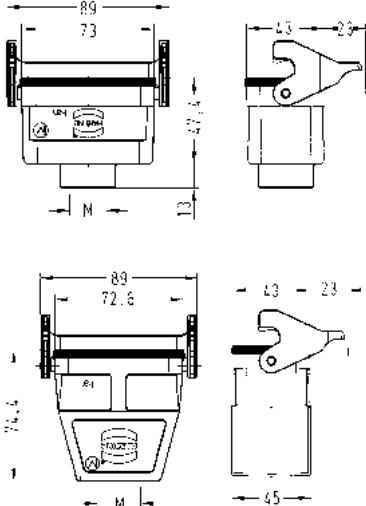
HARTING standard hoods and housings for industrial connectors
Single locking lever

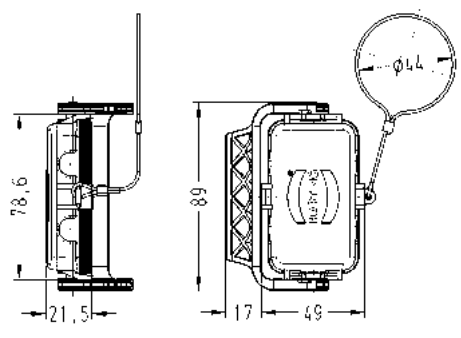
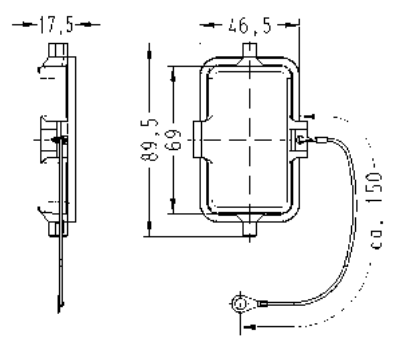
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Hoods, Top entry 	1x M20 1x M25 1x M32 1x M40	19 30 010 1440 19 30 010 1441	19 30 010 0447 19 30 010 0448	
Han® B , Hoods, Side entry 	1x M20 1x M25 1x M32	19 30 010 1540 19 30 010 1541	19 30 010 0547	
Han® B , Hoods, Without cable entry 			09 30 010 0803	

Housings

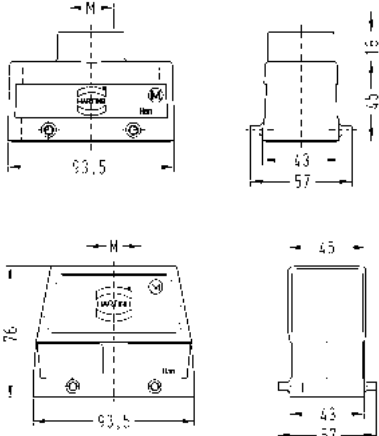
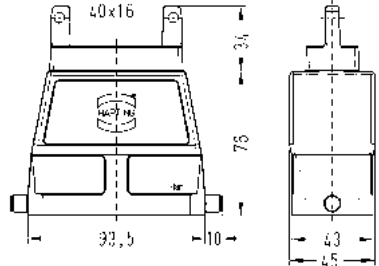
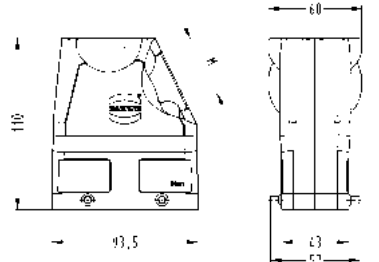
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Bulkhead mounted housings, Han-Easy Lock® 		09 30 010 0305		 Panel cut out
Han® B , Bulkhead mounted housings, Han-Easy Lock®, IP67 		09 30 010 1305		 Panel cut out
Han® B , Bulkhead mounted housings, With thermo-plastic cover, Han-Easy Lock® 		09 30 010 0303		 Panel cut out

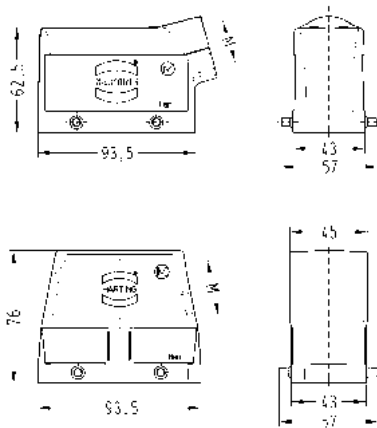
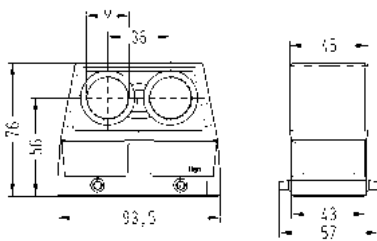
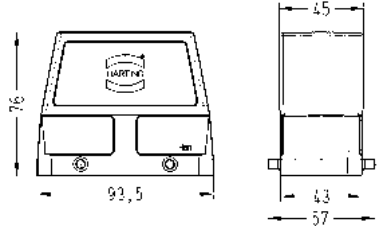
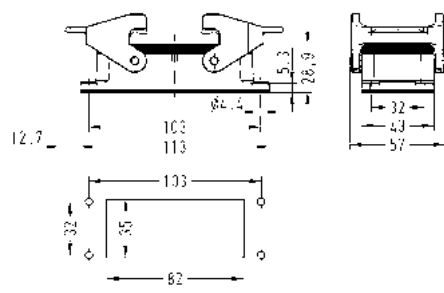
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Bulkhead mounted housings, With metal cover, Han-Easy Lock® 		09 30 010 0318		 Panel cut out
Han® B , Bulkhead mounted housings, With self-closing cover, Han-Easy Lock® 		09 30 010 1306		 Panel cut out
Han® B , Surface mounted housing, Side entry, Han-Easy Lock® 	1x M20 2x M20 2x M25 2x M32	19 30 010 1250 19 30 010 1290	19 30 010 0291 19 30 010 0292	

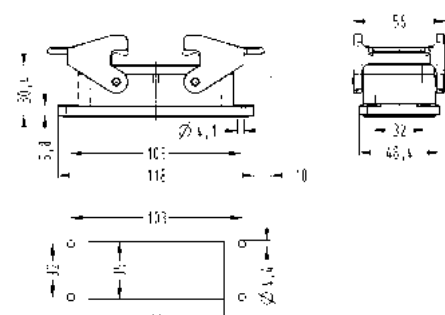
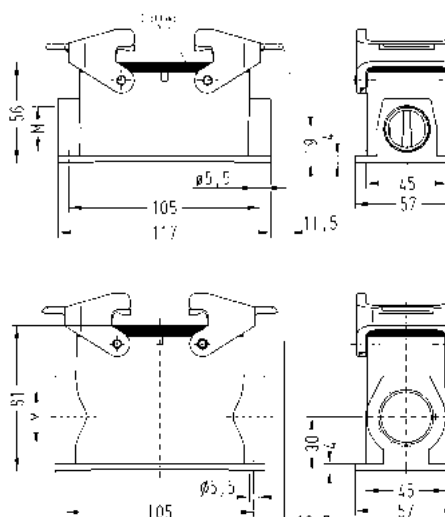
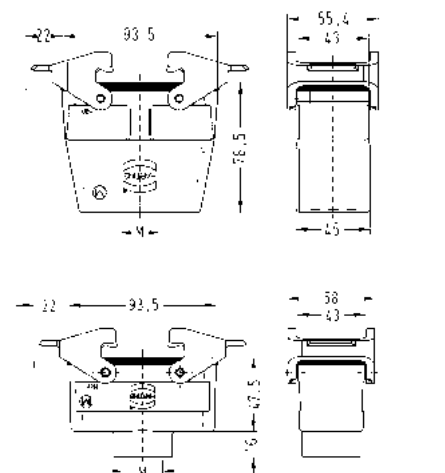
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Surface mounted housing, With thermo-plastic cover, Side entry, Han-Easy Lock® 	1x M20 2x M20 2x M25 2x M32	19 30 010 1255 19 30 010 1295	19 30 010 0296 19 30 010 0297	   
Han® B , Surface mounted housing, With metal cover, Side entry, Han-Easy Lock® 	2x M20 2x M25 2x M32	19 30 010 2295	19 30 010 7296 19 30 010 7297	 
Han® B , Cable to cable housing, Top entry, Han-Easy Lock® 	1x M20 1x M25 1x M32	19 30 010 1750	19 30 010 0756 19 30 010 0757	

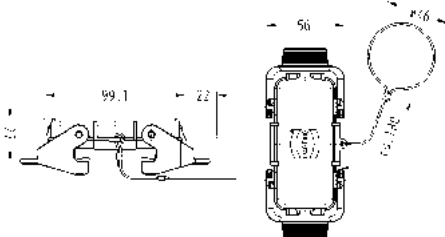
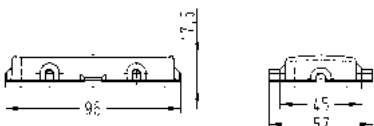
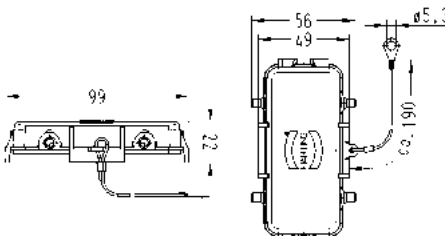
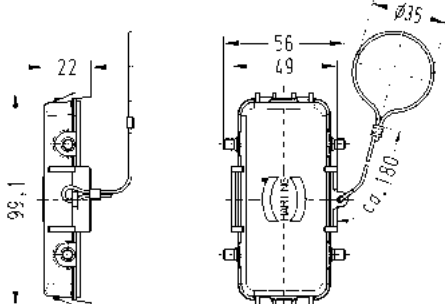
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Protection cover for hoods, Metal, With fixing cord, Han-Easy Lock® 		09 30 010 5432	09 30 010 5432	
Han® B , Protection cover for all housings, Thermoplastic, With fixing cord 		09 30 010 5412	09 30 010 5412	

HARTING standard hoods and housings for industrial connectors
Double locking lever

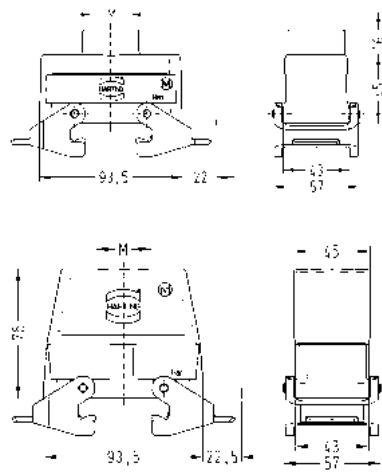
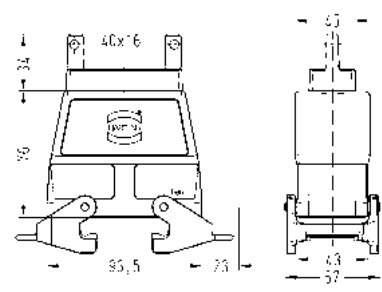
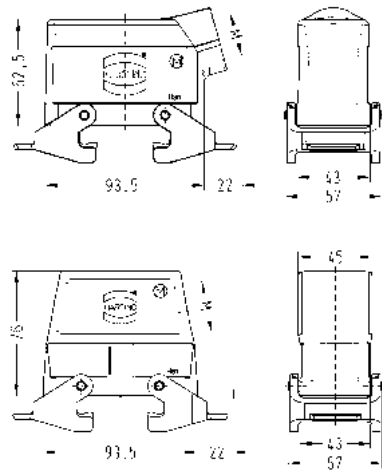
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Hoods, Top entry 	1x M25 1x M32 1x M40 2x M25	19 30 016 1421 19 30 016 1422	19 30 016 0427 19 30 016 0428 19 30 016 0466	
Han® B , Hoods, Flat cable entry, Top entry 			09 30 016 4441	
Han® B , Hoods, Special type, Side entry 	1x M40 1x M50		19 30 016 0523 19 30 016 0529	

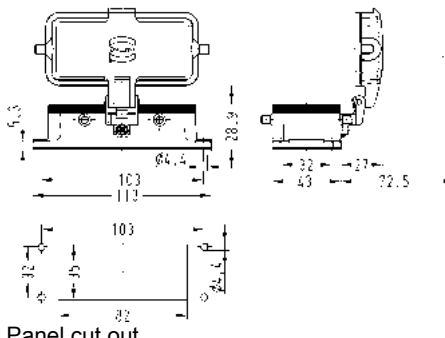
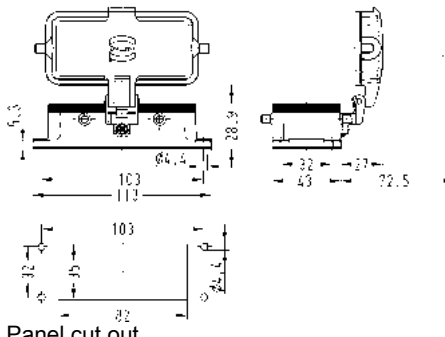
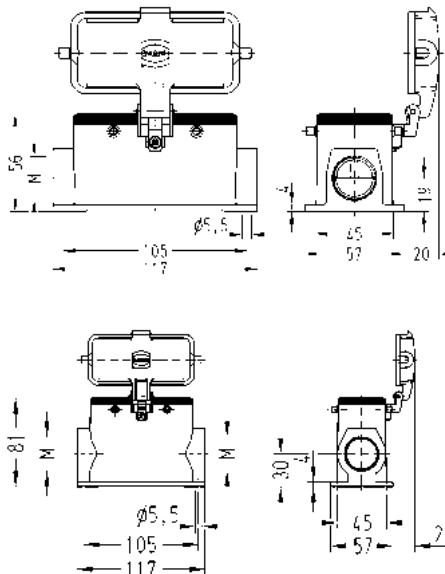
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Hoods, Side entry 	1x M25 1x M32 1x M40	19 30 016 1521 19 30 016 1522	19 30 016 0527 19 30 016 0528	
Han® B , Hoods, Angled entry 	2x M25		19 30 016 0666	
Han® B , Hoods, Without cable entry 			09 30 016 0801	
Han® B , Bulkhead mounted housings, Han-Easy Lock® 		09 30 016 0301		 Panel cut out

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Bulkhead mounted housings, Han-Easy Lock®, IP67 		09 30 016 1301		 Panel cut out
Han® B , Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 1x M32 2x M25 2x M32 2x M40	19 30 016 1231 19 30 016 1271	19 30 016 0232 19 30 016 0271 19 30 016 0272 19 30 016 0273	
Han® B , Cable to cable housing, Top entry, Han-Easy Lock® 	1x M25 1x M32	19 30 016 1731 19 30 016 1732	19 30 016 0736 19 30 016 0737	

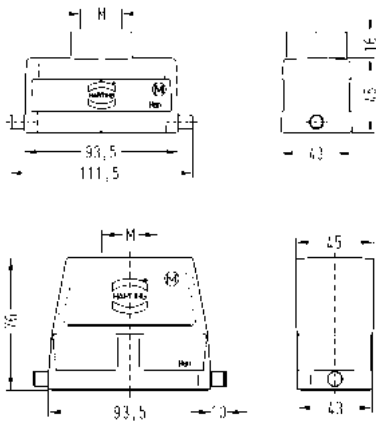
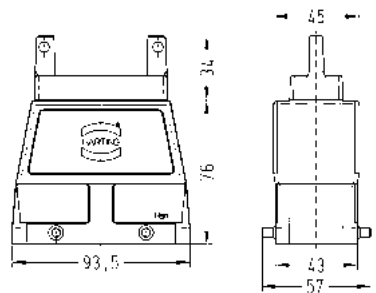
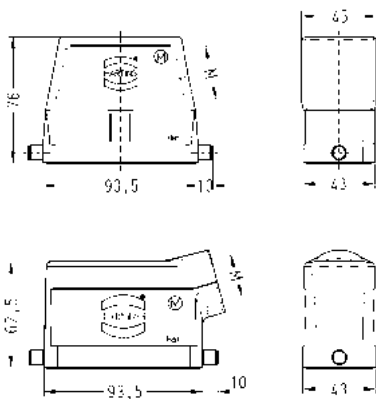
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Protection cover for hoods, Metal, With fixing cord, Han-Easy Lock® 		09 30 016 5422	09 30 016 5422	
Han® B , Protection cover for bulkhead and cable to cable housing, Thermoplastic 		09 30 016 5405	09 30 016 5405	
Han® B , Protection cover for all housings, Metal, With fixing cord 		09 30 016 5417 09 30 016 5457	09 30 016 5417 09 30 016 5457	
Han® B , Protection cover for bulkhead and cable to cable housing, Metal, With fixing cord 		09 30 016 5425	09 30 016 5425	
Han® B , Protection cover for cable to cable housings, Metal, With fixing cord 		09 30 016 5426	09 30 016 5426	

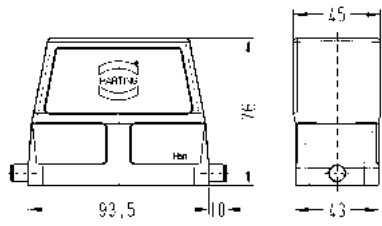
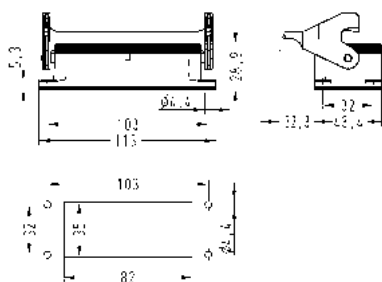
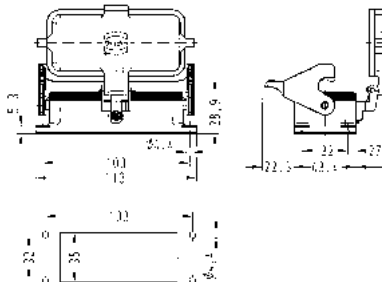
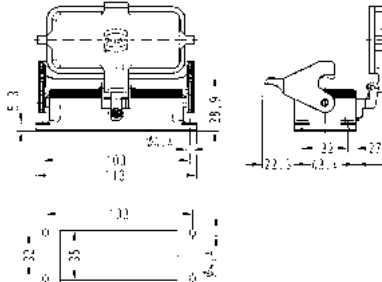
HARTING standard hoods and housings for industrial connectors
Double locking lever (revers)

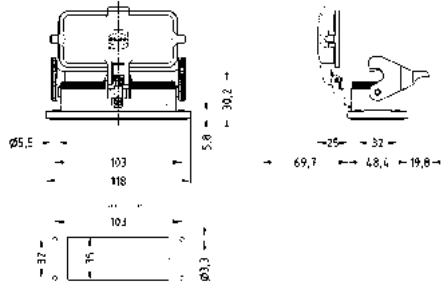
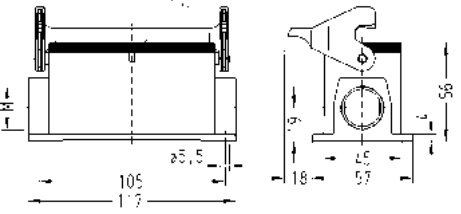
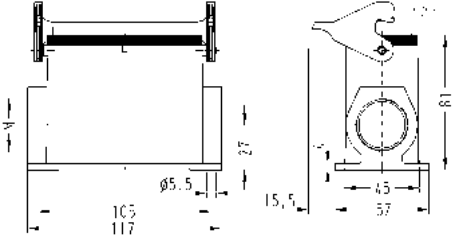
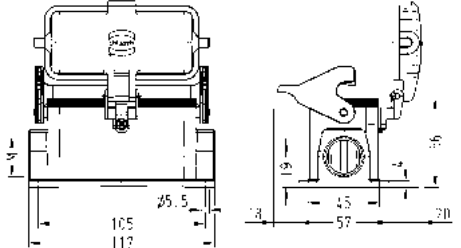
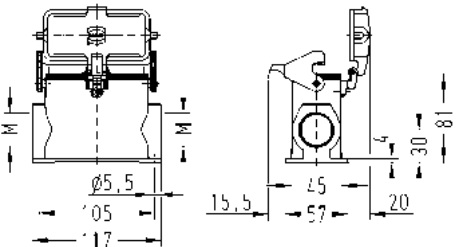
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Hoods, Top entry, Han-Easy Lock® 	1x M25 1x M32 1x M40	19 30 016 1431 19 30 016 1432	19 30 016 0437 19 30 016 0438	
Han® B , Hoods, Flat cable entry, Top entry, Han-Easy Lock® 			09 30 016 4431	
Han® B , Hoods, Side entry, Han-Easy Lock® 	1x M25 1x M32 1x M40	19 30 016 1531	19 30 016 0537 19 30 016 0538	

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Bulkhead mounted housings, With thermo-plastic cover 		09 30 016 0302		 Panel cut out
Han® B , Bulkhead mounted housings, With metal cover 		09 30 016 0317		 Panel cut out
Han® B , Surface mounted housing, With thermo-plastic cover, Side entry 	1x M25 2x M25 2x M32	19 30 016 1226 19 30 016 1266	19 30 016 0267	

HARTING standard hoods and housings for industrial connectors
Single locking lever

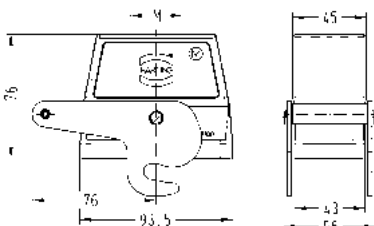
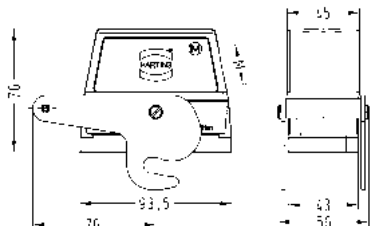
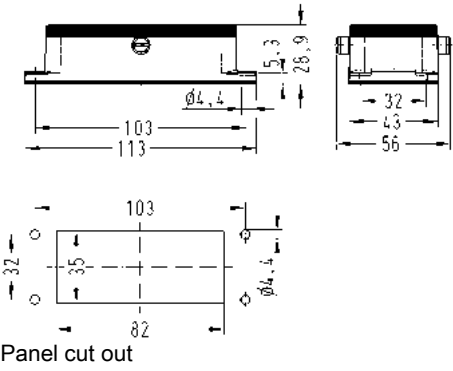
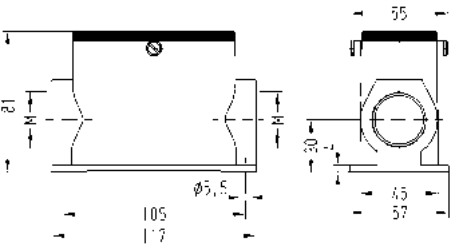
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Hoods, Top entry 	1x M25 1x M32 1x M40	19 30 016 1441 19 30 016 1442	19 30 016 0447 19 30 016 0448	
Han® B , Hoods, Flat cable entry, Top entry 			09 30 016 4411	
Han® B , Hoods, Side entry 	1x M25 1x M32 1x M40	19 30 016 1541 19 30 016 1542	19 30 016 0547 19 30 016 0548	

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Hoods, Without cable entry 			09 30 016 0803	
Han® B , Bulkhead mounted housings, Han-Easy Lock® 		09 30 016 0307		 Panel cut out
Han® B , Bulkhead mounted housings, With thermo-plastic cover, Han-Easy Lock® 		09 30 016 0306		 Panel cut out
Han® B , Bulkhead mounted housings, With metal cover, Han-Easy Lock® 		09 30 016 0318		 Panel cut out












Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Bulkhead mounted housings, With self-closing cover, Han-Easy Lock® 		09 30 016 1306		 Panel cut out
Han® B , Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 1x M32 2x M25 2x M32	19 30 016 1251 19 30 016 1291	19 30 016 0252 19 30 016 0291 19 30 016 0292	 
Han® B , Surface mounted housing, With thermo-plastic cover, Side entry, Han-Easy Lock® 	1x M25 2x M25 2x M32	19 30 016 1256 19 30 016 1296	19 30 016 0297	 

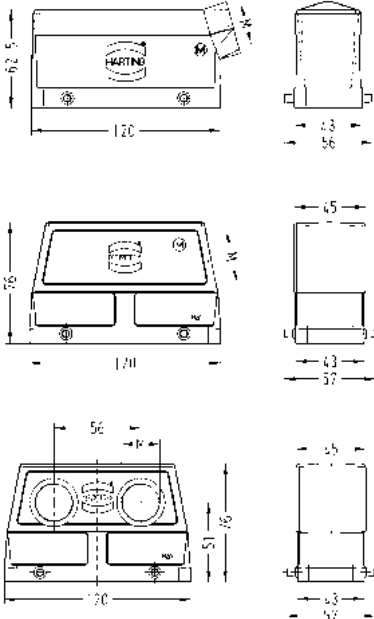
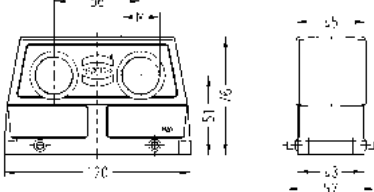
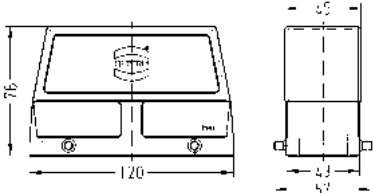
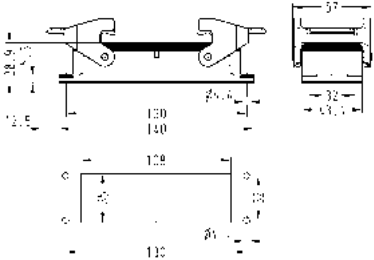
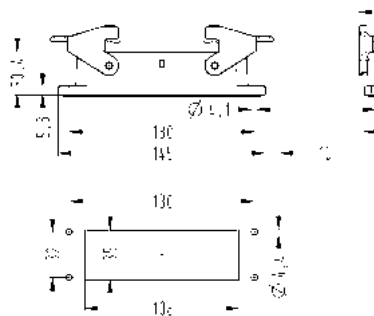
Housings

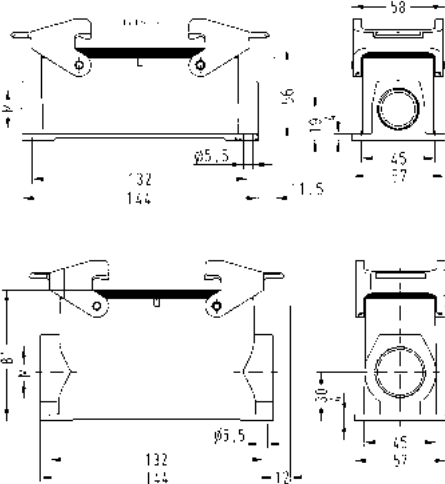
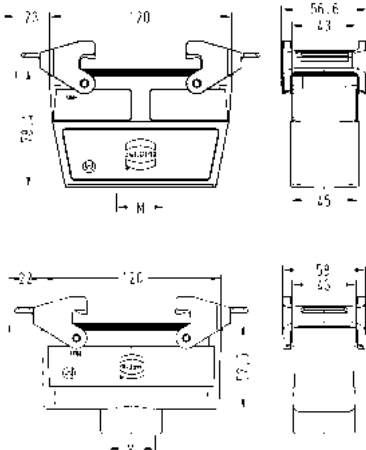



HARTING standard hoods and housings for industrial connectors
Central locking lever




Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Hoods, Top entry 	1x M32		19 30 016 0487	
Han® B , Hoods, Side entry 	1x M25 1x M32		19 30 016 0586 19 30 016 0587	
Han® B , Bulkhead mounted housings 		09 30 016 0381		 Panel cut out
Han® B , Surface mounted housing, Side entry 	2x M32		19 30 016 0282	

HARTING standard hoods and housings for industrial connectors
Double locking lever









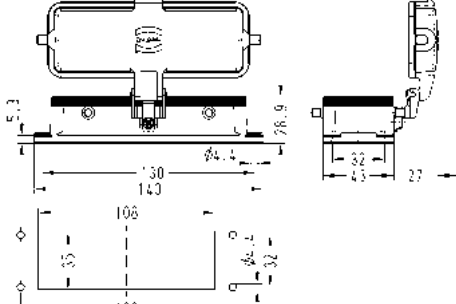
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Hoods, Special type, Top entry 	1x M50		19 30 024 0429	 
Han® B , Hoods, Top entry 	1x M32 1x M40 2x M32	19 30 024 1422	19 30 024 0427 19 30 024 0428 19 30 024 0467	   
Han® B , Hoods, Flat cable entry, Top entry 			09 30 024 4411	 
Han® B , Hoods, Special type, Side entry 	1x M50		19 30 024 0529	 

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Hoods, Side entry 	1x M25 1x M32 1x M40 1x M40	19 30 024 1521 19 30 024 1522	19 30 024 0527 19 30 024 0523 19 30 024 0528	
Han® B , Hoods, Angled entry 	2x M25		19 30 024 0666	
Han® B , Hoods, Without cable entry 			09 30 024 0801	
Han® B , Bulkhead mounted housings, Han-Easy Lock® 		09 30 024 0301		 Panel cut out
Han® B , Bulkhead mounted housings, Han-Easy Lock®, IP67 		09 30 024 1301		 Panel cut out

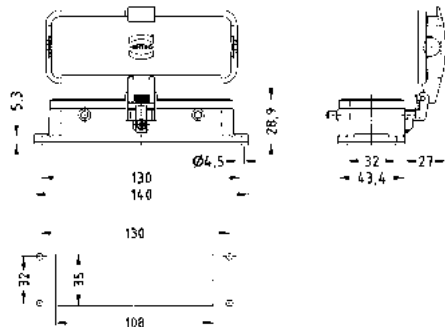
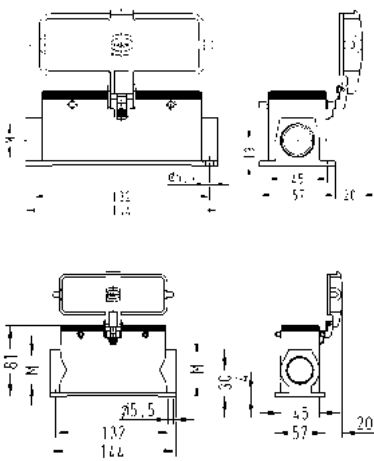

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 1x M32 2x M25 2x M32 2x M40	19 30 024 1231 19 30 024 1271	19 30 024 0232 19 30 024 0272 19 30 024 0273	
Han® B , Cable to cable housing, Top entry, Han-Easy Lock® 	1x M32 1x M40	19 30 024 1732	19 30 024 0737 19 30 024 0738	
Han® B , Protection cover for hoods, Thermoplastic, With board locks 		09 30 024 5401	09 30 024 5401	
Han® B , Protection cover for hoods, Metal, With fixing cord, Han-Easy Lock® 		09 30 024 5422	09 30 024 5422	
Han® B , Protection cover for bulkhead and cable to cable housing, Thermoplastic 		09 30 024 5405	09 30 024 5405	

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Protection cover for all housings, Metal, With fixing cord 		09 30 024 5417	09 30 024 5417	
Han® B , Protection cover for bulkhead and cable to cable housing, Metal, With fixing cord 		09 30 024 5425	09 30 024 5425	
Han® B , Protection cover for cable to cable housings, Metal, With fixing cord 		09 30 024 5426	09 30 024 5426	

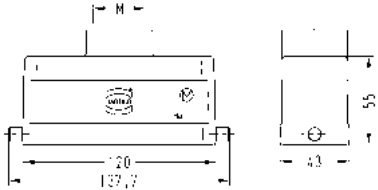
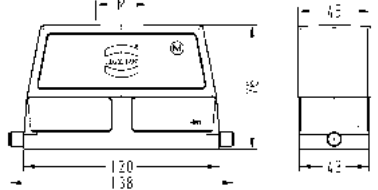
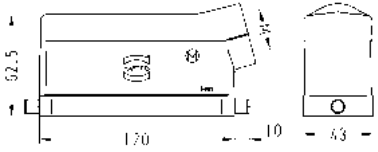
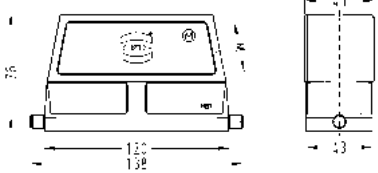
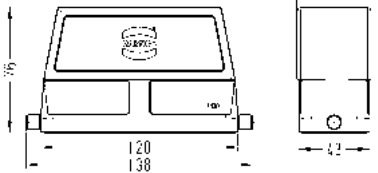
HARTING standard hoods and housings for industrial connectors
Double locking lever (revers)


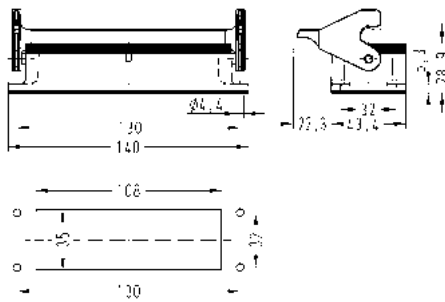
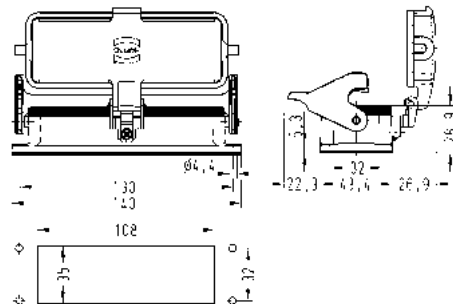
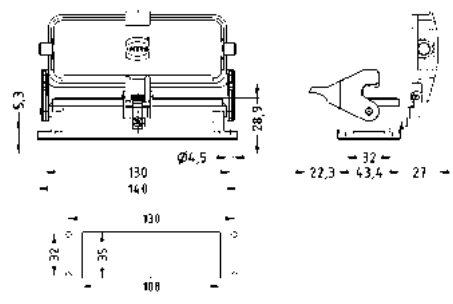
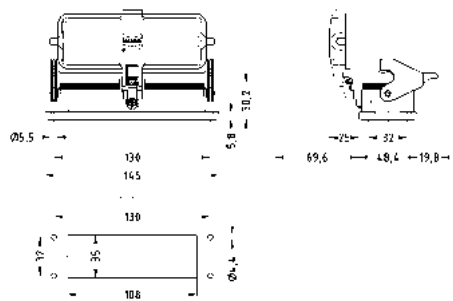
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Hoods, Top entry, Han-Easy Lock® 	1x M32 1x M40	19 30 024 1432	19 30 024 0437 19 30 024 0438	   
Han® B , Hoods, Side entry, Han-Easy Lock® 	1x M25 1x M32 1x M40	19 30 024 1531	19 30 024 0537 19 30 024 0538	   
Han® B , Bulkhead mounted housings, With thermo-plastic cover 		09 30 024 0302		 Panel cut out

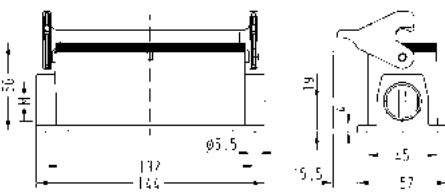
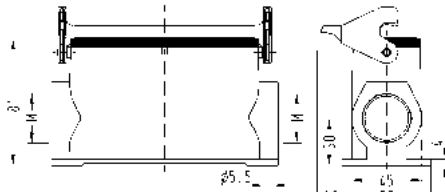
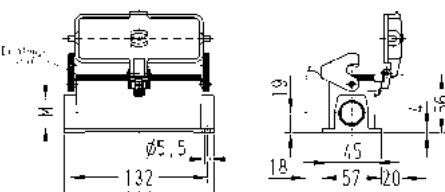
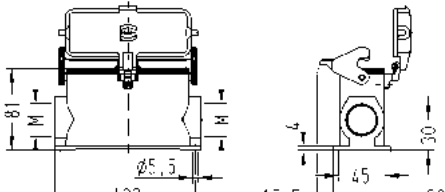
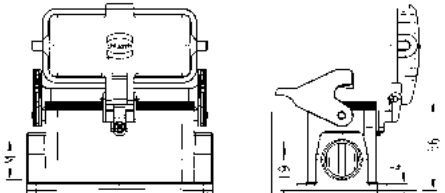
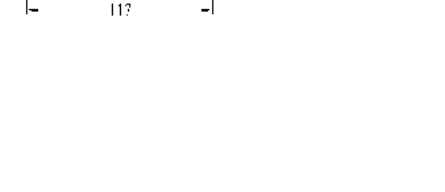
Housings

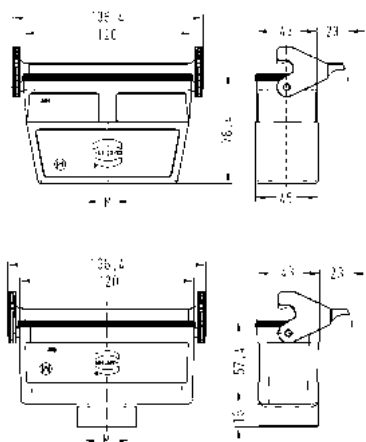


Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Bulkhead mounted housings, With metal cover 		09 30 024 0317		 Panel cut out
Han® B , Surface mounted housing, With thermo-plastic cover, Side entry 	1x M25 2x M25 2x M32	19 30 024 1226 19 30 024 1266	19 30 024 0267	
Han® B , Protection cover for hoods, Metal, With fixing cord 		09 30 024 5442	09 30 024 5442	

HARTING standard hoods and housings for industrial connectors
Single locking lever

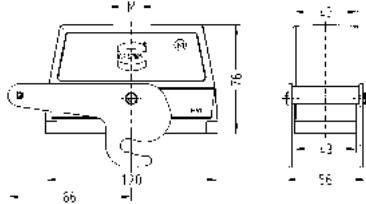
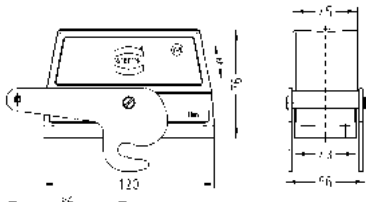
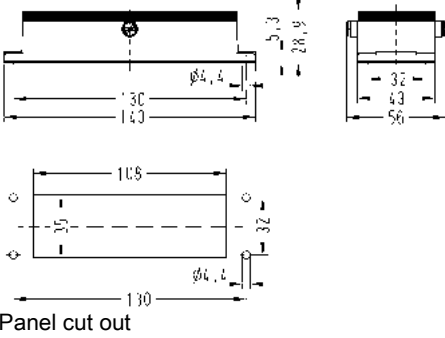
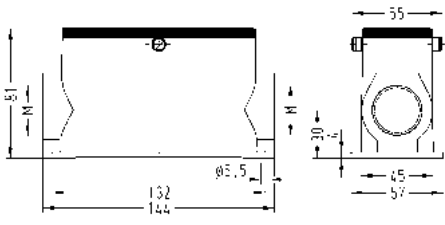
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Hoods, Top entry 	1x M32 1x M40 2x M32	19 30 024 1442	19 30 024 0447 19 30 024 0448 19 30 024 0457	 
Han® B , Hoods, Side entry 	1x M25 1x M32 1x M40	19 30 024 1541 19 30 024 1542	19 30 024 0547 19 30 024 0548	 
Han® B , Hoods, Without cable entry 			09 30 024 0803	

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Bulkhead mounted housings, Han-Easy Lock® 		09 30 024 0307		 Panel cut out
Han® B , Bulkhead mounted housings, With thermo-plastic cover, Han-Easy Lock® 		09 30 024 0304		 Panel cut out
Han® B , Bulkhead mounted housings, With metal cover, Han-Easy Lock® 		09 30 024 0318		 Panel cut out
Han® B , Bulkhead mounted housings, With self-closing cover, Han-Easy Lock® 		09 30 024 1306		 Panel cut out

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Surface mounted housing, Side entry, Han-Easy Lock® 	1x M25 2x M25 2x M32	19 30 024 1251 19 30 024 1291	19 30 024 0292	 
Han® B , Surface mounted housing, With thermo-plastic cover, Side entry, Han-Easy Lock® 	1x M25 2x M25 2x M32	19 30 024 1256 19 30 024 1296	19 30 024 0297	 
Han® B , Surface mounted housing, With metal cover, Side entry, Han-Easy Lock® 	2x M25 2x M32	19 30 024 2296	19 30 024 7297	 

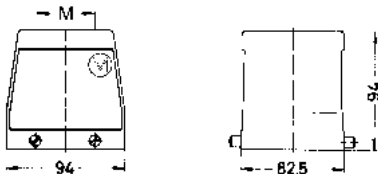
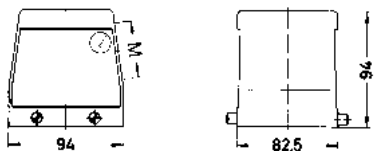
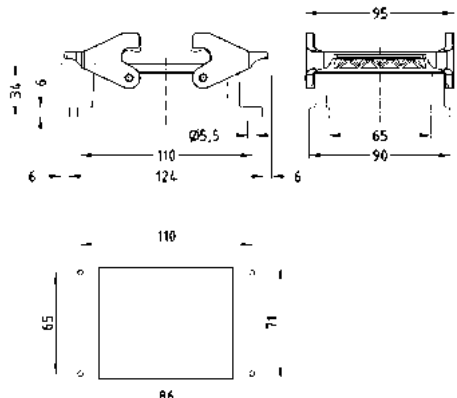
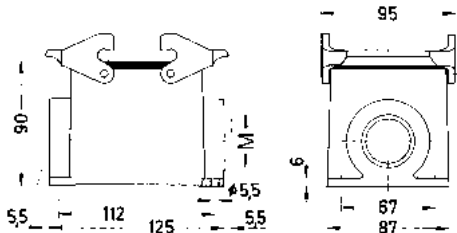
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Cable to cable housing, Top entry, Han-Easy Lock® 	1x M32	19 30 024 1752	19 30 024 0757	
Han® B , Protection cover for hoods, Metal, With fixing cord, Han-Easy Lock® 		09 30 024 5432	09 30 024 5432	
Han® B , Protection cover for bulkhead and cable to cable housing, Metal, With fixing cord 		09 30 024 5436	09 30 024 5436	

HARTING standard hoods and housings for industrial connectors
Central locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Hoods, Top entry 	1x M32		19 30 024 0487	
Han® B , Hoods, Side entry 	1x M25 1x M32 1x M40		19 30 024 0586 19 30 024 0587 19 30 024 0588	
Han® B , Bulkhead mounted housings 		09 30 024 0381		 Panel cut out
Han® B , Surface mounted housing, Side entry 	2x M32		19 30 024 0282	

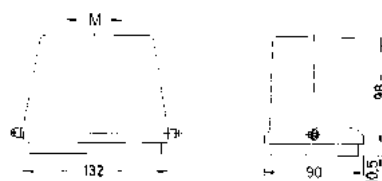
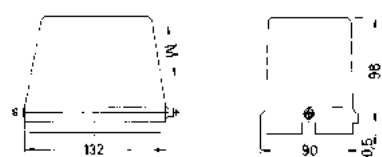
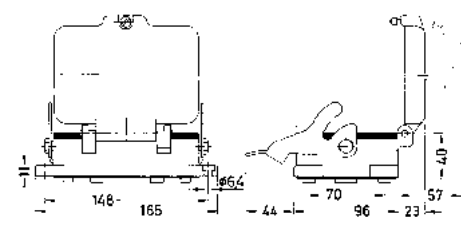

Housings

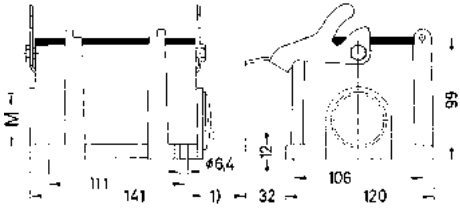
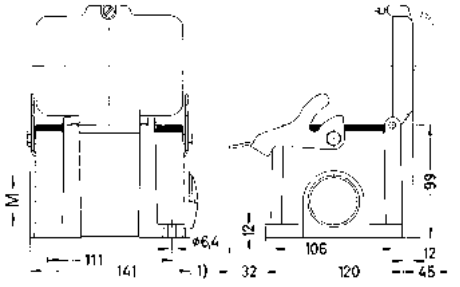
HARTING standard hoods and housings for industrial connectors
Double locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Hoods, Top entry 	1x M32 1x M40 1x M50		19 30 032 0427 19 30 032 0428 19 30 032 0429	
Han® B , Hoods, Side entry 	1x M32 1x M40 1x M50		19 30 032 0527 19 30 032 0528 19 30 032 0529	
Han® B , Bulkhead mounted housings, Han-Easy Lock® 			09 30 032 0301	 Panel cut out
Han® B , Surface mounted housing, Side entry, Han-Easy Lock® 	1x M32 2x M32 2x M40		19 30 032 0232 19 30 032 0272 19 30 032 0273	

31
.
69

HARTING standard hoods and housings for industrial connectors
Single locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Hoods, Top entry 	1x M40 1x M50		19 30 048 0448 19 30 048 0449	
Han® B , Hoods, Side entry 	1x M40 1x M50		19 30 048 0548 19 30 048 0549	
Han® B , Bulkhead mounted housings 		09 30 048 0302		
Han® B , Bulkhead mounted housings, With thermo-plastic cover 		09 30 048 0301		
Han® B , Bulkhead mounted housings, With metal cover 		09 30 048 0317		  Panel cut out

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® B , Surface mounted housing, Side entry 	2x M32 2x M40		19 30 048 0292 19 30 048 0293	
Han® B , Surface mounted housing, With thermo-plastic cover, Side entry 	2x M40		19 30 048 0298	

Features

- Hoods/housings for industrial applications

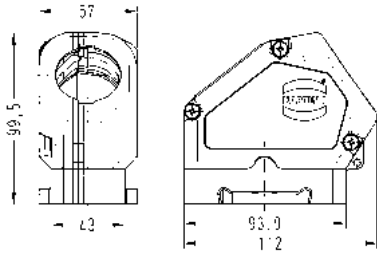
Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)

Specifications and approvals

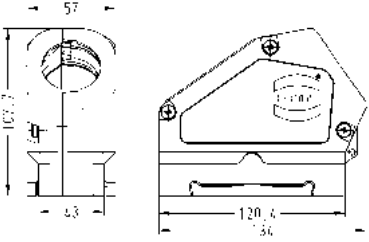


Double locking lever

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han® Easy Hood , Hoods, Side entry 	1x Integrated	20 ... 34	11 30 016 0520	
Han® Easy Hood , Protection cover for hoods, Metal, With fixing cord, Han-Easy Lock® 			11 30 016 5422	



Double locking lever

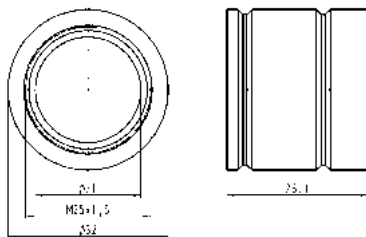
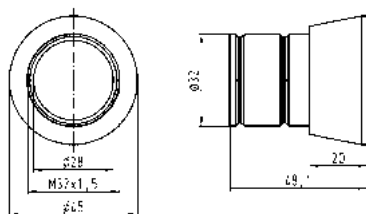
Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han® Easy Hood , Hoods, Side entry 	1x Integrated	20 ... 34	11 30 024 0520	
Han® Easy Hood , Protection cover for hoods, Metal, With fixing cord 			11 30 024 5422	

Technical characteristics

Material (cable glands) Thermoplastic

Technical characteristics

Material (accessories) Thermoplastic
Colour (accessories) Black

Identification	Size	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Cable seal, Han® Easy Hood		20 ... 22 23 ... 25 26 ... 28 29 ... 31 32 ... 34	11 30 000 9955 11 30 000 9956 11 30 000 9957 11 30 000 9958 11 30 000 9959	
				
Han® Easy Hood , Thread adapter	M25 M32		11 30 000 9961 11 30 000 9962	 
				

Features

- Angled housing replaces the terminal box
- Compact design saves space
- The position of the terminal housing can be switched by 90°
- Compatible with standard hoods for single lever size 10 B
- Locking levers: Han-Easy Lock®
- Star and delta circuits can be realised in the female connector Han® ESS
- Suitable for standard inserts

Technical characteristics


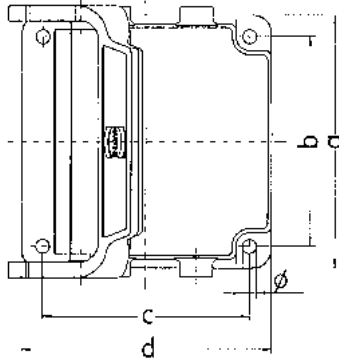
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94 (locking levers)	V-0
Degree of protection acc. to IEC 60529	IP65
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Uncoated, Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)

Specifications and approvals

Ⓜ

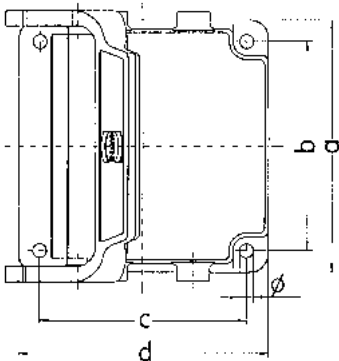
Single locking lever



Identification	Part number	Drawing (dimensions in mm)																																																																																										
Han-Drive® , Housing for motor applications, Han-Easy Lock®	09 30 410 0901 09 30 410 0909 09 30 410 0921																																																																																											
Han-Drive® , Housing for motor applications, With thermo-plastic cover, Han-Easy Lock®	09 30 410 0951 09 30 410 0960 09 30 410 0970 09 30 410 0971 09 30 410 0974 09 30 410 0983																																																																																											
Han-Drive® , Housing for motor applications, Powder-coated, Han-Easy Lock®	09 30 010 0901 09 30 010 0902																																																																																											
Han-Drive® , Housing for motor applications, Powder-coated, With thermo-plastic cover, Han-Easy Lock®	09 30 010 0961	<table><tr><th></th><th>a</th><th>b</th><th>c</th><th>d</th><th>Ø</th></tr><tr><td>09 30 010 0901</td><td>82</td><td>68</td><td>68</td><td>82</td><td>4,5</td></tr><tr><td>09 30 010 0902</td><td>98</td><td></td><td></td><td>98</td><td></td></tr><tr><td>09 30 010 0961</td><td>82</td><td>70</td><td>70</td><td>82</td><td></td></tr><tr><td>09 30 410 0901</td><td>82</td><td>68</td><td>68</td><td>82</td><td>4,5</td></tr><tr><td>09 30 410 0909</td><td>98</td><td></td><td></td><td>98</td><td></td></tr><tr><td>09 30 410 0921</td><td>85</td><td>73</td><td>73</td><td>85</td><td></td></tr><tr><td>09 30 410 0951</td><td>82</td><td>68</td><td>68</td><td>82</td><td>4,5</td></tr><tr><td>09 30 410 0960</td><td>98</td><td>70</td><td>70</td><td>98</td><td>4,3</td></tr><tr><td>09 30 410 0970</td><td>92</td><td>77</td><td>77</td><td>92</td><td>4,3</td></tr><tr><td>09 30 410 0971</td><td>85</td><td>73</td><td>73</td><td>85</td><td>5,5</td></tr><tr><td>09 30 410 0974</td><td>92</td><td>70</td><td>70</td><td>92</td><td>4,3</td></tr><tr><td>09 30 410 0983</td><td>92</td><td>80</td><td>80</td><td>92</td><td>5,1</td></tr><tr><td>09 62 810 0901</td><td>82</td><td>68</td><td>68</td><td>82</td><td>4,5</td></tr><tr><td>09 62 810 0974</td><td>92</td><td>70</td><td>70</td><td>92</td><td>4,1</td></tr></table>		a	b	c	d	Ø	09 30 010 0901	82	68	68	82	4,5	09 30 010 0902	98			98		09 30 010 0961	82	70	70	82		09 30 410 0901	82	68	68	82	4,5	09 30 410 0909	98			98		09 30 410 0921	85	73	73	85		09 30 410 0951	82	68	68	82	4,5	09 30 410 0960	98	70	70	98	4,3	09 30 410 0970	92	77	77	92	4,3	09 30 410 0971	85	73	73	85	5,5	09 30 410 0974	92	70	70	92	4,3	09 30 410 0983	92	80	80	92	5,1	09 62 810 0901	82	68	68	82	4,5	09 62 810 0974	92	70	70	92	4,1
	a	b	c	d	Ø																																																																																							
09 30 010 0901	82	68	68	82	4,5																																																																																							
09 30 010 0902	98			98																																																																																								
09 30 010 0961	82	70	70	82																																																																																								
09 30 410 0901	82	68	68	82	4,5																																																																																							
09 30 410 0909	98			98																																																																																								
09 30 410 0921	85	73	73	85																																																																																								
09 30 410 0951	82	68	68	82	4,5																																																																																							
09 30 410 0960	98	70	70	98	4,3																																																																																							
09 30 410 0970	92	77	77	92	4,3																																																																																							
09 30 410 0971	85	73	73	85	5,5																																																																																							
09 30 410 0974	92	70	70	92	4,3																																																																																							
09 30 410 0983	92	80	80	92	5,1																																																																																							
09 62 810 0901	82	68	68	82	4,5																																																																																							
09 62 810 0974	92	70	70	92	4,1																																																																																							



Single locking lever

Identification	Part number	Drawing (dimensions in mm)																																																																																										
Han-Drive® , Housing for motor applications, EMC version, Han-Easy Lock®	09 62 810 0901																																																																																											
Han-Drive® , Housing for motor applications, EMC version, With thermo-plastic cover, Han-Easy Lock®	09 62 810 0974	<table><tr><th></th><th>a</th><th>b</th><th>c</th><th>d</th><th>Ø</th></tr><tr><td>09 30 010 0901</td><td>82</td><td>68</td><td>68</td><td>82</td><td>4,5</td></tr><tr><td>09 30 010 0902</td><td>98</td><td></td><td></td><td>98</td><td></td></tr><tr><td>09 30 010 0961</td><td>82</td><td>70</td><td>70</td><td>82</td><td></td></tr><tr><td>09 30 410 0901</td><td>82</td><td>68</td><td>68</td><td>82</td><td>4,5</td></tr><tr><td>09 30 410 0909</td><td>98</td><td></td><td></td><td>98</td><td></td></tr><tr><td>09 30 410 0921</td><td>85</td><td>73</td><td>73</td><td>85</td><td></td></tr><tr><td>09 30 410 0951</td><td>82</td><td>68</td><td>68</td><td>82</td><td>4,5</td></tr><tr><td>09 30 410 0960</td><td>98</td><td>70</td><td>70</td><td>98</td><td>4,3</td></tr><tr><td>09 30 410 0970</td><td>92</td><td>77</td><td>77</td><td>92</td><td>4,3</td></tr><tr><td>09 30 410 0971</td><td>85</td><td>73</td><td>73</td><td>85</td><td>5,5</td></tr><tr><td>09 30 410 0974</td><td>92</td><td>70</td><td>70</td><td>92</td><td>4,3</td></tr><tr><td>09 30 410 0983</td><td>92</td><td>80</td><td>80</td><td>92</td><td>5,1</td></tr><tr><td>09 62 810 0901</td><td>82</td><td>68</td><td>68</td><td>82</td><td>4,5</td></tr><tr><td>09 62 810 0974</td><td>92</td><td>70</td><td>70</td><td>92</td><td>4,1</td></tr></table>		a	b	c	d	Ø	09 30 010 0901	82	68	68	82	4,5	09 30 010 0902	98			98		09 30 010 0961	82	70	70	82		09 30 410 0901	82	68	68	82	4,5	09 30 410 0909	98			98		09 30 410 0921	85	73	73	85		09 30 410 0951	82	68	68	82	4,5	09 30 410 0960	98	70	70	98	4,3	09 30 410 0970	92	77	77	92	4,3	09 30 410 0971	85	73	73	85	5,5	09 30 410 0974	92	70	70	92	4,3	09 30 410 0983	92	80	80	92	5,1	09 62 810 0901	82	68	68	82	4,5	09 62 810 0974	92	70	70	92	4,1
	a	b	c	d	Ø																																																																																							
09 30 010 0901	82	68	68	82	4,5																																																																																							
09 30 010 0902	98			98																																																																																								
09 30 010 0961	82	70	70	82																																																																																								
09 30 410 0901	82	68	68	82	4,5																																																																																							
09 30 410 0909	98			98																																																																																								
09 30 410 0921	85	73	73	85																																																																																								
09 30 410 0951	82	68	68	82	4,5																																																																																							
09 30 410 0960	98	70	70	98	4,3																																																																																							
09 30 410 0970	92	77	77	92	4,3																																																																																							
09 30 410 0971	85	73	73	85	5,5																																																																																							
09 30 410 0974	92	70	70	92	4,3																																																																																							
09 30 410 0983	92	80	80	92	5,1																																																																																							
09 62 810 0901	82	68	68	82	4,5																																																																																							
09 62 810 0974	92	70	70	92	4,1																																																																																							

Features

- Hoods/housings for more demanding environmental requirements
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Locking lever made of high-quality stainless steel


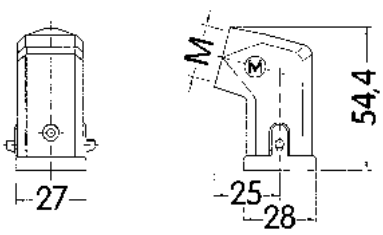
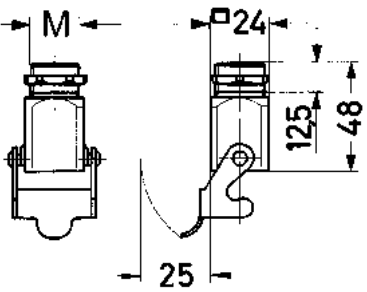

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP65, IP67
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	FPM
Material (locking)	Stainless steel

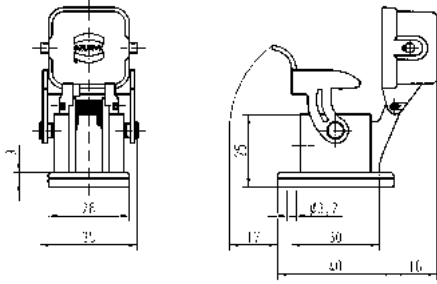
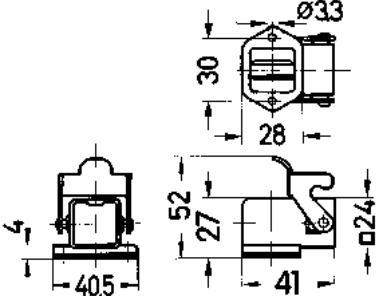
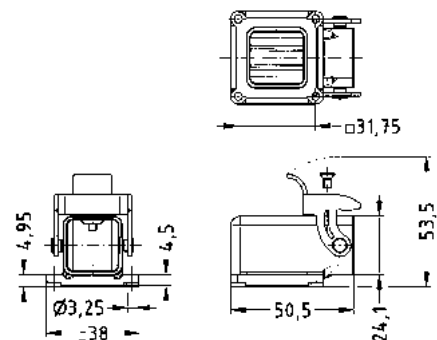
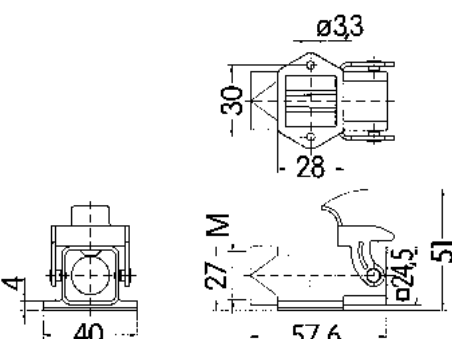
Specifications and approvals



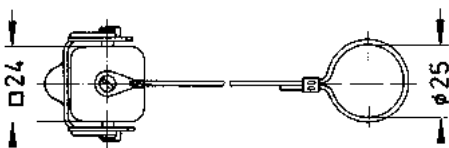
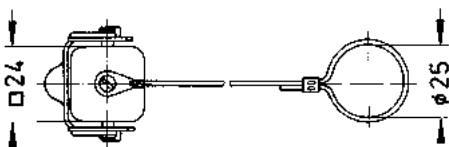
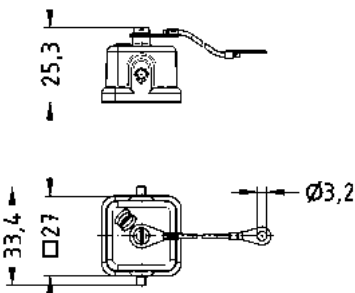
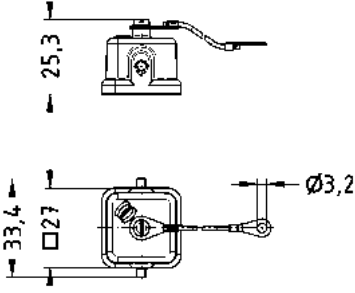
Ⓜ

Hoods/housings for more demanding environmental requirements
Single locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® M , Hoods, Top entry 	1x M20 1x M25	19 37 003 1440 19 37 003 1445	
Han® M , Hoods, Side entry 	1x M20	19 37 003 1640	
Han® M , Screw mounted housings, Top entry 	1x M20	19 37 003 1150	
Han® M , Bulkhead mounted housings, Straight 		09 37 003 0301	 Panel cut out 22 x 22 mm

Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® M , Bulkhead mounted housings, Straight, With metal cover 		09 37 003 0305	
Han® M , Bulkhead mounted housings, Angled 		09 37 003 0801	 Panel cut out 22 x 22 mm
Han® M , Bulkhead mounted housings, Angled, Square mounting flange 		09 37 003 0811	 Panel cut out 22 x 22 mm
Han® M , Surface mounted housing, Top entry 	1x M20	19 37 003 1250	 Panel cut out 22 x 22 mm

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® M , Cable to cable housing, Top entry 	1x M20 1x M25	19 37 003 1750 19 37 003 1755	
Han® M , Protection cover for hoods, Metal, for female inserts, With fixing cord 		09 37 003 5401	
Han® M , Protection cover for hoods, Metal, for male inserts, With fixing cord 		09 37 003 5402	
Han® M , Protection cover for all housings, for mounted female insert, Metal, With fixing cord 		09 37 003 5405	
Han® M , Protection cover for all housings, for mounted male insert, Metal, With fixing cord 		09 37 003 5406	

Features

- Hoods/housings for more demanding environmental requirements
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Locking lever made of high-quality stainless steel

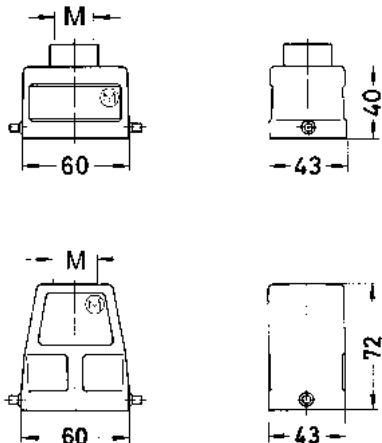
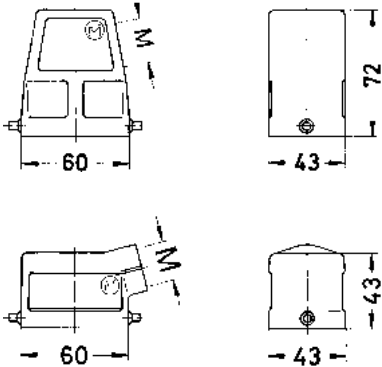
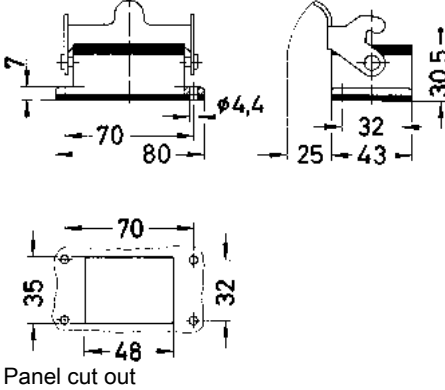
Technical characteristics

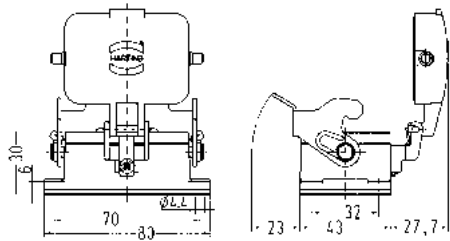
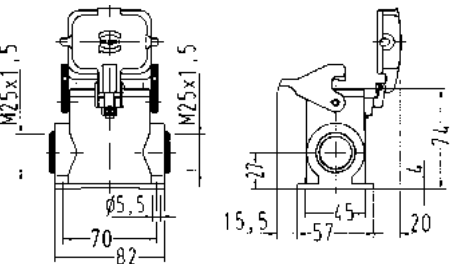
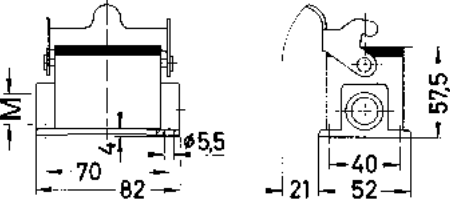


Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94 (locking levers)	V-0
Degree of protection acc. to IEC 60529	IP65
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	FPM
Material (locking)	Stainless steel, Polycarbonate
Colour (locking)	RAL 7037 (dust grey)

Specifications and approvals

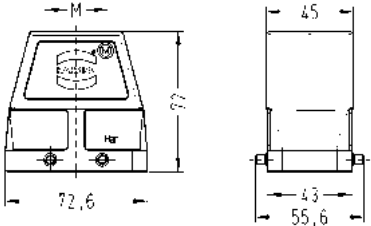

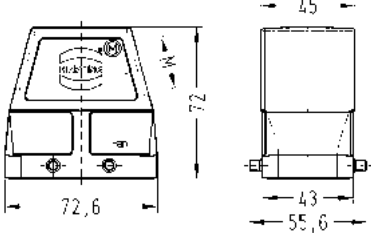
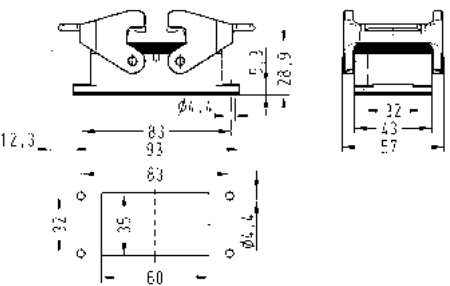


Hoods/housings for more demanding environmental requirements
Single locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® M , Hoods, Top entry 	1x M20 1x M25 1x M32	19 37 006 1440	19 37 006 0445 19 37 006 0446 19 37 006 0447		
Han® M , Hoods, Side entry 	1x M20 1x M25	19 37 006 1540	19 37 006 0545 19 37 006 0546		
Housings Han® M , Bulkhead mounted housings 		09 37 006 0301			

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® M , Bulkhead mounted housings, With metal cover 		09 37 006 0318		
Han® M , Surface mounted housing, With thermo-plastic cover, Side entry, Han-Easy Lock® 	2x M25		19 37 006 0296	
Han® M , Surface mounted housing, Side entry 	2x M20	19 37 006 1290		
Han® M , Protection cover for bulkhead and cable to cable housing 		09 37 006 5405	09 37 006 5405	
Han® M , Protection cover for cable to cable housings 		09 37 006 5407	09 37 006 5407	

Hoods/housings for more demanding environmental requirements
Double locking lever


Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® M , Hoods, Top entry 	1x M20 1x M25 1x M32 2x M20	19 37 010 1420	19 37 010 0426 19 37 010 0427 19 37 010 0465	
Han® M , Hoods, Side entry 	1x M20 1x M25 1x M32 1x M40	19 37 010 1520	19 37 010 0526 19 37 010 0527 19 37 010 0528	
Han® M , Bulkhead mounted housings 		09 37 010 0301		 Panel cut out



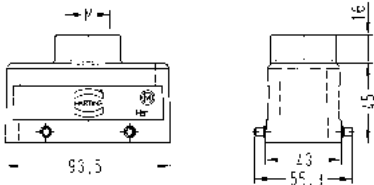
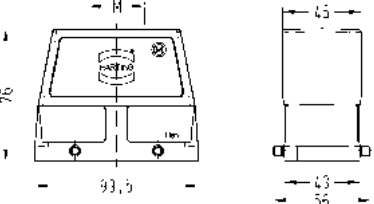

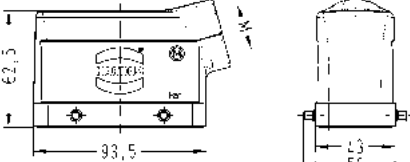
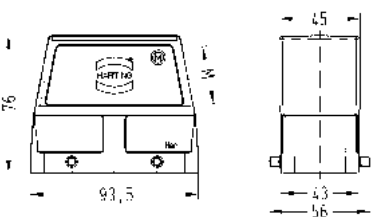
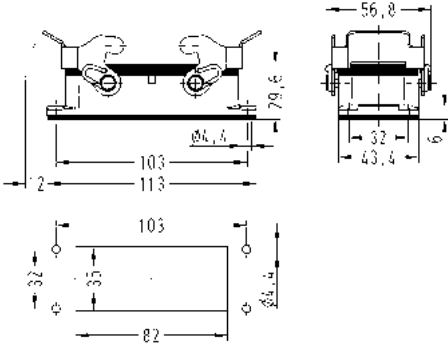
Hoods/housings for more demanding environmental requirements
Single locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® M , Surface mounted housing, Side entry 	2x M25	19 37 010 0296	

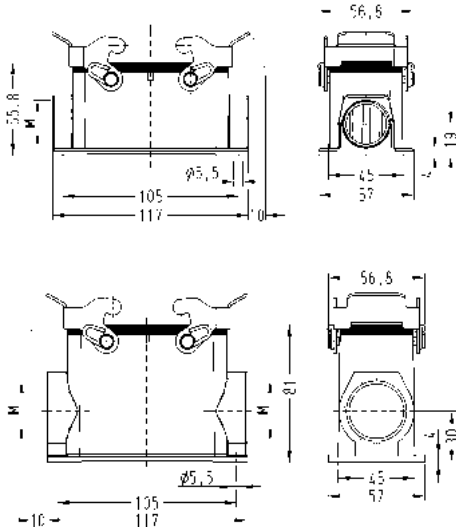
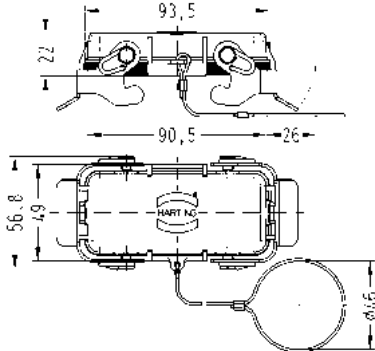
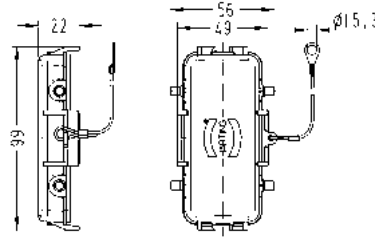
Hoods/housings for more demanding environmental requirements
Central locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)	
Han® M , Hoods, Top entry 	1x M32	19 37 010 0447		

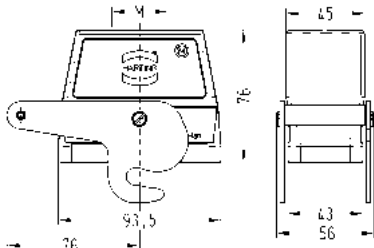
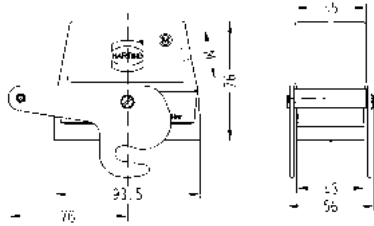
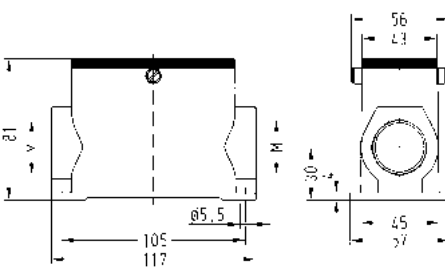
Hoods/housings for more demanding environmental requirements
Double locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® M , Hoods, Top entry 	1x M25 1x M32	19 37 016 1421	19 37 016 0427	 
Han® M , Hoods, Side entry 	1x M25 1x M32 1x M40	19 37 016 1521	19 37 016 0527 19 37 016 0528	 
Han® M , Bulkhead mounted housings 		09 37 016 0301		 Panel cut out

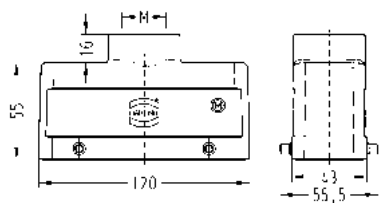
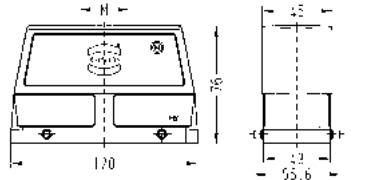

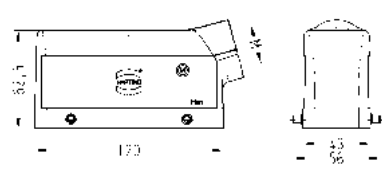
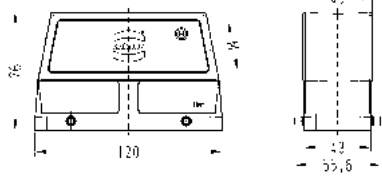
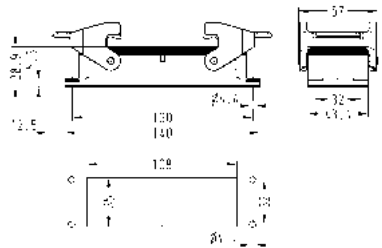
Housings

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® M , Surface mounted housing, Side entry 	1x M25 2x M32 2x M40	19 37 016 1231	19 37 016 0272 19 37 016 0273	
Han® M , Protection cover for hoods, Metal, With fixing cord 		09 37 016 5402	09 37 016 5402	
Han® M , Protection cover for all housings, Metal, With fixing cord 		09 37 016 5405	09 37 016 5405	

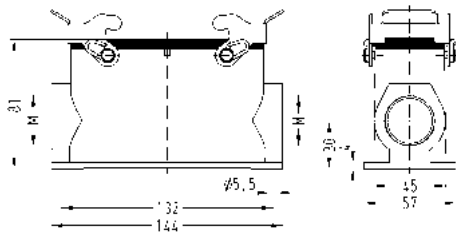
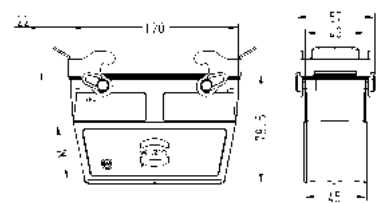


Hoods/housings for more demanding environmental requirements
Central locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® M , Hoods, Top entry 	1x M32	19 37 016 0487	
Han® M , Hoods, Side entry 	1x M32	19 37 016 0587	
Han® M , Surface mounted housing, Side entry 	2x M32	19 37 016 0282	

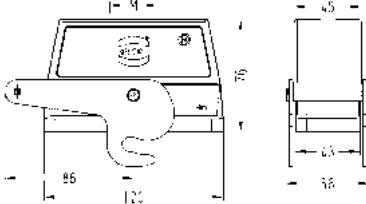
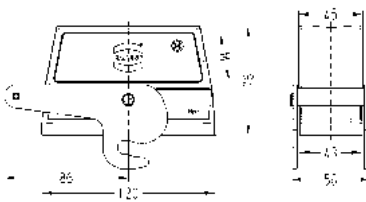
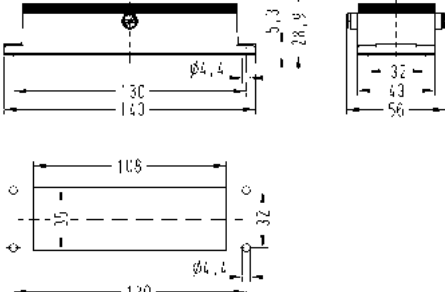
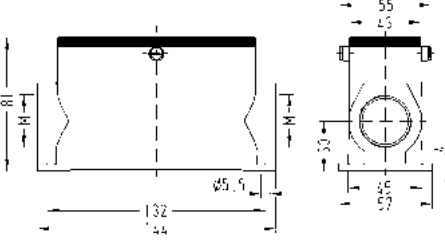
Hoods/housings for more demanding environmental requirements
Double locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® M , Hoods, Top entry 	1x M25 1x M32 1x M40	19 37 024 1421	19 37 024 0427 19 37 024 0428	 
Han® M , Hoods, Side entry 	1x M25 1x M32 1x M40	19 37 024 1521	19 37 024 0527 19 37 024 0528	 
Han® M , Bulkhead mounted housings 		09 37 024 0301		 Panel cut out

Housings

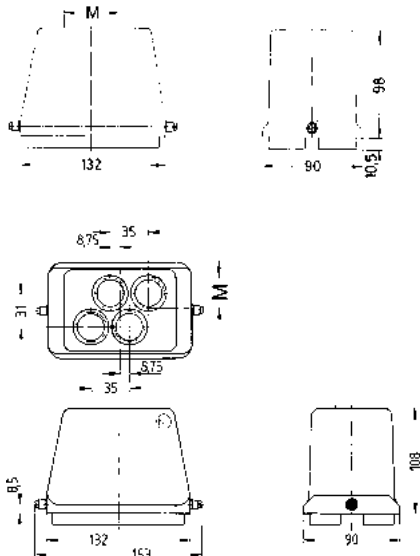
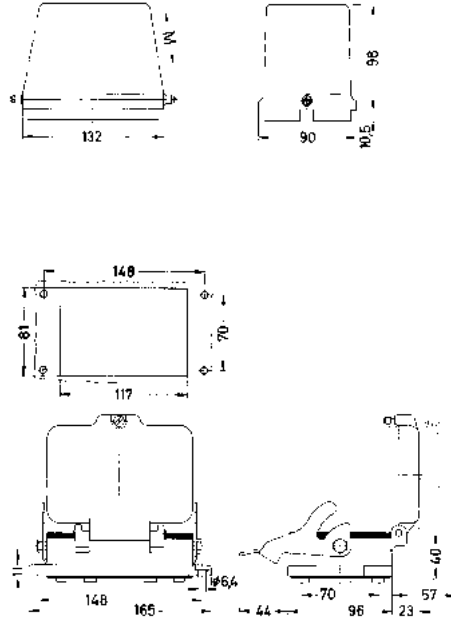
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® M , Surface mounted housing, Side entry 	2x M32		19 37 024 0272	
Han® M , Cable to cable housing, Side entry 	1x M40		19 37 024 0733	
Han® M , Protection cover for hoods 		09 37 024 5402	09 37 024 5402	
Han® M , Protection cover for all housings, Metal, With fixing cord 		09 37 024 5405	09 37 024 5405	

Hoods/housings for more demanding environmental requirements
Central locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® M , Hoods, Top entry 	1x M32		19 37 024 0487	
Han® M , Hoods, Side entry 	1x M32		19 37 024 0587	
Han® M , Bulkhead mounted housings 		09 37 024 0381		 Panel cut out
Han® M , Surface mounted housing, Side entry 	2x M32		19 37 024 0282	

Housings

Hoods/housings for more demanding environmental requirements
Single locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® M , Hoods, Top entry 	1x M40 1x M50 4x M25		19 37 048 0448 19 37 048 0449 19 37 048 0401	
Han® M , Hoods, Side entry 	1x M40		19 37 048 0548	
Han® M , Bulkhead mounted housings, With thermo-plastic cover 		09 37 048 0301		

Features

- Hoods/Housings for higher EMC requirements
- Continuous shield connection using conductive surface
- Metal hoods / housings with high shielding efficiency
- Field of application: for sensitive interconnections that have to be shielded against electrical, magnetic or electro-magnetic interferences
- Distinguishing feature: Electrically conductive surface, internal seal




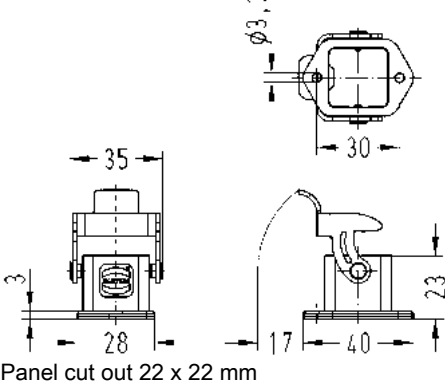
Technical characteristics

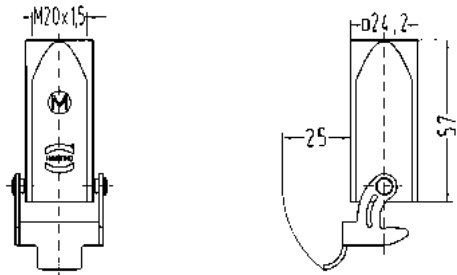
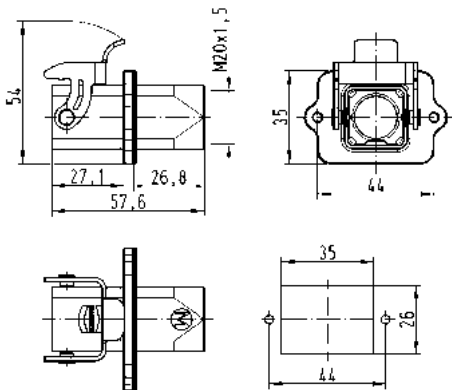
Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP44, IP67, With seal screw 09 20 000 9918
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Electrical conductive
Colour (hood/housing)	Unpainted
Material (seal)	NBR
Material (locking)	Steel
Surface (locking)	Zinc plated

Specifications and approvals



Hoods/Housings for higher EMC requirements
Single locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® EMC , Hoods, Top entry 	1x M20 1x M25	19 62 003 1440 19 62 003 1445	
Han® EMC , Hoods, Side entry 	1x M20	19 62 003 1640	
Han® EMC , Screw mounted housings, Top entry 	1x M20	19 62 003 1150	
Han® EMC , Bulkhead mounted housings, Straight 		09 62 003 0301	 Panel cut out 22 x 22 mm

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® EMC , Cable to cable housing, Top entry 	1x M20 1x M25	19 62 003 1750 19 62 003 1755	
Han® EMC , Panel feed through housing, Top entry 	1x M20	19 62 003 1120	 Panel cut out

Features

- Hoods/Housings for higher EMC requirements
- Continuous shield connection using conductive surface
- Metal hoods / housings with high shielding efficiency
- Field of application: for sensitive interconnections that have to be shielded against electrical, magnetic or electro-magnetic interferences
- Distinguishing feature: Electrically conductive surface, internal seal

Technical characteristics

Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94 (locking levers)	V-0
Degree of protection acc. to IEC 60529	IP65
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Electrical conductive
Colour (hood/housing)	Unpainted
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)

Specifications and approvals



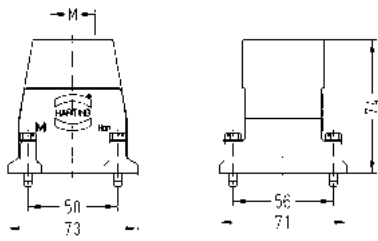
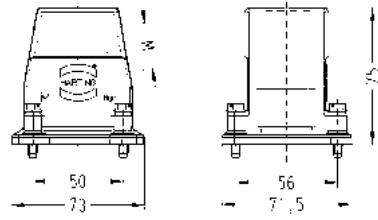
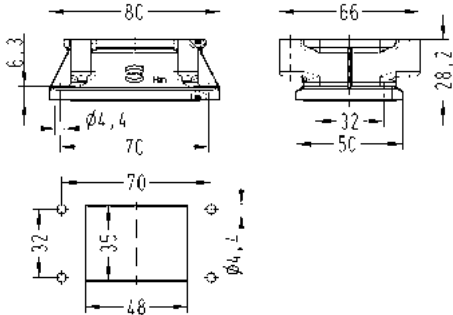
Hoods/Housings for higher EMC requirements
Single locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® EMC , Hoods, Top entry	1x M25	19 62 015 0446	Front view dimensions: N, 64, 73. Side view dimensions: 34, 70, 30,5.
Han® EMC , Hoods, Side entry	1x M25	19 62 015 0546	Front view dimensions: 64. Side view dimensions: 34, 70, 33,5.
Han® EMC , Bulkhead mounted housings, Han-Easy Lock®		09 62 015 0301	Top view dimensions: 26,1, 3,4, 70, 81, Ø3,4. Side view dimensions: 20, 17,5, 33. Panel cut out dimensions: 70, 24, 17,5, 57, Ø3,4. Panel cut out

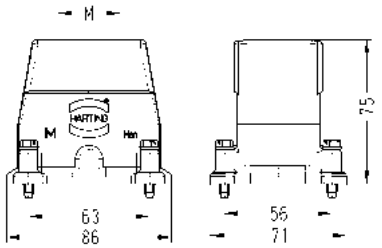
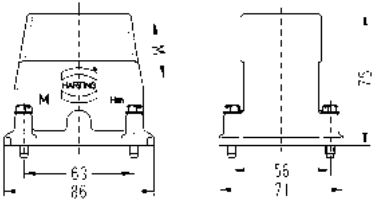
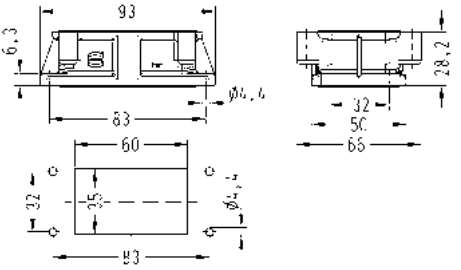
Hoods/Housings for higher EMC requirements
Single locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® EMC , Hoods, Top entry	1x M25	19 62 025 0446	Front view dimensions: 80mm width, 89mm base width, 70mm height. Mounting holes are spaced 34mm apart. Side view dimensions: 34mm top flange, 30.5mm bottom flange, total height 70mm.
Han® EMC , Hoods, Side entry	1x M25	19 62 025 0546	Front view dimensions: 80mm width, 89mm base width, 70mm height. Mounting holes are spaced 34mm apart. Side view dimensions: 34mm top flange, 30.5mm bottom flange, total height 70mm.
Han® EMC , Bulkhead mounted housings, Han-Easy Lock®		09 62 025 0301	Panel cut out dimensions: 86mm width, 73mm height. Mounting holes are spaced 34mm apart. Other dimensions shown: 26.1mm, 3.4mm, 56mm, 96mm, 17.5mm, 20mm, 33mm, 17.5mm, 33mm, 20mm.

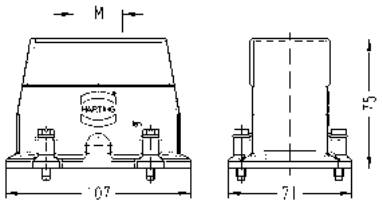
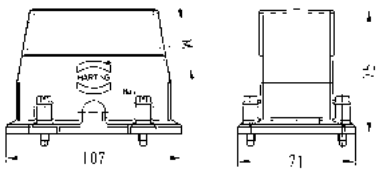
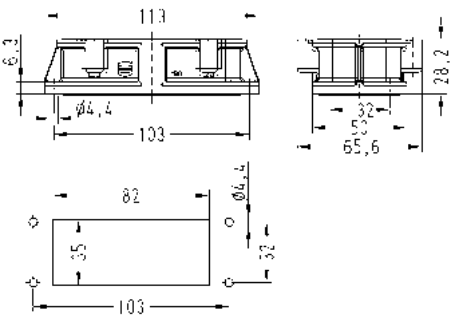
Hoods/Housings for higher EMC requirements
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® EMC , Hoods, Top entry 	1x M25 1x M32	19 62 006 0441 19 62 006 0442	
Han® EMC , Hoods, Side entry 	1x M25	19 62 006 0541	
Han® EMC , Bulkhead mounted housings 		09 62 006 0301	 Panel cut out

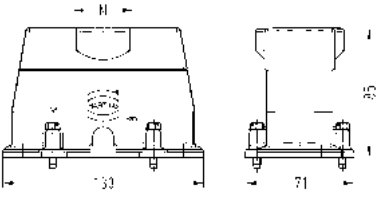
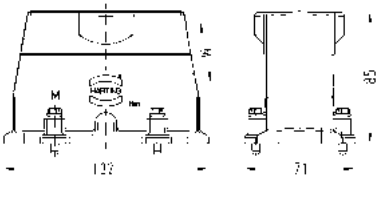
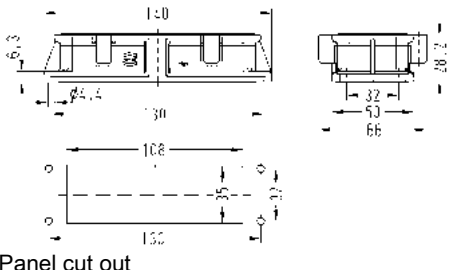
Hoods/Housings for higher EMC requirements
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® EMC , Hoods, Top entry 	1x M32	19 62 010 0442	
Han® EMC , Hoods, Side entry 	1x M32 1x M40	19 62 010 0542 19 62 010 0543	
Han® EMC , Bulkhead mounted housings 		09 62 010 0301	 Panel cut out

Hoods/Housings for higher EMC requirements
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® EMC , Hoods, Top entry 	1x M32	19 62 040 0442	
Han® EMC , Hoods, Side entry 	1x M32	19 62 040 0542	
Han® EMC , Bulkhead mounted housings 		09 62 040 0301	 Panel cut out

Hoods/Housings for higher EMC requirements
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® EMC , Hoods, Top entry 	1x M40	19 62 064 0443	
Han® EMC , Hoods, Side entry 	1x M40	19 62 064 0543	
Han® EMC , Bulkhead mounted housings 		09 62 064 0301	 Panel cut out

Features

- Hoods/Housings for higher EMC requirements
- Continuous shield connection using conductive surface
- Metal hoods / housings with high shielding efficiency
- Field of application: for sensitive interconnections that have to be shielded against electrical, magnetic or electro-magnetic interferences
- Distinguishing feature: Electrically conductive surface, internal seal
- Locking levers: Han-Easy Lock®

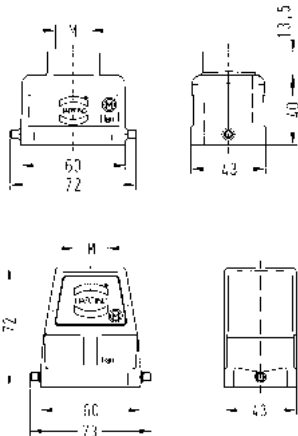



Technical characteristics

Limiting temperature	-40 ... +125 °C, -40 ... +200 °C With Han® High Temp components
Flammability acc. to UL 94 (locking levers)	V-0
Degree of protection acc. to IEC 60529	IP65
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Electrical conductive
Colour (hood/housing)	Unpainted
Material (seal)	NBR
Material (locking)	Polycarbonate, Stainless steel
Colour (locking)	RAL 7037 (dust grey)



Specifications and approvals

Ⓜ

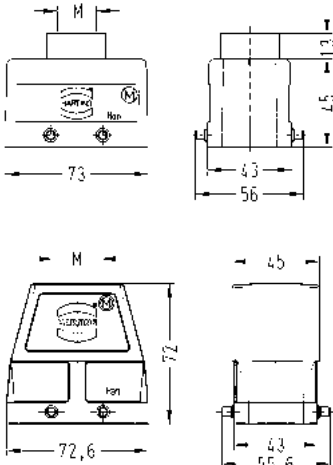
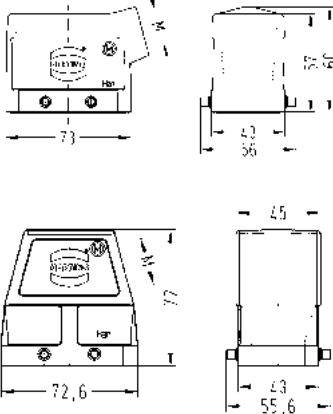

Hoods/Housings for higher EMC requirements
Single locking lever


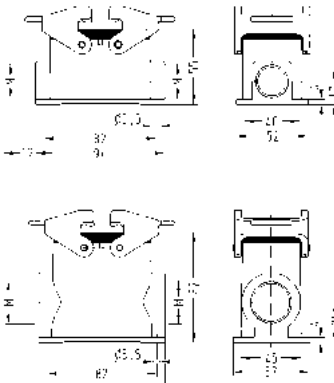

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B Han® High Temp , Hoods, Top entry 	1x M20 1x M25 1x M32	19 62 806 1440	19 62 806 0446 19 62 806 0447	
Han® EMC/B Han® High Temp , Hoods, Side entry 	1x M20 1x M25 1x M32	19 62 806 1540	19 62 806 0546 19 62 806 0547	
Han® EMC/B Han® High Temp , Hoods, Without cable entry 			09 62 806 0801	
Han® EMC/B , Bulkhead mounted housings, Han-Easy Lock® 		09 62 806 0301		 Panel cut out



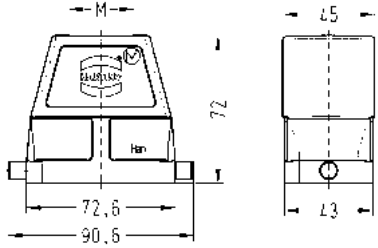
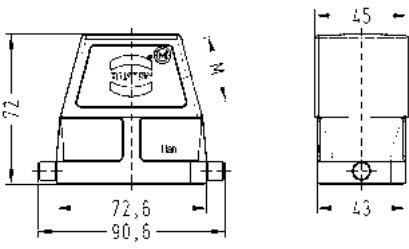


Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B , Surface mounted housing, Side entry, Han-Easy Lock® 	2x M20	19 62 806 1290		 

Hoods/Housings for higher EMC requirements
Double locking lever








Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B Han® High Temp , Hoods, Top entry 	1x M20 1x M25 1x M32	19 62 810 1420 19 62 810 1421	19 62 810 0426 19 62 810 0427	
Han® EMC/B Han® High Temp , Hoods, Side entry 	1x M20 1x M25 1x M32	19 62 810 1520	19 62 810 0526 19 62 810 0527	
Han® EMC/B Han® High Temp , Hoods, Without cable entry 			09 62 810 0801	

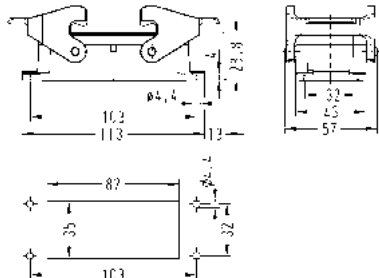
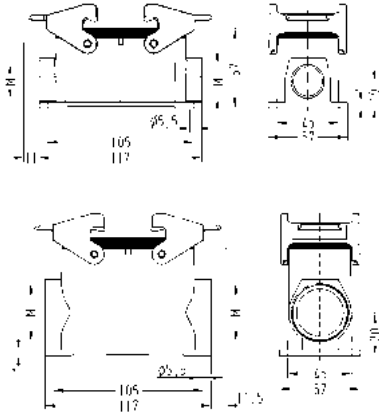
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B , Bulkhead mounted housings, Han-Easy Lock® 		09 62 810 0301		 Panel cut out
Han® EMC/B , Surface mounted housing, Side entry, Han-Easy Lock® 	2x M25 2x M32	19 62 810 1271	19 62 810 0272	
Han® EMC/B , Cable to cable housing, Top entry, Han-Easy Lock® 	1x M25 1x M32		19 62 810 0766 19 62 810 0757	

Hoods/Housings for higher EMC requirements
Single locking lever

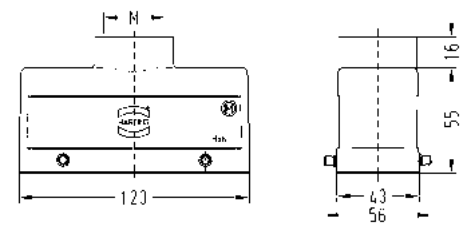
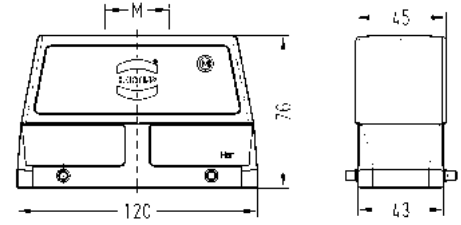
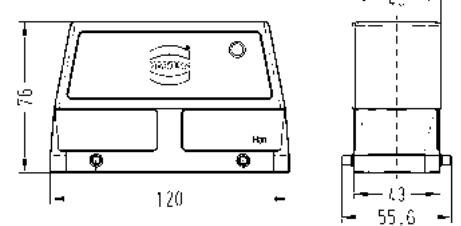
Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B Han® High Temp , Hoods, Top entry 	1x M25 1x M32		19 62 810 0446 19 62 810 0447	
Han® EMC/B Han® High Temp , Hoods, Side entry 	1x M32		19 62 810 0547	
Han® EMC/B , Bulkhead mounted housings, Han-Easy Lock® 		09 62 810 0305		  Panel cut out

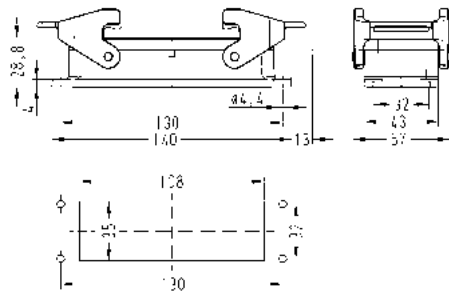
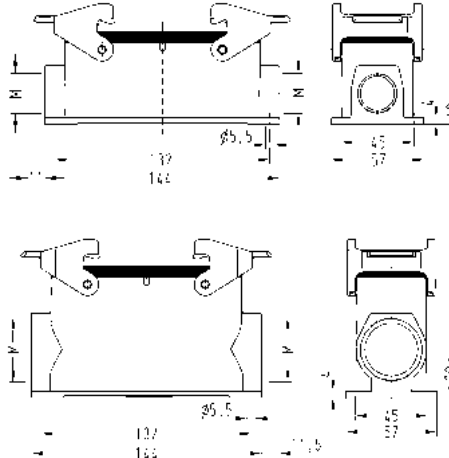

Hoods/Housings for higher EMC requirements
Double locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)	
		Low construction	High construction		
Han® EMC/B Han® High Temp , Hoods, Top entry 	1x M25 1x M32	19 62 816 1421	19 62 816 0427	 	 
Han® EMC/B Han® High Temp , Hoods, Side entry 	1x M25 1x M32	19 62 816 1521	19 62 816 0527	 	 
Han® EMC/B Han® High Temp , Hoods, Without cable entry 			09 62 816 0801	 	 

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B , Bulkhead mounted housings, Han-Easy Lock® 		09 62 816 0301		 Panel cut out
Han® EMC/B , Surface mounted housing, Side entry, Han-Easy Lock® 	2x M25 2x M40	19 62 816 1271	19 62 816 0273	

Hoods/Housings for higher EMC requirements
Double locking lever

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B Han® High Temp , Hoods, Top entry 	1x M32	19 62 824 1422	19 62 824 0427	
Han® EMC/B Han® High Temp , Hoods, Side entry 	1x M25 1x M32 1x M40	19 62 824 1521	19 62 824 0527 19 62 824 0528	
Han® EMC/B Han® High Temp , Hoods, Without cable entry 			09 62 824 0801	

Identification	Cable entry	Part number		Drawing (dimensions in mm)
		Low construction	High construction	
Han® EMC/B , Bulkhead mounted housings, Han-Easy Lock® 		09 62 824 0301		 Panel cut out
Han® EMC/B , Surface mounted housing, Side entry, Han-Easy Lock® 	2x M25 2x M40	19 62 824 1271	19 62 824 0273	
Han® EMC/B , Protection cover for bulkhead and cable to cable housing, Metal, With fixing cord 		09 62 824 5425	09 62 824 5425	

Features

- Hoods/housings for harsh outdoor environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Excellent EMC characteristics
- Screw locking M4
- Field of application: for external electrical interconnections in vehicles, in highly demanding environments and wet areas, as well as for sensitive interconnections that have to be shielded
- Distinguishing feature: colour-coded black, internal seal

Technical characteristics

Limiting temperature	-40 ... +125 °C
Tightening torque	2 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69K
Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Powder-coated, Chromated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel

Specifications and approvals

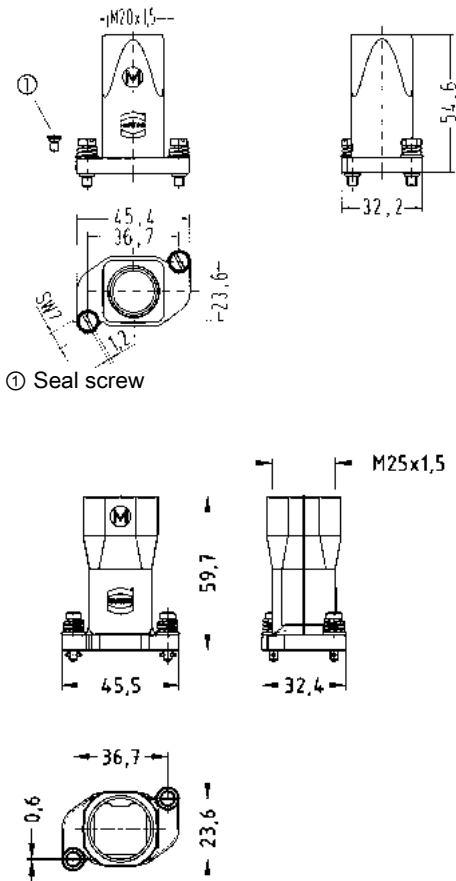
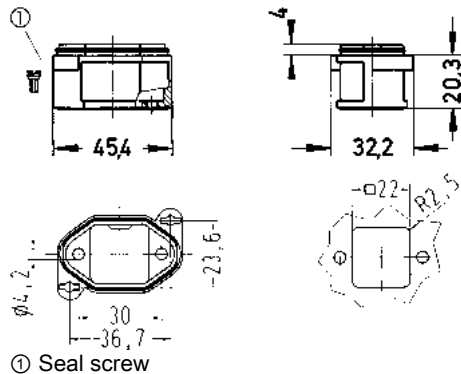


Details





By using the inserts of Han® Q and Han A® series, the sealing on the insert has to be removed. The sealing screw of the insert must be replaced by the sealing screw of the hood/housing.

By using the angled bulkhead and surface mounted housings with through holes in the mounting flanges, it has to be ensured by the customer that the fixing screws appropriately sealed from the inside of the housing.

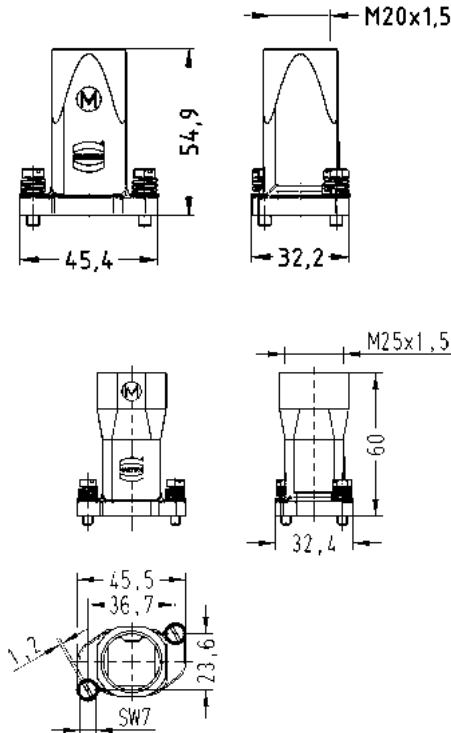
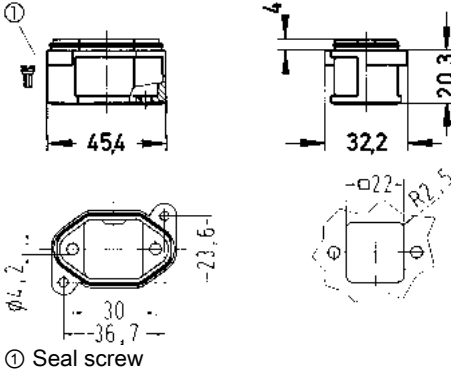
Hoods/housings for harsh outdoor environments
Toggle locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry, Pack contents: With seal screw 	1x M20 1x M25	19 40 703 0400 19 40 703 0401	 ① Seal screw
Han® HPR , Bulkhead mounted housings, Straight, Pack contents: With seal screw 		09 40 703 0301	 ① Seal screw

Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Protection cover for all housings 		09 40 703 5401	
Han® HPR , Protection cover for all housings, With fixing cord 		09 40 703 5402	
Han® HPR , Adapter, Open bottom, for assembly of bulkhead mounted bulk- head mounted position, Top entry 	1x M20	19 40 703 0900	
Han® HPR , Adapter, Open bottom, for assembly of bulkhead mounted bulk- head mounted position, Without cable entry 		09 40 703 0902	

Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry, Pack contents: With seal screw 	1x M20 1x M25	19 40 703 0410 19 40 703 0411	
Han® HPR , Bulkhead mounted housings, Straight, Pack contents: With seal screw 		09 40 703 0311	 ① Seal screw

Identification

Cable entry

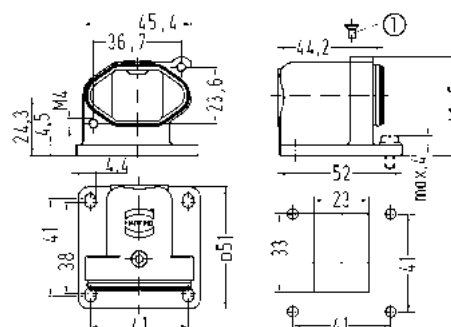
Part number

Drawing
(dimensions in mm)

Han® HPR ,
Bulkhead mounted housings,
Angled,
Open bottom,
Feed through hole for fixing screws,
Pack contents:
With seal screw



09 40 703 0950

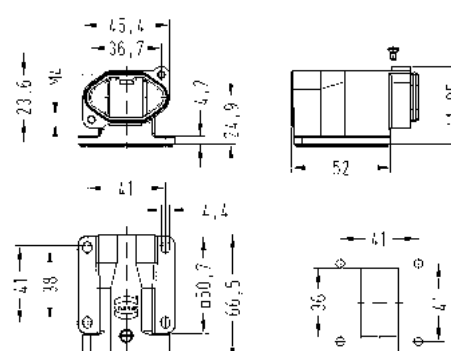


① Seal screw

Han® HPR ,
Bulkhead mounted housings,
Angled,
Open bottom,
Long version,
Feed through hole for fixing screws,
Pack contents:
With seal screw



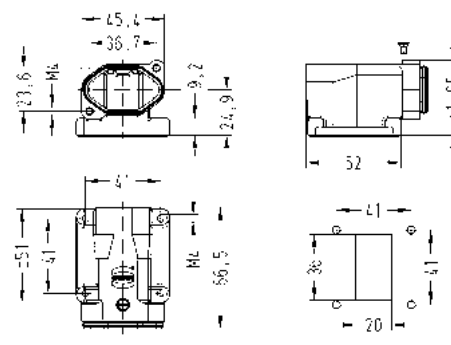
09 40 703 0951



Han® HPR ,
Bulkhead mounted housings,
Angled,
Open bottom,
Long version,
Tapped blind hole for fixing screws,
Pack contents:
With seal screw



09 40 703 0953

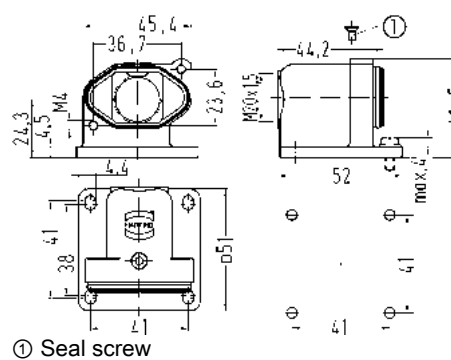


Han® HPR ,
Surface mounted housing,
Angled,
Bottom closed,
Feed through hole for fixing screws,
Top entry,
Pack contents:
With seal screw

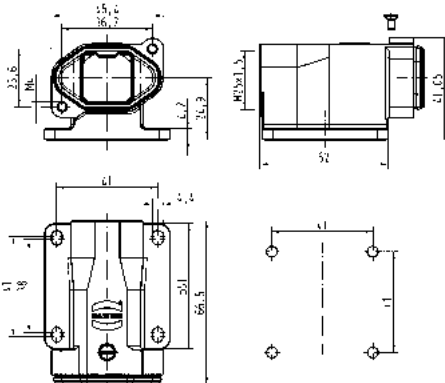
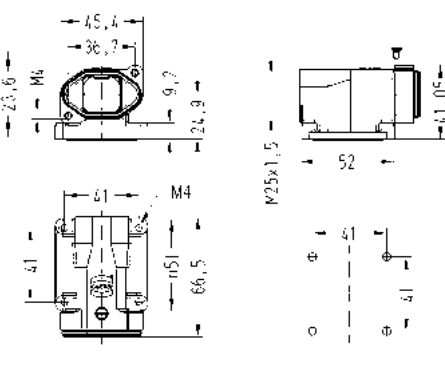




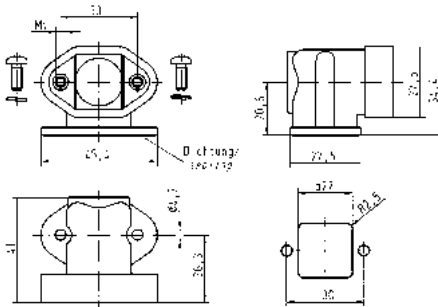
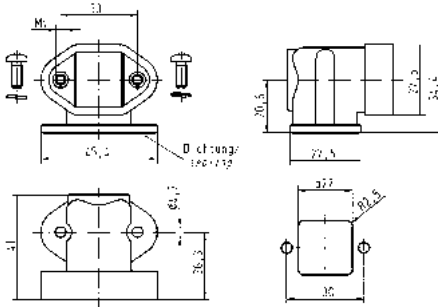
1x M20

19 40 703 0950



① Seal screw



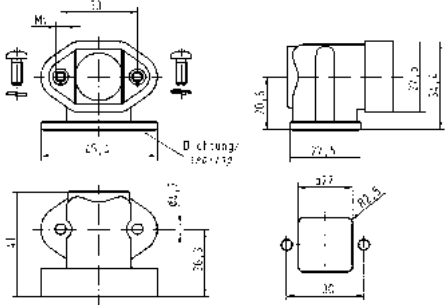
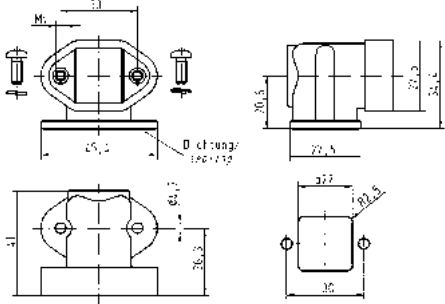
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Surface mounted housing, Angled, Bottom closed, Long version, Bottom closed, Feed through hole for fixing screws, Top entry, Pack contents: With seal screw	1x M25	19 40 703 0951	
Han® HPR , Surface mounted housing, Angled, Bottom closed, Long version, Bottom closed, Tapped blind hole for fixing screws, Top entry, Pack contents: With seal screw	1x M25	19 40 703 0953	
Han® HPR , Protection cover for all housings		09 40 703 5411	
Han® HPR , Protection cover for all housings, With fixing cord		09 40 703 5412	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Adapter, Open bottom, for assembly of bulkhead mounted bulk- head mounted position, Top entry 	1x M20	19 40 703 0900	
Han® HPR , Adapter, Open bottom, for assembly of bulkhead mounted bulk- head mounted position, Without cable entry 		09 40 703 0902	

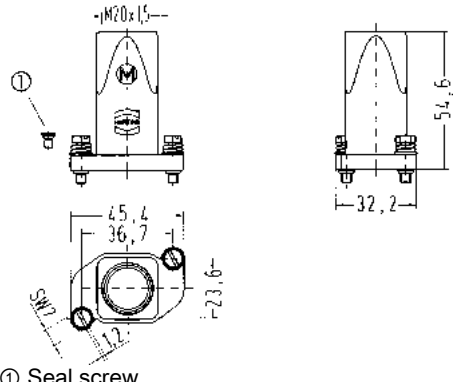
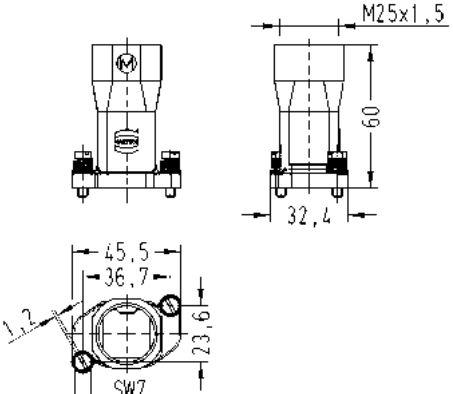
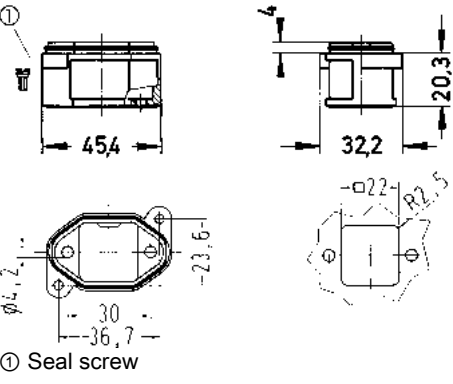
Hoods/housings for harsh outdoor environments
Toggle locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry, Pack contents: With seal screw	1x M20 1x M25	19 40 003 0400 19 40 003 0401	
Han® HPR , Bulkhead mounted housings, Straight, Pack contents: With seal screw		09 40 003 0301	

Housings

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Protection cover for all housings 		09 40 003 5401	
Han® HPR , Protection cover for all housings, With fixing cord 		09 40 003 5402	
Han® HPR , Adapter, Open bottom, for assembly of bulkhead mounted bulk- head mounted position, Top entry 	1x M20	19 40 003 0900	
Han® HPR , Adapter, Open bottom, for assembly of bulkhead mounted bulk- head mounted position, Without cable entry 		09 40 003 0902	

Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry, Pack contents: With seal screw 	1x M20 1x M25	19 40 003 0410 19 40 003 0411	 ① Seal screw 
Han® HPR , Bulkhead mounted housings, Straight, Pack contents: With seal screw 		09 40 003 0311	 ① Seal screw

Housings

Identification

Cable entry

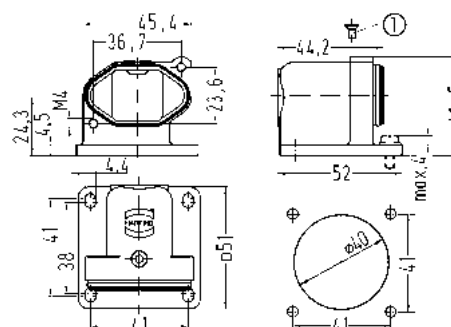
Part number

Drawing
(dimensions in mm)

Han® HPR ,
Bulkhead mounted housings,
Angled,
Open bottom,
Feed through hole for fixing screws,
Pack contents:
With seal screw



09 40 003 0950

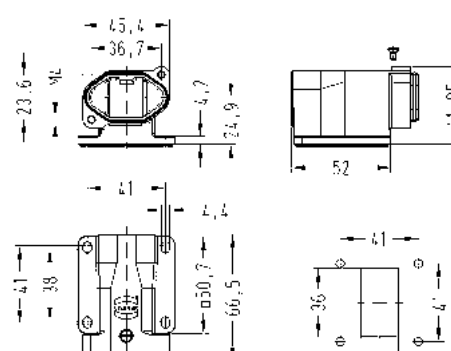


① Seal screw

Han® HPR ,
Bulkhead mounted housings,
Angled,
Long version,
Open bottom,
Feed through hole for fixing screws,
Pack contents:
With seal screw



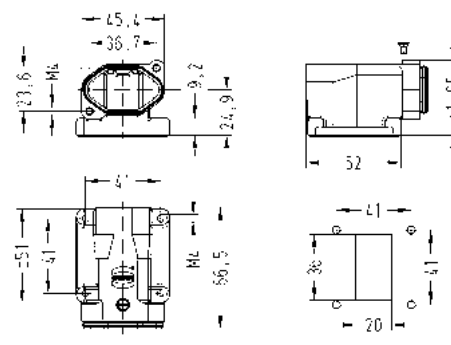
09 40 003 0951



Han® HPR ,
Bulkhead mounted housings,
Angled,
Long version,
Open bottom,
Tapped blind hole for fixing screws,
Pack contents:
With seal screw



09 40 003 0953

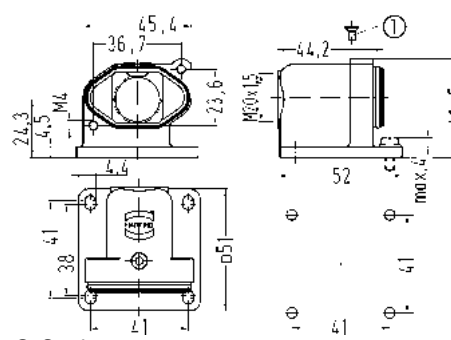


Han® HPR ,
Surface mounted housing,
Bottom closed,
Feed through hole for fixing screws,
Top entry,
Pack contents:
With seal screw

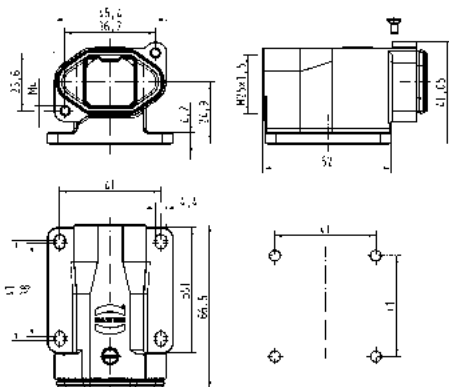
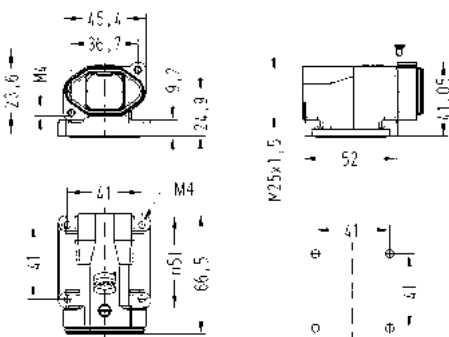




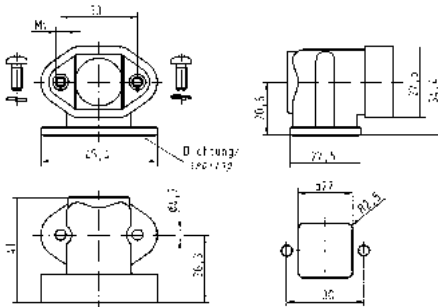
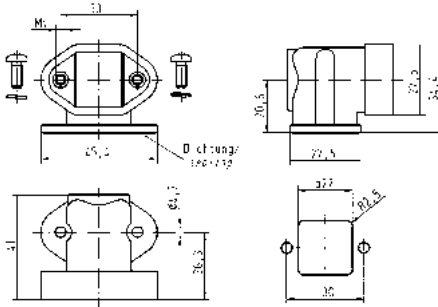
1x M20

19 40 003 0950



① Seal screw

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Surface mounted housing, Long version, Bottom closed, Feed through hole for fixing screws, Top entry, Pack contents: With seal screw 	1x M25	19 40 003 0951	
Han® HPR , Surface mounted housing, Long version, Bottom closed, Tapped blind hole for fixing screws, Top entry, Pack contents: With seal screw 	1x M25	19 40 003 0953	
Han® HPR , Protection cover for all housings 		09 40 003 5411	
Han® HPR , Protection cover for all housings, With fixing cord 		09 40 003 5412	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Adapter, Open bottom, for assembly of bulkhead mounted bulk- head mounted position, Top entry 	1x M20	19 40 003 0900	
Han® HPR , Adapter, Open bottom, for assembly of bulkhead mounted bulk- head mounted position, Without cable entry 		09 40 003 0902	

Features

- Hoods/housings for harsh outdoor environments
- Metal hoods and housings with excellent corrosion resistance
- Corrosion resistance ASTM B117-09 (500 h)
- Excellent EMC characteristics
- Screw locking M6
- Field of application: for external electrical interconnections in vehicles, in highly demanding environments and wet areas, as well as for sensitive interconnections that have to be shielded
- Distinguishing feature: colour-coded black, internal seal

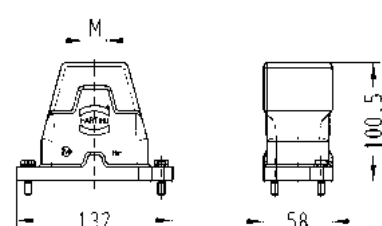
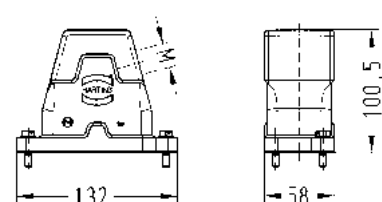
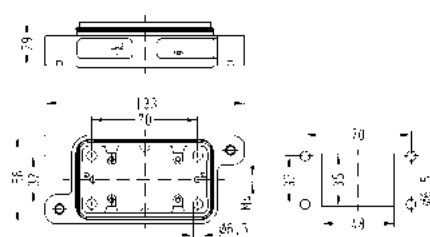
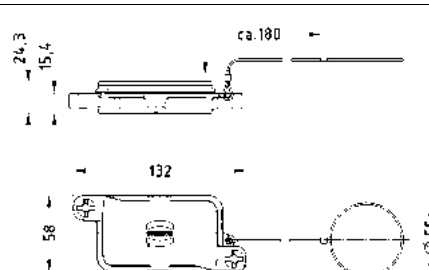
Technical characteristics

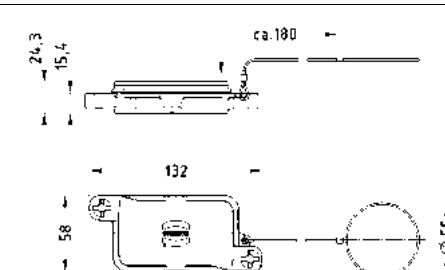
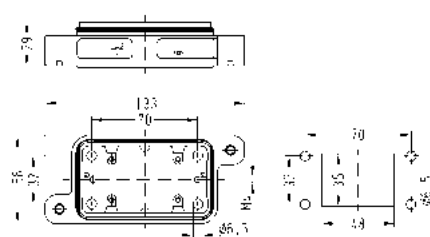
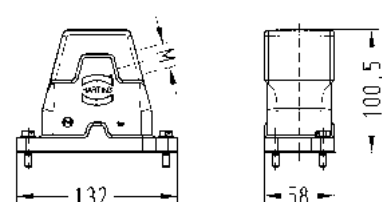
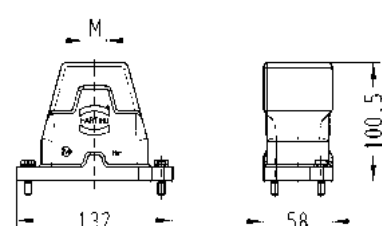
Limiting temperature	-40 ... +125 °C
Tightening torque	4 Nm
Degree of protection acc. to IEC 60529	IP65, IP68, IP69K
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Aluminium die-cast, Corrosion resistant
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 9005 (jet black)
Material (seal)	NBR
Material (locking)	Stainless steel

Specifications and approvals



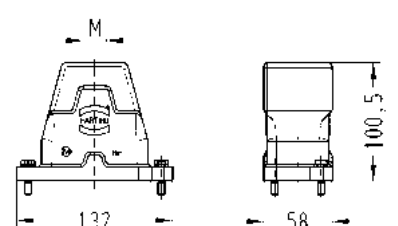
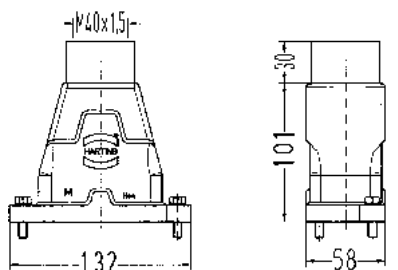
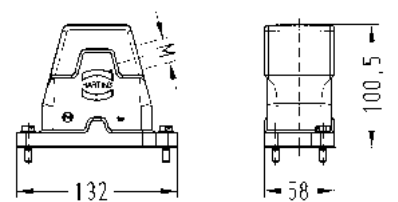
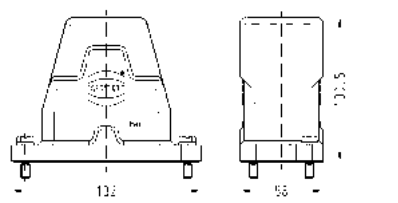
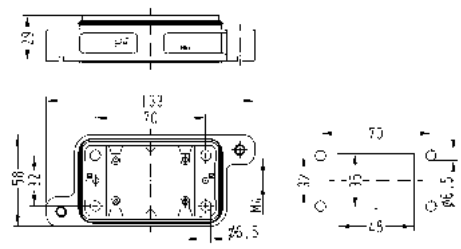
Hoods/housings for harsh outdoor environments
Toggle locking

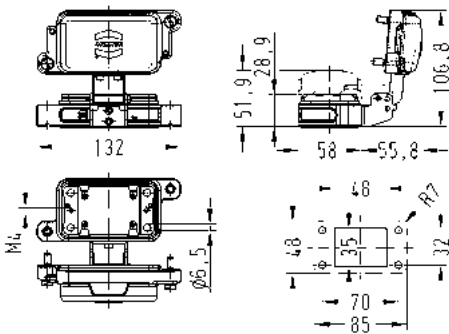
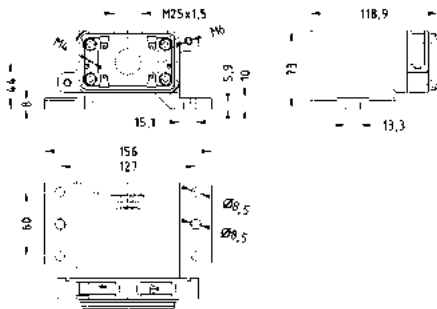
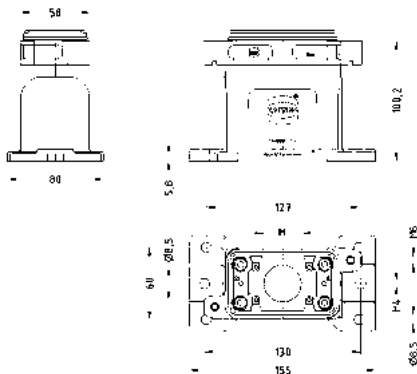
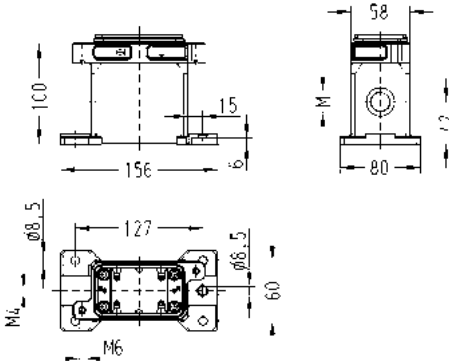
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry 	1x M25	19 40 006 0401	
Han® HPR , Hoods, Side entry 	1x M25	19 40 006 0501	
Han® HPR , Bulkhead mounted housings 		09 40 006 0301	
Han® HPR , Protection cover for hoods, Metal 		09 40 006 5404	

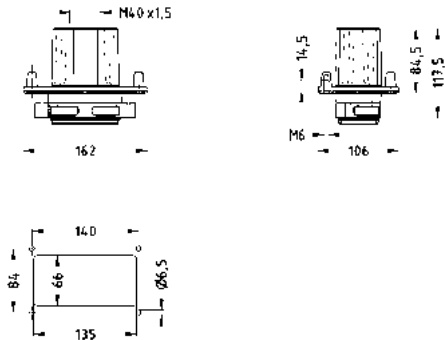
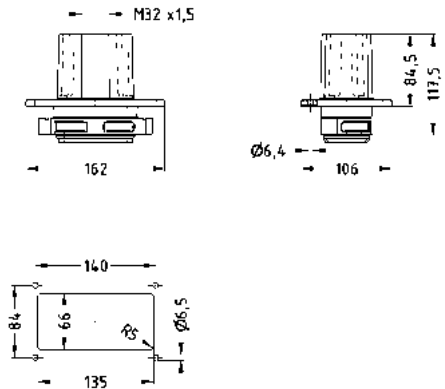
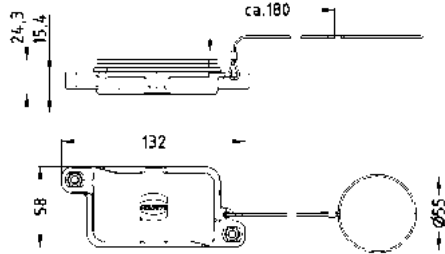
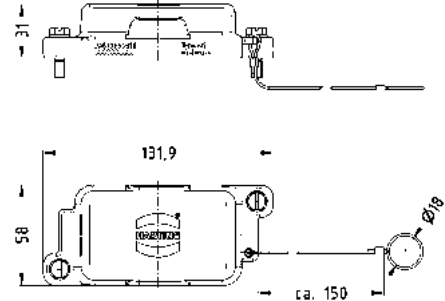


Housings

Hoods/housings for harsh outdoor environments
Screw locking

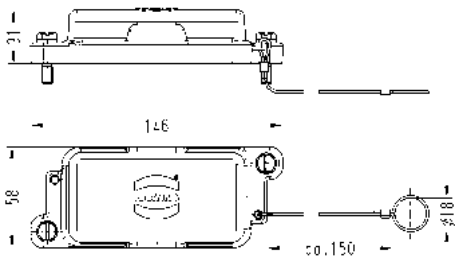
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry 	1x M20 1x M25 1x M32 1x M40	19 40 006 0410 19 40 006 0411 19 40 006 0412 19 40 006 0413	
Han® HPR , Hoods, With adapter, Top entry 	1x M40	19 40 006 0418	
Han® HPR , Hoods, Side entry 	1x M20 1x M25 1x M32 1x M40	19 40 006 0510 19 40 006 0511 19 40 006 0512 19 40 006 0513	
Han® HPR , Hoods, Without cable entry 		09 40 006 0811	
Han® HPR , Bulkhead mounted housings 		09 40 006 0311	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Bulkhead mounted housings, With metal cover 		09 40 006 0317	
Han® HPR , Surface mounted housing, Horizontal version, Top entry 	1x M25	19 40 006 0911	
Han® HPR , Surface mounted housing, Top entry 	1x M32 1x M40	19 40 006 1212 19 40 006 1213	
Han® HPR , Surface mounted housing, Side entry 	1x M20 1x M25 1x M32	19 40 006 1260 19 40 006 1261 19 40 006 1262	

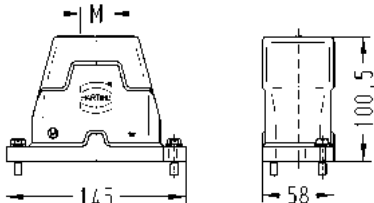
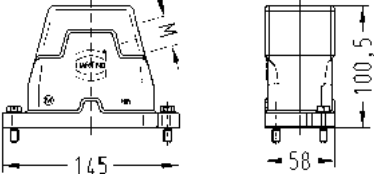
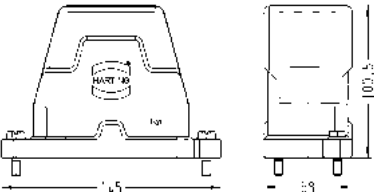
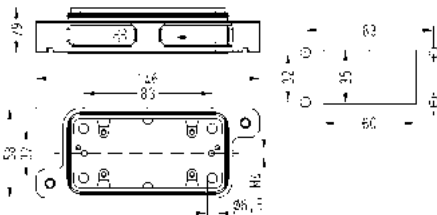
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Panel feed through housing, for mounting from inside, Top entry 	1x M32 1x M40	19 40 006 1112 19 40 006 1113	
Han® HPR , Panel feed through housing, for mounting from outside, Top entry 	1x M32 1x M40	19 40 006 1117 19 40 006 1118	
Han® HPR , Protection cover for hoods, Metal 		09 40 006 5414	
Han® HPR , Protection cover for bulkhead and cable to cable housing, Metal 		09 40 006 5411	

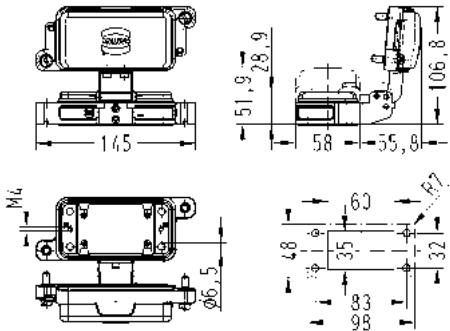
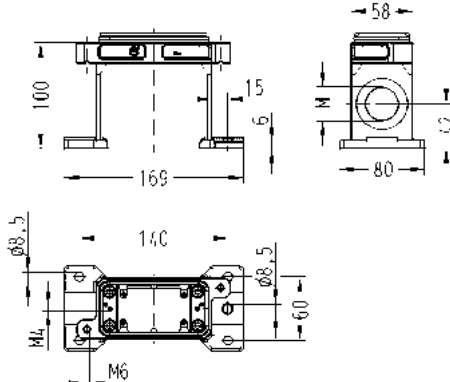
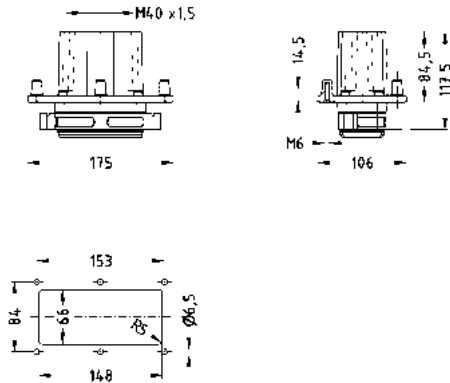
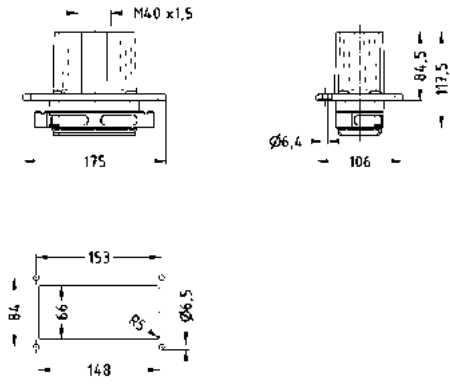
Hoods/housings for harsh outdoor environments
Toggle locking

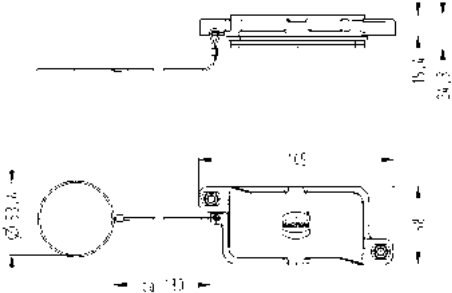
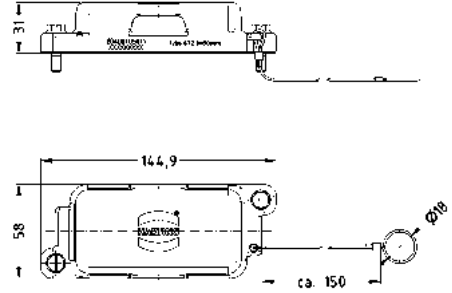
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry	1x M25	19 40 010 0401	
Han® HPR , Hoods, Side entry	1x M25	19 40 010 0501	
Han® HPR , Bulkhead mounted housings		09 40 010 0301	
Han® HPR , Protection cover for hoods, Metal		09 40 010 5404	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Protection cover for bulkhead and cable to cable housing, Metal 		09 40 010 5401	

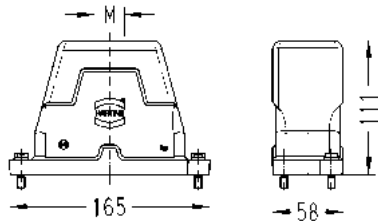
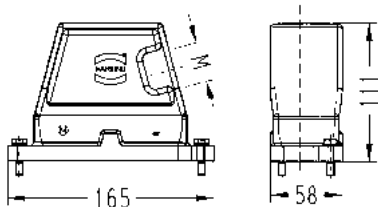
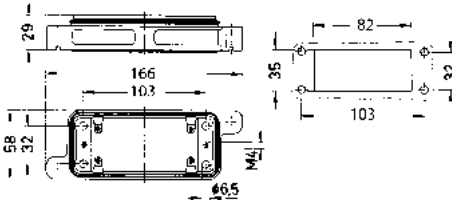
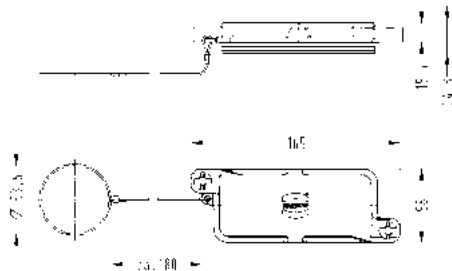
Hoods/housings for harsh outdoor environments
Screw locking

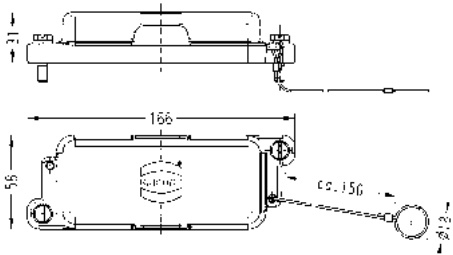
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry 	1x M25 1x M32 1x M40 2x M20	19 40 010 0411 19 40 010 0412 19 40 010 0413 19 40 010 0430	
Han® HPR , Hoods, Side entry 	1x M25 1x M32 1x M40	19 40 010 0511 19 40 010 0512 19 40 010 0513	
Han® HPR , Hoods, Without cable entry 		09 40 010 0811	
Han® HPR , Bulkhead mounted housings 		09 40 010 0311	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Bulkhead mounted housings, With metal cover 		09 40 010 0317	
Han® HPR , Surface mounted housing, Side entry 	1x M20 1x M32 1x M40 2x M25 2x M32	19 40 010 1260 19 40 010 1262 19 40 010 1263 19 40 010 1271 19 40 010 1272	
Han® HPR , Panel feed through housing, for mounting from inside, Top entry 	1x M40	19 40 010 1113	
Han® HPR , Panel feed through housing, for mounting from outside, Top entry 	1x M40	19 40 010 1118	

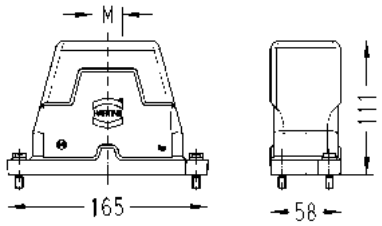
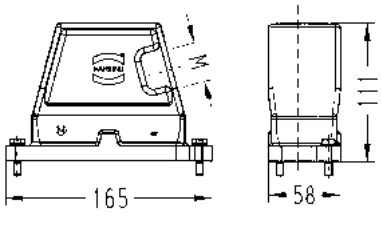
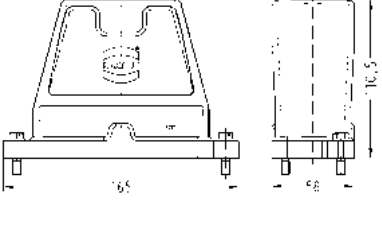
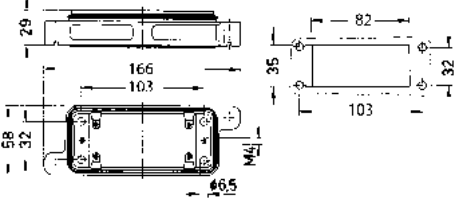
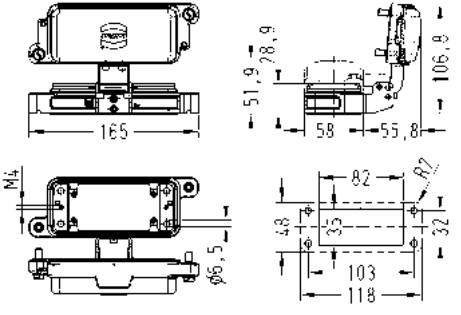
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Protection cover for hoods, Metal 		09 40 010 5414	
Han® HPR , Protection cover for bulkhead and cable to cable housing, Metal 		09 40 010 5411	

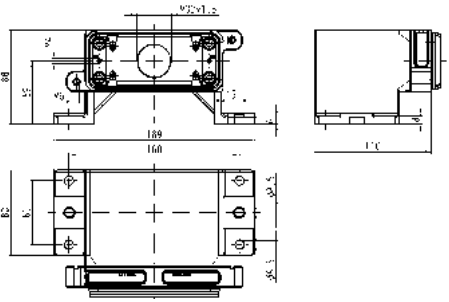
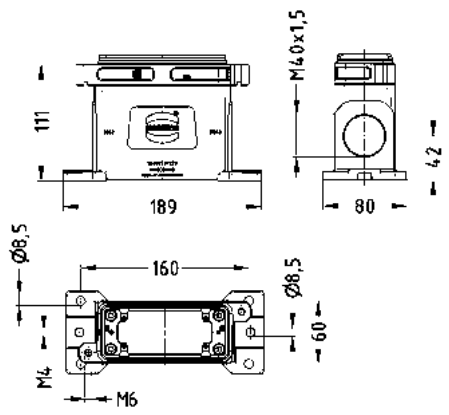
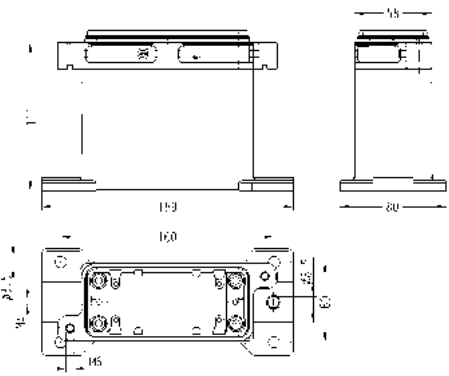
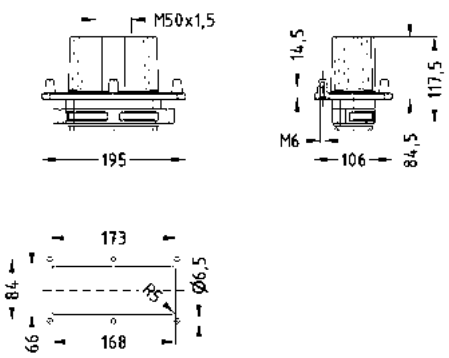
Hoods/housings for harsh outdoor environments
Toggle locking

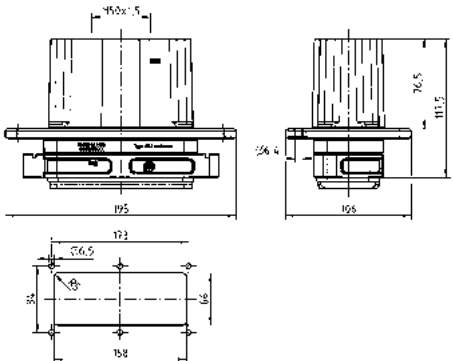
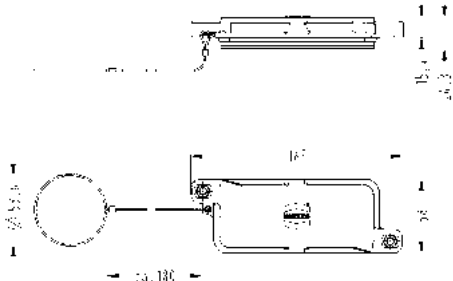
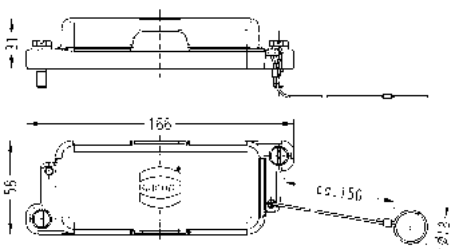
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry 	1x M32	19 40 016 0402	
Han® HPR , Hoods, Side entry 	1x M32	19 40 016 0502	
Han® HPR , Bulkhead mounted housings 		09 40 016 0301	
Han® HPR , Protection cover for hoods, Metal 		09 40 016 5404	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Protection cover for bulkhead and cable to cable housing, Metal 		09 40 016 5401	

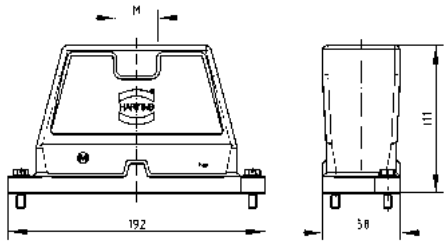
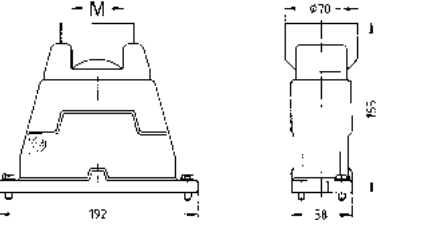
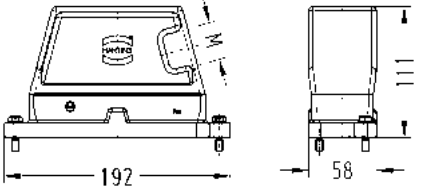
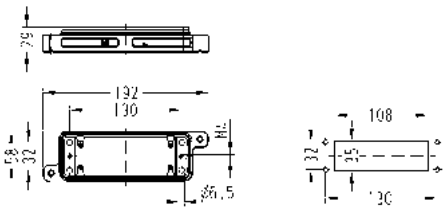
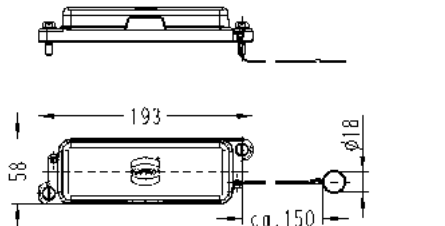
Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry 	1x M25 1x M32 1x M40 1x M50 2x M25	19 40 016 0411 19 40 016 0412 19 40 016 0413 19 40 016 0414 19 40 016 0431	
Han® HPR , Hoods, Side entry 	1x M25 1x M32 1x M40 1x M50	19 40 016 0511 19 40 016 0512 19 40 016 0513 19 40 016 0514	
Han® HPR , Hoods, Without cable entry 		09 40 016 0811	
Han® HPR , Bulkhead mounted housings 		09 40 016 0311	
Han® HPR , Bulkhead mounted housings, With metal cover 		09 40 016 0317	

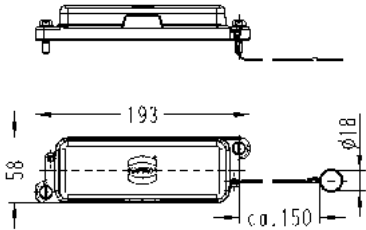
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Surface mounted housing, Horizontal version, Top entry 	1x M32 2x M32	19 40 016 0912 19 40 016 0922	
Han® HPR , Surface mounted housing, Side entry 	1x M25 1x M32 1x M40 2x M40	19 40 016 1261 19 40 016 1262 19 40 016 1263 19 40 016 1273	
Han® HPR , Surface mounted housing, Without cable entry 		09 40 016 1201	
Han® HPR , Panel feed through housing, for mounting from inside, Top entry 	1x M50	19 40 016 1114	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Panel feed through housing, for mounting from outside, Top entry 	1x M50 2x M25	19 40 016 1119 19 40 016 1134	
Han® HPR , Protection cover for hoods, Metal 		09 40 016 5414	
Han® HPR , Protection cover for bulkhead and cable to cable housing, Metal 		09 40 016 5411	

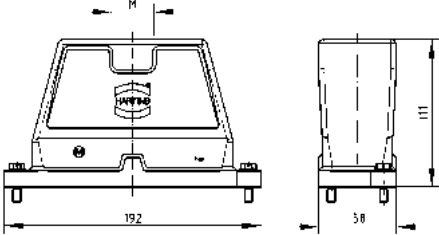
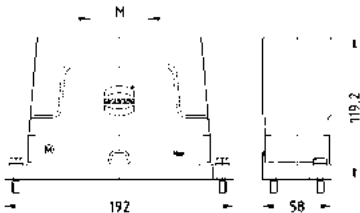
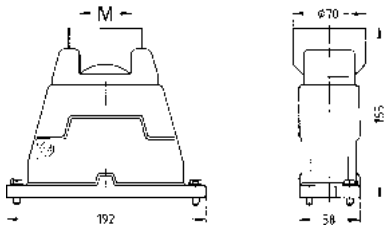
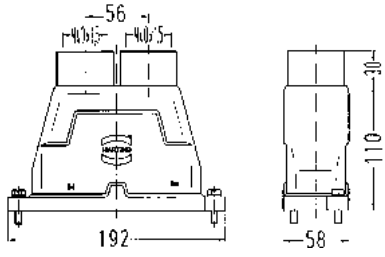
Hoods/housings for harsh outdoor environments
Toggle locking

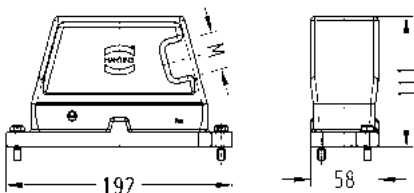
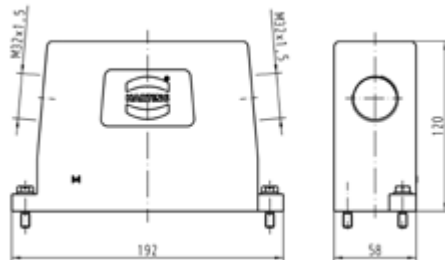
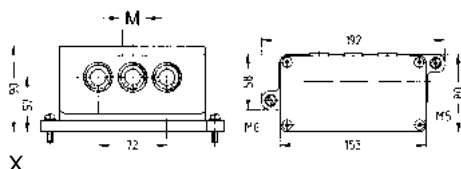
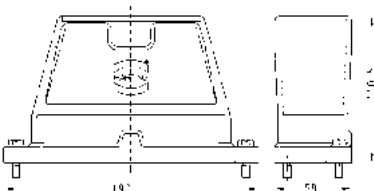
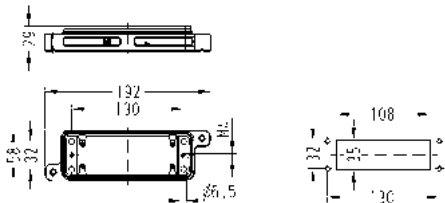
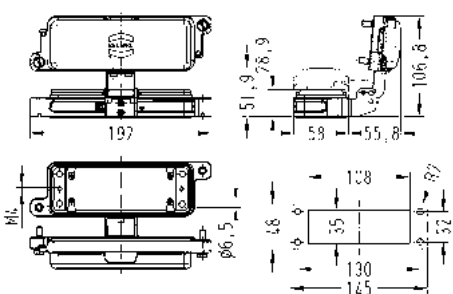
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry 	1x M32 1x M63	19 40 024 0402 19 40 024 0410	 
Han® HPR , Hoods, Side entry 	1x M40	19 40 024 0503	
Han® HPR , Bulkhead mounted housings 		09 40 024 0301	
Han® HPR , Protection cover for hoods, Metal 		09 40 024 5404	



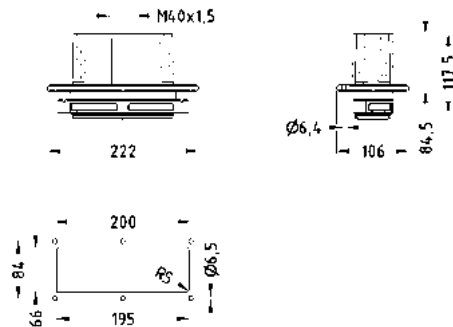
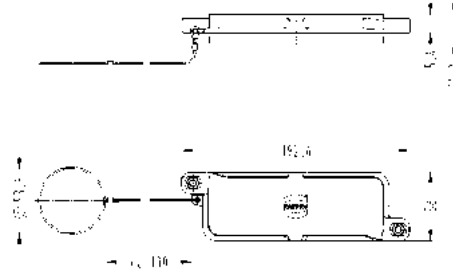
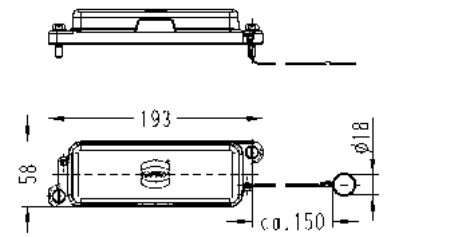
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Protection cover for bulkhead and cable to cable housing, Metal 		09 40 024 5401	

Hoods/housings for harsh outdoor environments
Screw locking

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Top entry 	1x M32 1x M40 1x M50 2x M25 2x M32 2x M40 3x M25 3x M25, 1x M20 4x M20 4x M25	19 40 024 0412 19 40 024 0413 19 40 024 0414 19 40 024 0431 19 40 024 0432 19 40 024 0433 19 40 024 0461 19 40 024 0471 19 40 024 0473 19 40 024 0474	
Han® HPR , Hoods, Top entry, High construction 	1x M50 3x M32 4x M25	19 40 024 0419 19 40 024 0467 19 40 024 0477	
Han® HPR , Hoods, Special type, Top entry 	1x M63	19 40 024 0420	
Han® HPR , Hoods, With adapter, Top entry 	2x M40	19 40 024 0438	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Hoods, Side entry 	1x M32 1x M40 1x M50	19 40 024 0512 19 40 024 0513 19 40 024 0514	
Han® HPR , Hoods, Side entry, High construction 	2x M32	19 40 024 0537	
Han® HPR , Hoods, Special type, Angled entry 	3x M25	19 40 024 0631	
Han® HPR , Hoods, Without cable entry 		09 40 024 0811	
Han® HPR , Bulkhead mounted housings 		09 40 024 0311	
Han® HPR , Bulkhead mounted housings, With metal cover 		09 40 024 0317	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Surface mounted housing, Horizontal version, Top entry	1x M50 2x M32 3x M25 3x M25, 1x M20 4x M25	19 40 024 0914 19 40 024 0925 19 40 024 0931 19 40 024 0971 19 40 024 0941	
Han® HPR , Surface mounted housing, Top entry	3x M25 3x M25, 1x M20 4x M25	19 40 024 1231 19 40 024 1271 19 40 024 1242	
Han® HPR , Surface mounted housing, Side entry	1x M40 2x M40 2x M50	19 40 024 1263 19 40 024 1273 19 40 024 1274	
Han® HPR , Panel feed through housing, for mounting from inside, Top entry	1x M40 1x M50	19 40 024 1113 19 40 024 1114	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han® HPR , Panel feed through housing, for mounting from outside, Top entry 	1x M40 1x M50 2x M32	19 40 024 1118 19 40 024 1119 19 40 024 1135	
Han® HPR , Protection cover for hoods, Metal 		09 40 024 5414	
Han® HPR , Protection cover for bulkhead and cable to cable housing 		09 40 024 5411	

Features

- Hoods/housings for harsh environments
- Extremely resistant to chemicals and other aggressive influences
- Made completely from high-quality stainless steel
- Extremely resistant to corrosion




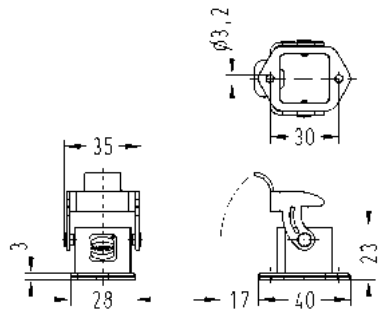
Technical characteristics

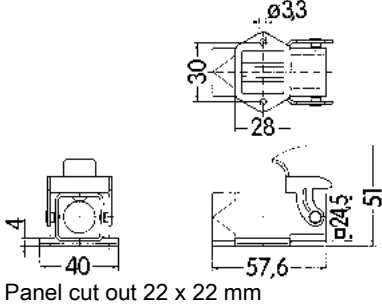
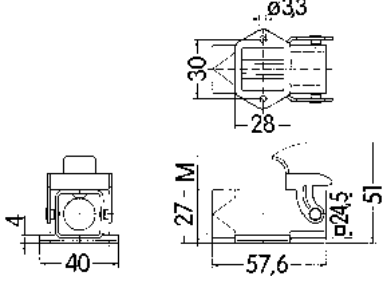


Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP67, IP44, IP65, With seal screw 09 20 000 9918
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Stainless steel
Surface (hood/housing)	Electrical conductive
Colour (hood/housing)	Unpainted
Material (seal)	NBR
Material (locking)	Stainless steel

Specifications and approvals



Hoods/housings for harsh environments
Single locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-INOX®, Hoods, Top entry 	1x M20	19 44 003 1440	
Han-INOX®, Hoods, Side entry 	1x M20	19 44 003 1640	
Han-INOX®, Screw mounted housings, Top entry, Pack contents: 1x M20 stainless steel screw nut 	1x M20	19 44 003 1150	
Han-INOX®, Bulkhead mounted housings, Straight 		19 44 003 0301	 Panel cut out 22 x 22 mm

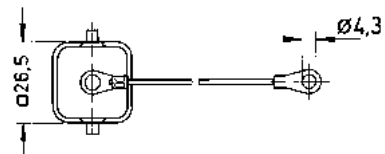
Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-INOX®, Bulkhead mounted housings, Angled 		19 44 003 0801	
Han-INOX®, Surface mounted housing, Side entry 	1x M20	19 44 003 1250	
Han-INOX®, Cable to cable housing, Top entry 	1x M20	19 44 003 1750	
Han-INOX®, Protection cover for hoods, for mounted female insert or for mounted Han-Brid® insert, Metal, With fixing cord 		19 44 003 5421	
Han-INOX®, Protection cover for hoods, for mounted male insert or for mounted Han-Brid® insert, Metal, With fixing cord 		19 44 003 5422	

Identification	Cable entry	Part number	Drawing (dimensions in mm)

Han-INOX®,
Protection cover for all housings,
for mounted female insert or for mounted
Han-Brid® insert,
Metal,
With fixing cord



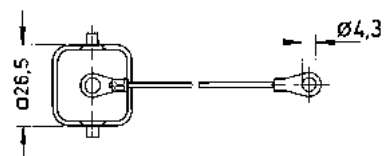
19 44 003 5425



Han-INOX®,
Protection cover for all housings,
for mounted male insert or for mounted
Han-Brid® insert,
Metal,
With fixing cord

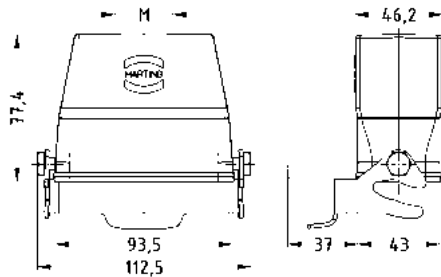
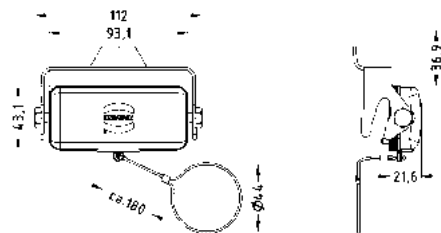
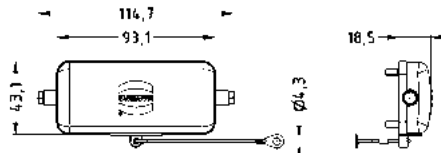


19 44 003 5426



Hoods/housings for harsh environments
Single locking lever

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-INOX®, Hoods, Top entry	1x M32	19 44 310 0447	
Han-INOX®, Hoods, Side entry	1x M32	19 44 310 0547	
Han-INOX®, Bulkhead mounted housings		19 44 310 0305	
Han-INOX®, Bulkhead mounted housings, With metal cover		19 44 310 0303	

Identification	Cable entry	Part number	Drawing (dimensions in mm)
Han-INOX®, Cable to cable housing, Top entry 	1x M32	19 44 310 0757	
Han-INOX®, Protection cover for hoods, Metal, With fixing cord 		19 44 310 5422	
Han-INOX®, Protection cover for all housings, Metal 		19 44 310 5421	
Han-INOX®, Protection cover for all housings, Metal, With fixing cord 		19 44 310 5423	

Technical characteristics

Material (seal) NBR
Colour (seal) Black

Technical characteristics

Material (cable glands) Metal
Material (clamping ring) Polyamide


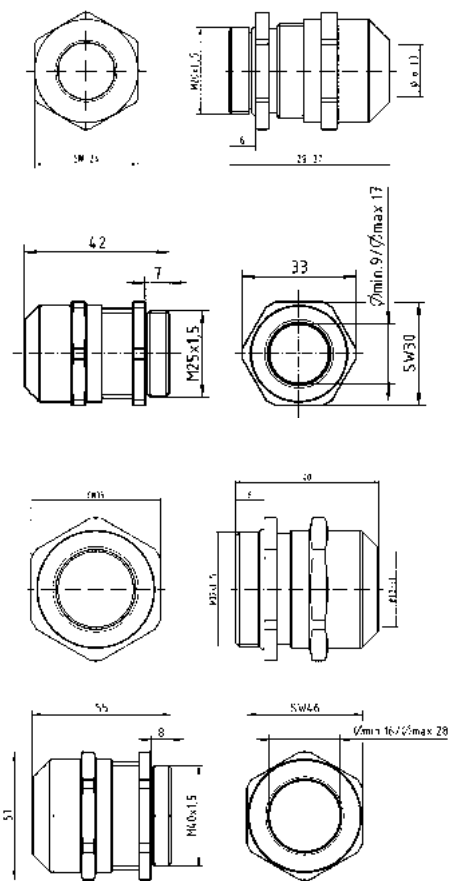
Identification	Size	Clamping range (mm)	Size	Part number	Drawing (dimensions in mm)
Han-INOX®, Flange gasket			10 B	19 44 000 9902	
 Han-INOX®, Cable gland	M20 M25 M32 M40	6 ... 13 9 ... 17 13 ... 21 16 ... 28		19 44 000 5082 19 44 000 5083 19 44 000 5084 19 44 000 5085	



Photo courtesy: MAN Diesel & Turbo SE



HARTING Han® Hoods/Housings
for control of marine Diesel engines.

Contents	Page
Han D® crimp contacts.....	41.2
Han E® crimp contacts.....	41.3
Han A® screw termination	41.4
Han E® screw termination.....	41.6

Features

- Suitable for Han D[®] / DD[®] inserts
- Can be combined with standard crimp contacts in one connector if needed
- Iron and constantan contacts according to IEC 60584 type J
- According to EUROMAP 14, Part 1

Technical characteristics

Contact resistance	≤1 mΩ
Material (contacts)	Iron, Constantan



Specifications and approvals

EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique
The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D [®] , Crimp contact, Iron Contact surface: Gold plated 	0,14 ... 0,37	09 15 000 6171	09 15 000 6271	 Stripping length 8 mm
Han D [®] , Crimp contact, Constantan 	0,14 ... 0,37	09 15 000 6161	09 15 000 6261	 Stripping length 8 mm

Ther-
mo

Features

- Suitable for Han E[®], Han[®] EE / EEE, Han[®] Q and Han A[®] inserts
- Can be combined with standard crimp contacts in one connector if needed
- Iron and constantan contacts according to IEC 60584 type J
- According to EUROMAP 14, Part 1

Technical characteristics

Contact resistance	≤1 mΩ
Material (contacts)	Iron, Constantan

Specifications and approvals



EN 60664-1
IEC 61984

Details

Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Identification	Conductor cross-section (mm ²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han E [®] , Crimp contact, Iron Contact surface: Gold plated 	0,14 ... 0,37 0,5	09 33 000 6173 09 33 000 6172	09 33 000 6273 09 33 000 6272	 Stripping length 7.5 mm
Han E [®] , Crimp contact, Constantan 	0,14 ... 0,37 0,5	09 33 000 6163 09 33 000 6162	09 33 000 6263 09 33 000 6262	 Stripping length 7.5 mm

Features

- Connector for temperature measurement conductors - suitable for injection moulding machines
- Iron and constantan contacts according to IEC 60584 type J
- According to EUROMAP 14, Part 1

Technical characteristics

Number of contacts	16
Electrical data acc. to IEC 61984	16 A 250 V 4 kV 3
Rated current	16 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated voltage acc. to UL	600 V
Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

Specifications and approvals

EN 60664-1
IEC 61984



Number of contacts

16+

16 A 250 V 4 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Thermocouple , Screw termination	1 ... 2,5	09 20 016 2691	09 20 016 2891	1) Distance for contact max. 24 mm Stripping length 7.5 mm Tightening torque 0.5 Nm Panel cut out for use without hood

Ther-
mo



Features

- Connector for temperature measurement conductors - suitable for injection moulding machines
- Iron and constantan contacts according to IEC 60584 type J
- According to EUROMAP 14, Part 1

Technical characteristics

Number of contacts	10, 16, 24
Electrical data acc. to IEC 61984	16 A 400 V 6 kV 3
Rated current	16 A
Rated voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)

Specifications and approvals

EN 60664-1
IEC 61984



Details

Tightening torque 0.5 Nm
Tightening torque PE screw 1.2 Nm

Number of contacts

10+

16 A 400 V 6 kV 3

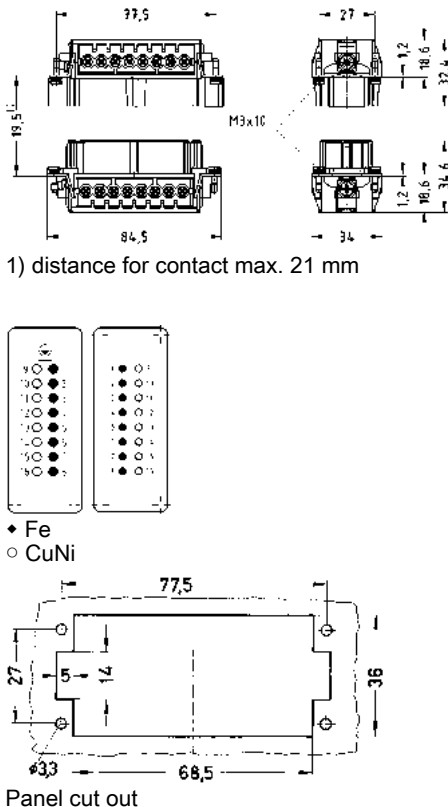
Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han [®] Thermocouple , Screw termination, With wire protection	1 ... 2,5	09 33 010 2691	09 33 010 2791	

Ther-
mo

Number of contacts

 $16 + \textcircled{\text{⏏}}$

16 A 400 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han® Thermocouple , Screw termination, With wire protection 	1 ... 2,5	09 33 016 2691	09 33 016 2791	 1) distance for contact max. 21 mm Panel cut out

Number of contacts

24+

16 A 400 V 6 kV 3

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han[®] Thermocouple , Screw termination, With wire protection Also suitable for standard con- tacts	1 ... 2,5	09 33 024 2689	09 33 024 2789	1) distance for contact max. 21 mm Standard contacts ♦ Fe ○ CuNi
Han[®] Thermocouple , Screw termination, With wire protection	1 ... 2,5	09 33 024 2691	09 33 024 2791	♦ Fe ○ CuNi Panel cut out

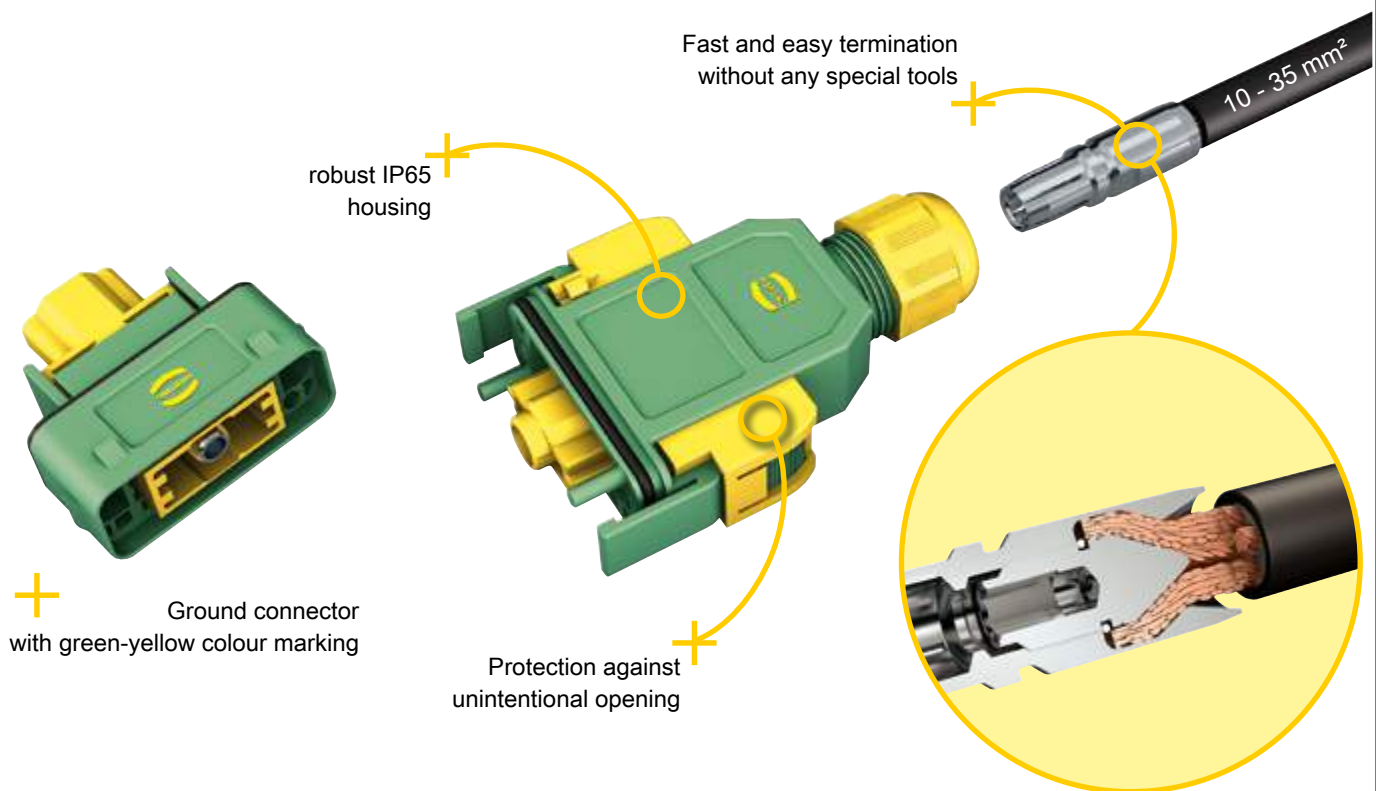
Contents	Page
Modules	42.5
Hoods/Housings	42.7

Han® GND – Mateable Potential Equalization

The new Han® GND series now enables pluggable grounding systems.

Han® GND (Han® Ground) is the innovative HARTING solution for potential equalization. The new connector series makes it possible to execute grounding systems in a pluggable design for the first time.

The use of connectors has been well-established in the electrical cabling of machines and systems for many years. The advantage is quick and error-free commissioning. Potential equalization lines are still being permanently connected, which is relatively time-consuming and can be subject to errors. HARTING's remedy: the Han® GND. The single-pole connector in the robust IP65 plastic housing is designed for stranded wires from 10 - 35 mm² and is optionally available in crimp or axial screw termination. The latter has the advantage that the lines can be connected without a special tool. A simple screwdriver is all it takes to achieve a quick and easy reliable connection. Extra connector mating security can be provided by the use of additional locking elements that prevent unintentional opening.



Assembly and construction

Assembly

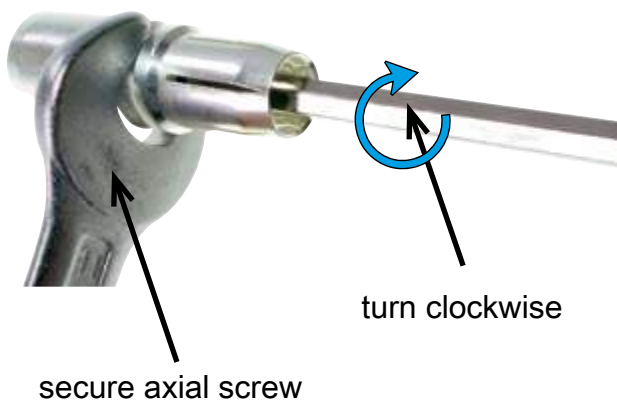
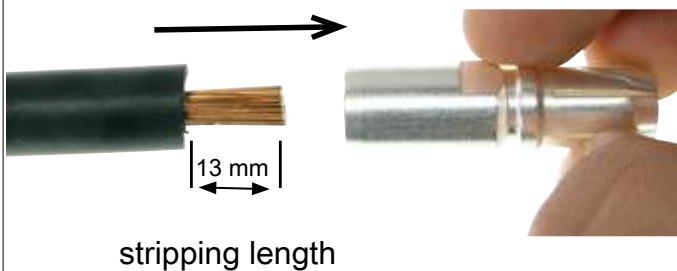
Please use fine stranded wire (Class 5) which is recommend for the axial screw termination.



Do not twist the stripped wire!

1.

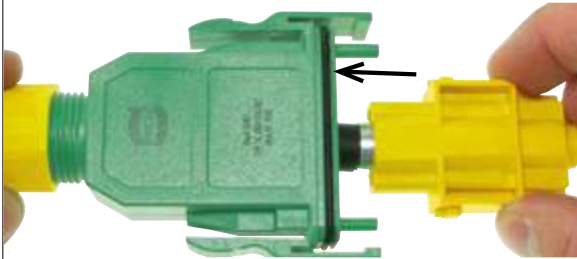
Please strip the wire. All suitable wire gauges have to be stripped with a length of 13 mm (acc. to Class 5). Insert stripped wire into the terminal and push fully inside. Pay attention that all fine stranded wires are inserted in the contact chamber.



2.

Please insert suitable torque key (SW 4) into the contact from mating side and turn the axial screw clockwise. For that purpose secure the axial screw with a spanner (SW 11). Tighten the screw to the specified torque value.

Assembly and construction



3.

Insert the installed cable through the cable gland into the Han® GND housing! Push the axial screw contact into the module until you hear an audible click, which is the indicator that the contact snaps into position.



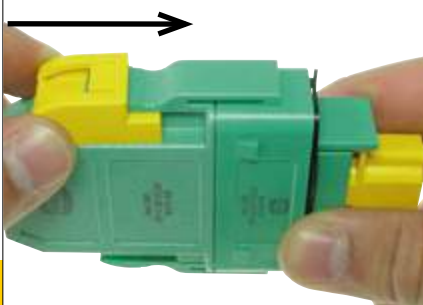
4.

Push the module back into the housing and turn the cable gland clockwise.



5.

Mount the module in the housing with the enclosed screws.



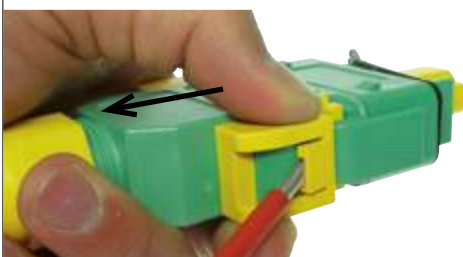
Protection against unintentional opening (option)

1.

Push the unlocking protection over the opening latches to prevent an unintentional opening (the connector can only be unmated with a separate tool).

2.

The removal of the unlocking protection can be done with a screwdriver for slotted screws (e.g. size 0.8 x 4.0). Insert the screwdriver in the unlocking protection slot and release the plastic latch until you are able to remove the unlocking protection with your fingers.



Features

- First connector for potential equalisation
- Slim, space saving construction type
- Low cost plastic hoods and housings
- Colours: green and yellow
- Crimp or axial screw termination available

Technical characteristics

Number of contacts	1
Insulation resistance	$\geq 10^{10} \Omega$
Contact resistance	$\leq 0.3 \text{ m}\Omega$
Limiting temperature	-40 ... +125 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥ 500
Material (insert)	Polycarbonate
Colour (insert)	Yellow
Material (contacts)	Copper alloy

Specifications and approvals

EN 60664-1
IEC 61984
UL 1977 ECBT2.E235076

Details

Hex key (A/F 4) see chapter 90

for more technical details (i.e. number of crimping operations or crimping position) see eCatalogue

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

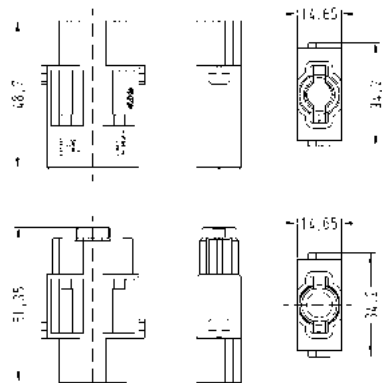
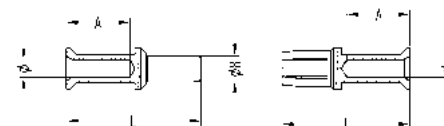
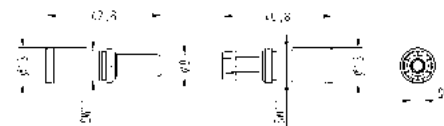
Crimping tools see chapter 90

Remarks on the crimp technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Number of contacts

1

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)															
		Male	Female																
Han® GND , Crimp termination, Axial screw termination  Please order contacts separately.	10 ... 35	09 14 001 3032	09 14 001 3132																
TC 100 , Crimp contact, Contact surface: Silver plated 	10 16 25 35	09 11 000 6114 09 11 000 6116 09 11 000 6125 09 11 000 6135	09 11 000 6214 09 11 000 6216 09 11 000 6225 09 11 000 6235	 <table><tr><th>Wire gauge</th><th>Ø</th><th>Stripping length A</th></tr><tr><td>10 mm²</td><td>4.3</td><td>19 mm</td></tr><tr><td>16 mm²</td><td>5.5</td><td>19 mm</td></tr><tr><td>25 mm²</td><td>7</td><td>19 mm</td></tr><tr><td>35 mm²</td><td>8.2</td><td>16 mm</td></tr></table> for stranded wire according to IEC 60 228 Class 5	Wire gauge	Ø	Stripping length A	10 mm²	4.3	19 mm	16 mm²	5.5	19 mm	25 mm²	7	19 mm	35 mm²	8.2	16 mm
Wire gauge	Ø	Stripping length A																	
10 mm²	4.3	19 mm																	
16 mm²	5.5	19 mm																	
25 mm²	7	19 mm																	
35 mm²	8.2	16 mm																	
TC 100 , Axial screw contact, Contact surface: Silver plated 	10 ... 25 16 ... 35	09 11 000 6112 09 11 000 6113	09 11 000 6212 09 11 000 6213	 Stripping length 13 mm Tightening torque <table><tr><th>mm²</th><td>10</td><td>16</td><td>25</td><td>35</td></tr><tr><th>Nm</th><td>6</td><td>6</td><td>7</td><td>8</td></tr></table>	mm²	10	16	25	35	Nm	6	6	7	8					
mm²	10	16	25	35															
Nm	6	6	7	8															

Han
GND

Features

- First connector for potential equalisation
- Slim, space saving construction type
- Low cost plastic hoods and housings
- Colours: green and yellow


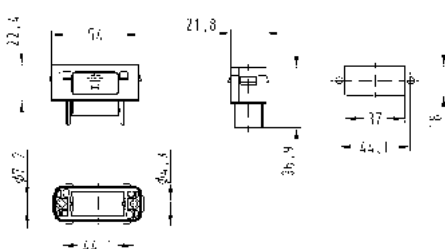


Technical characteristics

Limiting temperature	-40 ... +85 °C
Flammability acc. to UL 94	V-0
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	Green, Yellow
Material (seal)	NBR
Material (cable glands)	Polyamide

Specifications and approvals

EN 60664-1
IEC 61984

Snap-in latches

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han® GND , Hoods, Top entry 	1x Integrated	7,5 ... 14	09 14 001 0430	
Han® GND , Bulkhead mounted housings 			09 14 001 0330	
Han® GND , Cable to cable housing, Top entry 	1x Integrated	7,5 ... 14	09 14 001 0730	
Han® GND, Adapter, Male / male 			09 14 001 9901	
Han® GND , Unlocking protection 			09 14 000 9938	

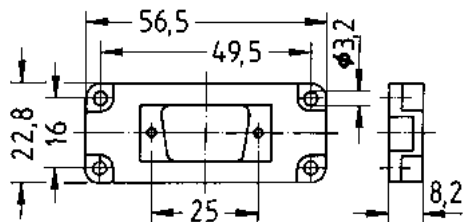
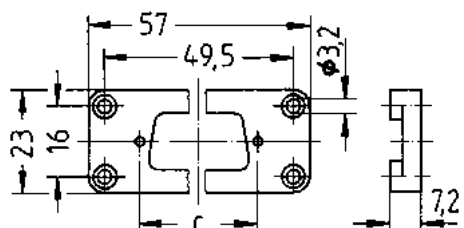
Contents	Page
D-Sub adapter	80.2
Locking levers.....	80.8
Seals.....	80.10
Han® Hood Link	80.12
Panel feed through housings.....	80.13
Accessories for flat cable entry.....	80.15
Cable glands.....	80.16
Shielding frame.....	80.21
Grip frames.....	80.24
Coding of inserts in hoods/housings.....	80.26
Han® docking frame.....	80.30
PE Multiple ground connection.....	80.31
Strain relief clamp.....	80.32
Special insert fixing screws	80.33
Screws.....	80.34
Bearing pedestal and covers	80.36
Further accessories	80.37

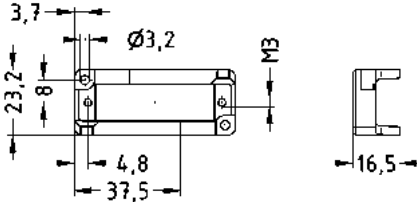


Details

Thermoplastic, Metal

Not suitable for D-Sub High Density!

Identification	Part number	Drawing (dimensions in mm)
D-Sub 9, Adapter, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector 	09 20 000 9932	 D-Sub 9
D-Sub 15, Adapter, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector 	09 20 000 9928	 D-Sub 15 c= 33.3 mm D-Sub 25 c= 47 mm
D-Sub 25, Adapter, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector 	09 20 000 9929	

Identification	Part number	Drawing (dimensions in mm)
D-Sub 25 in the Han® 10 A, D-Sub 37 in the Han® 16 A, Adapter, for 1 x D-Sub, Metal, Pack contents: Two-piece adapter, 2 fixing screws for adapter, 2 fixing screws for D-Sub connector 	09 20 000 9925	



Technical characteristics

Material (accessories) Thermoplastic, Metal

Details

Not suitable for D-Sub High Density!

Identification	Part number	Drawing (dimensions in mm)
D-Sub 50, Adapter, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector	09 20 000 9931	
D-Sub 25 in the Han® 10 A, D-Sub 37 in the Han® 16 A, Adapter, for 1 x D-Sub, Metal, Pack contents: Two-piece adapter, 2 fixing screws for adapter, 2 fixing screws for D-Sub connector	09 20 000 9925	







Technical characteristics

Material (accessories) Thermoplastic

Details

Not suitable for D-Sub High Density!

Identification	Part number	Drawing (dimensions in mm)
D-Sub 9, Adapter, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector	09 30 000 9965	 ① Mounting in housing: character A visible ② Mounting in hood: character T visible D-Sub 9: a=44; b=51.5; c=25 D-Sub 15: a=44; b=51.5; c=33.3
D-Sub 15, Adapter, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector	09 30 000 9966	
D-Sub 9, Adapter, for 2 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 4 fixing screws for D-Sub connector	09 30 000 9970	 ① Mounting in housing: character A visible ② Mounting in hood: character T visible D-Sub 2x 9: a=44; b=51.5; c=25 D-Sub 2x 15: a=44; b=51.5; c=33.3
D-Sub 15, Adapter, for 2 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 4 fixing screws for D-Sub connector	09 30 000 9971	





Technical characteristics

Material (accessories) Thermoplastic

Details

Not suitable for D-Sub High Density!

Identification	Part number	Drawing (dimensions in mm)
D-Sub 25, Adapter, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector	09 30 000 9967	 ① Mounting in housing: character A visible ② Mounting in hood: character T visible D-Sub 25: a=57; b=64.5; c=47
D-Sub 25, Adapter, for 2 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 4 fixing screws for D-Sub connector	09 30 000 9972	 ① Mounting in housing: character A visible ② Mounting in hood: character T visible D-Sub 2x 25: a=57; b=64.5; c=47





Technical characteristics

Material (accessories) Thermoplastic

Details

Not suitable for D-Sub High Density!

Identification	Part number	Drawing (dimensions in mm)
D-Sub 37, Adapter, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector	09 30 000 9968	 ① Mounting in housing: character A visible ② Mounting in hood: character T visible D-Sub 37: a=77.5; b=85; c=63.5 D-Sub 50: a=77.5; b=85; c=61.1
D-Sub 50, Adapter, for 1 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 2 fixing screws for D-Sub connector	09 30 000 9969	
D-Sub 37, Adapter, for 2 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 4 fixing screws for D-Sub connector	09 30 000 9973	 ① Mounting in housing: character A visible ② Mounting in hood: character T visible D-Sub 2x 37: a=77.5; b=85; c=63.5 D-Sub 2x 50: a=77.5; b=85; c=61.1
D-Sub 50, Adapter, for 2 x D-Sub, Pack contents: 1 adapter, 4 fixing screws for adapter, 4 fixing screws for D-Sub connector	09 30 000 9974	

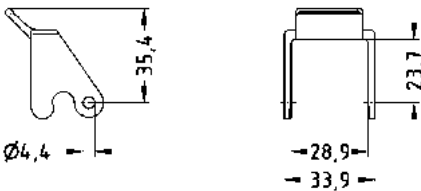
Double locking lever

Technical characteristics

Flammability acc. to UL 94 V-0
(locking levers)

Technical characteristics

Material (accessories) Thermoplastic, Polycarbonate, Stainless steel
Colour (accessories) RAL 7032 (pebble grey), Black, RAL 7037 (dust grey)

Identification	Size	Part number	Drawing (dimensions in mm)
Locking levers, RAL 7032 (pebble grey)	3 A	09 00 000 5241	
			
Locking levers, Black	3 A	09 00 000 5242	
			
Locking levers, Han® Q 8/0, Black	Modular Compact	09 00 000 5244	
			
Han A®, Han-Easy Lock®, Locking levers, RAL 7037 (dust grey)	32 A	09 00 000 5223	
			
Han® B , Han-Easy Lock®, Locking levers, RAL 7037 (dust grey)	10/16/24 B 32 B	09 00 000 5221 09 00 000 5231	
			

Accesso-
ries

Single locking lever

Technical characteristics

Flammability acc. to UL 94 V-0
(locking levers)

Technical characteristics

Material (accessories) Thermoplastic, Polycarbonate,
Stainless steel
Colour (accessories) Black, RAL 7037 (dust grey)

Identification	Size	Part number	Drawing (dimensions in mm)
Locking levers, Black 	06 B 10/16/24 B	09 00 000 5401 09 00 000 5246	
Han A®, Han-Easy Lock®, Locking levers, RAL 7037 (dust grey) 	10 A 16 A	09 00 000 5224 09 00 000 5225	
Han® B , Han-Easy Lock®, Locking levers, RAL 7037 (dust grey) 	06 B 10 B 16 B 24 B	09 00 000 5222 09 00 000 5228 09 00 000 5229 09 00 000 5230	



Technical characteristics

Material (seal) NBR, FPM

Technical characteristics

Colour (seal) Black

Identification	Size	Part number	Drawing (dimensions in mm)
Han A [®] , Flange gasket	03 A 10 A 16 A 32 A	09 20 000 9991 09 20 000 9992 09 20 000 9993 09 20 000 9994	
			
Han [®] B , Flange gasket	06 B 10 B 16 B 24 B	09 30 000 9991 09 30 000 9992 09 30 000 9993 09 30 000 9994	
			
Han [®] B , Flange gasket, Self-retaining	06 B 10 B 16 B 24 B	09 30 000 9801 09 30 000 9802 09 30 000 9803 09 30 000 9804	
			
Flange gasket	03 HPR 48 HPR Han-Drive [®] Modular Compact	09 40 000 9980 09 30 000 9996 09 30 000 9903 09 14 000 9940	
			
Han A [®] , Flange gasket, FPM	03 A	09 37 000 9912	
Han [®] B , Flange gasket, FPM	06 B 10 B 16 B 24 B	09 37 000 9946 09 37 000 9947 09 37 000 9948 09 37 000 9949	

Technical characteristics

Material (seal) NBR, FPM

Technical characteristics

Colour (seal) Black

Identification	Size	Part number	Drawing (dimensions in mm)
Han A® , Profile gasket 	03 A	09 70 000 9991	
	10 A	09 20 000 9996	
	16 A	09 20 000 9997	
Han® B , Profile gasket 	06 B	09 30 000 9941	
	10 B	09 30 000 9942	
	16 B	09 30 000 9943	
	24 B	09 30 000 9944	
	32 B	09 30 000 9963	
	48 B	09 30 000 9995	
O-ring rubber seal, Han® HPR 	03 HPR	09 40 000 9910	
	06 HPR	09 40 000 9911	
	10 HPR	09 40 000 9912	
	16 HPR	09 40 000 9913	
	24 HPR	09 40 000 9914	
L-seal 	06 B	09 30 000 9936	
	10 B	09 30 000 9935	
	16 B	09 30 000 9934	
	24 B	09 30 000 9933	
Profile gasket, FPM	03 A	09 21 000 9906	



Features

- Cable to cable connection simple to realise and easy to mount
- Resistant elastomer
- Locking as well as seal combined in one system
- for two lever locking system

Technical characteristics

Operating temperature -40 ... +85 °C
Degree of protection acc. to IEC IP65, In locked position
60529
Colour (hood/housing) Black

Identification

Part number

Drawing
(dimensions in mm)

Locking element,
for hoods



09 30 016 9901

HARTING standard hoods and housings for industrial connectors
Double locking lever

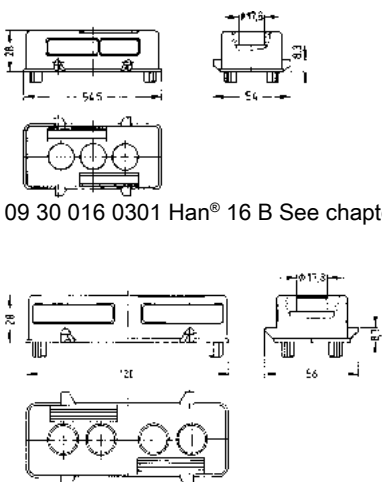



Features

- Allows the entry of pre-assembled cables into a switch cabinet
- Use of identification strips is possible
- No special tools required
- Standard screw driver (5 x 1 mm) necessary to open split hood
- IP54 due to continuous contoured seal

Technical characteristics

Limiting temperature	-40 ... +125 °C
Degree of protection acc. to IEC 60529	IP54, When mounted vertically, IP65
Degree of protection acc. to UL 50	4, 4X, 12
Material (hood/housing)	Polycarbonate
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR

Identification	Cable entry	Cable diameter (mm)	Part number	Drawing (dimensions in mm)
Han® B , Panel feed through housing, Pack contents: 2 split hood halves  Please order cable entry glands separately.	3x Integrated 4x Integrated	17,6 17,8	09 30 016 0408 09 30 024 0408	 09 30 016 0301 Han® 16 B See chapter 31 09 30 024 0301 Han® 24 B See chapter 31
Identification strip, Pack contents: Single 			09 33 000 9981	

Technical characteristics

Material (accessories) Thermoplastic

Technical characteristics

Colour (accessories) Black

Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)

Cable entry gland



3 ... 4
4 ... 5
5 ... 6
6 ... 7
7 ... 8
8 ... 9
9 ... 10

09 00 000 5351
09 00 000 5352
09 00 000 5353
09 00 000 5354
09 00 000 5355
09 00 000 5356
09 00 000 5357


Cable entry gland,
Additional strain relief can be provided by
cable ties (max. width 8 mm)

10 ... 11
11 ... 12
12 ... 13
13 ... 14
14 ... 15
15 ... 16

09 00 000 5358
09 00 000 5359
09 00 000 5360
09 00 000 5361
09 00 000 5362
09 00 000 5363


Cable entry gland,
for ASI cable

09 00 000 5364



Dummy plugs

09 00 000 5350



Technical characteristics

Material (seal) NBR

Technical characteristics

Colour (seal) Black

Identification	Part number	Drawing (dimensions in mm)
Set of seals for ribbon cable entry, With strain relief clamp, for 1 flat cable	09 00 000 5315	
Set of seals for ribbon cable entry, With strain relief clamp, for 2 flat cables	09 00 000 5316	
Set of seals for ribbon cable entry, With strain relief clamp, for 3 flat cables	09 00 000 5317	
Holder for ribbon cable entry, for separate mounting	09 00 000 5325	

Technical characteristics


Limiting temperature	-40 ... +100 °C
Flammability acc. to UL 94	V-0
Degree of protection acc. to IEC 60529	IP68, IP69K
Material (seal)	NBR
Material (cable glands)	Polyamide

Technical characteristics

Colour (accessories)	RAL 5012 (light blue), RAL 9005 (jet black), RAL 7032 (pebble grey), RAL 7035 (light grey)

Specifications and approvals



Identification	Size	Clamping range (mm)	Part number	Drawing (dimensions in mm)																																								
Han® CGM-Ex i , Cable gland, Intrinsically safe electric circuits , Blue	M20	5 ... 9	19 00 000 7101																																									
	M20	6 ... 12	19 00 000 7102																																									
	M25	9 ... 16	19 00 000 7104																																									
	M32	13 ... 20	19 00 000 7106																																									
	M40	22 ... 32	19 00 000 7109																																									
Han® CGM-P , Cable gland, Grey	M20	5 ... 9	19 00 000 5180	<table border="1"><thead><tr><th>Outer cable Ø</th><th>SW</th><th>E</th><th>Nm</th></tr></thead><tbody><tr><td>5 ... 9 mm</td><td>24</td><td>26.4</td><td>4.5</td></tr><tr><td>6 ... 12 mm</td><td>24</td><td>26.4</td><td>4.5</td></tr><tr><td>10 ... 14 mm</td><td>27</td><td>29.8</td><td>4.5</td></tr><tr><td>9 ... 16 mm</td><td>33</td><td>33.5</td><td>5</td></tr><tr><td>13 ... 18 mm</td><td>33</td><td>36.5</td><td>5</td></tr><tr><td>13 ... 20 mm</td><td>42</td><td>46.8</td><td>6.5</td></tr><tr><td>18 ... 25 mm</td><td>42</td><td>46.8</td><td>6.5</td></tr><tr><td>20 ... 26 mm</td><td>53</td><td>58.8</td><td>10</td></tr><tr><td>22 ... 32 mm</td><td>53</td><td>58.8</td><td>10</td></tr></tbody></table>	Outer cable Ø	SW	E	Nm	5 ... 9 mm	24	26.4	4.5	6 ... 12 mm	24	26.4	4.5	10 ... 14 mm	27	29.8	4.5	9 ... 16 mm	33	33.5	5	13 ... 18 mm	33	36.5	5	13 ... 20 mm	42	46.8	6.5	18 ... 25 mm	42	46.8	6.5	20 ... 26 mm	53	58.8	10	22 ... 32 mm	53	58.8	10
	Outer cable Ø	SW	E		Nm																																							
	5 ... 9 mm	24	26.4		4.5																																							
	6 ... 12 mm	24	26.4		4.5																																							
	10 ... 14 mm	27	29.8		4.5																																							
	9 ... 16 mm	33	33.5		5																																							
	13 ... 18 mm	33	36.5		5																																							
	13 ... 20 mm	42	46.8		6.5																																							
	18 ... 25 mm	42	46.8		6.5																																							
	20 ... 26 mm	53	58.8		10																																							
22 ... 32 mm	53	58.8	10																																									
M20	6 ... 12	19 00 000 5182																																										
M20	10 ... 14	19 00 000 5184																																										
M25	9 ... 16	19 00 000 5190																																										
M25	13 ... 18	19 00 000 5192																																										
M32	13 ... 18	19 00 000 5194																																										
M32	18 ... 25	19 00 000 5196																																										
M40	20 ... 26	19 00 000 5197																																										
M40	22 ... 32	19 00 000 5198																																										
Han® CGM-P , Cable gland, Black	M20	5 ... 9	19 00 000 5181																																									
	M20	6 ... 12	19 00 000 5183																																									
	M20	10 ... 14	19 00 000 5185																																									
	M25	9 ... 16	19 00 000 5191																																									
	M25	13 ... 18	19 00 000 5193																																									
	M32	13 ... 20	19 00 000 5186																																									
	M32	18 ... 25	19 00 000 5187																																									
	M40	20 ... 26	19 00 000 5188																																									
	M40	22 ... 32	19 00 000 5189																																									

Specifications and approvals

UL **US** **GL**

Accessories



Technical characteristics

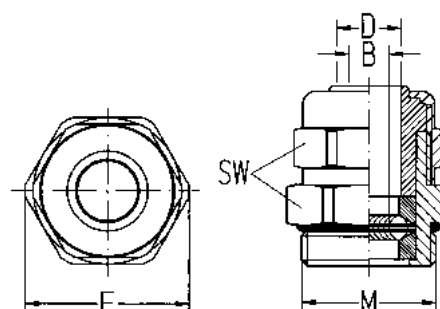
Degree of protection acc. to IEC IP68
60529

Technical characteristics

Material (cable glands)

Metal

Identification	Size	Clamping range (mm)	Part number	Drawing (dimensions in mm)			
Cable gland, EMC version	M20	4 ... 6,5	19 62 000 5081	cable-Ø D	SW	E	shield-Ø B
	M20	6,5 ... 9,5	19 62 000 5080	6.5 ... 9.5	22	24.4	3,5 ... 8,5
	M20	7 ... 10,5	19 62 000 5082	4 ... 6.5	22	24.4	2,5 ... 6,5
	M20	9 ... 13	19 62 000 5084	7 ... 10.5	22	24.4	6,5 ... 10,5
	M25	6,5 ... 9,5	19 62 000 5090	9 ... 13	22	24.4	6,5 ... 10,5
	M25	9 ... 13	19 62 000 5092	6.5 ... 9.5	22	31.2	3 ... 8
	M32	11,5 ... 15,5	19 62 000 5094	9 ... 13	28	31.2	4,8 ... 8
	M32	14 ... 18	19 62 000 5096	11.5 ... 15.5	35	38.5	8 ... 13,5
	M40	17 ... 20,5	19 62 000 5097	14 ... 18	35	38.5	9 ... 14,5
	M40	20 ... 25	19 62 000 5098	17 ... 20.5	43	47.3	15 ... 20
				20 ... 25	43	47.3	15 ... 20

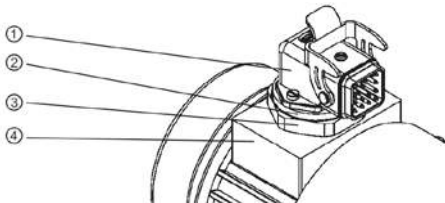


Technical characteristics

Material (accessories) Thermoplastic, Metal

Technical characteristics

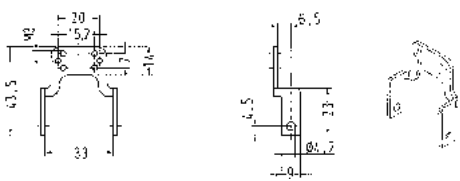
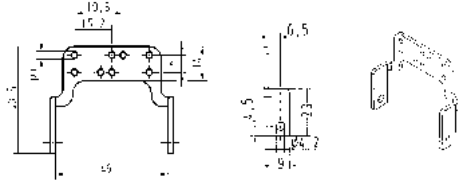
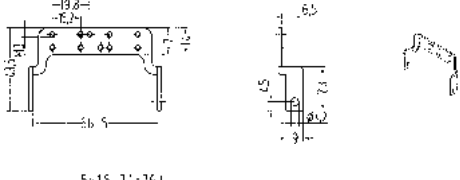
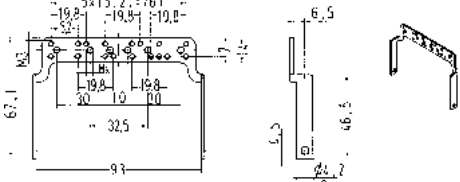
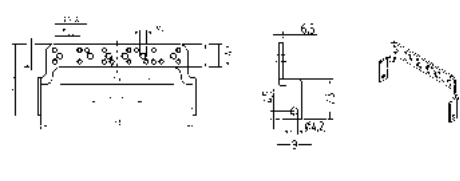
Colour (accessories) Black

Identification	Size	Reduced size	Part number	Drawing (dimensions in mm)
Han A®, Adapter, for motor connection 	M20		19 20 000 9962	 ① Han® 3 A ② Seal ③ Adapter Han® 3 A ④ Housing for motor applications
Dummy plugs 	M32 M40		19 00 000 5172 19 00 000 5173	 M32: Ø 35 mm M40: Ø 46.2 mm
Reduced size 	M20 M32 M32	M16 M20 M25	19 00 000 5060 19 00 000 5067 19 00 000 5068	
Reduced size, With O-ring 	M32 M32	M20 M25	19 00 000 5066 19 00 000 5069	

Identification	Size	Reduced size	Part number	Drawing (dimensions in mm)
Dummy plugs, With O-ring	M20 M25 M32 M40		19 00 000 5070 19 00 000 5071 19 00 000 5072 19 00 000 5073	  M20: SW 22; E 25.4 M25: SW 28; E 32.3 M32: SW 35; E 40.4 M40: SW 44; E 50.8



Technical characteristics

Material (accessories) Steel, zinc plated

Identification	Cable diameter (mm)	Size	Part number	Drawing (dimensions in mm)
Han E® Han® EE Han DD® Han-Snap®, Shielding frame, for bulkhead mounted housings and hoods, High construction, Pack contents: Ground terminal frame with M4 screws for fixing at insert 		06 B 10 B 16 B	09 00 000 5206 09 00 000 5207 09 00 000 5208	  
Han E® Han® EE Han DD® Han-Snap®, Shielding frame, for bulkhead mounted housings and hoods, High construction, 24 B, Pack contents: Ground terminal frame with M4 screws for fixing at insert 		24 B 24 B	09 00 000 5210 09 00 000 5280	 

Accessories

Identification	Cable diameter (mm)	Size	Part number	Drawing (dimensions in mm)
Han-Modular®, Shielding frame, for bulkhead mounted housings, High construction		06 B 10 B 16 B 24 B	09 00 000 5256 09 00 000 5257 09 00 000 5258 09 00 000 5211	
Han-Modular®, Shielding frame, for bulkhead mounted housings and hoods		24 B	09 00 000 5298	
Han-Quintax®, Shielding frame, for bulkhead mounted housings and hoods		24 B	09 00 000 5235	
Han-Modular®, PE bracket, for bulkhead mounted housings		24 B	09 00 000 5209	

Identification	Cable diameter (mm)	Size	Part number	Drawing (dimensions in mm)
Clamp, for shield frames	5		09 00 000 5341	 Cable diameter 5 mm
	10		09 00 000 5342	
				 Cable diameter 10 mm

Technical characteristics

Material (accessories) Metal

Technical characteristics

Surface (accessories) Zinc plated

Identification	Size	Part number	Drawing (dimensions in mm)
Grip frame	16 B 24 B	09 00 016 5603 09 00 024 5601	
Grip frame, With screw adapter and screw to use in connection with 09 00 000 5602	24 B	09 00 024 5611	

Features

- Grip frame suitable for Han® 64 D / Han® 108 DD / Han® 24 E / Han® 24 ES / Han® 24 ESS / Han® 46 EE
- Multiple shield connections via grip frame
- Cable can be fixed with clamps or cable tie

Technical characteristics

Material (accessories)	Zinc die-cast
Surface (accessories)	Copper-plated, Nickel plated


Identification

Screw adapter,
Bulkhead mounting,
To use in connection 09 00 024 5611

Part number

09 00 000 5602

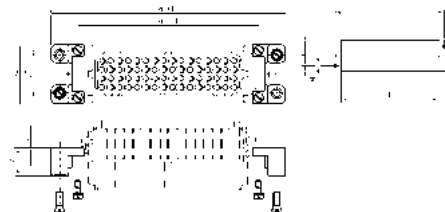
Drawing (dimensions in mm)








	a	b
6 B	44	35
10 B	57	48
16 B	77,5	68,5
24 B	104	95


Screw adapter,
Bulkhead mounting



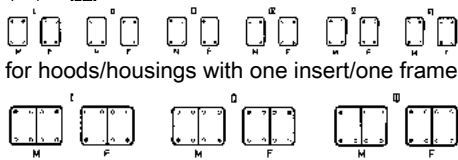

09 00 000 5603



	a	b
6 B	65	52
10 B	78	65
16 B	98,5	85,5
24 B	125	112

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Coding, With guide pins/bushes, for application "insert with screw adapter" with/ without grip frame  Please order 4 pieces for one connector.	09 33 000 9808	09 33 000 9809	  
Coding, With guide pins/bushes, for application "insert in hood/housing"  Please order 4 pieces for one connector.	09 33 000 9908	09 33 000 9909	 
Han-Modular®, Coding, With guide pins/bushes, for application "insert with screw adapter" with/ without grip frame  Please order 4 pieces for one connector.	09 14 000 9981	09 14 000 9982	

Identification	Part number		Drawing (dimensions in mm)
	Male	Female	
Han-Modular® , Coding, With guide pins/bushes, for application "insert in hood/housing"  Please order 4 pieces for one connector.	09 14 000 9908	09 14 000 9909	

Identification		Part number	Drawing (dimensions in mm)
Coding, With code pins, Han® B		09 30 000 9901	
Please order 4 pieces for one connector.			
Han-Modular®, Coding, With code pins		09 14 000 9901	 for hoods/housings with one insert/one frame  for hoods/housings with two inserts/two frames  ♦ Code pin + Fixing screw M - male insert F - female insert
Please order 4 pieces for one connector.			

Details

Coding pin

Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.

Identification		Part number	Drawing (dimensions in mm)
Han D® Han DD®, Coding pin		09 33 000 9915	
Only for crimp termination With loss of one contact			
Han E® Han® EE Han® EEE , Coding pin		09 33 000 9954	

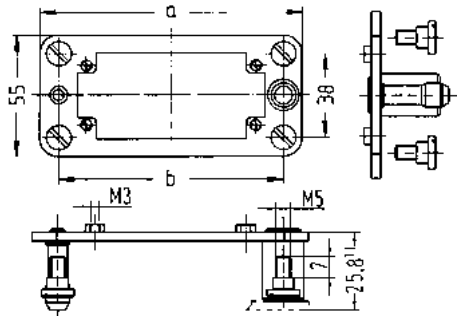
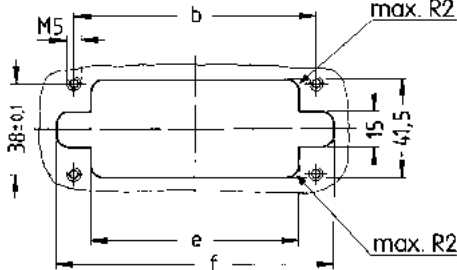


Features

- Suitable for all inserts of the series Han E®, Han E® HMC, Han EE®, Han EE® HMC, Han EEE®, Han EEE® HMC, Han® ES, Han D® (size B), Han D® HMC, Han DD®, Han DD® HMC, Han-Com®, Han® HsB, Han-Modular®
- Due to the floating system of the docking frame the PE connection of the mounting base has to be installed separately.
- Inserts are protected against mechanical damage

Technical characteristics

Mating cycles	≥500
Mating cycles with other HMC components	≥10000
Material (accessories)	Stainless steel

Identification	Size	Part number	Drawing (dimensions in mm)
Docking frame, Pack contents: 1 frame, 4 cheese head shoulder screws (Steel, zinc plated) to fix the docking frame  Pull-in-range x-axis: ± 1.5 mm Pull-in-range y-axis: ± 1.5 mm	06 B 10 B 16 B 24 B	09 30 006 1704 09 30 010 1704 09 30 016 1704 09 30 024 1704	 Distance for electrical and FO contacts max. 27 mm; for Han-Modular® series max. 26.5 mm 6 B: a=86; b=69 10 B: a=99; b=82 16 B: a= 119.5 ; b= 102.5 24 B: a=146; b=129  6 B: b= 69; e= 54.5; f= 84 10 B: b= 82; e= 67.5; f= 97 16 B: b= 102.5; e= 88; f= 117.5 24 B: b= 129; e= 114.5; f= 144

Number of contacts

3+



Features

- 3 PE-terminations
- Screws with $\pm$ head
- Self lifting washer
- Suitable for use with all inserts of the Han® 6 B to 24 B size (except Han® ESS-inserts)
- Suitable in hoods high construction

Technical characteristics

Number of contacts	3
Contact resistance	$\leq 3 \text{ m}\Omega$
Material (contacts)	Copper alloy

Details

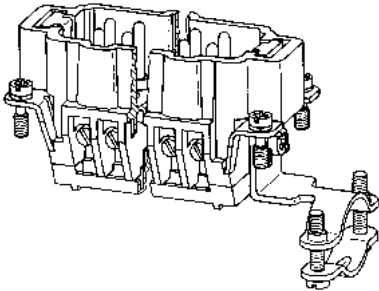
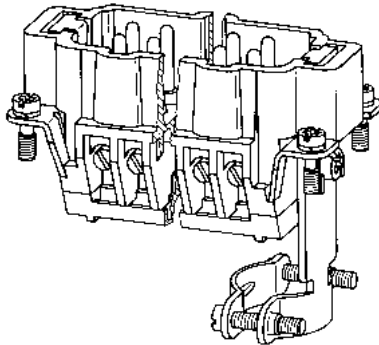
The PE-multiple ground connection may be used to terminate three PE-wires on one connector. Each PE-wire can be terminated and removed separately.
(acc. VDE 0113 DIN EN 60204 Pt. 14.1.1)

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
PE Multiple ground connection, Pack contents: Distributor, Fixing screw M4 with washer Contact surface: Nickel plated	0,5 ... 2,5	09 33 000 9992	



Details

When using inserts without hoods or housings and requiring a strain relief this system is suitable for all rectangular connectors of series Han DD®, Han® 40-64 D, Han E®, Han® ES, Han Hv E®, Han® Hv ES, Han® EE, Han® K 8/24.
Fitted at the opposite end to the PE-termination.

Identification	Clamping range (mm)	Part number	Drawing (dimensions in mm)
Strain relief clamp, Angled, Pack contents: Strain relief clamp with 2 screws M3, Fixing screw M4 with washer 	9 ... 19	09 00 000 5339	
Strain relief clamp, Straight, Pack contents: Strain relief clamp with 2 screws M3, Fixing screw M4 with washer 	9 ... 19	09 00 000 5340	

Features

- Useable for inserts without hoods or housings and requiring a strain relief
- Suitable for all rectangular connectors of the Han® series Han® 6 B, 10 B, 16 B, 24 B

Details

When using inserts without hoods or housings and requiring a locking facility this system is suitable for all rectangular connectors of the Han® series size 6 ... 24 B. For each connector we recommend two screw pins and two bushes as shown which are fitted diagonally to the inserts instead of the ordinary fixing screws. Holes for fixing to be drilled as shown.


Identification	Part number	Drawing (dimensions in mm)

Bush

Order 2 pieces for one connector.



09 33 000 9912

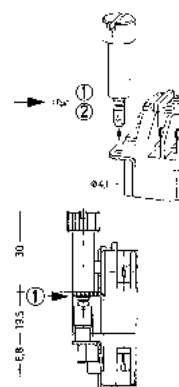


Screw pin

Order 2 pieces for one connector.



09 33 000 9910



Mounting example

Identification	Size	Part number	Drawing (dimensions in mm)

Han-Modular® Compact , Fixing screws	ST 2.9x9.5 F-H	09 12 000 9921	



Fixing screws	M3	09 16 000 9903	



Fixing screws, With seal, Han® 3 A	M3	09 20 000 9918	



Fixing screws, Han® 3 A	M3	09 20 000 9995	



Toggle locking screw, Han® 6/10/16/24 HPR		09 40 000 9931	



Toggle locking screw, 3 HPR		09 40 000 9933	



Contact screw, Han A®		09 30 000 9997	



for PE in Han® Q 5/0, Q 7/0			

Identification	Size	Part number	Drawing (dimensions in mm)
PE screw, Han-Modular® hinged frames	M3 M4	09 14 000 9953 09 14 000 9954	
			
PE screw, Han A®, Han® 15 D, Han® 25 D	M3.5	09 20 000 9919	
			
PE screw, 6 B ... 24 B	M4	09 33 000 9925	
			
PE screw, Han-Com®, Han® HsB	M5	09 33 000 9926	
			
Countersunk flat		09 70 000 9902	
Countersunk flat, With seal		09 70 000 9905	
Locking screw, 3 HPR	M4	09 40 000 9929	
			
Locking screw, Han® 6/10/16/24 HPR	M6	09 40 000 9932	
			
Locking screw, 48 HPR	M6	09 40 000 9937	
			

Technical characteristics

Limiting temperature -40 ... +125 °C
Degree of protection acc. to IEC IP65
60529

Technical characteristics

Material (accessories) Steel, zinc plated, Thermoplastic, Metal

Identification	Size	Part number	Drawing (dimensions in mm)

Bearing pedestal,
for Han® 10 A, 16 A, 32 A, 6 B, 10 B, 16
B, 24 B



09 30 000 9964

Han A®,
Protection cover,
for bearing pedestal,
Thermoplastic

10 A
16 A

09 20 010 5410
09 20 016 5410



Han® B ,
Protection cover,
for bearing pedestal,
Metal

06 B
10 B
16 B
24 B

09 30 006 5403
09 30 010 5404
09 30 016 5404
09 30 024 5404



Han® B ,
Protection cover,
for bearing pedestal,
Thermoplastic


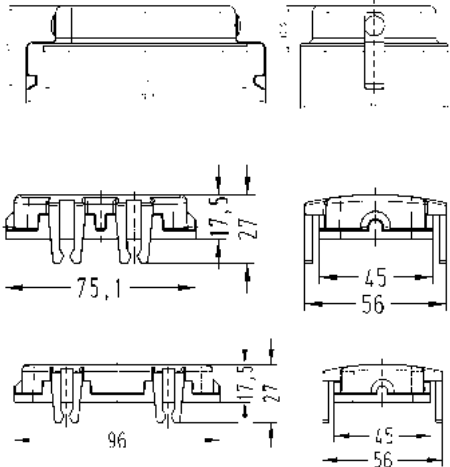

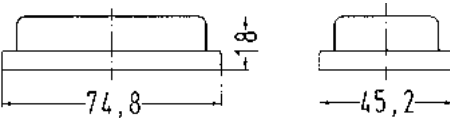
06 B
10 B
16 B
24 B

09 30 006 5410
09 30 010 5410
09 30 016 5410
09 30 024 5410



Technical characteristics

Material (accessories) Metal, Thermoplastic

Identification	Size	Part number	Drawing (dimensions in mm)
Han® B , Dust protection cover, for hoods, With board locks 	06 B 10 B 16 B	09 30 006 5401 09 30 010 5401 09 30 016 5401	
Han® B , Dust protection cover, for housings 	10 B 16 B 24 B	09 30 010 5406 09 30 016 5406 09 30 024 5406	
Han® HPR , Dust protection cover, for housings 	03 HPR 06 HPR 10 HPR 16 HPR 24 HPR	09 40 003 5406 09 40 006 5406 09 40 010 5406 09 40 016 5406 09 40 024 5406	

Identification	Size	Part number	Drawing (dimensions in mm)
Locking element, With cord, for Han® 10/16/24 B housings bulkhead mounting with Han-Easy Lock® double levers		09 30 000 9986	① Length 120 mm
Locking element, With cord, for Han® 10/16/24 B with double metal levers		09 30 000 9987	① Length 120 mm
Mounting frames, for standard hoods/housings	06 B 10 B 16 B 24 B	09 40 000 9921 09 40 000 9922 09 40 000 9923 09 40 000 9924	6 B: a=70; b=96 10 B: a=83; b=109 16 B: a=103; b=129 24 B: a=130; b=156
Frame, for custom test adapters, Pack contents: 2 assembly plates, 12 nuts for insertion		09 38 000 9901	
Label, According to CSA-approval, Pack contents: 50 labels per sheet		09 30 000 9958	

Identification	Size	Part number	Drawing (dimensions in mm)
Contact lubricant DvDA, for Han® contacts, Pack contents: Vaporizer (40 ml), Handling instruction  Applicable onto Han® contacts to reduce mating and unmating forces. Content: Preperation of perfluoropolyethers		09 99 000 0829	

Contents	Page
Hand crimping tools for Han® standard contacts	90.4
Pneumatic crimping tools for Han® standard contacts.....	90.9
Crimping tools for D-Sub contacts.....	90.10
Crimping tools for Han® TC high current contacts	90.11
Crimping tools for fibre optic contacts	90.13
Crimping tools for Han-Fast® Lock contacts	90.14
Crimping tools for other contacts.....	90.15
Crimping machine TC-C01	90.16
Crimping machine TK-M.....	90.18
Crimping machine TC-SC.....	90.20
Crimping machine BK.....	90.22
Assembly tools	90.24
Removal tools.....	90.29
Stripping tools.....	90.32

Overview Han® crimping tools



Crimp contacts Series	Part number				mm²	AWG	Crimping tools						Tools		
	male contact silver plated	female contact silver plated	male contact gold plated	female contact gold plated			09 99 000 0888	09 99 000 0110	09 99 000 0021	09 99 000 0303	09 99 000 0377	20 99 000 1035	removal tools		
Han D® Signal contacts 09 15 000 	6107	6207	6127	6227	0.14 - 0.25	26 - 24	x						09 99 000 0012	09 99 000 0052	
	6104	6204	6124	6224						x	x				
	6107	6207	6127	6227	0.37	22	x								
	6104	6204	6124	6224			x	x	x						
	6103	6203	6123	6223	0.5	20	x	x	x						
	6105	6205	6125	6225	0.75	18	x	x	x						
	6102	6202	6122	6222	1.0	18	x	x	x						
	6101	6201	6121	6221	1.5	16	x	x	x						
6106	6206	6126	6226	2.5	14	x									
Han D® F.O. contacts 20 10 001	Male contact 3211 3212 / 3213		Female contact 3221 3222		1 mm POF							x			
Han E® Power contacts 09 33 000 	6127	6227	6117	6217	0.14 - 0.37	26 - 22	x						09 99 000 0319		
	6121	6220	6122	6222	0.5	20	x	x	x						
	6114	6214	6115	6215	0.75	18	x	x	x						
	6105	6205	6118	6218	1.0	18	x	x	x						
	6104	6204	6116	6216	1.5	16	x	x	x						
	6102	6202	6123	6223	2.5	14	x	x	x						
	6106	6206			3.0	12	x	x							
	6107	6207	6119	6221	4.0	12	x	x							
Han E® F.O. contacts 20 10 001	Male contact 3311		Female contact 3321		1 mm POF							x			
Han-Yellock® Power contacts 11 05 000 	6101	6201	6121	6221	0.14 - 0.37	26 - 22	x						09 99 000 0319		
	6102	6202	6122	6222	0.5	20	x	x	x						
	6103	6203	6123	6223	0.75	18	x	x	x						
	6104	6204	6124	6224	1.0	18	x	x	x						
	6105	6205	6125	6225	1.5	16	x	x	x						
	6106	6206	6126	6226	2.5	14	x	x	x						
	6107	6207	6127	6227	3.0	12	x	x							
	6108	6208	6128	6228	4.0	12	x	x							
Han® C Power contacts 09 32 000 	6104	6204			1.5	16	x	x					09 99 000 0305	09 99 000 0381	
	6105	6205			2.5	14	x	x							
	6107	6207			4.0	12	x	x		x					
	6108	6208			6.0	10				x	x				
	6109	6209			10.0	8				x	x				
Description															
Locator Han D®	09 99 000 0022								x						
Locator Han E®	09 99 000 0022								x						
Locator Han-Yellock®	09 99 000 0341							x							
	09 99 000 0343								x						
Locator Han® C	09 99 000 0304									x					
Locator Han D® Han E® and Han® C	09 99 000 0376							x							

1) for Han® C power contacts, 10 mm²

Crimp contacts Series	Part number				mm²	AWG	Crimping machines										
	male contact silver plated	female contact silver plated	male contact gold plated	female contact gold plated			09 99 000 0813 3)	09 99 000 0814 3)	09 98 000 6901 1)	09 98 000 6902 1)	09 98 000 8101	09 98 000 8102	09 98 000 8103	09 98 000 8107 ⁵⁾	09 98 000 9001	09 98 000 9002	09 98 000 9003
Han D® Signal contacts 09 15 000 	6107	6207	6127	6227	0.14 - 0.25	26 - 24			x ⁶⁾	x ⁶⁾					x		
	6104	6204	6124	6224			x										
	6107	6207	6127	6227	0.37	22			x	x					x		
	6104	6204	6124	6224			x	x	x	x					x		
	6103	6203	6123	6223	0.5	20	x	x	x	x					x		
	6105	6205	6125	6225	0.75	18	x	x	x	x					x		
	6102	6202	6122	6222	1.0	18	x	x	x	x					x		
	6101	6201	6121	6221	1.5	16	x	x	x	x					x		
6106	6206	6126	6226	2.5	14			x	x					x			
Han E® Power contacts 09 33 000 	6127	6227	6117	6217	0.14 - 0.37	26 - 22				x ⁶⁾	x ⁶⁾					x	
	6121	6220	6122	6222	0.5	20	x			x	x					x	
	6114	6214	6115	6215	0.75	18	x			x	x					x	
	6105	6205	6118	6218	1.0	18	x			x	x					x	
	6104	6204	6116	6216	1.5	16	x			x	x					x	
	6102	6202	6123	6223	2.5	14	x			x	x					x	
	6106	6206			3.0	12	x			x	x					x	
	6107	6207	6119	6221	4.0	12	x			x	x					x	
Han-Yellock® Power contacts 11 05 000 	6101	6201	6121	6221	0.14 - 0.37	26 - 22								x ⁶⁾			
	6102	6202	6122	6222	0.5	20	x								x		
	6103	6203	6123	6223	0.75	18	x								x		
	6104	6204	6124	6224	1.0	18	x								x		
	6105	6205	6125	6225	1.5	16	x								x		
	6106	6206	6126	6226	2.5	14	x								x		
	6107	6207	6127	6227	3.0	12	x										
	6108	6208	6128	6228	4.0	12	x										
Han® C Power contacts 09 32 000 	6104	6204			1.5	16	x						x				x
	6105	6205			2.5	14	x						x				x
	6107	6207			4.0	12	x						x				x
	6108	6208			6.0	10		x					x				x
	6109	6209			10.0	8		x					x				x
Description																	
Locator Han-Yellock®	09 99 000 0344						x										

1) TK-M basic machine 09 98 000 6900 is required
 3) basic unit CP 600 (09 99 000 0810) is required
 5) TC-SC basic machine 09 98 000 8000 is required
 6) depending on the wire

Details	Details
The high end tool with best performance.	for wire gauges from 0.14 und 0.25 mm² please use the contacts 09 15 000 6107, 6207, 6127 or 6227.

Identification	Part number
Crimping tool, Han D [®] : 0.14 ... 2.5 mm², Han E [®] : 0.14 ... 4 mm², Han- <i>Yellowlock</i> [®] : 0.14 ... 4 mm², Han [®] C: 1.5 ... 4 mm², Pack contents: incl. Locator, Handling instruction	09 99 000 0888
Check gauge, for crimping tool 09 99 000 0888, for optional testing	09 99 000 0889
Locator, Spare part, for crimping tool 09 99 000 0888	09 99 000 0887



Details

Robust allrounder with very good performance.

Identification	Conductor cross-section (mm²)	Part number
HARTING standard crimping tool, Han D®: 0.14 ... 1.5 mm², Han E®: 0.5 ... 4 mm², Han-<i>Yellowlock</i>®: 0.5 ... 4 mm², Han® C: 1.5 ... 4 mm², Pack contents: incl. Locator, Han D®, Han E®, Han® C, Please order Han-<i>Yellowlock</i>® separately.	0,14 ... 4	09 99 000 0110
Locator, Han-<i>Yellowlock</i>®		09 99 000 0341
Locator, Spare part, Han D®, Han E®, Han® C		09 99 000 0376





Details

The service tool for on-site maintenance.

Identification	Conductor cross-section (mm²)	Part number
HARTING service crimping tool, Han D®: 0.14 ... 1.5 mm², Han E®: 0.5 ... 2.5 mm², Han- <i>Yellowlock</i> ®: 0.5 ... 2.5 mm², Pack contents: incl. Locator, Please order Han- <i>Yellowlock</i> ® separately.	0,14 ... 2,5	09 99 000 0021
Locator, Spare part, Han D®, Han E®		09 99 000 0022
Locator, Han- <i>Yellowlock</i> ®		09 99 000 0343



Details

The professional tool for a wide contact range.

Identification	Conductor cross-section (mm²)	Part number
HARTING crimping tool, Han® C: 4 ... 10 mm², Pack contents: incl. Locator, Han® C	4 ... 10	09 99 000 0303
Locator, Spare part, Han® C		09 99 000 0304
Locator, Han E®: 5.5 mm²		09 99 000 0306
Locator, Han- <i>Yellock</i> ® PE, Contacts 6 + 10 mm²		09 99 000 0845





Details

The professional tool for big cross-sections.

Identification	Conductor cross-section (mm ²)	Part number
HARTING crimping tool, Han [®] C: 6 ... 10 mm ² , Pack contents: incl. Locator	6 ... 10	09 99 000 0377



Identification	Conductor cross-section (mm²)	Part number	
HARTING pneumatic crimping tool CP 600 Please order tool head separately.		09 99 000 0810	
Footswitch, CP 600		09 99 000 0811	
Table fixing, CP 600		09 99 000 0812	
Tool head, Han D®: 0.14 ... 1.5 mm², Han E®: 0.5 ... 4 mm², Han- Yellok®: 0.5 ... 4 mm², Han® C: 1.5 ... 4 mm², Pack contents: incl. Locator, Han D®, Han E®, Han® C, Please order Han- Yellok® separately.	0,14 ... 4	09 99 000 0813	
Tool head, Han® C: 6 ... 10 mm², Pack contents: incl. Locator	6 ... 10	09 99 000 0814	
Locator, Han- Yellok®, for part number 09 99 000 0813		09 99 000 0344	



Identification	Conductor cross-section (mm²)	Part number	
HARTING crimping tool, for 500 bandoliered standard contacts	0,09 ... 0,56	09 99 000 0169	
Crimping tool, for single stamped D-Sub contact	0,09 ... 0,56	09 99 000 0175	
Hand crimping tool, for turned male and female contact, 4 indent crimp in acc. to MIL 22 520/2-01	0,09 ... 0,82	09 99 000 0501	
Locator, for part number 09 99 000 0501		09 99 000 0531	

Specifications and approvals

DIN 46235

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)																												
HARTING Battery hydraulic tool, Pressing force 60 kN, Crimp die acc. to DIN 46235 with pressing width 9 mm	10 ... 70	09 99 000 0850																													
HARTING hydraulic handtool, Pressing force 60 kN, Crimp die acc. to DIN 46235 with pressing width 9 mm	10 ... 70	09 99 000 0851																													
Crimp die, for 60 kN tool, Pack contents: Supplied as a pair	10 16 25 35 50 70	09 99 000 0852 09 99 000 0853 09 99 000 0854 09 99 000 0855 09 99 000 0856 09 99 000 0857	 <table border="1"> <thead> <tr> <th>Cross-section</th><th>Pressing width</th><th>Identification</th><th>Contacts</th></tr> </thead> <tbody> <tr> <td>10 mm²</td><td>9 mm</td><td>6</td><td>TC 70, TC 100</td></tr> <tr> <td>16 mm²</td><td>9 mm</td><td>8</td><td>TC 70, TC 100</td></tr> <tr> <td>25 mm²</td><td>9 mm</td><td>10</td><td>TC 70, TC 100, TC 200, TC 250, TC 350</td></tr> <tr> <td>35 mm²</td><td>9 mm</td><td>12</td><td>TC 100, TC 200, TC 250, TC 350</td></tr> <tr> <td>50 mm²</td><td>9 mm</td><td>14</td><td>TC 200, TC 250, TC 350</td></tr> <tr> <td>70 mm²</td><td>9 mm</td><td>16</td><td>TC 200, TC 250, TC 350, TC 650</td></tr> </tbody> </table>	Cross-section	Pressing width	Identification	Contacts	10 mm ²	9 mm	6	TC 70, TC 100	16 mm ²	9 mm	8	TC 70, TC 100	25 mm ²	9 mm	10	TC 70, TC 100, TC 200, TC 250, TC 350	35 mm ²	9 mm	12	TC 100, TC 200, TC 250, TC 350	50 mm ²	9 mm	14	TC 200, TC 250, TC 350	70 mm ²	9 mm	16	TC 200, TC 250, TC 350, TC 650
Cross-section	Pressing width	Identification	Contacts																												
10 mm ²	9 mm	6	TC 70, TC 100																												
16 mm ²	9 mm	8	TC 70, TC 100																												
25 mm ²	9 mm	10	TC 70, TC 100, TC 200, TC 250, TC 350																												
35 mm ²	9 mm	12	TC 100, TC 200, TC 250, TC 350																												
50 mm ²	9 mm	14	TC 200, TC 250, TC 350																												
70 mm ²	9 mm	16	TC 200, TC 250, TC 350, TC 650																												

Specifications and approvals

DIN 46235

Identification	Conductor cross-section (mm²)	Part number	Drawing (dimensions in mm)																																																
HARTING Battery hydraulic tool, Pressing force 120 kN, Crimp die acc. to DIN 46235 with pressing width 10 ... 14 mm	10 ... 240	09 99 000 0860																																																	
HARTING hydraulic handtool, Pressing force 120 kN, Crimp die acc. to DIN 46235 with pressing width 10 ... 14 mm	10 ... 240	09 99 000 0861																																																	
Crimp die, for 120 kN tool, Pack contents: Supplied as a pair	10 16 25 35 50 70 95 120 150 185 240	09 99 000 0862 09 99 000 0863 09 99 000 0864 09 99 000 0865 09 99 000 0866 09 99 000 0867 09 99 000 0868 09 99 000 0869 09 99 000 0870 09 99 000 0871 09 99 000 0872	 <table><tr><th>Cross-section</th><th>Pressing width</th><th>Identification</th><th>Contacts</th></tr><tr><td>10 mm²</td><td>10 mm</td><td>6</td><td>TC 70, TC 100</td></tr><tr><td>16 mm²</td><td>10 mm</td><td>8</td><td>TC 70, TC 100</td></tr><tr><td>25 mm²</td><td>10 mm</td><td>10</td><td>TC 70, TC 100, TC 200, TC 250, TC 350</td></tr><tr><td>35 mm²</td><td>10 mm</td><td>12</td><td>TC 100, TC 200, TC 250, TC 350</td></tr><tr><td>50 mm²</td><td>13 mm</td><td>14</td><td>TC 200, TC 250, TC 350</td></tr><tr><td>70 mm²</td><td>13 mm</td><td>16</td><td>TC 200, TC 250, TC 350, TC 650</td></tr><tr><td>95 mm²</td><td>14 mm</td><td>18</td><td>TC 350, TC 650</td></tr><tr><td>120 mm²</td><td>14 mm</td><td>20</td><td>TC 350, TC 650</td></tr><tr><td>150 mm²</td><td>10 mm</td><td>22</td><td>TC 650</td></tr><tr><td>185 mm²</td><td>10 mm</td><td>25</td><td>TC 650</td></tr><tr><td>240 mm²</td><td>10 mm</td><td>28</td><td>TC 650</td></tr></table>	Cross-section	Pressing width	Identification	Contacts	10 mm²	10 mm	6	TC 70, TC 100	16 mm²	10 mm	8	TC 70, TC 100	25 mm²	10 mm	10	TC 70, TC 100, TC 200, TC 250, TC 350	35 mm²	10 mm	12	TC 100, TC 200, TC 250, TC 350	50 mm²	13 mm	14	TC 200, TC 250, TC 350	70 mm²	13 mm	16	TC 200, TC 250, TC 350, TC 650	95 mm²	14 mm	18	TC 350, TC 650	120 mm²	14 mm	20	TC 350, TC 650	150 mm²	10 mm	22	TC 650	185 mm²	10 mm	25	TC 650	240 mm²	10 mm	28	TC 650
Cross-section	Pressing width	Identification	Contacts																																																
10 mm²	10 mm	6	TC 70, TC 100																																																
16 mm²	10 mm	8	TC 70, TC 100																																																
25 mm²	10 mm	10	TC 70, TC 100, TC 200, TC 250, TC 350																																																
35 mm²	10 mm	12	TC 100, TC 200, TC 250, TC 350																																																
50 mm²	13 mm	14	TC 200, TC 250, TC 350																																																
70 mm²	13 mm	16	TC 200, TC 250, TC 350, TC 650																																																
95 mm²	14 mm	18	TC 350, TC 650																																																
120 mm²	14 mm	20	TC 350, TC 650																																																
150 mm²	10 mm	22	TC 650																																																
185 mm²	10 mm	25	TC 650																																																
240 mm²	10 mm	28	TC 650																																																

Identification

Part number

HARTING crimping tool,
for FO connector (glass fibre),
SC, F-SMA F-ST,
A/F 3.8 mm, A/F 4.3 mm, A/F 4.95 mm
for crimping of the strain relief

20 99 000 1031



HARTING crimping tool,
for FO connector (plastic fibre),
SC, F-SMA F-ST,
A/F 3 mm, A/F 4.95 mm, A/F 6.5 mm
for crimping of the strain relief

20 99 000 1033



HARTING crimping tool,
for following 1 mm POF contacts,
Han D®, Han E®, DIN 41626, Ferrule, F-SMA, -ST

20 99 000 1035



Identification	Conductor cross-section (mm²)	Part number	
HARTING crimping tool, Angled, for Han-Fast® Lock single contact	1,5 ... 2,5 4 ... 10	09 99 000 0876 09 99 000 0877	
HARTING crimping tool, for Han-Fast® Lock single contact, incl. Locator	1,5 ... 2,5 4 ... 10	09 99 000 0881 09 99 000 0831	

Identification	Conductor cross-section (mm ²)	Part number	
HARTING crimping tool, for wire end ferrules	10 16 ... 25	09 99 000 0374 09 99 000 0830	
HARTING crimping tool, for coaxial contact, acc. to DIN 41626 Please order crimp dies separately.		09 99 000 0503	
Crimp die		09 99 000 0508	
HARTING crimping tool, Crimp die included, for coaxial contact, acc. to DIN 41626		09 99 000 0194	

Features

- Basic unit of compact construction for pre-stripped wires (stranded wire)
- Easy handling due to well-arranged design
- for individual, turned male and female contacts
- Selective processing of male and female contacts
- Automatic contact feed
- Reproducible, top quality gas-tight crimp connections
- Non-slip, anti-vibration adjustable feet for setting the height
- Low noise level
- With carrying handle
- Removable electric and pneumatic supply connections
- Maintenance interval counter
- Minimal setup effort
- Crimping depth can be set without tools
- Low follow-up costs for maintenance and repair
- Easy replacement of wearing components

Details

Nominal voltage, max. 230 V
 Nominal frequency 50 Hz
 Power consumption ca.0.2 kW
 Pressure ca.6 bar
 Control system PLC
 Work cycle trigger Footswitch
 Work cycle 1 s
 Noise level ca.62 dB
 Crimp type Four-point crimping
 Contact feed Vibratory bowl feed
 Stroke counters Resettable daily counter and permanent counter
 Dimensions 345 x 230 x 400 mm
 Weight ≥24 kg

Pack contents:
 2.0 m connection cable and grounding plug,
 2.0 m pneumatic hose,
 quick-release coupling and N6 plugin nipple,
 footswitch,
 carrying handle,
 operating instructions,
 declaration of conformity

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
Crimping machine TC-C01, for Han D® contact	0,14 ... 2,5	09 98 000 9001	
Crimping machine TC-C01, for Han E® contact	0,14 ... 4	09 98 000 9002	
Crimping machine TC-C01, for Han® C contact	1,5 ... 10	09 98 000 9003	
Maintenance unit, Optional accessory		09 98 336 6851	

Features

- Basic unit of compact construction
- Fast stripping and crimping in one operating step
- Easy handling due to well-arranged design
- Touchscreen controlling
- for individual, turned male and female contacts
- Selective processing of male and female contacts
- Contact magazine with filling control
- Reproducible, top quality gas-tight crimp connections
- Infinitely variable adjustment parameters (stripping depth, stripping length, crimping depth, crimp contact feed rate)
- Rotatable vibration feeder and actuator in basic unit
- Low noise level
- for oil-free compressed air
- Minimal setup effort
- Low maintenance costs

Details

Drive electro-pneumatic
 Nominal voltage, max. 230 V
 Nominal frequency 50 Hz
 Power consumption ca.0.75 kW
 Pressure ca.6 bar
 Compressed air connection 3 dm³ / work cycle
 Control system PLC
 Work cycle trigger sensor
 Work cycle 1.5 s
 Noise level <70 dB
 Crimp type Four-point crimping
 Contact feed Vibratory bowl feed
 Stroke counters Resettable daily counte, total counter, operating hours, maintenance counter and quantity preselection
 Dimensions 580 x 470 x 470 mm
 Weight <60 kg
Pack contents:
 one mounted interchangeable unit,
 2.0 m connection cable and grounding plug,
 2.0 m pneumatic hose with plug-in nipple N6,
 plug gauges for setting the crimping,
 centering bush for positioning the plug gauges,
 draw for insulation remains,
 drawer for holding the contacts when the magazine is emptied,
 tool set for setting,
 1 set of stripping blades,
 operating instructions,
 declaration of conformity

Identification	Conductor cross-section (mm ²)	Part number	
Crimping machine TK-M, Basic machine without interchangeable unit, Pack contents: Tool set for setting, 1 set of stripping blades, Operating instructions, Declaration of Conformity		09 98 000 6900	
Interchangeable unit, Han D®	0,14 ... 2,5	09 98 000 6901	
Interchangeable unit, Han E®	0,14 ... 4	09 98 000 6902	

Features

- Fast stripping and crimping in one operating step
- Basic unit of compact construction
- Easy handling due to well-arranged design
- Touchscreen controlling
- for individual, turned male and female contacts (series Han D®, Han E®, Han® C, Han P®, Han-Yellock®, D- Sub)
- Selective processing of male and female contacts
- Contact magazine with filling control
- Reproducible, top quality gas-tight crimp connections
- Motor-driven variable adjustment parameters (stripping depth, stripping length, crimping depth and wire position)
- Infinitely variable adjustment parameters (wire retention force and crimp contact feed rate)
- Low noise level
- for oil-free compressed air
- Minimal setup effort
- Low maintenance costs

Details

Drive electro-pneumatic
 Nominal voltage, max. 230 V
 Nominal frequency 50 Hz
 Power consumption ca.1 kW
 Pressure ca.6 bar
 Compressed air connection 3 dm³ / work cycle
 Control system PLC
 Work cycle trigger sensor
 Work cycle 2 s
 Noise level ca.75 dB
 Crimp type Four-point crimping
 Contact feed Vibratory bowl feed
 Stroke counters Resettable daily counte, total counter, operating hours, maintenance counter and quantity preselection
 Dimensions 480 x 650 x 560 mm
 Weight ≥75 kg
Pack contents:
 with one mounted interchangeable unit,
 2.0 m connection cable and grounding plug,
 2.0 m pneumatic hose with plug-in nipple N6,
 tool set for setting,
 1 set of stripping blades,
 operating instructions,
 declaration of conformity

Identification	Conductor cross-section (mm ²)	Part number	
Crimping machine TC-SC, Pack contents: Tool set for setting, 1 set of stripping blades, Operating instructions, Declaration of Conformity		09 98 000 8000	
Interchangeable unit, Han D®	0,14 ... 2,5	09 98 000 8101	
Interchangeable unit, Han E®	0,14 ... 4	09 98 000 8102	
Interchangeable unit, Han® C Only for use with crimping tool 09 98 300 8103	1,5 ... 10	09 98 000 8103	
Interchangeable unit, D-Sub	0,5 ... 0,75	09 98 000 8104	
Interchangeable unit, Han- <i>Yellowlock</i> ®	0,5 ... 2,5	09 98 000 8107	
Crimping tool	1,5 ... 10	09 98 300 8103	

Features

- Fast stripping and crimping in one operating step
- Easy handling due to quick change tool and stripper
- Suitable for D-Sub crimp contacts
- Selective processing of male and female contacts
- Hand wheel for manual adjustments
- Maintenance-friendly through needle bearing rail
- Automatic exhaust of the isolation remainders
- Reproducible, top quality gas-tight crimp connections
- With crimp force monitor
- Setting parameters with raster rotary button (depth of insulation stripping, length of insulation stripping, crimping height on wire, crimping height on insulation, wire retainer position, band thrust and wire position in the crimp contact)
- Non slip and anti-vibration feet
- Low noise level
- for oil-free compressed air
- Low maintenance costs
- V-blades for special wires on request

Details

Drive electro-pneumatic
 Nominal voltage, max. 230 V
 Nominal frequency 50 Hz
 Power consumption 0.75 kW
 Pressure 6 bar
 Control system PLC
 Stripping device type 514
 Suction apparatus 2000.0900.20
 Work cycle trigger sensor
 Work cycle 0.35 s
 Noise level 85 dB
 Illumination integrated tool light 20001326
 Motor speed 440 –2000 rpm
 Stroke counters Resettable daily counter and permanent counter
 Dimensions 690 (with a contact reel: 1400) x 420 x 430 mm
 Weight <72 kg

Pack contents:

with role owner and guide plate,
 2.0 m connection cable and grounding plug,
 2.0 m pneumatic hose with plug-in nipple N9,
 oiler bottle for the lubricating of the crimping contacts,
 tool set for setting,
 1 set of stamps for wire and isolation-crimp,
 1 anvil one-piece for wire and isolation-crimp,
 1 set of stripping blades,
 1 litre of contact oil,
 operating instructions,
 declaration of conformity

Identification	Conductor cross-section (mm ²)	Part number	
Crimping machine BK, Pack contents: With role owner and guide plate, Tool set for setting, 1 set of stripping blades, Operating instructions, Declaration of Conformity		09 98 000 5000	
Quick change tool, D-Sub	0,09 ... 0,25 0,25 ... 0,5	09 98 000 3008 09 98 000 3009	

Identification

Size

Part number

HARTING Battery hydraulic panel punch,
To produce panel cut outs for connectors,
Punching pressure: 60 kN,

Pack contents:

In plastic case,
Lithium-Ion battery 18 V, 3 Ah,
Charging set,
Accessories

HARTING hydraulic hand panel punch,
To produce panel cut outs for connectors,
Punching pressure: 60 kN,

Pack contents:

In plastic case,
Accessories

Han A® ,
Punch units for hydraulicpunch drivers,
max. plate thickness (structural grade
carbon steel): 2.0 mm

Han® B ,
Punch units for hydraulicpunch drivers,
max. plate thickness (structural grade
carbon steel): 2.0 mm

Punch units for hydraulicpunch drivers,
max. plate thickness (structural grade
carbon steel): 2.0 mm

03 A
10 A
16 A

06 B
10 B
16 B
24 B

3 HPR
Han-Eco® 10 A
Han-Eco® 16 A
Han-Yellock® 10
Han-Yellock® 30
Han-Yellock® 60
Modular Compact

09 99 000 0900

09 99 000 0901

09 99 000 0907
09 99 000 0908
09 99 000 0909

09 99 000 0902
09 99 000 0903
09 99 000 0904
09 99 000 0905

09 99 000 0906
09 99 000 0914
09 99 000 0915
09 99 000 0910
11 99 300 0001
11 99 600 0001
09 99 000 0912



Identification

Part number

Torque set,
for High Current axial screw contact,
incl. reversing blade (A/F 4.0 + A/F 5.0),
Tightening torque: 5 ... 14 Nm,

Pack contents:
High quality metal box,
Variable tightening torque tool TorqueVario®-STplus,
Setting tool: torque-setter,
HARTING optimised interchangeable blades hexagonal A/F 4,
HARTING optimised interchangeable blades hexagonal A/F 5

09 99 000 0833



Torque set,
for power contact,
incl. reversing blade (A/F 2.0 + A/F 2.5 + PH2),
+ different bits,
+ adapter blade,
Tightening torque: 1 ... 5 Nm,

Pack contents:
High quality metal box,
Variable tightening torque tool TorqueVario®-S,
Setting tool: torque-setter,
HARTING optimised interchangeable blades hexagonal A/F 2,
HARTING optimised interchangeable blades hexagonal A/F 2.5,
HARTING optimised interchangeable blades PH2,
Torque bit universal holder,
Bits: A/F3, A/F4, PH0, PH1, PH2, T10, T15, T20, slot 0.6 x 4.5,
slot 0.8 x 5.5

09 99 000 0834



Torque set,
for HARTING screw contacts and fixing screws,
Tightening torque: 0.5 ... 1.2 Nm,

Pack contents:
High quality metal box,
Two pre-set tightening torque screwdrivers TorqueFix®,
Interchangeable blades PH1, PH2, slot 0.5 x 3.0

09 99 000 0835



Identification

Part number

Torque set,
for guiding pins and bushes,
Tightening torque: 0.5 Nm,
incl. 1/4" Bit,
Pack contents:
Torque bit universal holder 1/4",
1 HARTING guiding pins and bushes bit,
Product comes already pre-assembled in practical plastic pack-
aging

09 99 000 0840



Bit 1/4" as a spare part for guiding pins and bushes,
Packaging unit: 5 pieces

09 99 000 0841



Insertion tool for crimp contacts,
Small cross-section,
Variable length of blade,
Han D®,
Han E®,
Han-Yellock®
The terminated contact is inserted into the tool and pushed into
the contact chamber from the termination side.

09 99 000 0847



Replacement-tip,
for part number 09 99 000 0847

09 99 000 0848

Assembly tool,
for Han® ES insert

09 99 000 0367



Hexagonal driver for axial screw,
With grip,
A/F 4 (e. g. Han® 100 A Axial module)

09 99 000 0363



Hexagonal driver for axial screw,
With grip,
A/F 5 (e. g. Han® 200 A Axial module)

09 99 000 0364



Hexagonal driver for axial screw,
Bit 1/4",
40 A contact (A/F 2)

09 99 000 0369



Identification	Part number	
Hexagonal driver for axial screw, Adapter 3/8", A/F 4 (e. g. Han® 100 A Axial module)	09 99 000 0370	
Hexagonal driver for axial screw, Adapter 3/8", A/F 5 (e. g. Han® 200 A Axial module)	09 99 000 0371	
Hexagonal driver for axial screw, Adapter 3/8", A/F 8 (e. g. Han® HC Modular 650)	09 99 000 0372	
Hexagonal driver for axial screw, Bit 1/4", 70 A contact (A/F 2.5)	09 99 000 0375	
Han® VDE Screw Driver Set, The standard set, Pack contents: Slim bit screw driver 0.4 x 2.5, Slim bit screw driver 0.5 x 3.0, Slim bit screw driver 0.6 x 3.5, Slim bit screw driver 1.0 x 4.5, Phillips screw driver PH1 (191 x 30 mm), Phillips screw driver PH2 (218 x 23 mm)	09 99 000 0836	
Screw driver set Slimline, Insolated blade for slim assembly, Pack contents: Slim bit screw driver 0.6 x 3.5, Slim bit screw driver 0.8 x 4.5, Phillips screw driver PH1 (191 x 30 mm), Phillips screw driver PH2 (218 x 36 mm)	09 99 000 0844	

Identification	Part number	Drawing (dimensions in mm)

Polishing paper,
for POF grain size 1000,
Pack contents:
Each part number means 5 pieces

20 80 001 9911

Polishing paper,
for GI 9 μ -grain size,
Pack contents:
Each part number means 5 pieces


20 80 001 9912

Polishing paper,
for GI 1 μ -grain size,
Pack contents:
Each part number means 5 pieces

20 80 001 9913


Polishing tool,
DIN 41612

20 99 000 1092



Polishing tool,
POF cable 2.2 mm diameter

20 99 000 1093

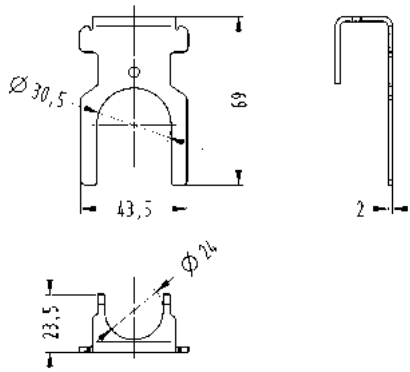



Polishing tool,
SC

20 99 000 1097

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
Removal tool, Han D® Insert tool from the mating side of the connector until it comes to a stop. By putting additional pressure on the tool the contact is unlocked and pushed out towards the termination side.	1,5 ... 6 10	09 99 000 0012	
Replacement-tip, for part number 09 99 000 0012		09 99 000 0004	
Removal tool, Han D®, Service Insert tool from the mating side of the connector until it comes to a stop. The contact is unlocked by pushing the central plunger.		09 99 000 0052	
Removal tool, Han® C		09 99 000 0305 09 99 000 0381	
Removal tool for crimp contacts Insert the tool from the termination side until it comes to a stop. After that the contact with the attached wire can be pulled out of the isolator body.		09 99 000 0319	
Removal tool, Han-Quintax®, for Quintax contact		09 99 000 0323	
Removal tool for crimp contacts, for contact in the multi module		09 99 000 0328	
Insertion / removal tools, Han-Modular®, for D-Sub crimp contact		09 99 000 0368	

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
Removal tool, Han-Fast® Lock, for easier removal of the Fast-Lock contact from the printed circuit board		09 99 000 0837	
Removal tool, for LC contact in the Han® LC module		09 99 000 0843	
Removal tool, for locking sleeves in the HV module, Insert from mating side.		09 99 000 0327	
Removal tool, for all Han-Modular® modules in plastic frames Insert the tool from the termination side between plastic frame and module and remove the module by applying slight pressure from the mating side You need 2 pieces for the removal of a single module and 4 pieces for the double module.		09 99 000 0331	
Removal tool, Han-Modular®		09 99 000 0335	
Removal tool, for the Han® 100 A crimp module		09 99 000 0383	
Removal tool, for the Han® 200 A crimp module Insert from mating side.		09 99 000 0820	
Removal tool, for the Han® 100 A single module, for Han® GND		09 99 000 0827	
Removal tool, Han-Modular®, Han-Eco®, Han-Yellock®, for single modules, Metal Insert the tool from the termination side between plastic frame and module and remove the module by applying slight pressure from the mating side		09 99 000 0828	
Removal tool, Han-Modular®, for double modules Insert the tool from the termination side between plastic frame and module and remove the module by applying slight pressure from the mating side		09 99 000 0842	

Identification	Conductor cross-section (mm ²)	Part number	Drawing (dimensions in mm)
Removal tool, for Han- <i>Yellowlock</i> ® modules and frames, Thermoplastic		11 99 000 0001	
Removal tool, for Han- <i>Yellowlock</i> ® modules and frames, Metal		11 99 000 0002	
Removal tool, for Han® HC Modular 250 Crimp, for unlocking the fixing plate Insert from mating side.		09 99 000 0332	
Removal tool, Han® EasyCon, for assembly and disassembly of shielding clamps		09 99 000 0334	
Removal tool, Han® HC Individual		09 99 000 0826	 
Removal tool, for opening of the HARTING RJ Industrial® cable jacks, Pack contents: Packaging unit: 10 pieces		20 82 000 9916	

Identification	Conductor cross-section (mm²)	Part number		
Stripping tool, Self-adjusting	0,03 ... 10		09 99 000 0808	
Stripping tool	0,08 ... 10		09 99 000 0159	
Fibre stripper	0.18 / 0.3 mm 0.3 mm 1 mm		20 99 000 1046 20 99 000 1041 20 99 000 1045	

Altanium Temperature Controllers and Ultra Hot Runners provide superior melt delivery for the Plastics Industry.

Husky Hot Runner Systems with HARTING Han® 24 E connectors providing power and signal – quality connections resulting in highest reliability and minimum down time in molding systems.

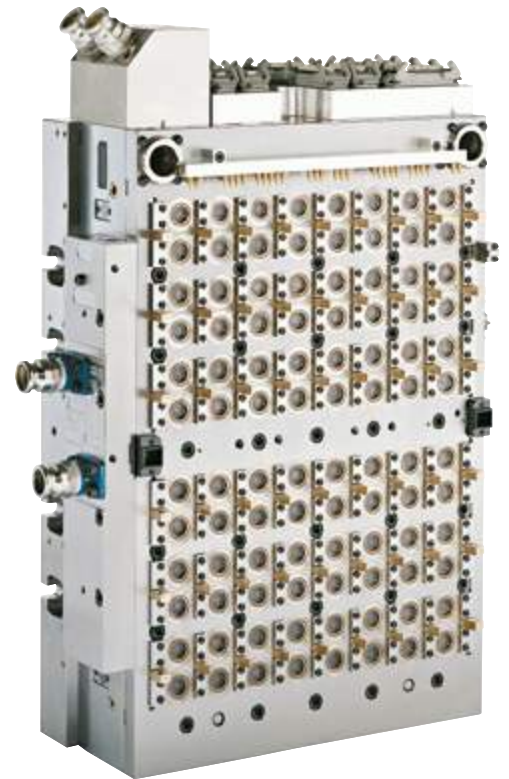


Photo courtesy:
Husky Injection Molding
Systems, Bolton, Ontario,
Canada

List of part numbers



Part number	Page	Part number	Page	Part number	Page	Part number	Page
09 00 000 5047	13.51	09 08 000 6124	20.12	09 11 000 6222	06.21	09 11 000 9965	14.42
09 00 000 5057	13.51	09 08 000 7122	20.12	09 11 000 6223	06.21	09 11 000 9965	14.44
09 00 000 5058	13.51	09 08 000 7123	20.12	09 11 000 6225	06.25	09 11 000 9965	14.65
09 00 000 5059	13.51	09 08 000 7124	20.12	09 11 000 6225	06.27	09 11 000 9971	14.52
09 00 000 5156	13.51	09 08 000 7222	20.12	09 11 000 6225	42.6	09 11 000 9972	14.53
09 00 000 5157	13.51	09 08 000 7223	20.12	09 11 000 6226	14.12	09 11 000 9972	14.54
09 00 000 5158	13.51	09 08 000 7224	20.12	09 11 000 6227	14.12	09 11 000 9973	14.55
09 00 000 5206	80.21			09 11 000 6228	14.12	09 11 000 9973	14.56
09 00 000 5207	80.21	09 11 000 6104	14.12	09 11 000 6229	14.12	09 11 000 9973	14.65
09 00 000 5208	80.21	09 11 000 6112	06.27	09 11 000 6231	06.30	09 11 000 9974	14.55
09 00 000 5209	80.22	09 11 000 6112	42.6	09 11 000 6232	06.30	09 11 000 9974	14.57
09 00 000 5210	80.21	09 11 000 6113	06.27	09 11 000 6233	06.30	09 11 000 9974	14.65
09 00 000 5211	80.22	09 11 000 6113	42.6	09 11 000 6235	06.25		
09 00 000 5221	80.8	09 11 000 6114	06.25	09 11 000 6235	06.27	09 11 001 2651	14.27
09 00 000 5222	80.9	09 11 000 6114	06.27	09 11 000 6235	42.6	09 11 001 2652	14.27
09 00 000 5223	80.8	09 11 000 6114	42.6	09 11 000 6239	14.24	09 11 001 2655	14.26
09 00 000 5224	80.9	09 11 000 6116	06.25	09 11 000 6240	14.24	09 11 001 2671	14.50
09 00 000 5225	80.9	09 11 000 6116	06.27	09 11 000 6241	14.24	09 11 001 2672	14.50
09 00 000 5228	80.9	09 11 000 6116	42.6	09 11 000 6242	14.24	09 11 001 2675	14.50
09 00 000 5229	80.9	09 11 000 6120	06.21	09 11 000 6243	14.24	09 11 001 2751	14.27
09 00 000 5230	80.9	09 11 000 6121	06.21	09 11 000 6244	14.24	09 11 001 2752	14.27
09 00 000 5231	80.8	09 11 000 6122	06.21	09 11 000 6256	14.27	09 11 001 2755	14.26
09 00 000 5235	80.22	09 11 000 6123	06.21	09 11 000 6258	14.26	09 11 001 2771	14.50
09 00 000 5241	80.8	09 11 000 6125	06.25	09 11 000 6261	14.49	09 11 001 2772	14.50
09 00 000 5242	80.8	09 11 000 6125	06.27	09 11 000 6262	14.49	09 11 001 2775	14.50
09 00 000 5244	13.53	09 11 000 6125	42.6	09 11 000 6263	14.49	09 11 001 3001	14.24
09 00 000 5244	80.8	09 11 000 6126	14.12	09 11 000 6264	14.49	09 11 001 3012	14.49
09 00 000 5246	80.9	09 11 000 6127	14.12	09 11 000 6265	14.49	09 11 001 3021	14.12
09 00 000 5256	80.22	09 11 000 6128	14.12	09 11 000 6268	14.49	09 11 001 3101	14.24
09 00 000 5257	80.22	09 11 000 6129	14.12	09 11 000 6272	14.25	09 11 001 3112	14.49
09 00 000 5258	80.22	09 11 000 6131	06.30	09 11 000 6284	14.12	09 11 001 3121	14.12
09 00 000 5280	80.21	09 11 000 6132	06.30	09 11 000 6285	14.12		
09 00 000 5298	80.22	09 11 000 6133	06.30	09 11 000 6290	14.12	09 12 000 9901	13.25
09 00 000 5315	80.15	09 11 000 6135	06.25	09 11 000 9925	14.14	09 12 000 9901	29.7
09 00 000 5316	80.15	09 11 000 6135	06.27	09 11 000 9926	14.16	09 12 000 9901	29.8
09 00 000 5317	80.15	09 11 000 6135	42.6	09 11 000 9927	14.22	09 12 000 9901	29.9
09 00 000 5325	80.15	09 11 000 6139	14.24	09 11 000 9927	14.63	09 12 000 9901	29.10
09 00 000 5339	80.32	09 11 000 6140	14.24	09 11 000 9928	14.22	09 12 000 9902	13.25
09 00 000 5340	80.32	09 11 000 6141	14.24	09 11 000 9928	14.63	09 12 000 9902	29.7
09 00 000 5341	80.23	09 11 000 6142	14.24	09 11 000 9931	14.20	09 12 000 9902	29.8
09 00 000 5342	80.23	09 11 000 6143	14.24	09 11 000 9931	14.64	09 12 000 9902	29.9
09 00 000 5350	80.14	09 11 000 6144	14.24	09 11 000 9932	14.20	09 12 000 9902	29.10
09 00 000 5351	80.14	09 11 000 6156	14.27	09 11 000 9932	14.64	09 12 000 9905	20.27
09 00 000 5352	80.14	09 11 000 6158	14.26	09 11 000 9935	06.136	09 12 000 9905	20.27
09 00 000 5353	80.14	09 11 000 6161	14.49	09 11 000 9935	14.66	09 12 000 9908	20.30
09 00 000 5354	80.14	09 11 000 6162	14.49	09 11 000 9936	06.136	09 12 000 9908	20.30
09 00 000 5355	80.14	09 11 000 6163	14.49	09 11 000 9936	14.66	09 12 000 9911	13.53
09 00 000 5356	80.14	09 11 000 6164	14.49	09 11 000 9937	14.17	09 12 000 9912	13.53
09 00 000 5357	80.14	09 11 000 6165	14.49	09 11 000 9938	14.18	09 12 000 9921	80.34
09 00 000 5358	80.14	09 11 000 6168	14.49	09 11 000 9941	14.16	09 12 000 9922	13.3
09 00 000 5359	80.14	09 11 000 6172	14.25	09 11 000 9942	14.14	09 12 000 9922	13.3
09 00 000 5360	80.14	09 11 000 6184	14.12	09 11 000 9951	14.30	09 12 000 9922	13.5
09 00 000 5361	80.14	09 11 000 6185	14.12	09 11 000 9952	14.31	09 12 000 9922	13.5
09 00 000 5362	80.14	09 11 000 6190	14.12	09 11 000 9954	14.46	09 12 000 9922	13.7
09 00 000 5363	80.14	09 11 000 6204	14.12	09 11 000 9955	14.47	09 12 000 9922	13.7
09 00 000 5364	80.14	09 11 000 6212	06.27	09 11 000 9956	14.33	09 12 000 9922	13.9
09 00 000 5401	80.9	09 11 000 6212	42.6	09 11 000 9957	14.39	09 12 000 9922	13.9
09 00 000 5602	80.25	09 11 000 6213	06.27	09 11 000 9957	14.40	09 12 000 9924	13.11
09 00 000 5603	80.25	09 11 000 6213	42.6	09 11 000 9957	14.64	09 12 000 9924	13.11
		09 11 000 6214	06.25	09 11 000 9958	14.39	09 12 000 9924	13.13
09 00 016 5603	80.24	09 11 000 6214	06.27	09 11 000 9958	14.41	09 12 000 9924	13.13
		09 11 000 6214	42.6	09 11 000 9958	14.64	09 12 000 9924	13.33
09 00 024 5601	80.24	09 11 000 6216	06.25	09 11 000 9963	14.35	09 12 000 9924	13.33
09 00 024 5611	80.24	09 11 000 6216	06.27	09 11 000 9963	14.38	09 12 000 9958	06.81
		09 11 000 6216	42.6	09 11 000 9964	14.42	09 12 000 9969	15.30
09 08 000 6122	20.12	09 11 000 6220	06.21	09 11 000 9964	14.44	09 12 000 9970	15.30
09 08 000 6123	20.12	09 11 000 6221	06.21	09 11 000 9964	14.65	09 12 000 9971	15.30

List of part numbers



Part number	Page	Part number	Page	Part number	Page	Part number	Page
09 12 000 9972	15.30	09 12 006 2765	13.18	09 12 012 9901	20.36	09 14 000 9981	80.26
09 12 000 9973	15.30	09 12 006 2766	13.18	09 12 012 9901	20.36	09 14 000 9982	80.26
09 12 000 9974	15.30	09 12 006 2791	19.9				
		09 12 006 2792	19.9	09 12 017 3001	13.35	09 14 001 0301	06.125
09 12 001 2774	19.25	09 12 006 2794	19.9	09 12 017 3101	13.35	09 14 001 0311	06.124
09 12 001 2794	19.24	09 12 006 2795	19.9			09 14 001 0320	06.131
09 12 001 3071	19.25	09 12 006 3001	19.8	09 12 021 3001	13.37	09 14 001 0321	06.133
09 12 001 3091	19.24	09 12 006 3041	13.15	09 12 021 3101	13.37	09 14 001 0330	42.8
		09 12 006 3111	19.7			09 14 001 0420	06.131
09 12 002 2651	13.7	09 12 006 3141	13.15	09 12 708 0301	13.46	09 14 001 0421	06.133
09 12 002 2652	13.9	09 12 006 9901	20.24			09 14 001 0422	06.131
09 12 002 2653	13.7	09 12 006 9901	20.24	09 14 000 0304	06.138	09 14 001 0423	06.133
09 12 002 2654	13.9			09 14 000 0312	06.135	09 14 001 0430	42.8
09 12 002 2655	13.7	09 12 007 3001	13.25	09 14 000 0313	06.135	09 14 001 0720	06.132
09 12 002 2656	13.9	09 12 007 3101	13.25	09 14 000 6111	06.106	09 14 001 0721	06.134
09 12 002 2751	13.7			09 14 000 6111	06.111	09 14 001 0722	06.132
09 12 002 2752	13.9	09 12 008 0301	13.47	09 14 000 6115	06.108	09 14 001 0723	06.134
09 12 002 2753	13.7	09 12 008 0303	13.50	09 14 000 6121	06.107	09 14 001 0730	42.8
09 12 002 2754	13.9	09 12 008 0327	13.42	09 14 000 6121	06.112	09 14 001 2632	06.19
09 12 002 2755	13.7	09 12 008 0327	20.25	09 14 000 6151	06.115	09 14 001 2633	06.19
09 12 002 2756	13.9	09 12 008 0327	20.34	09 14 000 6152	06.115	09 14 001 2634	06.19
09 12 002 3051	13.3	09 12 008 0427	13.41	09 14 000 6153	06.115	09 14 001 2662	06.21
09 12 002 3052	13.5	09 12 008 0428	13.41	09 14 000 6174	06.114	09 14 001 2663	06.21
09 12 002 3151	13.3	09 12 008 0429	13.41	09 14 000 6211	06.106	09 14 001 2667	06.23
09 12 002 3152	13.5	09 12 008 0527	13.41	09 14 000 6211	06.111	09 14 001 2668	06.23
		09 12 008 0727	13.42	09 14 000 6215	06.108	09 14 001 2732	06.19
09 12 003 2770	19.23	09 12 008 0728	13.42	09 14 000 6221	06.107	09 14 001 2733	06.19
09 12 003 2774	19.23	09 12 008 0901	13.42	09 14 000 6221	06.112	09 14 001 2734	06.19
09 12 003 2776	19.23	09 12 008 0902	13.42	09 14 000 6251	06.115	09 14 001 2762	06.21
09 12 003 3011	19.22	09 12 008 2633	13.27	09 14 000 6252	06.115	09 14 001 2763	06.21
09 12 003 3015	19.22	09 12 008 2634	13.27	09 14 000 6253	06.115	09 14 001 2767	06.23
09 12 003 3016	19.22	09 12 008 2733	13.27	09 14 000 6256	06.115	09 14 001 2768	06.23
09 12 003 3021	19.22	09 12 008 2734	13.27	09 14 000 6257	06.115	09 14 001 3001	06.21
09 12 003 3031	19.22	09 12 008 3001	13.29	09 14 000 6258	06.115	09 14 001 3011	06.88
09 12 003 3051	13.11	09 12 008 3101	13.29	09 14 000 6274	06.114	09 14 001 3011	06.90
09 12 003 3151	13.11	09 12 008 4620	15.7	09 14 000 6279	06.114	09 14 001 3011	06.92
		09 12 008 4650	15.9	09 14 000 9901	80.28	09 14 001 3011	06.94
09 12 004 2601	19.12	09 12 008 4720	15.27	09 14 000 9908	80.27	09 14 001 3031	06.27
09 12 004 2603	19.12	09 12 008 4751	15.23	09 14 000 9909	80.27	09 14 001 3032	42.6
09 12 004 2606	19.12	09 12 008 4752	15.19	09 14 000 9912	06.139	09 14 001 3072	06.18
09 12 004 2611	19.11	09 12 008 4753	15.23	09 14 000 9915	06.99	09 14 001 3073	06.18
09 12 004 2701	19.12	09 12 008 4756	15.21	09 14 000 9915	06.99	09 14 001 3074	06.18
09 12 004 2711	19.11	09 12 008 4757	15.25	09 14 000 9915	06.101	09 14 001 3101	06.21
09 12 004 2713	19.11	09 12 008 4760	15.29	09 14 000 9915	06.101	09 14 001 3111	06.88
09 12 004 2716	19.11	09 12 008 4770	15.17	09 14 000 9924	06.128	09 14 001 3111	06.90
09 12 004 3051	13.13	09 12 008 4801	15.13	09 14 000 9928	06.129	09 14 001 3111	06.92
09 12 004 3151	13.13	09 12 008 4802	15.15	09 14 000 9929	06.132	09 14 001 3111	06.94
		09 12 008 4804	15.3	09 14 000 9929	06.134	09 14 001 3131	06.27
09 12 005 2633	13.20	09 12 008 4806	15.3	09 14 000 9930	06.74	09 14 001 3132	42.6
09 12 005 2634	13.20	09 12 008 4807	15.5	09 14 000 9931	06.74	09 14 001 3172	06.18
09 12 005 2733	13.20	09 12 008 4811	15.13	09 14 000 9932	06.74	09 14 001 3173	06.18
09 12 005 2734	13.20	09 12 008 4901	15.11	09 14 000 9933	06.74	09 14 001 3174	06.18
09 12 005 3001	13.22	09 12 008 4951	15.11	09 14 000 9936	06.17	09 14 001 4601	06.77
09 12 005 3101	13.22	09 12 008 5407	13.43	09 14 000 9938	42.8	09 14 001 4611	06.78
		09 12 008 5408	13.43	09 14 000 9940	80.10	09 14 001 4622	06.81
09 12 006 2611	19.7	09 12 008 9901	20.33	09 14 000 9947	06.125	09 14 001 4623	06.84
09 12 006 2662	13.18	09 12 008 9901	20.33	09 14 000 9950	06.135	09 14 001 4623	06.82
09 12 006 2663	13.18			09 14 000 9953	80.35	09 14 001 4651	06.77
09 12 006 2665	13.18	09 12 011 3001	13.39	09 14 000 9954	80.35	09 14 001 4701	06.77
09 12 006 2666	13.18	09 12 011 3111	13.39	09 14 000 9960	06.135	09 14 001 4703	06.77
09 12 006 2691	19.9			09 14 000 9965	06.118	09 14 001 4711	06.78
09 12 006 2692	19.9	09 12 012 3001	13.32	09 14 000 9965	06.118	09 14 001 4721	06.79
09 12 006 2694	19.9	09 12 012 3002	20.36	09 14 000 9966	06.84	09 14 001 4722	06.79
09 12 006 2695	19.9	09 12 012 3004	13.32	09 14 000 9971	06.126	09 14 001 5401	06.125
09 12 006 2701	19.8	09 12 012 3101	13.32	09 14 000 9972	06.126	09 14 001 5402	06.124
09 12 006 2762	13.18	09 12 012 3102	20.36	09 14 000 9973	06.126	09 14 001 9901	42.8
09 12 006 2763	13.18	09 12 012 3104	13.32	09 14 000 9974	06.126		

List of part numbers



Part number	Page	Part number	Page	Part number	Page	Part number	Page
09 14 002 0301	06.129	09 14 005 2617	06.58	09 14 016 1711	06.16	09 15 000 6103	05.14
09 14 002 0311	06.128	09 14 005 2646	06.32			09 15 000 6103	05.11
09 14 002 0950	06.128	09 14 005 2647	06.32	09 14 017 3001	06.70	09 15 000 6103	05.22
09 14 002 2601	06.35	09 14 005 2701	06.47	09 14 017 3101	06.70	09 15 000 6103	05.25
09 14 002 2602	06.35	09 14 005 2716	06.58			09 15 000 6103	06.68
09 14 002 2603	20.20	09 14 005 2717	06.58	09 14 020 3001	06.55	09 15 000 6103	06.70
09 14 002 2641	06.29	09 14 005 2741	06.32	09 14 020 3013	06.90	09 15 000 6103	06.42
09 14 002 2642	06.29	09 14 005 2742	06.32	09 14 020 3101	06.55	09 15 000 6103	06.66
09 14 002 2646	06.29			09 14 020 3113	06.90	09 15 000 6103	13.25
09 14 002 2647	06.29	09 14 006 0361	06.10			09 15 000 6103	13.35
09 14 002 2650	06.25	09 14 006 0371	06.10	09 14 024 0361	06.13	09 15 000 6103	13.15
09 14 002 2651	06.25	09 14 006 1701	06.15	09 14 024 0371	06.13	09 15 000 6103	13.32
09 14 002 2653	06.25	09 14 006 1711	06.15	09 14 024 1701	06.17	09 15 000 6104	02.23
09 14 002 2701	06.35	09 14 006 2633	06.45	09 14 024 1711	06.17	09 15 000 6104	02.14
09 14 002 2702	06.35	09 14 006 2733	06.45			09 15 000 6104	05.14
09 14 002 2703	20.20	09 14 006 3001	06.45	09 14 025 3001	06.72	09 15 000 6104	05.11
09 14 002 2741	06.29	09 14 006 3041	06.49	09 14 025 3101	06.72	09 15 000 6104	05.22
09 14 002 2742	06.29	09 14 006 3101	06.45			09 15 000 6104	05.25
09 14 002 2750	06.25	09 14 006 3141	06.49	09 14 042 3001	06.68	09 15 000 6104	06.68
09 14 002 2751	06.25	09 14 006 4701	06.120	09 14 042 3101	06.68	09 15 000 6104	06.70
09 14 002 2753	06.25	09 14 006 4711	06.120			09 15 000 6104	06.42
09 14 002 3001	06.99			09 14 206 0303	06.10	09 15 000 6104	06.66
09 14 002 3001	06.101	09 14 007 3001	06.42	09 14 206 0313	06.10	09 15 000 6104	13.25
09 14 002 3001	06.103	09 14 007 3101	06.42			09 15 000 6104	13.35
09 14 002 3001	06.105			09 14 210 0303	06.11	09 15 000 6104	13.15
09 14 002 3002	06.35	09 14 008 2633	06.52	09 14 210 0313	06.11	09 15 000 6104	13.32
09 14 002 3021	06.61	09 14 008 2634	06.52			09 15 000 6105	02.23
09 14 002 3023	06.60	09 14 008 2733	06.52	09 14 216 0303	06.12	09 15 000 6105	02.14
09 14 002 3025	06.63	09 14 008 2734	06.52	09 14 216 0313	06.12	09 15 000 6105	05.14
09 14 002 3041	06.29	09 14 008 3001	06.52			09 15 000 6105	05.11
09 14 002 3051	06.25	09 14 008 3011	06.88	09 14 224 0303	06.13	09 15 000 6105	05.22
09 14 002 3101	06.99	09 14 008 3016	06.92	09 14 224 0313	06.13	09 15 000 6105	05.25
09 14 002 3101	06.101	09 14 008 3017	06.94			09 15 000 6105	06.68
09 14 002 3101	06.103	09 14 008 3021	06.92	09 14 545 1120	06.80	09 15 000 6105	06.70
09 14 002 3101	06.105	09 14 008 3022	06.94	09 14 545 1561	06.80	09 15 000 6105	06.42
09 14 002 3102	06.35	09 14 008 3101	06.52	09 14 545 1562	06.80	09 15 000 6105	06.66
09 14 002 3121	06.61	09 14 008 3111	06.88			09 15 000 6105	13.25
09 14 002 3123	06.60	09 14 008 3116	06.92	09 15 000 6101	02.23	09 15 000 6105	13.35
09 14 002 3125	06.63	09 14 008 3117	06.94	09 15 000 6101	02.14	09 15 000 6105	13.15
09 14 002 3141	06.29	09 14 008 3121	06.92	09 15 000 6101	05.14	09 15 000 6105	13.32
09 14 002 3151	06.25	09 14 008 3122	06.94	09 15 000 6101	05.11	09 15 000 6106	02.23
09 14 002 4501	06.114	09 14 008 4720	06.80	09 15 000 6101	05.22	09 15 000 6106	02.14
09 14 002 4501	06.114			09 15 000 6101	05.25	09 15 000 6106	05.14
09 14 002 5401	06.129	09 14 009 3001	06.74	09 15 000 6101	06.68	09 15 000 6106	05.11
		09 14 009 3101	06.74	09 15 000 6101	06.70	09 15 000 6106	05.22
		09 14 009 3151	06.74	09 15 000 6101	06.42	09 15 000 6106	05.25
09 14 003 2601	06.38			09 15 000 6101	06.66	09 15 000 6106	06.68
09 14 003 2602	06.38			09 15 000 6101	13.25	09 15 000 6106	06.70
09 14 003 2701	06.38	09 14 010 0361	06.11	09 15 000 6101	13.35	09 15 000 6106	06.42
09 14 003 2702	06.38	09 14 010 0371	06.11	09 15 000 6101	13.15	09 15 000 6106	06.66
09 14 003 3001	06.38	09 14 010 1701	06.15	09 15 000 6101	13.32	09 15 000 6106	13.25
09 14 003 3101	06.38	09 14 010 1711	06.16	09 15 000 6101	02.23	09 15 000 6106	13.35
09 14 003 4501	06.115			09 15 000 6102	02.14	09 15 000 6106	13.15
09 14 003 4501	06.115	09 14 012 2632	06.65	09 15 000 6102	05.14	09 15 000 6106	13.32
		09 14 012 2634	06.65	09 15 000 6102	05.11	09 15 000 6107	06.68
09 14 004 3041	06.40	09 14 012 2732	06.65	09 15 000 6102	05.22	09 15 000 6121	02.23
09 14 004 3141	06.40	09 14 012 2734	06.65	09 15 000 6102	05.25	09 15 000 6121	02.14
09 14 004 4501	06.106	09 14 012 3002	06.65	09 15 000 6102	06.68	09 15 000 6121	05.14
09 14 004 4501	06.108	09 14 012 3102	06.65	09 15 000 6102	06.70	09 15 000 6121	05.11
09 14 004 4512	06.106	09 14 012 4501	06.111	09 15 000 6102	06.42	09 15 000 6121	05.23
09 14 004 4513	06.108	09 14 012 4512	06.111	09 15 000 6102	06.66	09 15 000 6121	05.26
09 14 004 4701	06.117			09 15 000 6102	13.25	09 15 000 6121	06.68
09 14 004 4711	06.117	09 14 015 3001	25.16	09 15 000 6102	13.35	09 15 000 6121	06.70
09 14 004 4712	06.117	09 14 015 3101	25.16	09 15 000 6102	13.15	09 15 000 6121	06.99
09 14 004 4713	06.117			09 15 000 6102	13.32	09 15 000 6121	06.103
		09 14 016 0361	06.12	09 15 000 6102	13.32	09 15 000 6121	06.43
09 14 005 2601	06.47	09 14 016 0371	06.12	09 15 000 6103	02.23	09 15 000 6121	06.66
09 14 005 2616	06.58	09 14 016 1701	06.16	09 15 000 6103	02.14		

List of part numbers



Part number	Page	Part number	Page	Part number	Page	Part number	Page
09 15 000 6121	06.93	09 15 000 6124	13.16	09 15 000 6201	13.15	09 15 000 6206	06.66
09 15 000 6121	06.95	09 15 000 6124	13.33	09 15 000 6201	13.32	09 15 000 6206	13.25
09 15 000 6121	13.25	09 15 000 6124	19.16	09 15 000 6202	02.23	09 15 000 6206	13.35
09 15 000 6121	13.35	09 15 000 6124	19.17	09 15 000 6202	02.14	09 15 000 6206	13.15
09 15 000 6121	13.16	09 15 000 6124	19.19	09 15 000 6202	05.14	09 15 000 6206	13.32
09 15 000 6121	13.33	09 15 000 6125	02.23	09 15 000 6202	05.11	09 15 000 6207	06.68
09 15 000 6121	19.16	09 15 000 6125	02.14	09 15 000 6202	05.22	09 15 000 6221	02.23
09 15 000 6121	19.17	09 15 000 6125	05.14	09 15 000 6202	05.25	09 15 000 6221	02.14
09 15 000 6121	19.19	09 15 000 6125	05.11	09 15 000 6202	06.68	09 15 000 6221	05.14
09 15 000 6122	02.23	09 15 000 6125	05.23	09 15 000 6202	06.70	09 15 000 6221	05.11
09 15 000 6122	02.14	09 15 000 6125	05.26	09 15 000 6202	06.42	09 15 000 6221	05.23
09 15 000 6122	05.14	09 15 000 6125	06.68	09 15 000 6202	06.66	09 15 000 6221	05.26
09 15 000 6122	05.11	09 15 000 6125	06.70	09 15 000 6202	13.25	09 15 000 6221	06.68
09 15 000 6122	05.23	09 15 000 6125	06.99	09 15 000 6202	13.35	09 15 000 6221	06.70
09 15 000 6122	05.26	09 15 000 6125	06.103	09 15 000 6202	13.15	09 15 000 6221	06.99
09 15 000 6122	06.68	09 15 000 6125	06.43	09 15 000 6202	13.32	09 15 000 6221	06.103
09 15 000 6122	06.70	09 15 000 6125	06.66	09 15 000 6203	02.23	09 15 000 6221	06.43
09 15 000 6122	06.99	09 15 000 6125	06.93	09 15 000 6203	02.14	09 15 000 6221	06.66
09 15 000 6122	06.103	09 15 000 6125	06.95	09 15 000 6203	05.14	09 15 000 6221	06.93
09 15 000 6122	06.43	09 15 000 6125	13.25	09 15 000 6203	05.11	09 15 000 6221	06.95
09 15 000 6122	06.66	09 15 000 6125	13.35	09 15 000 6203	05.22	09 15 000 6221	13.25
09 15 000 6122	06.93	09 15 000 6125	13.16	09 15 000 6203	05.25	09 15 000 6221	13.35
09 15 000 6122	06.95	09 15 000 6125	13.33	09 15 000 6203	06.68	09 15 000 6221	13.16
09 15 000 6122	13.25	09 15 000 6125	19.16	09 15 000 6203	06.70	09 15 000 6221	13.33
09 15 000 6122	13.35	09 15 000 6125	19.17	09 15 000 6203	06.42	09 15 000 6221	19.16
09 15 000 6122	13.16	09 15 000 6125	19.19	09 15 000 6203	06.66	09 15 000 6221	19.17
09 15 000 6122	13.33	09 15 000 6126	02.23	09 15 000 6203	13.25	09 15 000 6221	19.19
09 15 000 6122	19.16	09 15 000 6126	02.14	09 15 000 6203	13.35	09 15 000 6222	02.23
09 15 000 6122	19.17	09 15 000 6126	05.14	09 15 000 6203	13.15	09 15 000 6222	02.14
09 15 000 6122	19.19	09 15 000 6126	05.11	09 15 000 6203	13.32	09 15 000 6222	05.14
09 15 000 6123	02.23	09 15 000 6126	05.23	09 15 000 6204	02.23	09 15 000 6222	05.11
09 15 000 6123	02.14	09 15 000 6126	05.26	09 15 000 6204	02.14	09 15 000 6222	05.23
09 15 000 6123	05.14	09 15 000 6126	06.68	09 15 000 6204	05.14	09 15 000 6222	05.26
09 15 000 6123	05.11	09 15 000 6126	06.70	09 15 000 6204	05.11	09 15 000 6222	06.68
09 15 000 6123	05.23	09 15 000 6126	06.99	09 15 000 6204	05.22	09 15 000 6222	06.70
09 15 000 6123	05.26	09 15 000 6126	06.103	09 15 000 6204	05.25	09 15 000 6222	06.99
09 15 000 6123	06.68	09 15 000 6126	06.43	09 15 000 6204	06.68	09 15 000 6222	06.103
09 15 000 6123	06.70	09 15 000 6126	06.66	09 15 000 6204	06.70	09 15 000 6222	06.43
09 15 000 6123	06.99	09 15 000 6126	06.93	09 15 000 6204	06.42	09 15 000 6222	06.66
09 15 000 6123	06.103	09 15 000 6126	06.95	09 15 000 6204	06.66	09 15 000 6222	06.93
09 15 000 6123	06.43	09 15 000 6126	13.25	09 15 000 6204	13.25	09 15 000 6222	06.95
09 15 000 6123	06.66	09 15 000 6126	13.35	09 15 000 6204	13.35	09 15 000 6222	13.25
09 15 000 6123	06.93	09 15 000 6126	13.16	09 15 000 6204	13.15	09 15 000 6222	13.35
09 15 000 6123	06.95	09 15 000 6126	13.33	09 15 000 6204	13.32	09 15 000 6222	13.16
09 15 000 6123	13.25	09 15 000 6126	19.16	09 15 000 6205	02.23	09 15 000 6222	13.33
09 15 000 6123	13.35	09 15 000 6126	19.17	09 15 000 6205	02.14	09 15 000 6222	19.16
09 15 000 6123	13.16	09 15 000 6126	19.19	09 15 000 6205	05.14	09 15 000 6222	19.17
09 15 000 6123	13.33	09 15 000 6161	41.2	09 15 000 6205	05.11	09 15 000 6222	19.19
09 15 000 6123	19.16	09 15 000 6171	41.2	09 15 000 6205	05.22	09 15 000 6223	02.23
09 15 000 6123	19.17	09 15 000 6190	20.30	09 15 000 6205	05.25	09 15 000 6223	02.14
09 15 000 6123	19.19	09 15 000 6191	20.14	09 15 000 6205	06.68	09 15 000 6223	05.14
09 15 000 6124	02.23	09 15 000 6191	20.15	09 15 000 6205	06.70	09 15 000 6223	05.11
09 15 000 6124	02.14	09 15 000 6191	20.24	09 15 000 6205	06.42	09 15 000 6223	05.23
09 15 000 6124	05.14	09 15 000 6191	20.36	09 15 000 6205	06.66	09 15 000 6223	05.26
09 15 000 6124	05.11	09 15 000 6197	20.17	09 15 000 6205	13.25	09 15 000 6223	06.68
09 15 000 6124	05.23	09 15 000 6201	02.23	09 15 000 6205	13.35	09 15 000 6223	06.70
09 15 000 6124	05.26	09 15 000 6201	02.14	09 15 000 6205	13.15	09 15 000 6223	06.99
09 15 000 6124	06.68	09 15 000 6201	05.14	09 15 000 6205	13.32	09 15 000 6223	06.103
09 15 000 6124	06.70	09 15 000 6201	05.11	09 15 000 6206	02.23	09 15 000 6223	06.43
09 15 000 6124	06.99	09 15 000 6201	05.22	09 15 000 6206	02.14	09 15 000 6223	06.66
09 15 000 6124	06.103	09 15 000 6201	05.25	09 15 000 6206	05.14	09 15 000 6223	06.93
09 15 000 6124	06.43	09 15 000 6201	06.68	09 15 000 6206	05.11	09 15 000 6223	06.95
09 15 000 6124	06.66	09 15 000 6201	06.70	09 15 000 6206	05.22	09 15 000 6223	13.25
09 15 000 6124	06.93	09 15 000 6201	06.42	09 15 000 6206	05.25	09 15 000 6223	13.35
09 15 000 6124	06.95	09 15 000 6201	06.66	09 15 000 6206	06.68	09 15 000 6223	13.16
09 15 000 6124	13.25	09 15 000 6201	13.25	09 15 000 6206	06.70	09 15 000 6223	13.33
09 15 000 6124	13.35	09 15 000 6201	13.35	09 15 000 6206	06.42	09 15 000 6223	19.16

List of part numbers



Part number	Page	Part number	Page	Part number	Page	Part number	Page
09 15 000 6223	19.17	09 15 000 6290	20.30	09 16 042 3001	02.18	09 20 003 5422	31.8
09 15 000 6223	19.19	09 15 000 6291	20.14	09 16 042 3101	02.18	09 20 003 5425	31.8
09 15 000 6224	02.23	09 15 000 6291	20.17			09 20 003 5426	31.9
09 15 000 6224	02.14	09 15 000 6293	20.24	09 16 072 3001	02.19	09 20 003 5427	31.9
09 15 000 6224	05.14	09 15 000 6294	20.15	09 16 072 3001	02.21	09 20 003 5428	31.9
09 15 000 6224	05.11	09 15 000 6297	20.36	09 16 072 3011	02.21	09 20 003 5441	31.13
09 15 000 6224	05.23			09 16 072 3101	02.19	09 20 003 5442	31.13
09 15 000 6224	05.26	09 15 001 3004	19.14	09 16 072 3101	02.21	09 20 003 5445	31.14
09 15 000 6224	06.68	09 15 001 3013	06.103	09 16 072 3111	02.21	09 20 003 5446	31.14
09 15 000 6224	06.70	09 15 001 3013	19.17			09 20 003 5447	31.14
09 15 000 6224	06.99	09 15 001 3023	06.105	09 16 108 3001	02.20	09 20 003 5448	31.14
09 15 000 6224	06.103	09 15 001 3023	19.18	09 16 108 3001	02.22	09 20 003 5449	31.15
09 15 000 6224	06.43	09 15 001 3104	19.14	09 16 108 3011	02.22	09 20 003 5450	31.15
09 15 000 6224	06.66	09 15 001 3113	06.103	09 16 108 3101	02.20		
09 15 000 6224	06.93	09 15 001 3113	19.17	09 16 108 3101	02.22	09 20 004 2611	01.4
09 15 000 6224	06.95	09 15 001 3123	06.105	09 16 108 3111	02.22	09 20 004 2633	01.4
09 15 000 6224	13.25	09 15 001 3123	19.18			09 20 004 2634	01.4
09 15 000 6224	13.35	09 15 001 6101	19.14	09 16 208 3001	16.12	09 20 004 2711	01.4
09 15 000 6224	13.16	09 15 001 6201	19.14	09 16 208 3101	16.12	09 20 004 2733	01.4
09 15 000 6224	13.33					09 20 004 2734	01.4
09 15 000 6224	19.16	09 15 003 3001	19.16	09 16 224 3001	16.9	09 20 004 4701	19.27
09 15 000 6224	19.17	09 15 003 3101	19.16	09 16 224 3101	16.9	09 20 004 4711	19.27
09 15 000 6224	19.19						
09 15 000 6225	02.23	09 15 004 3013	06.99	09 16 242 3001	16.10	09 20 010 0301	31.18
09 15 000 6225	02.14	09 15 004 3013	19.19	09 16 242 3101	16.10	09 20 010 0321	31.18
09 15 000 6225	05.14	09 15 004 3113	06.99			09 20 010 0801	31.17
09 15 000 6225	05.11	09 15 004 3113	19.19	09 16 272 3001	16.11	09 20 010 2612	01.6
09 15 000 6225	05.23			09 16 272 3101	16.11	09 20 010 2614	01.6
09 15 000 6225	05.26	09 15 008 3013	06.101			09 20 010 2812	01.6
09 15 000 6225	06.68	09 15 008 3013	19.20	09 20 000 9918	80.34	09 20 010 2814	01.6
09 15 000 6225	06.70	09 15 008 3113	06.101	09 20 000 9919	80.35	09 20 010 3001	01.6
09 15 000 6225	06.99	09 15 008 3113	19.20	09 20 000 9925	80.4	09 20 010 3101	01.6
09 15 000 6225	06.103			09 20 000 9925	80.3	09 20 010 5410	80.36
09 15 000 6225	06.43	09 15 200 6121	16.21	09 20 000 9928	80.2	09 20 010 5423	31.19
09 15 000 6225	06.66	09 15 200 6122	16.21	09 20 000 9929	80.2	09 20 010 5423	31.19
09 15 000 6225	06.93	09 15 200 6123	16.21	09 20 000 9931	80.4	09 20 010 5425	31.19
09 15 000 6225	06.95	09 15 200 6124	16.21	09 20 000 9932	80.2	09 20 010 5425	31.19
09 15 000 6225	13.25	09 15 200 6125	16.21	09 20 000 9933	11.16		
09 15 000 6225	13.35	09 15 200 6126	16.21	09 20 000 9991	80.10	09 20 016 0301	31.21
09 15 000 6225	13.16	09 15 200 6221	16.21	09 20 000 9992	80.10	09 20 016 0321	31.21
09 15 000 6225	13.33	09 15 200 6222	16.21	09 20 000 9993	80.10	09 20 016 0801	31.20
09 15 000 6225	19.16	09 15 200 6223	16.21	09 20 000 9994	80.10	09 20 016 2612	01.7
09 15 000 6225	19.17	09 15 200 6224	16.21	09 20 000 9995	80.34	09 20 016 2612	01.9
09 15 000 6225	19.19	09 15 200 6225	16.21	09 20 000 9996	80.11	09 20 016 2613	01.9
09 15 000 6226	02.23	09 15 200 6226	16.21	09 20 000 9997	80.11	09 20 016 2614	01.7
09 15 000 6226	02.14					09 20 016 2614	01.10
09 15 000 6226	05.14	09 16 000 9903	80.34	09 20 003 0301	20.31	09 20 016 2615	01.10
09 15 000 6226	05.11	09 16 000 9905	20.14	09 20 003 0301	31.6	09 20 016 2691	41.5
09 15 000 6226	05.23	09 16 000 9905	20.14	09 20 003 0305	31.6	09 20 016 2812	01.7
09 15 000 6226	05.26	09 16 000 9905	20.15	09 20 003 0306	31.6	09 20 016 2812	01.9
09 15 000 6226	06.68	09 16 000 9905	20.15	09 20 003 0320	31.12	09 20 016 2813	01.9
09 15 000 6226	06.70	09 16 000 9905	20.17	09 20 003 0327	31.12	09 20 016 2814	01.7
09 15 000 6226	06.99	09 16 000 9905	20.17	09 20 003 0801	31.6	09 20 016 2814	01.10
09 15 000 6226	06.103	09 16 000 9908	20.14	09 20 003 0810	31.7	09 20 016 2815	01.10
09 15 000 6226	06.43	09 16 000 9908	20.14	09 20 003 0811	31.7	09 20 016 2891	41.5
09 15 000 6226	06.66	09 16 000 9908	20.15	09 20 003 0820	31.12	09 20 016 3001	01.7
09 15 000 6226	06.93	09 16 000 9908	20.15	09 20 003 0827	31.12	09 20 016 3001	01.8
09 15 000 6226	06.95	09 16 000 9908	20.17	09 20 003 2611	01.3	09 20 016 3011	01.8
09 15 000 6226	13.25	09 16 000 9908	20.17	09 20 003 2633	01.3	09 20 016 3101	01.7
09 15 000 6226	13.35	09 16 000 9915	20.17	09 20 003 2634	01.3	09 20 016 3101	01.8
09 15 000 6226	13.16	09 16 000 9915	20.17	09 20 003 2711	01.3	09 20 016 3111	01.8
09 15 000 6226	13.33	09 16 000 9918	20.18	09 20 003 2733	01.3	09 20 016 5410	80.36
09 15 000 6226	19.16	09 16 000 9918	20.18	09 20 003 2734	01.3	09 20 016 5423	31.21
09 15 000 6226	19.17			09 20 003 5407	31.13	09 20 016 5423	31.21
09 15 000 6226	19.19	09 16 024 3001	02.17	09 20 003 5408	31.13	09 20 016 5425	31.22
09 15 000 6261	41.2	09 16 024 3101	02.17	09 20 003 5409	31.14	09 20 016 5425	31.22
09 15 000 6271	41.2			09 20 003 5421	31.8		

List of part numbers



Part number	Page	Part number	Page	Part number	Page	Part number	Page
09 20 032 0301	31.23	09 21 264 3101	16.7	09 30 010 0381	31.45	09 30 024 0301	31.58
09 20 032 0302	31.25			09 30 010 0801	31.34	09 30 024 0302	31.61
09 20 032 5401	31.24	09 30 000 9801	80.10	09 30 010 0803	31.40	09 30 024 0304	31.64
09 20 032 5401	31.24	09 30 000 9802	80.10	09 30 010 0901	31.77	09 30 024 0307	31.64
09 20 032 5405	31.24	09 30 000 9803	80.10	09 30 010 0902	31.77	09 30 024 0317	31.62
09 20 032 5405	31.24	09 30 000 9804	80.10	09 30 010 0961	31.77	09 30 024 0318	31.64
		09 30 000 9901	80.28	09 30 010 1301	31.35	09 30 024 0381	31.67
09 21 000 9906	80.11	09 30 000 9903	80.10	09 30 010 1305	31.41	09 30 024 0408	80.13
09 21 000 9971	08.26	09 30 000 9933	80.11	09 30 010 1306	31.42	09 30 024 0801	31.58
		09 30 000 9934	80.11	09 30 010 1704	16.32	09 30 024 0803	31.63
09 21 007 2632	02.3	09 30 000 9935	80.11	09 30 010 1704	80.30	09 30 024 1301	31.58
09 21 007 2732	02.3	09 30 000 9936	80.11	09 30 010 5401	80.37	09 30 024 1306	31.64
09 21 007 3031	02.3	09 30 000 9941	80.11	09 30 010 5404	80.36	09 30 024 1704	16.32
09 21 007 3131	02.3	09 30 000 9942	80.11	09 30 010 5406	80.37	09 30 024 1704	80.30
		09 30 000 9943	80.11	09 30 010 5407	31.36	09 30 024 4411	31.57
09 21 015 2601	02.7	09 30 000 9944	80.11	09 30 010 5407	31.36	09 30 024 5401	31.59
09 21 015 2701	02.7	09 30 000 9958	80.38	09 30 010 5410	80.36	09 30 024 5401	31.59
09 21 015 3001	02.7	09 30 000 9963	80.11	09 30 010 5412	31.44	09 30 024 5404	80.36
09 21 015 3101	02.7	09 30 000 9964	80.36	09 30 010 5412	31.44	09 30 024 5405	31.59
		09 30 000 9965	80.5	09 30 010 5423	31.36	09 30 024 5405	31.59
09 21 025 2601	02.8	09 30 000 9966	80.5	09 30 010 5423	31.36	09 30 024 5406	80.37
09 21 025 2601	02.10	09 30 000 9967	80.6	09 30 010 5425	31.36	09 30 024 5410	80.36
09 21 025 2701	02.8	09 30 000 9968	80.7	09 30 010 5425	31.36	09 30 024 5417	31.60
09 21 025 2701	02.10	09 30 000 9969	80.7	09 30 010 5427	31.36	09 30 024 5417	31.60
09 21 025 3001	02.8	09 30 000 9970	80.5	09 30 010 5427	31.36	09 30 024 5422	31.59
09 21 025 3001	02.10	09 30 000 9971	80.5	09 30 010 5432	31.44	09 30 024 5422	31.59
09 21 025 3101	02.8	09 30 000 9972	80.6	09 30 010 5432	31.44	09 30 024 5425	31.60
09 21 025 3101	02.10	09 30 000 9973	80.7	09 30 010 5457	31.39	09 30 024 5425	31.60
		09 30 000 9974	80.7	09 30 010 5457	31.39	09 30 024 5426	31.60
09 21 040 2601	02.9	09 30 000 9986	80.38			09 30 024 5426	31.60
09 21 040 2601	02.12	09 30 000 9987	80.38	09 30 016 0301	31.47	09 30 024 5432	31.66
09 21 040 2701	02.9	09 30 000 9991	80.10	09 30 016 0302	31.51	09 30 024 5432	31.66
09 21 040 2701	02.12	09 30 000 9992	80.10	09 30 016 0306	31.53	09 30 024 5436	31.66
09 21 040 3001	02.9	09 30 000 9993	80.10	09 30 016 0307	31.53	09 30 024 5436	31.66
09 21 040 3001	02.12	09 30 000 9994	80.10	09 30 016 0317	31.51	09 30 024 5442	31.62
09 21 040 3101	02.9	09 30 000 9995	80.11	09 30 016 0318	31.53	09 30 024 5442	31.62
09 21 040 3101	02.12	09 30 000 9996	80.10	09 30 016 0381	31.56		
09 21 040 4601	08.5	09 30 000 9997	80.34	09 30 016 0408	80.13	09 30 032 0301	31.68
09 21 040 4602	08.5			09 30 016 0801	31.47	09 30 032 5420	31.69
09 21 040 4611	08.6	09 30 006 0301	31.29	09 30 016 0803	31.53	09 30 032 5420	31.69
09 21 040 4612	08.6	09 30 006 0302	31.29	09 30 016 1301	31.48	09 30 032 5425	31.69
09 21 040 4701	08.5	09 30 006 0318	31.29	09 30 016 1306	31.54	09 30 032 5425	31.69
09 21 040 4702	08.5	09 30 006 0381	31.33	09 30 016 1704	16.32	09 30 032 5426	31.69
09 21 040 4711	08.6	09 30 006 0801	31.28	09 30 016 1704	80.30	09 30 032 5426	31.69
09 21 040 4712	08.6	09 30 006 1301	31.29	09 30 016 4411	31.52	09 30 032 5427	31.69
		09 30 006 1306	31.30	09 30 016 4431	31.50	09 30 032 5427	31.69
09 21 064 2601	02.11	09 30 006 1308	31.30	09 30 016 4441	31.46		
09 21 064 2601	02.13	09 30 006 1704	16.32	09 30 016 5401	80.37	09 30 048 0301	31.70
09 21 064 2701	02.11	09 30 006 1704	80.30	09 30 016 5404	80.36	09 30 048 0302	31.70
09 21 064 2701	02.13	09 30 006 5401	80.37	09 30 016 5405	31.49	09 30 048 0317	31.70
09 21 064 3001	02.11	09 30 006 5403	80.36	09 30 016 5405	31.49		
09 21 064 3001	02.13	09 30 006 5404	31.32	09 30 016 5406	80.37	09 30 210 0305	16.27
09 21 064 3101	02.11	09 30 006 5404	31.32	09 30 016 5410	80.36	09 30 210 0803	16.26
09 21 064 3101	02.13	09 30 006 5410	80.36	09 30 016 5417	31.49		
09 21 064 4601	08.7	09 30 006 5423	31.32	09 30 016 5417	31.49	09 30 216 0307	16.29
09 21 064 4602	08.7	09 30 006 5423	31.32	09 30 016 5422	31.49	09 30 216 0803	16.28
09 21 064 4611	08.8	09 30 006 5425	31.32	09 30 016 5422	31.49		
09 21 064 4612	08.8	09 30 006 5425	31.32	09 30 016 5425	31.49	09 30 224 0307	16.31
09 21 064 4701	08.7	09 30 006 5427	31.32	09 30 016 5425	31.49	09 30 224 0803	16.30
09 21 064 4702	08.7	09 30 006 5427	31.32	09 30 016 5426	31.49		
09 21 064 4711	08.8			09 30 016 5426	31.49	09 30 410 0901	31.77
09 21 064 4712	08.8	09 30 010 0301	31.35	09 30 016 5432	31.55	09 30 410 0909	31.77
		09 30 010 0302	31.38	09 30 016 5432	31.55	09 30 410 0921	31.77
09 21 240 3001	16.6	09 30 010 0303	31.41	09 30 016 5457	31.49	09 30 410 0951	31.77
09 21 240 3101	16.6	09 30 010 0305	31.41	09 30 016 5457	31.49	09 30 410 0960	31.77
		09 30 010 0317	31.38	09 30 016 9901	80.12	09 30 410 0970	31.77
09 21 264 3001	16.7	09 30 010 0318	31.42			09 30 410 0971	31.77

List of part numbers



Part number	Page	Part number	Page	Part number	Page	Part number	Page
09 30 410 0974	31.77	09 32 000 6204	06.38	09 32 032 3101	03.33	09 33 000 6105	06.63
09 30 410 0983	31.77	09 32 000 6204	06.40	09 32 032 3101	03.35	09 33 000 6105	06.32
		09 32 000 6204	06.60	09 32 032 3111	03.35	09 33 000 6105	06.46
09 31 006 2601	07.3	09 32 000 6204	06.36			09 33 000 6105	06.49
09 31 006 2601	07.4	09 32 000 6204	06.42	09 32 040 3001	03.38	09 33 000 6105	06.53
09 31 006 2611	07.4	09 32 000 6204	13.3	09 32 040 3101	03.38	09 33 000 6105	06.55
09 31 006 2701	07.3	09 32 000 6204	13.5			09 33 000 6105	13.22
09 31 006 2701	07.4	09 32 000 6204	13.11	09 32 046 3001	03.34	09 33 000 6105	13.29
09 31 006 2711	07.4	09 32 000 6204	13.13	09 32 046 3001	03.36	09 33 000 6105	25.16
		09 32 000 6204	13.15	09 32 046 3011	03.36	09 33 000 6106	01.11
09 32 000 6104	05.22	09 32 000 6205	05.22	09 32 046 3101	03.34	09 33 000 6106	03.40
09 32 000 6104	05.25	09 32 000 6205	05.25	09 32 046 3101	03.36	09 33 000 6106	04.18
09 32 000 6104	06.38	09 32 000 6205	06.38	09 32 046 3111	03.36	09 33 000 6106	06.61
09 32 000 6104	06.40	09 32 000 6205	06.40			09 33 000 6106	06.63
09 32 000 6104	06.60	09 32 000 6205	06.60	09 32 064 3001	03.39	09 33 000 6106	06.32
09 32 000 6104	06.36	09 32 000 6205	06.36	09 32 064 3101	03.39	09 33 000 6106	06.46
09 32 000 6104	06.42	09 32 000 6205	06.42			09 33 000 6106	06.49
09 32 000 6104	13.3	09 32 000 6205	13.3	09 32 200 6114	16.23	09 33 000 6106	06.53
09 32 000 6104	13.5	09 32 000 6205	13.5	09 32 200 6115	16.23	09 33 000 6106	06.55
09 32 000 6104	13.11	09 32 000 6205	13.11	09 32 200 6117	16.23	09 33 000 6106	13.29
09 32 000 6104	13.13	09 32 000 6205	13.13	09 32 200 6118	16.23	09 33 000 6106	25.16
09 32 000 6104	13.15	09 32 000 6205	13.15	09 32 200 6119	16.23	09 33 000 6107	01.11
09 32 000 6105	05.22	09 32 000 6207	05.22	09 32 200 6224	16.23	09 33 000 6107	03.40
09 32 000 6105	05.25	09 32 000 6207	05.25	09 32 200 6225	16.23	09 33 000 6107	04.18
09 32 000 6105	06.38	09 32 000 6207	06.38	09 32 200 6227	16.23	09 33 000 6107	05.12
09 32 000 6105	06.40	09 32 000 6207	06.40	09 32 200 6228	16.23	09 33 000 6107	06.61
09 32 000 6105	06.60	09 32 000 6207	06.60	09 32 200 6229	16.23	09 33 000 6107	06.63
09 32 000 6105	06.36	09 32 000 6207	06.36			09 33 000 6107	06.32
09 32 000 6105	06.42	09 32 000 6207	06.42	09 32 240 3001	16.19	09 33 000 6107	06.46
09 32 000 6105	13.3	09 32 000 6207	13.3	09 32 240 3101	16.19	09 33 000 6107	06.49
09 32 000 6105	13.5	09 32 000 6207	13.5			09 33 000 6107	06.53
09 32 000 6105	13.11	09 32 000 6207	13.11	09 32 264 3001	16.20	09 33 000 6107	06.55
09 32 000 6105	13.13	09 32 000 6207	13.13	09 32 264 3101	16.20	09 33 000 6107	13.29
09 32 000 6105	13.15	09 32 000 6207	13.15			09 33 000 6107	25.16
09 32 000 6107	05.22	09 32 000 6208	05.22	09 33 000 6102	01.11	09 33 000 6109	03.41
09 32 000 6107	05.25	09 32 000 6208	05.25	09 33 000 6102	03.40	09 33 000 6109	04.18
09 32 000 6107	06.38	09 32 000 6208	06.38	09 33 000 6102	04.18	09 33 000 6109	05.12
09 32 000 6107	06.40	09 32 000 6208	06.40	09 33 000 6102	05.12	09 33 000 6109	13.22
09 32 000 6107	06.60	09 32 000 6208	06.60	09 33 000 6102	06.61	09 33 000 6109	13.30
09 32 000 6107	06.36	09 32 000 6208	06.36	09 33 000 6102	06.63	09 33 000 6110	03.41
09 32 000 6107	06.42	09 32 000 6208	06.42	09 33 000 6102	06.32	09 33 000 6110	04.18
09 32 000 6107	13.3	09 32 000 6208	13.3	09 33 000 6102	06.46	09 33 000 6110	05.12
09 32 000 6107	13.5	09 32 000 6208	13.5	09 33 000 6102	06.49	09 33 000 6110	13.22
09 32 000 6107	13.11	09 32 000 6208	13.11	09 33 000 6102	06.53	09 33 000 6110	13.30
09 32 000 6107	13.13	09 32 000 6208	13.13	09 33 000 6102	06.55	09 33 000 6111	03.41
09 32 000 6107	13.15	09 32 000 6208	13.15	09 33 000 6102	13.22	09 33 000 6111	04.18
09 32 000 6108	05.22	09 32 000 6209	06.60	09 33 000 6102	13.29	09 33 000 6111	05.12
09 32 000 6108	05.25	09 32 000 6209	06.36	09 33 000 6102	25.16	09 33 000 6111	13.22
09 32 000 6108	06.38	09 32 000 6209	13.3	09 33 000 6104	01.11	09 33 000 6111	13.30
09 32 000 6108	06.40	09 32 000 6209	13.5	09 33 000 6104	03.40	09 33 000 6114	01.11
09 32 000 6108	06.60	09 32 000 6209	13.11	09 33 000 6104	04.18	09 33 000 6114	03.40
09 32 000 6108	06.36	09 32 000 6209	13.13	09 33 000 6104	05.12	09 33 000 6114	04.18
09 32 000 6108	06.42	09 32 000 6280	20.24	09 33 000 6104	06.61	09 33 000 6114	05.12
09 32 000 6108	13.3	09 32 000 6295	20.20	09 33 000 6104	06.63	09 33 000 6114	06.61
09 32 000 6108	13.5			09 33 000 6104	06.32	09 33 000 6114	06.63
09 32 000 6108	13.11	09 32 010 3001	03.31	09 33 000 6104	06.46	09 33 000 6114	06.32
09 32 000 6108	13.13	09 32 010 3101	03.31	09 33 000 6104	06.49	09 33 000 6114	06.46
09 32 000 6108	13.15			09 33 000 6104	06.53	09 33 000 6114	06.49
09 32 000 6109	06.60	09 32 012 3001	05.25	09 33 000 6104	06.55	09 33 000 6114	06.53
09 32 000 6109	06.36	09 32 012 3101	05.25	09 33 000 6104	13.22	09 33 000 6114	06.55
09 32 000 6109	13.3			09 33 000 6104	13.29	09 33 000 6114	13.22
09 32 000 6109	13.5	09 32 018 3001	03.32	09 33 000 6104	25.16	09 33 000 6114	13.29
09 32 000 6109	13.11	09 32 018 3101	03.32	09 33 000 6105	01.11	09 33 000 6114	25.16
09 32 000 6109	13.13			09 33 000 6105	03.40	09 33 000 6115	01.11
09 32 000 6180	20.24	09 32 032 3001	03.33	09 33 000 6105	04.18	09 33 000 6115	03.40
09 32 000 6204	05.22	09 32 032 3001	03.35	09 33 000 6105	05.12	09 33 000 6115	05.12
09 32 000 6204	05.25	09 32 032 3011	03.35	09 33 000 6105	06.61	09 33 000 6115	06.105

List of part numbers



Part number	Page	Part number	Page	Part number	Page	Part number	Page
09 33 000 6115	06.33	09 33 000 6121	06.53	09 33 000 6204	06.63	09 33 000 6215	13.30
09 33 000 6115	06.46	09 33 000 6121	06.55	09 33 000 6204	06.32	09 33 000 6215	19.14
09 33 000 6115	06.50	09 33 000 6121	13.22	09 33 000 6204	06.46	09 33 000 6215	19.18
09 33 000 6115	06.53	09 33 000 6121	13.29	09 33 000 6204	06.49	09 33 000 6216	01.11
09 33 000 6115	06.56	09 33 000 6121	25.16	09 33 000 6204	06.53	09 33 000 6216	03.40
09 33 000 6115	13.22	09 33 000 6122	01.11	09 33 000 6204	06.55	09 33 000 6216	05.12
09 33 000 6115	13.30	09 33 000 6122	03.40	09 33 000 6204	13.22	09 33 000 6216	06.105
09 33 000 6115	19.14	09 33 000 6122	05.12	09 33 000 6204	13.29	09 33 000 6216	06.33
09 33 000 6115	19.18	09 33 000 6122	06.105	09 33 000 6205	01.11	09 33 000 6216	06.46
09 33 000 6116	01.11	09 33 000 6122	06.33	09 33 000 6205	03.40	09 33 000 6216	06.50
09 33 000 6116	03.40	09 33 000 6122	06.46	09 33 000 6205	04.18	09 33 000 6216	06.53
09 33 000 6116	05.12	09 33 000 6122	06.50	09 33 000 6205	05.12	09 33 000 6216	06.56
09 33 000 6116	06.105	09 33 000 6122	06.53	09 33 000 6205	06.61	09 33 000 6216	13.22
09 33 000 6116	06.33	09 33 000 6122	06.56	09 33 000 6205	06.63	09 33 000 6216	13.30
09 33 000 6116	06.46	09 33 000 6122	13.22	09 33 000 6205	06.32	09 33 000 6216	19.14
09 33 000 6116	06.50	09 33 000 6122	13.30	09 33 000 6205	06.46	09 33 000 6216	19.18
09 33 000 6116	06.53	09 33 000 6122	19.14	09 33 000 6205	06.49	09 33 000 6217	01.11
09 33 000 6116	06.56	09 33 000 6122	19.18	09 33 000 6205	06.53	09 33 000 6217	03.40
09 33 000 6116	13.22	09 33 000 6123	01.11	09 33 000 6205	06.55	09 33 000 6217	06.105
09 33 000 6116	13.30	09 33 000 6123	03.40	09 33 000 6205	13.22	09 33 000 6217	06.33
09 33 000 6116	19.14	09 33 000 6123	05.12	09 33 000 6205	13.29	09 33 000 6217	06.46
09 33 000 6116	19.18	09 33 000 6123	06.105	09 33 000 6206	01.11	09 33 000 6217	06.50
09 33 000 6117	01.11	09 33 000 6123	06.33	09 33 000 6206	03.40	09 33 000 6217	06.53
09 33 000 6117	03.40	09 33 000 6123	06.46	09 33 000 6206	04.18	09 33 000 6217	06.56
09 33 000 6117	06.105	09 33 000 6123	06.50	09 33 000 6206	06.61	09 33 000 6217	13.22
09 33 000 6117	06.33	09 33 000 6123	06.53	09 33 000 6206	06.63	09 33 000 6217	13.30
09 33 000 6117	06.46	09 33 000 6123	06.56	09 33 000 6206	06.32	09 33 000 6217	19.14
09 33 000 6117	06.50	09 33 000 6123	13.22	09 33 000 6206	06.46	09 33 000 6217	19.18
09 33 000 6117	06.53	09 33 000 6123	13.30	09 33 000 6206	06.49	09 33 000 6218	01.11
09 33 000 6117	06.56	09 33 000 6123	19.14	09 33 000 6206	06.53	09 33 000 6218	03.40
09 33 000 6117	13.22	09 33 000 6123	19.18	09 33 000 6206	06.55	09 33 000 6218	05.12
09 33 000 6117	13.30	09 33 000 6127	01.11	09 33 000 6206	13.29	09 33 000 6218	06.105
09 33 000 6117	19.14	09 33 000 6127	03.40	09 33 000 6207	01.11	09 33 000 6218	06.33
09 33 000 6117	19.18	09 33 000 6127	06.32	09 33 000 6207	03.40	09 33 000 6218	06.46
09 33 000 6118	01.11	09 33 000 6127	06.46	09 33 000 6207	04.18	09 33 000 6218	06.50
09 33 000 6118	03.40	09 33 000 6127	06.49	09 33 000 6207	05.12	09 33 000 6218	06.53
09 33 000 6118	05.12	09 33 000 6127	06.53	09 33 000 6207	06.61	09 33 000 6218	06.56
09 33 000 6118	06.105	09 33 000 6127	06.55	09 33 000 6207	06.63	09 33 000 6218	13.22
09 33 000 6118	06.33	09 33 000 6127	13.22	09 33 000 6207	06.32	09 33 000 6218	13.30
09 33 000 6118	06.46	09 33 000 6127	13.29	09 33 000 6207	06.46	09 33 000 6218	19.14
09 33 000 6118	06.50	09 33 000 6127	25.16	09 33 000 6207	06.49	09 33 000 6218	19.18
09 33 000 6118	06.53	09 33 000 6139	19.14	09 33 000 6207	06.53	09 33 000 6220	01.11
09 33 000 6118	06.56	09 33 000 6162	41.3	09 33 000 6207	06.55	09 33 000 6220	03.40
09 33 000 6118	13.22	09 33 000 6163	41.3	09 33 000 6207	13.29	09 33 000 6220	04.18
09 33 000 6118	13.30	09 33 000 6172	41.3	09 33 000 6214	01.11	09 33 000 6220	05.12
09 33 000 6118	19.14	09 33 000 6173	41.3	09 33 000 6214	03.40	09 33 000 6220	06.61
09 33 000 6118	19.18	09 33 000 6180	20.22	09 33 000 6214	04.18	09 33 000 6220	06.63
09 33 000 6119	01.11	09 33 000 6180	20.33	09 33 000 6214	05.12	09 33 000 6220	06.32
09 33 000 6119	03.40	09 33 000 6195	20.27	09 33 000 6214	06.61	09 33 000 6220	06.46
09 33 000 6119	05.12	09 33 000 6202	01.11	09 33 000 6214	06.63	09 33 000 6220	06.49
09 33 000 6119	06.105	09 33 000 6202	03.40	09 33 000 6214	06.32	09 33 000 6220	06.53
09 33 000 6119	06.33	09 33 000 6202	04.18	09 33 000 6214	06.46	09 33 000 6220	06.55
09 33 000 6119	06.46	09 33 000 6202	05.12	09 33 000 6214	06.49	09 33 000 6220	13.22
09 33 000 6119	06.50	09 33 000 6202	06.61	09 33 000 6214	06.53	09 33 000 6220	13.29
09 33 000 6119	06.53	09 33 000 6202	06.63	09 33 000 6214	06.55	09 33 000 6221	01.11
09 33 000 6119	06.56	09 33 000 6202	06.32	09 33 000 6214	13.22	09 33 000 6221	03.40
09 33 000 6119	13.30	09 33 000 6202	06.46	09 33 000 6214	13.29	09 33 000 6221	05.12
09 33 000 6119	19.14	09 33 000 6202	06.49	09 33 000 6215	01.11	09 33 000 6221	06.105
09 33 000 6121	01.11	09 33 000 6202	06.53	09 33 000 6215	03.40	09 33 000 6221	06.33
09 33 000 6121	03.40	09 33 000 6202	06.55	09 33 000 6215	05.12	09 33 000 6221	06.46
09 33 000 6121	04.18	09 33 000 6202	13.22	09 33 000 6215	06.105	09 33 000 6221	06.50
09 33 000 6121	05.12	09 33 000 6202	13.29	09 33 000 6215	06.33	09 33 000 6221	06.53
09 33 000 6121	06.61	09 33 000 6204	01.11	09 33 000 6215	06.46	09 33 000 6221	06.56
09 33 000 6121	06.63	09 33 000 6204	03.40	09 33 000 6215	06.50	09 33 000 6221	13.30
09 33 000 6121	06.32	09 33 000 6204	04.18	09 33 000 6215	06.53	09 33 000 6221	19.14
09 33 000 6121	06.46	09 33 000 6204	05.12	09 33 000 6215	06.56	09 33 000 6222	01.11
09 33 000 6121	06.49	09 33 000 6204	06.61	09 33 000 6215	13.22	09 33 000 6222	03.40

List of part numbers



Part number	Page	Part number	Page	Part number	Page	Part number	Page
09 33 000 6222	05.12	09 33 000 9910	80.33	09 33 010 2648	03.16	09 33 024 0401	11.14
09 33 000 6222	06.105	09 33 000 9912	80.33	09 33 010 2672	03.17	09 33 024 2601	03.7
09 33 000 6222	06.33	09 33 000 9915	02.23	09 33 010 2691	41.7	09 33 024 2601	03.11
09 33 000 6222	06.46	09 33 000 9915	02.15	09 33 010 2701	03.5	09 33 024 2602	03.7
09 33 000 6222	06.50	09 33 000 9915	16.21	09 33 010 2702	03.5	09 33 024 2602	03.10
09 33 000 6222	06.53	09 33 000 9915	80.29	09 33 010 2716	03.16	09 33 024 2611	03.11
09 33 000 6222	06.56	09 33 000 9925	80.35	09 33 010 2748	03.16	09 33 024 2612	03.10
09 33 000 6222	13.22	09 33 000 9926	80.35	09 33 010 2772	03.17	09 33 024 2616	03.20
09 33 000 6222	13.30	09 33 000 9928	08.25	09 33 010 2791	41.7	09 33 024 2616	03.25
09 33 000 6222	19.14	09 33 000 9929	08.25	09 33 010 4625	08.14	09 33 024 2626	03.25
09 33 000 6222	19.18	09 33 000 9954	03.41	09 33 010 4626	08.14	09 33 024 2648	03.20
09 33 000 6223	01.11	09 33 000 9954	13.23	09 33 010 4629	08.22	09 33 024 2648	03.26
09 33 000 6223	03.40	09 33 000 9954	13.30	09 33 010 4635	08.15	09 33 024 2672	03.21
09 33 000 6223	05.12	09 33 000 9954	16.22	09 33 010 4636	08.15	09 33 024 2672	03.27
09 33 000 6223	06.105	09 33 000 9954	80.29	09 33 010 4639	08.22	09 33 024 2688	03.26
09 33 000 6223	06.33	09 33 000 9956	11.15	09 33 010 4725	08.14	09 33 024 2689	41.9
09 33 000 6223	06.46	09 33 000 9957	11.15	09 33 010 4726	08.14	09 33 024 2691	41.9
09 33 000 6223	06.50	09 33 000 9964	08.26	09 33 010 4729	08.22	09 33 024 2701	03.7
09 33 000 6223	06.53	09 33 000 9965	08.26	09 33 010 4735	08.15	09 33 024 2701	03.11
09 33 000 6223	06.56	09 33 000 9966	08.26	09 33 010 4736	08.15	09 33 024 2702	03.7
09 33 000 6223	13.22	09 33 000 9967	08.26	09 33 010 4739	08.22	09 33 024 2702	03.10
09 33 000 6223	13.30	09 33 000 9971	08.26	09 33 010 5401	11.12	09 33 024 2711	03.11
09 33 000 6223	19.14	09 33 000 9973	08.26			09 33 024 2712	03.10
09 33 000 6223	19.18	09 33 000 9980	11.7	09 33 016 0401	11.13	09 33 024 2716	03.20
09 33 000 6227	01.11	09 33 000 9981	11.16	09 33 016 2601	03.6	09 33 024 2716	03.25
09 33 000 6227	03.40	09 33 000 9981	80.13	09 33 016 2601	03.9	09 33 024 2726	03.25
09 33 000 6227	06.32	09 33 000 9982	11.16	09 33 016 2602	03.6	09 33 024 2748	03.20
09 33 000 6227	06.46	09 33 000 9984	11.6	09 33 016 2602	03.8	09 33 024 2748	03.26
09 33 000 6227	06.49	09 33 000 9985	11.5	09 33 016 2611	03.9	09 33 024 2772	03.21
09 33 000 6227	06.53	09 33 000 9987	11.3	09 33 016 2612	03.8	09 33 024 2772	03.27
09 33 000 6227	06.55	09 33 000 9988	11.9	09 33 016 2616	03.18	09 33 024 2788	03.26
09 33 000 6227	13.22	09 33 000 9989	11.9	09 33 016 2616	03.22	09 33 024 2789	41.9
09 33 000 6227	13.29	09 33 000 9990	11.4	09 33 016 2626	03.22	09 33 024 2791	41.9
09 33 000 6239	19.14	09 33 000 9991	11.4	09 33 016 2648	03.18	09 33 024 4625	08.18
09 33 000 6262	41.3	09 33 000 9992	80.31	09 33 016 2648	03.23	09 33 024 4626	08.18
09 33 000 6263	41.3	09 33 000 9996	20.22	09 33 016 2672	03.19	09 33 024 4629	08.24
09 33 000 6272	41.3	09 33 000 9996	20.22	09 33 016 2672	03.24	09 33 024 4635	08.19
09 33 000 6273	41.3			09 33 016 2688	03.23	09 33 024 4636	08.19
09 33 000 6280	20.22	09 33 006 0401	11.11	09 33 016 2691	41.8	09 33 024 4639	08.24
09 33 000 6280	20.33	09 33 006 2601	03.4	09 33 016 2701	03.6	09 33 024 4725	08.18
09 33 000 6295	20.27	09 33 006 2602	03.4	09 33 016 2701	03.9	09 33 024 4726	08.18
09 33 000 9801	11.8	09 33 006 2616	03.14	09 33 016 2702	03.6	09 33 024 4729	08.24
09 33 000 9803	11.8	09 33 006 2648	03.14	09 33 016 2702	03.8	09 33 024 4735	08.19
09 33 000 9808	11.15	09 33 006 2672	03.15	09 33 016 2711	03.9	09 33 024 4736	08.19
09 33 000 9808	80.26	09 33 006 2701	03.4	09 33 016 2712	03.8	09 33 024 4739	08.24
09 33 000 9809	11.15	09 33 006 2702	03.4	09 33 016 2716	03.18	09 33 024 5401	11.14
09 33 000 9809	80.26	09 33 006 2716	03.14	09 33 016 2716	03.22		
09 33 000 9820	03.28	09 33 006 2748	03.14	09 33 016 2726	03.22	09 33 200 6115	16.22
09 33 000 9821	03.28	09 33 006 2772	03.15	09 33 016 2748	03.18	09 33 200 6116	16.22
09 33 000 9822	03.28	09 33 006 4625	08.12	09 33 016 2748	03.23	09 33 200 6117	16.22
09 33 000 9830	03.28	09 33 006 4626	08.12	09 33 016 2772	03.19	09 33 200 6118	16.22
09 33 000 9831	03.29	09 33 006 4629	08.21	09 33 016 2772	03.24	09 33 200 6119	16.22
09 33 000 9833	03.29	09 33 006 4635	08.13	09 33 016 2788	03.23	09 33 200 6122	16.22
09 33 000 9836	03.29	09 33 006 4636	08.13	09 33 016 2791	41.8	09 33 200 6123	16.22
09 33 000 9840	03.29	09 33 006 4639	08.21	09 33 016 4625	08.16	09 33 200 6215	16.22
09 33 000 9841	03.28	09 33 006 4725	08.12	09 33 016 4626	08.16	09 33 200 6216	16.22
09 33 000 9842	03.29	09 33 006 4726	08.12	09 33 016 4629	08.23	09 33 200 6217	16.22
09 33 000 9844	03.29	09 33 006 4729	08.21	09 33 016 4635	08.17	09 33 200 6218	16.22
09 33 000 9847	03.29	09 33 006 4735	08.13	09 33 016 4636	08.17	09 33 200 6221	16.22
09 33 000 9851	03.29	09 33 006 4736	08.13	09 33 016 4639	08.23	09 33 200 6222	16.22
09 33 000 9852	03.28	09 33 006 4739	08.21	09 33 016 4725	08.16	09 33 200 6223	16.22
09 33 000 9853	03.29	09 33 006 5401	11.11	09 33 016 4726	08.16		
09 33 000 9855	03.29			09 33 016 4729	08.23	09 33 206 2602	16.14
09 33 000 9858	03.29	09 33 010 0401	11.12	09 33 016 4735	08.17	09 33 206 2702	16.14
09 33 000 9862	03.29	09 33 010 2601	03.5	09 33 016 4736	08.17		
09 33 000 9908	80.26	09 33 010 2602	03.5	09 33 016 4739	08.23	09 33 210 2602	16.15
09 33 000 9909	80.26	09 33 010 2616	03.16	09 33 016 5401	11.13	09 33 210 2702	16.15

List of part numbers



Part number	Page	Part number	Page	Part number	Page	Part number	Page
09 33 216 2602	16.16	09 34 010 2701	04.8	09 38 005 2702	14.7	09 40 000 9980	80.10
09 33 216 2702	16.16	09 34 010 2702	04.6	09 38 005 2721	14.5		
		09 34 010 2702	04.8	09 38 005 2722	14.5	09 40 003 0301	31.125
09 33 224 2602	16.17	09 34 010 2716	04.15			09 40 003 0311	31.127
09 33 224 2702	16.17	09 34 010 2716	04.17	09 38 006 2601	05.18	09 40 003 0902	31.126
				09 38 006 2611	05.16	09 40 003 0902	31.130
09 33 800 6102	17.8	09 34 016 2601	04.10	09 38 006 2701	05.18	09 40 003 0950	31.128
09 33 800 6104	17.8	09 34 016 2601	04.11	09 38 006 2711	05.16	09 40 003 0951	31.128
09 33 800 6105	17.8	09 34 016 2701	04.10			09 40 003 0953	31.128
09 33 800 6114	17.8	09 34 016 2701	04.11	09 38 008 2601	05.9	09 40 003 5401	31.126
09 33 800 6121	17.8			09 38 008 2602	05.9	09 40 003 5402	31.126
09 33 800 6202	17.8	09 36 008 2632	02.5	09 38 008 2611	05.9	09 40 003 5406	80.37
09 33 800 6204	17.8	09 36 008 2732	02.5	09 38 008 2612	05.9	09 40 003 5411	31.129
09 33 800 6205	17.8	09 36 008 3001	02.5	09 38 008 2653	05.32	09 40 003 5412	31.129
09 33 800 6214	17.8	09 36 008 3101	02.5	09 38 008 2701	05.9		
09 33 800 6220	17.8			09 38 008 2702	05.9	09 40 006 0301	31.132
		09 37 000 9912	80.10	09 38 008 2753	05.32	09 40 006 0311	14.29
09 33 806 2603	17.4	09 37 000 9946	80.10			09 40 006 0311	31.134
09 33 806 2604	17.4	09 37 000 9947	80.10	09 38 012 2601	05.28	09 40 006 0314	14.52
09 33 806 2703	17.4	09 37 000 9948	80.10	09 38 012 2651	05.30	09 40 006 0317	31.135
09 33 806 2704	17.4	09 37 000 9949	80.10	09 38 012 2701	05.28	09 40 006 0811	31.134
				09 38 012 2751	05.30	09 40 006 5401	31.133
09 33 810 2603	17.5	09 37 003 0301	31.80			09 40 006 5404	31.132
09 33 810 2604	17.5	09 37 003 0305	31.81	09 38 018 2601	05.20	09 40 006 5406	80.37
09 33 810 2703	17.5	09 37 003 0801	31.81	09 38 018 2602	05.20	09 40 006 5411	31.136
09 33 810 2704	17.5	09 37 003 0811	31.81	09 38 018 2701	05.20	09 40 006 5414	31.136
		09 37 003 5401	31.82	09 38 018 2702	05.20		
09 33 816 2603	17.6	09 37 003 5402	31.82			09 40 010 0301	31.137
09 33 816 2604	17.6	09 37 003 5405	31.82	09 38 032 3001	05.11	09 40 010 0311	31.139
09 33 816 2703	17.6	09 37 003 5406	31.82	09 38 032 3101	05.11	09 40 010 0317	31.140
09 33 816 2704	17.6					09 40 010 0811	31.139
		09 37 006 0301	31.84	09 38 042 3001	05.22	09 40 010 5401	31.138
09 33 824 2603	17.7	09 37 006 0318	31.85	09 38 042 3101	05.22	09 40 010 5404	31.137
09 33 824 2604	17.7	09 37 006 5405	31.85			09 40 010 5406	80.37
09 33 824 2703	17.7	09 37 006 5405	31.85	09 38 087 3001	05.14	09 40 010 5411	31.141
09 33 824 2704	17.7	09 37 006 5407	31.85	09 38 087 3101	05.14	09 40 010 5414	31.141
		09 37 006 5407	31.85				
09 34 003 0301	04.20			09 40 000 9901	14.29	09 40 016 0301	31.142
09 34 003 2601	04.4	09 37 010 0301	31.86	09 40 000 9903	14.31	09 40 016 0311	14.31
09 34 003 2602	04.4	09 37 010 5403	31.87	09 40 000 9904	14.19	09 40 016 0311	31.144
09 34 003 2616	04.13	09 37 010 5403	31.87	09 40 000 9904	14.21	09 40 016 0317	31.144
09 34 003 2701	04.4	09 37 010 5405	31.87	09 40 000 9904	14.33	09 40 016 0368	14.18
09 34 003 2702	04.4	09 37 010 5405	31.87	09 40 000 9904	14.37	09 40 016 0811	31.144
09 34 003 2716	04.13			09 40 000 9904	14.40	09 40 016 1201	31.145
		09 37 016 0301	31.90	09 40 000 9904	14.43	09 40 016 5401	31.143
09 34 006 0301	04.21	09 37 016 5402	31.91	09 40 000 9910	80.11	09 40 016 5404	31.142
09 34 006 2601	04.5	09 37 016 5402	31.91	09 40 000 9911	80.11	09 40 016 5406	80.37
09 34 006 2601	04.7	09 37 016 5405	31.91	09 40 000 9912	80.11	09 40 016 5411	31.146
09 34 006 2602	04.5	09 37 016 5405	31.91	09 40 000 9913	80.11	09 40 016 5414	31.146
09 34 006 2602	04.7			09 40 000 9914	80.11		
09 34 006 2616	04.14	09 37 024 0301	31.93	09 40 000 9921	80.38	09 40 024 0301	31.147
09 34 006 2616	04.16	09 37 024 0381	31.95	09 40 000 9922	80.38	09 40 024 0311	14.54
09 34 006 2701	04.5	09 37 024 5402	31.94	09 40 000 9923	80.38	09 40 024 0311	14.9
09 34 006 2701	04.7	09 37 024 5402	31.94	09 40 000 9924	80.38	09 40 024 0311	14.15
09 34 006 2702	04.5	09 37 024 5405	31.94	09 40 000 9925	14.60	09 40 024 0311	14.33
09 34 006 2702	04.7	09 37 024 5405	31.94	09 40 000 9926	14.60	09 40 024 0311	14.37
09 34 006 2716	04.14			09 40 000 9929	80.35	09 40 024 0311	31.150
09 34 006 2716	04.16	09 37 048 0301	14.47	09 40 000 9931	80.34	09 40 024 0317	31.150
		09 37 048 0301	31.96	09 40 000 9932	80.35	09 40 024 0368	14.19
09 34 010 0301	04.22			09 40 000 9933	80.34	09 40 024 0368	14.21
09 34 010 2601	04.6	09 38 000 9901	80.38	09 40 000 9937	80.35	09 40 024 0368	14.40
09 34 010 2601	04.8			09 40 000 9955	14.54	09 40 024 0368	14.43
09 34 010 2602	04.6	09 38 005 2601	14.7	09 40 000 9955	14.16	09 40 024 0368	14.56
09 34 010 2602	04.8	09 38 005 2602	14.7	09 40 000 9955	14.56	09 40 024 0368	14.63
09 34 010 2616	04.15	09 38 005 2621	14.5	09 40 000 9955	14.63	09 40 024 0451	14.59
09 34 010 2616	04.17	09 38 005 2622	14.5	09 40 000 9956	14.18	09 40 024 0811	31.150
09 34 010 2701	04.6	09 38 005 2701	14.7	09 40 000 9965	14.72	09 40 024 0951	14.59

List of part numbers



Part number	Page	Part number	Page	Part number	Page	Part number	Page
09 40 024 5401	31.148	09 47 474 7009	06.85	09 62 806 0301	31.109	09 67 000 8476	06.90
09 40 024 5404	31.147	09 47 474 7010	06.85	09 62 806 0391	17.10	09 67 000 8476	06.101
09 40 024 5406	80.37	09 47 474 7011	06.85	09 62 806 0801	31.109	09 67 000 8476	06.75
09 40 024 5411	31.152	09 47 474 7012	06.85			09 67 000 8476	13.37
09 40 024 5414	31.152	09 47 474 7013	06.85	09 62 810 0301	31.112	09 67 000 8476	13.39
09 40 024 9903	14.60	09 47 474 7014	06.85	09 62 810 0305	31.113	09 67 000 8476	19.20
09 40 024 9904	14.60	09 47 474 7015	06.85	09 62 810 0391	17.11	09 67 000 8570	16.24
09 40 024 9911	14.61	09 47 474 7016	06.85	09 62 810 0801	31.111	09 67 000 8576	05.14
09 40 024 9912	14.61	09 47 474 7017	06.85	09 62 810 0901	31.78	09 67 000 8576	06.72
09 40 024 9913	14.61	09 47 474 7018	06.85	09 62 810 0974	31.78	09 67 000 8576	06.88
09 40 024 9914	14.61	09 47 474 7019	06.85			09 67 000 8576	06.90
09 40 024 9921	14.61	09 47 474 7020	06.85	09 62 816 0301	31.115	09 67 000 8576	06.101
09 40 024 9922	14.62	09 47 474 7021	06.85	09 62 816 0391	17.12	09 67 000 8576	06.75
09 40 024 9931	06.136	09 47 474 7022	06.85	09 62 816 0801	31.114	09 67 000 8576	13.37
09 40 024 9931	14.62	09 47 474 7023	06.85			09 67 000 8576	13.39
09 40 024 9932	06.137	09 47 474 7024	06.85	09 62 824 0301	31.117	09 67 000 8576	19.20
09 40 024 9932	14.62	09 47 474 7025	06.85	09 62 824 0391	17.13		
		09 47 474 7026	06.85	09 62 824 0801	31.116	09 69 181 5140	06.109
09 40 048 0311	14.69	09 47 474 7027	06.85	09 62 824 5425	31.117	09 69 181 5141	06.109
09 40 048 0331	14.69	09 47 474 7028	06.85	09 62 824 5425	31.117	09 69 181 5143	06.109
09 40 048 0451	14.69	09 47 474 7029	06.85			09 69 181 5230	06.110
09 40 048 0951	14.70	09 47 474 7035	06.85	09 67 000 5470	16.24		
09 40 048 5401	14.70	09 47 474 7101	06.86	09 67 000 5476	05.14	09 69 182 5140	06.109
09 40 048 9801	14.70	09 47 474 7102	06.86	09 67 000 5476	06.72	09 69 182 5230	06.109
09 40 048 9803	14.70	09 47 474 7103	06.86	09 67 000 5476	06.88		
09 40 048 9806	14.73	09 47 474 7104	06.86	09 67 000 5476	06.90	09 69 281 5140	06.109
09 40 048 9809	14.73	09 47 474 7105	06.86	09 67 000 5476	06.101	09 69 281 5141	06.109
09 40 048 9810	14.73	09 47 474 7106	06.86	09 67 000 5476	06.75	09 69 281 5143	06.109
09 40 048 9811	14.73	09 47 474 7107	06.86	09 67 000 5476	13.37	09 69 281 5230	06.110
09 40 048 9860	14.73	09 47 474 7108	06.86	09 67 000 5476	13.39		
09 40 048 9906	14.73	09 47 474 7109	06.86	09 67 000 5476	19.20	09 69 282 5140	06.109
09 40 048 9909	14.73	09 47 474 7110	06.86	09 67 000 5570	16.24	09 69 282 5230	06.109
09 40 048 9910	14.73	09 47 474 7111	06.86	09 67 000 5576	05.14		
09 40 048 9911	14.73	09 47 474 7112	06.86	09 67 000 5576	06.72	09 70 000 9902	80.35
09 40 048 9912	14.74	09 47 474 7113	06.86	09 67 000 5576	06.88	09 70 000 9905	80.35
09 40 048 9912	14.74	09 47 474 7114	06.86	09 67 000 5576	06.90	09 70 000 9991	80.11
09 40 048 9960	14.73	09 47 474 7115	06.86	09 67 000 5576	06.101		
		09 47 474 7116	06.86	09 67 000 5576	06.75	09 70 006 2615	09.3
09 40 703 0301	31.119	09 47 474 7117	06.86	09 67 000 5576	13.37	09 70 006 2616	09.3
09 40 703 0311	31.121	09 47 474 7118	06.86	09 67 000 5576	13.39	09 70 006 2812	09.3
09 40 703 0902	31.120	09 47 474 7119	06.86	09 67 000 5576	19.20	09 70 006 2813	09.3
09 40 703 0902	31.124	09 47 474 7120	06.86	09 67 000 7176	13.37		
09 40 703 0950	31.122	09 47 474 7121	06.86	09 67 000 7276	13.37	09 70 014 2613	09.4
09 40 703 0951	31.122	09 47 474 7122	06.86	09 67 000 7470	16.24	09 70 014 2614	09.4
09 40 703 0953	31.122	09 47 474 7123	06.86	09 67 000 7476	05.14	09 70 014 2810	09.4
09 40 703 5401	31.120	09 47 474 7124	06.86	09 67 000 7476	06.72	09 70 014 2811	09.4
09 40 703 5402	31.120	09 47 474 7125	06.86	09 67 000 7476	06.88		
09 40 703 5411	31.123	09 47 474 7126	06.86	09 67 000 7476	06.90	09 70 020 2621	09.5
09 40 703 5412	31.123	09 47 474 7199	06.86	09 67 000 7476	06.101	09 70 020 2621	09.6
				09 67 000 7476	06.75	09 70 020 2622	09.5
09 42 020 0111	08.10	09 62 003 0301	31.98	09 67 000 7476	13.37	09 70 020 2622	09.6
09 42 020 0121	08.10	09 62 003 0304	20.28	09 67 000 7476	19.20	09 70 020 2816	09.5
09 42 020 0131	08.10	09 62 003 0304	31.99	09 67 000 7570	16.24	09 70 020 2816	09.6
		09 62 003 0801	31.99	09 67 000 7576	05.14	09 70 020 2817	09.5
09 45 400 1100	06.82	09 62 003 0810	31.99	09 67 000 7576	06.72	09 70 020 2817	09.6
09 45 400 1109	06.82			09 67 000 7576	06.88		
09 45 400 1520	06.82	09 62 006 0301	31.104	09 67 000 7576	06.90	09 80 015 0100	06.121
09 45 400 1560	06.83			09 67 000 7576	06.101		
		09 62 010 0301	31.105	09 67 000 7576	06.75	09 80 113 0400	06.122
09 47 474 7001	06.85			09 67 000 7576	13.37	09 80 113 0400	06.122
09 47 474 7002	06.85	09 62 015 0301	31.102	09 67 000 7576	19.20		
09 47 474 7003	06.85			09 67 000 8176	13.37	09 80 115 0200	06.121
09 47 474 7004	06.85	09 62 025 0301	31.103	09 67 000 8276	13.37		
09 47 474 7005	06.85			09 67 000 8470	16.24	09 98 000 3008	90.23
09 47 474 7006	06.85	09 62 040 0301	31.106	09 67 000 8476	05.14	09 98 000 3009	90.23
09 47 474 7007	06.85			09 67 000 8476	06.72	09 98 000 5000	90.23
09 47 474 7008	06.85	09 62 064 0301	31.107	09 67 000 8476	06.88	09 98 000 6900	90.19

List of part numbers



Part number	Page	Part number	Page	Part number	Page	Part number	Page
09 98 000 6901	90.19	09 99 000 0827	90.30	11 00 200 0101	25.21	11 05 000 6201	25.24
09 98 000 6902	90.19	09 99 000 0828	90.30	11 00 200 0301	25.21	11 05 000 6201	25.25
09 98 000 8000	90.21	09 99 000 0829	80.39			11 05 000 6202	25.24
09 98 000 8101	90.21	09 99 000 0830	90.15	11 00 300 0101	25.22	11 05 000 6202	25.25
09 98 000 8102	90.21	09 99 000 0831	90.14	11 00 300 0301	25.21	11 05 000 6203	25.24
09 98 000 8103	90.21	09 99 000 0833	90.25	11 00 300 9501	25.44	11 05 000 6203	25.25
09 98 000 8104	90.21	09 99 000 0834	90.25	11 00 300 9502	25.44	11 05 000 6204	25.24
09 98 000 8107	90.21	09 99 000 0835	90.25	11 00 300 9503	25.44	11 05 000 6204	25.25
09 98 000 9001	90.17	09 99 000 0836	90.27	11 00 300 9601	25.43	11 05 000 6205	25.24
09 98 000 9002	90.17	09 99 000 0837	90.30	11 00 300 9603	25.43	11 05 000 6205	25.25
09 98 000 9003	90.17	09 99 000 0840	90.26			11 05 000 6206	25.24
		09 99 000 0841	90.26	11 00 600 0101	25.22	11 05 000 6206	25.25
09 98 300 8103	90.21	09 99 000 0842	90.30	11 00 600 0301	25.21	11 05 000 6207	25.24
		09 99 000 0843	90.30	11 00 600 9501	25.44	11 05 000 6207	25.25
09 98 336 6851	90.17	09 99 000 0844	90.27	11 00 600 9502	25.45	11 05 000 6208	25.24
		09 99 000 0845	90.7	11 00 600 9503	25.44	11 05 000 6208	25.25
09 99 000 0004	90.29	09 99 000 0847	90.26	11 00 600 9601	25.43	11 05 000 6221	25.24
09 99 000 0012	90.29	09 99 000 0848	90.26	11 00 600 9603	25.43	11 05 000 6221	25.25
09 99 000 0021	90.6	09 99 000 0850	90.11			11 05 000 6222	25.24
09 99 000 0022	90.6	09 99 000 0851	90.11	11 05 000 6101	25.14	11 05 000 6222	25.25
09 99 000 0052	90.29	09 99 000 0852	90.11	11 05 000 6101	25.24	11 05 000 6223	25.24
09 99 000 0110	90.5	09 99 000 0853	90.11	11 05 000 6101	25.25	11 05 000 6223	25.25
09 99 000 0159	90.32	09 99 000 0854	90.11	11 05 000 6102	25.14	11 05 000 6224	25.24
09 99 000 0169	90.10	09 99 000 0855	90.11	11 05 000 6102	25.24	11 05 000 6224	25.25
09 99 000 0175	90.10	09 99 000 0856	90.11	11 05 000 6102	25.25	11 05 000 6225	25.24
09 99 000 0194	90.15	09 99 000 0857	90.11	11 05 000 6103	25.14	11 05 000 6225	25.25
09 99 000 0303	90.7	09 99 000 0860	90.12	11 05 000 6103	25.24	11 05 000 6226	25.24
09 99 000 0304	90.7	09 99 000 0861	90.12	11 05 000 6103	25.25	11 05 000 6226	25.25
09 99 000 0305	90.29	09 99 000 0862	90.12	11 05 000 6104	25.14	11 05 000 6227	25.24
09 99 000 0306	90.7	09 99 000 0863	90.12	11 05 000 6104	25.24	11 05 000 6227	25.25
09 99 000 0319	90.29	09 99 000 0864	90.12	11 05 000 6104	25.25	11 05 000 6228	25.24
09 99 000 0323	90.29	09 99 000 0865	90.12	11 05 000 6105	25.14	11 05 000 6228	25.25
09 99 000 0327	90.30	09 99 000 0866	90.12	11 05 000 6105	25.24		
09 99 000 0328	90.29	09 99 000 0867	90.12	11 05 000 6105	25.25	11 05 001 2601	25.47
09 99 000 0331	90.30	09 99 000 0868	90.12	11 05 000 6106	25.14	11 05 001 2601	25.47
09 99 000 0332	90.31	09 99 000 0869	90.12	11 05 000 6106	25.24		
09 99 000 0334	90.31	09 99 000 0870	90.12	11 05 000 6106	25.25	11 05 105 2633	25.12
09 99 000 0335	90.30	09 99 000 0871	90.12	11 05 000 6107	25.14	11 05 105 2634	25.12
09 99 000 0341	90.5	09 99 000 0872	90.12	11 05 000 6107	25.24	11 05 105 2801	25.18
09 99 000 0343	90.6	09 99 000 0876	90.14	11 05 000 6107	25.25	11 05 105 2802	25.18
09 99 000 0344	90.9	09 99 000 0877	90.14	11 05 000 6108	25.14	11 05 105 2803	25.18
09 99 000 0363	90.26	09 99 000 0881	90.14	11 05 000 6108	25.24	11 05 105 2804	25.19
09 99 000 0364	90.26	09 99 000 0887	90.4	11 05 000 6108	25.25	11 05 105 2805	25.19
09 99 000 0367	90.26	09 99 000 0888	90.4	11 05 000 6121	25.14	11 05 105 2815	25.19
09 99 000 0368	90.29	09 99 000 0889	90.4	11 05 000 6121	25.24	11 05 105 2823	25.19
09 99 000 0369	90.26	09 99 000 0900	90.24	11 05 000 6121	25.25	11 05 105 3001	25.14
09 99 000 0370	90.27	09 99 000 0901	90.24	11 05 000 6122	25.14	11 05 105 3011	25.14
09 99 000 0371	90.27	09 99 000 0902	90.24	11 05 000 6122	25.24	11 05 105 3012	25.14
09 99 000 0372	90.27	09 99 000 0903	90.24	11 05 000 6122	25.25		
09 99 000 0374	90.15	09 99 000 0904	90.24	11 05 000 6123	25.14	11 05 325 3001	25.24
09 99 000 0375	90.27	09 99 000 0905	90.24	11 05 000 6123	25.24	11 05 325 3101	25.24
09 99 000 0376	90.5	09 99 000 0906	90.24	11 05 000 6123	25.25		
09 99 000 0377	90.8	09 99 000 0907	90.24	11 05 000 6124	25.14	11 05 648 3001	25.25
09 99 000 0381	90.29	09 99 000 0908	90.24	11 05 000 6124	25.24	11 05 648 3101	25.25
09 99 000 0383	90.30	09 99 000 0909	90.24	11 05 000 6124	25.25		
09 99 000 0501	90.10	09 99 000 0910	90.24	11 05 000 6125	25.14	11 12 300 0100	25.33
09 99 000 0503	90.15	09 99 000 0912	90.24	11 05 000 6125	25.24	11 12 300 0110	25.33
09 99 000 0508	90.15	09 99 000 0914	90.24	11 05 000 6125	25.25	11 12 300 0301	25.30
09 99 000 0531	90.10	09 99 000 0915	90.24	11 05 000 6126	25.14	11 12 300 0302	25.30
09 99 000 0808	90.32			11 05 000 6126	25.24	11 12 300 1200	25.30
09 99 000 0810	90.9	11 00 000 9501	25.45	11 05 000 6126	25.25	11 12 300 1201	25.30
09 99 000 0811	90.9	11 00 000 9509	25.47	11 05 000 6127	25.14	11 12 300 1202	25.30
09 99 000 0812	90.9	11 00 000 9510	25.47	11 05 000 6127	25.24	11 12 300 1204	25.30
09 99 000 0813	90.9	11 00 000 9511	25.46	11 05 000 6127	25.25	11 12 300 1205	25.30
09 99 000 0814	90.9	11 00 000 9512	25.46	11 05 000 6128	25.14	11 12 300 1206	25.30
09 99 000 0820	90.30	11 00 000 9601	25.46	11 05 000 6128	25.24	11 12 300 1210	25.31
09 99 000 0826	90.31			11 05 000 6128	25.25	11 12 300 1211	25.31

List of part numbers



Part number	Page	Part number	Page	Part number	Page	Part number	Page
11 12 300 1212	25.31	11 20 003 0800	25.27	19 00 000 5184	80.16	19 20 003 0433	19.31
11 12 300 1214	25.31	11 20 003 1400	25.27	19 00 000 5185	80.16	19 20 003 0436	19.31
11 12 300 1215	25.31	11 20 003 1401	25.27	19 00 000 5186	80.16	19 20 003 0437	31.11
11 12 300 1216	25.31	11 20 003 1600	25.27	19 00 000 5187	80.16	19 20 003 0620	31.11
11 12 300 1400	25.32	11 20 003 1601	25.27	19 00 000 5188	80.16	19 20 003 0623	19.32
11 12 300 1401	25.32	11 20 003 5406	25.28	19 00 000 5189	80.16	19 20 003 0626	19.32
11 12 300 1402	25.32	11 20 003 5407	25.28	19 00 000 5190	80.16	19 20 003 0627	31.11
11 12 300 1500	25.32	11 20 003 5456	25.28	19 00 000 5191	80.16	19 20 003 0720	31.13
11 12 300 1501	25.32	11 20 003 9903	25.45	19 00 000 5192	80.16	19 20 003 0727	31.13
11 12 300 1502	25.32	11 20 003 9904	25.44	19 00 000 5193	80.16	19 20 003 1120	31.8
11 12 300 1510	25.32	11 20 003 9905	25.44	19 00 000 5194	80.16	19 20 003 1150	31.5
11 12 300 1581	25.32			19 00 000 5196	80.16	19 20 003 1250	31.7
11 12 300 1600	25.32	11 30 000 9955	31.75	19 00 000 5197	80.16	19 20 003 1252	31.7
11 12 300 1601	25.32	11 30 000 9956	31.75	19 00 000 5198	80.16	19 20 003 1421	31.5
11 12 300 1602	25.32	11 30 000 9957	31.75	19 00 000 7101	80.16	19 20 003 1422	31.5
11 12 300 1702	25.31	11 30 000 9958	31.75	19 00 000 7102	80.16	19 20 003 1423	19.29
11 12 300 5201	25.45	11 30 000 9959	31.75	19 00 000 7104	80.16	19 20 003 1425	19.29
11 12 300 5202	25.45	11 30 000 9961	31.75	19 00 000 7106	80.16	19 20 003 1440	31.5
11 12 300 5401	25.31	11 30 000 9962	31.75	19 00 000 7109	80.16	19 20 003 1443	19.29
11 12 300 5451	25.33					19 20 003 1445	31.5
		11 30 016 0520	31.73	19 12 000 5057	13.52	19 20 003 1640	31.5
11 12 600 0100	25.39	11 30 016 5422	31.73	19 12 000 5058	13.52	19 20 003 1643	19.29
11 12 600 0110	25.40			19 12 000 5156	13.51	19 20 003 1750	31.8
11 12 600 0301	25.37	11 30 024 0520	31.74	19 12 000 5157	13.51	19 20 003 1755	31.8
11 12 600 0302	25.37	11 30 024 5422	31.74	19 12 000 5158	13.51		
11 12 600 1201	25.37					19 20 010 0251	31.18
11 12 600 1202	25.37	11 99 000 0001	90.31	19 12 008 0411	13.47	19 20 010 0290	31.18
11 12 600 1203	25.37	11 99 000 0002	90.31	19 12 008 0412	13.49	19 20 010 0295	31.18
11 12 600 1205	25.37			19 12 008 0425	13.41	19 20 010 0446	31.17
11 12 600 1206	25.37	11 99 300 0001	90.24	19 12 008 0426	13.45	19 20 010 0546	31.17
11 12 600 1207	25.37			19 12 008 0428	13.49	19 20 010 1440	31.17
11 12 600 1211	25.37	11 99 600 0001	90.24	19 12 008 0429	13.41	19 20 010 1540	31.17
11 12 600 1212	25.37			19 12 008 0501	13.47	19 20 010 1730	31.18
11 12 600 1213	25.37	19 00 000 5013	14.67	19 12 008 0502	13.49		
11 12 600 1215	25.37	19 00 000 5014	14.67	19 12 008 0511	13.47	19 20 016 0251	31.21
11 12 600 1216	25.37	19 00 000 5015	14.67	19 12 008 0512	13.49	19 20 016 0290	31.21
11 12 600 1217	25.37	19 00 000 5019	14.67	19 12 008 0526	13.45	19 20 016 0291	31.21
11 12 600 1401	25.39	19 00 000 5022	14.67	19 12 008 0528	13.50	19 20 016 0295	31.21
11 12 600 1402	25.39	19 00 000 5060	80.19	19 12 008 0729	13.42	19 20 016 0446	31.20
11 12 600 1403	25.39	19 00 000 5066	80.19			19 20 016 0546	31.20
11 12 600 1411	25.39	19 00 000 5067	80.19	19 12 708 0411	13.45	19 20 016 1440	31.20
11 12 600 1415	25.39	19 00 000 5068	80.19	19 12 708 0501	13.45	19 20 016 1540	31.20
11 12 600 1501	25.39	19 00 000 5069	80.19	19 12 708 0511	13.46		
11 12 600 1502	25.39	19 00 000 5070	80.20			19 20 032 0226	31.26
11 12 600 1503	25.39	19 00 000 5071	80.20	19 14 001 0401	06.124	19 20 032 0231	31.23
11 12 600 1711	25.38	19 00 000 5072	80.20	19 14 001 0402	06.124	19 20 032 0232	31.23
11 12 600 5201	25.45	19 00 000 5073	80.20	19 14 001 0501	06.124	19 20 032 0272	31.23
11 12 600 5401	25.38	19 00 000 5080	80.17			19 20 032 0426	31.23
11 12 600 5451	25.40	19 00 000 5081	80.17	19 14 002 0400	06.128	19 20 032 0427	31.23
		19 00 000 5082	80.17	19 14 002 0401	06.128	19 20 032 0437	31.25
11 13 300 0100	25.35	19 00 000 5084	80.17	19 14 002 0402	06.128	19 20 032 0527	31.23
11 13 300 0110	25.35	19 00 000 5086	80.17	19 14 002 0501	06.128	19 20 032 0537	31.25
11 13 300 0301	25.34	19 00 000 5090	80.17	19 14 002 0952	06.128	19 20 032 1521	31.23
11 13 300 0302	25.34	19 00 000 5091	80.17			19 20 032 1531	31.25
11 13 300 1401	25.35	19 00 000 5092	80.17	19 20 000 9962	80.19		
11 13 300 1501	25.35	19 00 000 5094	80.17			19 30 006 0291	31.30
11 13 300 1601	25.35	19 00 000 5095	80.17	19 20 003 0220	31.12	19 30 006 0292	31.30
		19 00 000 5096	80.17	19 20 003 0227	31.12	19 30 006 0296	31.31
11 13 600 0100	25.42	19 00 000 5097	80.17	19 20 003 0410	31.11	19 30 006 0297	31.31
11 13 600 0110	25.42	19 00 000 5098	80.17	19 20 003 0413	19.31	19 30 006 0446	31.28
11 13 600 0301	25.41	19 00 000 5099	80.17	19 20 003 0415	31.11	19 30 006 0447	31.28
11 13 600 0302	25.41	19 00 000 5172	80.19	19 20 003 0418	19.31	19 30 006 0546	31.28
11 13 600 1402	25.42	19 00 000 5173	80.19	19 20 003 0420	31.11	19 30 006 0547	31.28
11 13 600 1403	25.42	19 00 000 5180	80.16	19 20 003 0423	19.31	19 30 006 0586	31.33
11 13 600 1502	25.42	19 00 000 5181	80.16	19 20 003 0426	19.31	19 30 006 0587	31.33
		19 00 000 5182	80.16	19 20 003 0427	31.11	19 30 006 0716	31.32
11 20 003 0300	25.27	19 00 000 5183	80.16	19 20 003 0430	31.11	19 30 006 0756	31.31

List of part numbers



Part number	Page	Part number	Page	Part number	Page	Part number	Page
19 30 006 0757	31.31	19 30 016 0282	31.56	19 30 024 0467	31.57	19 30 210 1541	16.26
19 30 006 1250	31.30	19 30 016 0291	31.54	19 30 024 0487	31.67	19 30 210 1750	16.27
19 30 006 1255	31.31	19 30 016 0292	31.54	19 30 024 0523	31.58		
19 30 006 1290	31.30	19 30 016 0297	31.54	19 30 024 0527	31.58	19 30 216 0252	16.29
19 30 006 1295	31.31	19 30 016 0427	31.46	19 30 024 0528	31.58	19 30 216 0291	16.29
19 30 006 1440	31.28	19 30 016 0428	31.46	19 30 024 0529	31.57	19 30 216 0292	16.29
19 30 006 1540	31.28	19 30 016 0437	31.50	19 30 024 0537	31.61	19 30 216 0447	16.28
19 30 006 1541	31.28	19 30 016 0438	31.50	19 30 024 0538	31.61	19 30 216 0448	16.28
19 30 006 1750	31.31	19 30 016 0447	31.52	19 30 024 0547	31.63	19 30 216 0547	16.28
19 30 006 2255	31.31	19 30 016 0448	31.52	19 30 024 0548	31.63	19 30 216 0548	16.28
19 30 006 2295	31.31	19 30 016 0466	31.46	19 30 024 0586	31.67	19 30 216 0757	16.29
19 30 006 7296	31.31	19 30 016 0487	31.56	19 30 024 0587	31.67	19 30 216 1251	16.29
19 30 006 7297	31.31	19 30 016 0523	31.46	19 30 024 0588	31.67	19 30 216 1291	16.29
		19 30 016 0527	31.47	19 30 024 0666	31.58	19 30 216 1441	16.28
19 30 010 0231	31.35	19 30 016 0528	31.47	19 30 024 0737	31.59	19 30 216 1442	16.28
19 30 010 0266	31.38	19 30 016 0529	31.46	19 30 024 0738	31.59	19 30 216 1541	16.28
19 30 010 0271	31.35	19 30 016 0537	31.50	19 30 024 0757	31.66	19 30 216 1542	16.28
19 30 010 0272	31.35	19 30 016 0538	31.50	19 30 024 1226	31.62	19 30 216 1751	16.29
19 30 010 0291	31.42	19 30 016 0547	31.52	19 30 024 1231	31.59	19 30 216 1752	16.29
19 30 010 0292	31.42	19 30 016 0548	31.52	19 30 024 1251	31.65		
19 30 010 0296	31.43	19 30 016 0586	31.56	19 30 024 1256	31.65	19 30 224 0292	16.31
19 30 010 0297	31.43	19 30 016 0587	31.56	19 30 024 1266	31.62	19 30 224 0447	16.30
19 30 010 0427	31.34	19 30 016 0666	31.47	19 30 024 1271	31.59	19 30 224 0448	16.30
19 30 010 0428	31.34	19 30 016 0736	31.48	19 30 024 1291	31.65	19 30 224 0547	16.30
19 30 010 0436	31.37	19 30 016 0737	31.48	19 30 024 1296	31.65	19 30 224 0548	16.30
19 30 010 0447	31.40	19 30 016 0757	31.55	19 30 024 1422	31.57	19 30 224 0757	16.31
19 30 010 0448	31.40	19 30 016 1226	31.51	19 30 024 1432	31.61	19 30 224 1251	16.31
19 30 010 0465	31.34	19 30 016 1231	31.48	19 30 024 1442	31.63	19 30 224 1291	16.31
19 30 010 0527	31.34	19 30 016 1251	31.54	19 30 024 1521	31.58	19 30 224 1442	16.30
19 30 010 0537	31.37	19 30 016 1256	31.54	19 30 024 1522	31.58	19 30 224 1541	16.30
19 30 010 0547	31.40	19 30 016 1266	31.51	19 30 024 1531	31.61	19 30 224 1542	16.30
19 30 010 0586	31.45	19 30 016 1271	31.48	19 30 024 1541	31.63	19 30 224 1752	16.31
19 30 010 0736	31.36	19 30 016 1291	31.54	19 30 024 1542	31.63		
19 30 010 0737	31.36	19 30 016 1296	31.54	19 30 024 1732	31.59	19 34 003 0270	04.20
19 30 010 0756	31.43	19 30 016 1421	31.46	19 30 024 1752	31.66	19 34 003 0420	04.20
19 30 010 0757	31.43	19 30 016 1422	31.46	19 30 024 2296	31.65	19 34 003 0421	04.20
19 30 010 1225	31.38	19 30 016 1431	31.50	19 30 024 7297	31.65	19 34 003 0520	04.20
19 30 010 1230	31.35	19 30 016 1432	31.50			19 34 003 0730	04.20
19 30 010 1231	31.35	19 30 016 1441	31.52	19 30 032 0232	31.68	19 34 003 0731	04.20
19 30 010 1250	31.42	19 30 016 1442	31.52	19 30 032 0272	31.68		
19 30 010 1255	31.43	19 30 016 1521	31.47	19 30 032 0273	31.68	19 34 006 0271	04.21
19 30 010 1265	31.38	19 30 016 1522	31.47	19 30 032 0427	31.68	19 34 006 0421	04.21
19 30 010 1270	31.35	19 30 016 1531	31.50	19 30 032 0428	31.68	19 34 006 0521	04.21
19 30 010 1290	31.42	19 30 016 1541	31.52	19 30 032 0429	31.68	19 34 006 0731	04.21
19 30 010 1295	31.43	19 30 016 1542	31.52	19 30 032 0527	31.68	19 34 006 0732	04.21
19 30 010 1420	31.34	19 30 016 1731	31.48	19 30 032 0528	31.68		
19 30 010 1421	31.34	19 30 016 1732	31.48	19 30 032 0529	31.68	19 34 010 0271	04.22
19 30 010 1430	31.37	19 30 016 1751	31.55	19 30 032 0738	31.69	19 34 010 0422	04.22
19 30 010 1440	31.40	19 30 016 1752	31.55			19 34 010 0521	04.22
19 30 010 1441	31.40	19 30 016 2296	31.55	19 30 048 0292	31.71	19 34 010 0732	04.22
19 30 010 1520	31.34	19 30 016 7297	31.55	19 30 048 0293	31.71		
19 30 010 1521	31.34			19 30 048 0298	31.71	19 36 000 5134	14.42
19 30 010 1530	31.37	19 30 024 0232	31.59	19 30 048 0448	31.70	19 36 000 5134	14.30
19 30 010 1540	31.40	19 30 024 0267	31.62	19 30 048 0449	31.70	19 36 000 5134	14.32
19 30 010 1541	31.40	19 30 024 0272	31.59	19 30 048 0548	31.70	19 36 000 5134	14.36
19 30 010 1730	31.36	19 30 024 0273	31.59	19 30 048 0549	31.70	19 36 000 5134	14.38
19 30 010 1750	31.43	19 30 024 0282	31.67			19 36 000 5135	14.39
19 30 010 2295	31.43	19 30 024 0292	31.65	19 30 210 0291	16.27	19 36 000 5135	14.55
19 30 010 7296	31.43	19 30 024 0297	31.65	19 30 210 0292	16.27	19 36 000 5135	14.30
19 30 010 7297	31.43	19 30 024 0427	31.57	19 30 210 0447	16.26	19 36 000 5135	14.34
		19 30 024 0428	31.57	19 30 210 0547	16.26	19 36 000 5135	14.36
19 30 016 0232	31.48	19 30 024 0429	31.57	19 30 210 0756	16.27	19 36 000 5135	14.57
19 30 016 0252	31.54	19 30 024 0437	31.61	19 30 210 1250	16.27		
19 30 016 0267	31.51	19 30 024 0438	31.61	19 30 210 1290	16.27	19 37 003 1150	31.80
19 30 016 0271	31.48	19 30 024 0447	31.63	19 30 210 1440	16.26	19 37 003 1250	31.81
19 30 016 0272	31.48	19 30 024 0448	31.63	19 30 210 1441	16.26	19 37 003 1440	31.80
19 30 016 0273	31.48	19 30 024 0457	31.63	19 30 210 1540	16.26	19 37 003 1443	19.34

List of part numbers



Part number	Page	Part number	Page	Part number	Page	Part number	Page
19 37 003 1445	31.80	19 40 003 0900	31.126	19 40 016 1134	31.146	19 40 024 1242	14.15
19 37 003 1640	31.80	19 40 003 0900	31.130	19 40 016 1261	31.145	19 40 024 1242	31.151
19 37 003 1643	19.34	19 40 003 0950	31.128	19 40 016 1262	31.145	19 40 024 1263	31.151
19 37 003 1750	31.82	19 40 003 0951	31.129	19 40 016 1263	31.145	19 40 024 1271	14.10
19 37 003 1755	31.82	19 40 003 0953	31.129	19 40 016 1273	31.145	19 40 024 1271	31.151
						19 40 024 1273	31.151
19 37 006 0296	31.85	19 40 006 0401	31.132	19 40 024 0402	31.147	19 40 024 1274	31.151
19 37 006 0445	31.84	19 40 006 0410	31.134	19 40 024 0410	31.147	19 40 024 9901	14.59
19 37 006 0446	31.84	19 40 006 0411	14.29	19 40 024 0412	31.149	19 40 024 9902	14.59
19 37 006 0447	31.84	19 40 006 0411	31.134	19 40 024 0413	31.149	19 40 024 9903	14.59
19 37 006 0545	31.84	19 40 006 0412	14.29	19 40 024 0414	31.149		
19 37 006 0546	31.84	19 40 006 0412	31.134	19 40 024 0419	31.149	19 40 048 9801	14.70
19 37 006 1290	31.85	19 40 006 0413	31.134	19 40 024 0420	14.9	19 40 048 9812	14.71
19 37 006 1440	31.84	19 40 006 0418	14.52	19 40 024 0420	31.149	19 40 048 9820	14.71
19 37 006 1540	31.84	19 40 006 0418	31.134	19 40 024 0431	31.149	19 40 048 9822	14.71
		19 40 006 0501	31.132	19 40 024 0432	14.33	19 40 048 9860	14.71
19 37 010 0272	31.87	19 40 006 0510	31.134	19 40 024 0432	31.149	19 40 048 9901	14.70
19 37 010 0296	31.88	19 40 006 0511	31.134	19 40 024 0433	31.149		
19 37 010 0426	31.86	19 40 006 0512	31.134	19 40 024 0438	14.53	19 40 703 0400	19.40
19 37 010 0427	31.86	19 40 006 0513	31.134	19 40 024 0438	31.149	19 40 703 0400	31.119
19 37 010 0447	31.89	19 40 006 0911	14.29	19 40 024 0461	14.9	19 40 703 0401	19.40
19 37 010 0465	31.86	19 40 006 0911	31.135	19 40 024 0461	14.35	19 40 703 0401	31.119
19 37 010 0526	31.86	19 40 006 1112	31.136	19 40 024 0461	31.149	19 40 703 0410	19.41
19 37 010 0527	31.86	19 40 006 1113	31.136	19 40 024 0467	14.35	19 40 703 0410	31.121
19 37 010 0528	31.86	19 40 006 1117	31.136	19 40 024 0467	31.149	19 40 703 0411	19.41
19 37 010 1270	31.87	19 40 006 1118	31.136	19 40 024 0468	14.39	19 40 703 0411	31.121
19 37 010 1420	31.86	19 40 006 1212	31.135	19 40 024 0468	14.55	19 40 703 0900	31.120
19 37 010 1520	31.86	19 40 006 1213	31.135	19 40 024 0468	14.19	19 40 703 0900	31.124
		19 40 006 1260	31.135	19 40 024 0471	14.9	19 40 703 0950	31.122
19 37 016 0272	31.91	19 40 006 1261	31.135	19 40 024 0471	31.149	19 40 703 0951	31.123
19 37 016 0273	31.91	19 40 006 1262	31.135	19 40 024 0473	14.14	19 40 703 0953	31.123
19 37 016 0282	31.92			19 40 024 0473	31.149		
19 37 016 0427	31.90	19 40 010 0401	31.137	19 40 024 0474	14.14	19 41 000 5111	29.45
19 37 016 0487	31.92	19 40 010 0411	31.139	19 40 024 0474	31.149	19 41 000 5121	29.45
19 37 016 0527	31.90	19 40 010 0412	31.139	19 40 024 0477	31.149	19 41 000 5131	29.45
19 37 016 0528	31.90	19 40 010 0413	31.139	19 40 024 0478	14.42	19 41 000 5132	29.46
19 37 016 0587	31.92	19 40 010 0430	31.139	19 40 024 0478	14.21	19 41 000 5141	29.45
19 37 016 1231	31.91	19 40 010 0501	31.137	19 40 024 0503	31.147	19 41 000 5142	29.46
19 37 016 1421	31.90	19 40 010 0511	31.139	19 40 024 0512	31.150	19 41 000 9801	29.47
19 37 016 1521	31.90	19 40 010 0512	31.139	19 40 024 0513	31.150	19 41 000 9802	29.47
		19 40 010 0513	31.139	19 40 024 0514	31.150	19 41 000 9803	29.47
19 37 024 0272	31.94	19 40 010 1113	31.140	19 40 024 0537	31.150	19 41 000 9804	29.47
19 37 024 0282	31.95	19 40 010 1118	31.140	19 40 024 0631	14.9	19 41 000 9901	29.47
19 37 024 0427	31.93	19 40 010 1260	31.140	19 40 024 0631	31.150	19 41 000 9902	29.47
19 37 024 0428	31.93	19 40 010 1262	31.140	19 40 024 0914	14.10	19 41 000 9903	29.47
19 37 024 0487	31.95	19 40 010 1263	31.140	19 40 024 0914	31.151	19 41 000 9904	29.47
19 37 024 0527	31.93	19 40 010 1271	31.140	19 40 024 0925	31.151		
19 37 024 0528	31.93	19 40 010 1272	31.140	19 40 024 0931	14.10	19 41 001 2600	29.44
19 37 024 0587	31.95			19 40 024 0931	14.37	19 41 001 2700	29.44
19 37 024 0733	31.94	19 40 016 0402	31.142	19 40 024 0931	31.151		
19 37 024 1421	31.93	19 40 016 0411	31.144	19 40 024 0941	14.15	19 41 006 0301	29.16
19 37 024 1521	31.93	19 40 016 0412	31.144	19 40 024 0941	31.151	19 41 006 5402	29.34
		19 40 016 0413	31.144	19 40 024 0968	14.19	19 41 006 5404	29.17
19 37 048 0401	14.46	19 40 016 0414	31.144	19 40 024 0968	14.40	19 41 006 5404	29.34
19 37 048 0401	31.96	19 40 016 0431	14.31	19 40 024 0968	14.56	19 41 006 5405	29.17
19 37 048 0448	31.96	19 40 016 0431	31.144	19 40 024 0971	14.10	19 41 006 5405	29.34
19 37 048 0449	31.96	19 40 016 0478	14.17	19 40 024 0971	31.151	19 41 006 5406	29.17
19 37 048 0548	31.96	19 40 016 0502	31.142	19 40 024 0978	14.21	19 41 006 5407	29.17
		19 40 016 0511	31.144	19 40 024 0978	14.43		
19 40 003 0400	19.42	19 40 016 0512	31.144	19 40 024 1113	31.151	19 41 010 0301	29.18
19 40 003 0400	31.125	19 40 016 0513	31.144	19 40 024 1114	31.151	19 41 010 2601	29.7
19 40 003 0401	19.42	19 40 016 0514	31.144	19 40 024 1118	31.152	19 41 010 2701	29.7
19 40 003 0401	31.125	19 40 016 0912	31.145	19 40 024 1119	31.152	19 41 010 5402	29.37
19 40 003 0410	19.43	19 40 016 0922	31.145	19 40 024 1135	31.152	19 41 010 5404	29.19
19 40 003 0410	31.127	19 40 016 0978	14.18	19 40 024 1231	14.10	19 41 010 5404	29.37
19 40 003 0411	19.43	19 40 016 1114	31.145	19 40 024 1231	14.37	19 41 010 5405	29.20
19 40 003 0411	31.127	19 40 016 1119	31.146	19 40 024 1231	31.151	19 41 010 5405	29.37

List of part numbers



Part number	Page	Part number	Page	Part number	Page	Part number	Page
19 41 010 5406	29.19	19 41 210 5406	29.36	19 46 110 0253	29.13	19 62 000 5084	80.18
19 41 010 5407	29.19	19 41 210 5407	29.36	19 46 110 0290	29.13	19 62 000 5090	80.18
				19 46 110 0290	29.29	19 62 000 5092	80.18
19 41 014 2601	29.8	19 41 216 0301	29.38	19 46 110 0291	29.13	19 62 000 5094	80.18
19 41 014 2701	29.8	19 41 216 5406	29.39	19 46 110 0291	29.29	19 62 000 5096	80.18
		19 41 216 5407	29.39	19 46 110 0292	29.13	19 62 000 5097	80.18
19 41 016 0301	29.21			19 46 110 0293	29.13	19 62 000 5098	80.18
19 41 016 5402	29.40	19 41 224 0301	29.41	19 46 110 0435	29.13		
19 41 016 5404	29.22	19 41 224 5406	29.42	19 46 110 0435	29.29	19 62 003 1120	31.100
19 41 016 5404	29.40	19 41 224 5407	29.42	19 46 110 0436	29.13	19 62 003 1150	31.98
19 41 016 5405	29.23			19 46 110 0436	29.29	19 62 003 1250	31.99
19 41 016 5405	29.40	19 41 306 0232	29.33	19 46 110 0445	29.12	19 62 003 1440	31.98
19 41 016 5406	29.22	19 41 306 0272	29.33	19 46 110 0446	29.12	19 62 003 1443	19.36
19 41 016 5407	29.22	19 41 306 0722	29.33	19 46 110 0545	29.12	19 62 003 1445	31.98
				19 46 110 0546	29.12	19 62 003 1640	31.98
19 41 020 2601	29.9	19 41 310 0232	29.36			19 62 003 1643	19.36
19 41 020 2701	29.9	19 41 310 0272	29.36	19 46 116 0250	29.15	19 62 003 1750	31.100
		19 41 310 0722	29.36	19 46 116 0250	29.31	19 62 003 1755	31.100
19 41 024 0301	29.24			19 46 116 0251	29.15		
19 41 024 5402	29.43	19 41 316 0233	29.39	19 46 116 0251	29.31	19 62 006 0441	31.104
19 41 024 5404	29.25	19 41 316 0273	29.39	19 46 116 0252	29.15	19 62 006 0442	31.104
19 41 024 5404	29.43	19 41 316 0723	29.39	19 46 116 0253	29.15	19 62 006 0541	31.104
19 41 024 5405	29.26			19 46 116 0290	29.15		
19 41 024 5405	29.43	19 41 324 0233	29.42	19 46 116 0290	29.31	19 62 010 0442	31.105
19 41 024 5406	29.25	19 41 324 0273	29.42	19 46 116 0291	29.15	19 62 010 0542	31.105
19 41 024 5407	29.25	19 41 324 0723	29.42	19 46 116 0291	29.31	19 62 010 0543	31.105
				19 46 116 0292	29.15		
19 41 028 2601	29.10	19 44 000 5082	31.159	19 46 116 0293	29.15	19 62 015 0446	31.102
19 41 028 2701	29.10	19 44 000 5083	31.159	19 46 116 0435	29.15	19 62 015 0546	31.102
		19 44 000 5084	31.159	19 46 116 0435	29.31		
19 41 106 0232	29.17	19 44 000 5085	31.159	19 46 116 0436	29.15	19 62 025 0446	31.103
19 41 106 0272	29.17	19 44 000 9902	31.159	19 46 116 0436	29.31	19 62 025 0546	31.103
19 41 106 0422	29.16			19 46 116 0445	29.14		
19 41 106 0422	29.32	19 44 003 0301	31.154	19 46 116 0446	29.14	19 62 040 0442	31.106
19 41 106 0522	29.16	19 44 003 0801	31.155	19 46 116 0545	29.14	19 62 040 0542	31.106
19 41 106 0522	29.32	19 44 003 1150	31.154	19 46 116 0546	29.14		
19 41 106 0722	29.17	19 44 003 1250	31.155			19 62 064 0443	31.107
		19 44 003 1440	31.154	19 46 210 0301	29.28	19 62 064 0543	31.107
19 41 110 0232	29.19	19 44 003 1443	19.38	19 46 210 0302	29.29		
19 41 110 0272	29.19	19 44 003 1640	31.154			19 62 806 0446	17.10
19 41 110 0422	29.18	19 44 003 1643	19.38	19 46 216 0301	29.30	19 62 806 0446	31.109
19 41 110 0422	29.35	19 44 003 1750	31.155	19 46 216 0302	29.31	19 62 806 0447	17.10
19 41 110 0522	29.18	19 44 003 5421	31.155			19 62 806 0447	31.109
19 41 110 0522	29.35	19 44 003 5422	31.155	19 46 310 0252	29.29	19 62 806 0546	17.10
19 41 110 0722	29.19	19 44 003 5425	31.156	19 46 310 0253	29.29	19 62 806 0546	31.109
		19 44 003 5426	31.156	19 46 310 0292	29.29	19 62 806 0547	17.10
19 41 116 0233	29.22			19 46 310 0293	29.29	19 62 806 0547	31.109
19 41 116 0273	29.22	19 44 310 0303	31.157	19 46 310 0445	29.28	19 62 806 1290	31.110
19 41 116 0423	29.21	19 44 310 0305	31.157	19 46 310 0446	29.28	19 62 806 1440	17.10
19 41 116 0423	29.38	19 44 310 0447	31.157	19 46 310 0545	29.28	19 62 806 1440	31.109
19 41 116 0523	29.21	19 44 310 0547	31.157	19 46 310 0546	29.28	19 62 806 1540	17.10
19 41 116 0523	29.38	19 44 310 0757	31.158			19 62 806 1540	31.109
19 41 116 0723	29.22	19 44 310 5421	31.158	19 46 316 0252	29.31		
		19 44 310 5422	31.158	19 46 316 0253	29.31	19 62 810 0272	31.112
19 41 124 0233	29.25	19 44 310 5423	31.158	19 46 316 0292	29.31	19 62 810 0426	17.11
19 41 124 0273	29.25			19 46 316 0293	29.31	19 62 810 0426	31.111
19 41 124 0423	29.24	19 46 010 0301	29.12	19 46 316 0445	29.30	19 62 810 0427	17.11
19 41 124 0423	29.41	19 46 010 0302	29.13	19 46 316 0446	29.30	19 62 810 0427	31.111
19 41 124 0523	29.24			19 46 316 0545	29.30	19 62 810 0446	31.113
19 41 124 0523	29.41	19 46 016 0301	29.14	19 46 316 0546	29.30	19 62 810 0447	31.113
19 41 124 0723	29.25	19 46 016 0302	29.14			19 62 810 0526	17.11
				19 62 000 5056	13.52	19 62 810 0526	31.111
19 41 206 0301	29.32	19 46 110 0250	29.13	19 62 000 5057	13.52	19 62 810 0527	17.11
19 41 206 5406	29.33	19 46 110 0250	29.29	19 62 000 5058	13.52	19 62 810 0527	31.111
19 41 206 5407	29.33	19 46 110 0251	29.13	19 62 000 5080	80.18	19 62 810 0547	31.113
		19 46 110 0251	29.29	19 62 000 5081	80.18	19 62 810 0757	31.112
19 41 210 0301	29.35	19 46 110 0252	29.13	19 62 000 5082	80.18	19 62 810 0766	31.112

List of part numbers



Part number	Page	Part number	Page	Part number	Page	Part number	Page
19 62 810 1271	31.112	20 10 001 3222	02.15	20 99 000 1031	90.13	39 50 012 0450	12.5
19 62 810 1420	17.11	20 10 001 3311	03.41	20 99 000 1033	90.13	39 50 012 0458	12.5
19 62 810 1420	31.111	20 10 001 3311	13.23	20 99 000 1035	90.13		
19 62 810 1421	17.11	20 10 001 3311	13.30	20 99 000 1041	90.32	39 50 903 0010	12.15
19 62 810 1421	31.111	20 10 001 3321	03.41	20 99 000 1045	90.32	39 50 903 0011	12.15
19 62 810 1520	17.11	20 10 001 3321	13.23	20 99 000 1046	90.32	39 50 903 0020	12.15
19 62 810 1520	31.111	20 10 001 3321	13.30	20 99 000 1092	90.28	39 50 903 0021	12.15
		20 10 001 4211	06.107	20 99 000 1093	90.28	39 50 903 0050	12.17
19 62 816 0273	31.115	20 10 001 4211	06.112	20 99 000 1097	90.28	39 50 903 0051	12.17
19 62 816 0427	17.12	20 10 001 4221	06.107			39 50 903 0060	12.16
19 62 816 0427	31.114	20 10 001 4221	06.112	39 50 000 0100	12.8	39 50 903 0061	12.16
19 62 816 0527	17.12	20 10 001 5211	06.117	39 50 000 0110	12.9		
19 62 816 0527	31.114	20 10 001 5211	06.117	39 50 000 0120	12.9	39 50 904 0010	12.18
19 62 816 1271	31.115	20 10 001 5211	19.27	39 50 000 0200	12.8	39 50 904 0020	12.18
19 62 816 1421	17.12	20 10 001 5211	19.27	39 50 000 0210	12.9	39 50 904 0030	12.18
19 62 816 1421	31.114	20 10 001 5217	06.118	39 50 000 0300	12.7	39 50 904 0031	12.18
19 62 816 1521	17.12	20 10 001 5217	06.118	39 50 000 0320	12.7	39 50 904 0032	12.18
19 62 816 1521	31.114	20 10 001 5217	19.27	39 50 000 0400	12.7	39 50 904 0050	12.18
		20 10 001 5217	19.27	39 50 000 0420	12.7		
19 62 824 0273	31.117			39 50 000 0851	12.19	61 03 000 0044	06.96
19 62 824 0427	17.13	20 10 125 4212	06.107	39 50 000 0890	12.19	61 03 000 0045	06.97
19 62 824 0427	31.116	20 10 125 4212	06.112	39 50 000 0900	12.19	61 03 000 0046	06.97
19 62 824 0527	17.13	20 10 125 4222	06.107			61 03 000 0047	06.97
19 62 824 0527	31.116	20 10 125 4222	06.112	39 50 001 0001	12.3	61 03 000 0048	06.97
19 62 824 0528	17.13	20 10 125 5211	06.118	39 50 001 0002	12.3	61 03 000 0049	06.97
19 62 824 0528	31.116	20 10 125 5211	06.118	39 50 001 0004	12.3	61 03 000 0050	06.97
19 62 824 1271	31.117	20 10 125 5211	19.27	39 50 001 0005	12.3	61 03 000 0051	06.97
19 62 824 1422	17.13	20 10 125 5211	19.27	39 50 001 0006	12.3	61 03 000 0052	06.97
19 62 824 1422	31.116	20 10 125 5220	19.27	39 50 001 0007	12.3	61 03 000 0053	06.97
19 62 824 1521	17.13	20 10 125 5220	19.27	39 50 001 0009	12.4	61 03 000 0054	06.97
19 62 824 1521	31.116	20 10 125 8211	06.120	39 50 001 0012	12.4	61 03 000 0055	06.97
		20 10 125 8211	06.120	39 50 001 0017	12.4	61 03 000 0056	06.97
20 10 001 3211	02.23	20 10 125 8212	06.120	39 50 001 0321	12.4	61 03 000 0057	06.97
20 10 001 3211	05.12	20 10 125 8212	06.120	39 50 001 0331	12.4	61 03 000 0058	06.97
20 10 001 3211	05.23	20 10 125 8220	06.120	39 50 001 0333	12.4	61 03 000 0059	06.97
20 10 001 3211	05.26	20 10 125 8220	06.120	39 50 001 0450	12.5	61 03 000 0060	06.97
20 10 001 3211	06.68	20 10 125 8221	06.120	39 50 001 0458	12.5	61 03 000 0061	06.97
20 10 001 3211	06.70	20 10 125 8221	06.120			61 03 000 0062	06.97
20 10 001 3211	06.66			39 50 002 0093	12.13	61 03 000 0063	06.97
20 10 001 3211	13.25	20 10 230 4211	06.107	39 50 002 0117	12.13	61 03 000 0064	06.97
20 10 001 3211	13.35	20 10 230 4211	06.112	39 50 002 0120	12.13	61 03 000 0065	06.97
20 10 001 3211	13.33	20 10 230 4221	06.107	39 50 002 0122	12.13	61 03 000 0066	06.97
20 10 001 3212	02.15	20 10 230 4221	06.112	39 50 002 0133	12.13	61 03 000 0067	06.97
20 10 001 3213	02.15	20 10 230 5211	06.118	39 50 002 0143	12.13	61 03 000 0068	06.97
20 10 001 3221	02.23	20 10 230 5211	06.118	39 50 002 0145	12.14	61 03 000 0069	06.97
20 10 001 3221	05.12	20 10 230 5211	19.27	39 50 002 0163	12.14	61 03 000 0070	06.97
20 10 001 3221	05.23	20 10 230 5211	19.27			61 03 000 0071	06.97
20 10 001 3221	05.26			39 50 003 0020	12.11	61 03 000 0072	06.97
20 10 001 3221	06.68	20 80 001 9911	90.28	39 50 003 0024	12.11	61 03 000 0127	06.97
20 10 001 3221	06.70	20 80 001 9912	90.28	39 50 003 0040	12.11	61 03 000 0141	06.96
20 10 001 3221	06.66	20 80 001 9913	90.28	39 50 003 0074	12.11	61 03 000 0142	06.97
20 10 001 3221	13.25			39 50 003 0111	12.11	61 03 000 0143	06.96
20 10 001 3221	13.35	20 82 000 9916	90.31	39 50 003 0129	12.11	61 03 000 0165	06.97
20 10 001 3221	13.33			39 50 003 0170	12.12	61 03 000 0166	06.97



Pushing Performance

HARTING.com –
the gateway to your country website.

www.HARTING.ae
www.HARTING.at
www.HARTING.com.au
www.HARTING.be
www.HARTING.com.br
www.HARTING.ca
www.HARTING.ch
www.HARTING.com.cn
www.HARTING.cz
www.HARTING.de
www.HARTING.dk
www.HARTING.es
www.HARTING.fi
www.HARTING.fr
www.HARTING.co.uk
www.HARTING.com.hk
www.HARTING.hu
www.HARTING.co.in
www.HARTING.it
www.HARTING.co.jp
www.HARTING.co.kr
www.HARTINGbv.nl
www.HARTING.no
www.HARTING.pl
www.HARTING.pt
www.HARTING.ro
www.HARTING.ru
www.HARTING.se
www.HARTING.sg
www.HARTING.sk
www.HARTING.com.tr
www.HARTING.com.tw
www.HARTING-USA.com
www.HARTING.co.za